

CMT ORANGE TOOLS™

50
Anniversary



Catalog **2014/2015**



Saw blades
Jig saw blades
Tools with bore & knives
Router bits & sets
CNC router cutters & chucks
Industrial dowel drills
Bits for hand power tools
Spare parts
Power tools & accessories
Display cabinets

WOOD 
Magazine

CMT The Perfect 10!
Rated the #1 Overall Router Bits

Welcome to the 2014/2015 catalog

Dear customer,

Thank you for your interest in CMT products.

Browse our new catalog at your leisure and choose from a wider range of innovative and state-of-the-art woodworking tools, from router bits and sets, saw blades, CNC cutters, cutter heads, chucks, boring bits, power tools, and many more.

A detailed list of spare parts on each product category is also provided to guide you through your purchase.

We continually strive to develop our technical know-how and invest in research and development, but our priority is customer care.

A satisfied customer is worth more than any other achievements, therefore each page of this catalog contains CMT's highest dedication to the professional woodworker.

Should you not find a product that is fitting your needs, please let us know.

Our highly skilled engineers and operators are eager to design it for you to assist you with your woodworking operations.

Thank you for your interest in CMT Orange Tools.

Your CMT Team

Abbreviations

| | |
|--------------------------|--|
| A | = Cutting angle |
| α | = Hook angle |
| ATB | = Alternate top bevel grind |
| B | = Bore diameter |
| β | = Type of grind |
| C | = Bearing diameter |
| COMBI3 | = Pin-Hole 2/7/42 + 2/9/46,4 + 2/10/60 |
| COMBI5 | = Pin-Hole 2/7/110 + 2/8,4/130 + 2/14/110 + 4/9/100 + 4/19/120 |
| COMBI7 | = Pin-Hole 2/10/80 + 1/11/85 + 2/11/115 + 2/11/148 + 2/14/100 + 2/14/125 + 2/19/120 |
| D | = Diameter |
| D₂ | = Overall diameter |
| D₃ | = For shank diameter |
| \emptyset | = Diameter |
| d | = Small cutting diameter |
| FFT | = Flat flat trapezoidal |
| FTG | = Flat top grind |
| FWF | = Flat with alternate chamfer |
| H | = Cutting depth |
| HDF | = Hollow ground teeth |
| l | = Cutting length |
| l₁ | = Cutting length |
| l₂ | = Cutting length |
| Inches | = Inches |
| K | = Kerf thickness |
| L | = Overall length |
| LB | = Adjusting length |
| LH | = Left-hand rotation |
| MATB | = Alternate top bevel with chamfer grind |
| MTCG | = Triple chip grind (trapezoidal) with chamfer |
| mm | = Millimeters |
| P | = Plate thickness |
| PTFE | = Non-stick industrial coating, black and orange |
| R | = Radius |
| R₁ | = Radius |
| RH | = Right-hand rotation |
| RPM | = Round per minute |
| S | = Shank diameter |
| T₁ | = Thickness / Maximum joint thickness |
| TCG | = Triple chip grind (trapezoidal) |
| V | = Spurs |
| Z | = Number of teeth |
| <input type="checkbox"/> | = On request |
| ● | = Solid tungsten carbide |



Saw blades

4 ~ 44

Saw blades



Jig saw blades

45 ~ 50

Jig saw blades



Tools with bore & knives

51 ~ 93

Tools with bore & Knives



Router bits & sets

94 ~ 188

Router bits & sets



CNC router cutters & chucks

189 ~ 224

CNC router cutter & chucks



Industrial dowel drills

225 ~ 250

Industrial dowel drills



Bits for hand power tools

251 ~ 268

Bits for hand power tools



Power tools & accessories

269 ~ 297

Power tools & accessories



Display cabinets & spare parts

298 ~ 306

Display cabinets & spare parts

SINCE 1962 - MADE IN ITALY THEN, STILL MADE IN ITALY TODAY

By now, the story has been told. After over 50 years of success and quality in manufacturing woodworking tools - orange woodworking tools, to be precise - word just sort of gets around. We have grown and we have changed, but one thing still remains the same: our commitment to making only the highest quality woodworking tools.



Pesaro, Italy



Greensboro, United States



Valencia, Spain

NEW! CMT Global Web Site!

- Full line catalogue available on line
- Instructional video on select products
- Instruction manuals available for download
- Listing of authorized CMT distributors
- Company history, tech information, testimonial and more!

CMT ORANGE TOOLS

THE ART OF CUTTING

Market Area: Where are you from? North America

Language: Choose favourite: English

News: New! Ref 2008 - August 20-23, 2008 Atlanta

OUR TOOLS So, what does it take to make a CMT tool? Like all things of quality, it's not only what you do but how you do it. And anyone who works wood knows that you get out of a piece only what you put into it, and it is no different when manufacturing a tool. You choose your designs and materials carefully and you work using all of your skill and know-how. You'll be happy to know that's what we do at CMT too.

DESIGN

Everything starts with a clear idea and having the potential to express it. We have both. At CMT, our technical department uses the best of both worlds - computer technology and hands-on experience - to engineer and design each tool so that it performs flawlessly each time you use it, and to guarantee that you'll be using it for a long, long time.

MATERIALS

Turning a design into a finished product means finding the right material that will do the job and that live up to the specifications set out in the design - quality performance from the final product depends on it. When it comes to selecting raw materials, we don't cut corners. At CMT, we know that high quality tools come only from high quality raw materials, so we use only solid bar stock steel and specially formulated micrograin carbide to manufacture our bits and blades.

MANUFACTURING

Like we said, it's not just what you do but how you do it. Over the years we have continuously invested in the latest technology in CNC machining equipment and innovative software to manufacture our tools. The result is that now our entire manufacturing process, from turning and milling the steel shanks to brazing and sharpening the carbide cutting tips, is completely automated. And since a machine is only as intelligent as the person using it, everything is operated by specifically trained operators.

THE FINAL TOUCH

A tool simply wouldn't be a CMT tool if it didn't have the trademark orange color non-stick PTFE coating on it. This unique industrial-strength surface coating is designed to withstand the physical stresses the tool undergoes during use while protecting it from residue build-up and burning. And we really like the orange color too.



QUALITY CONTROL

Nobody's perfect, but we're trying. CMT uses rigorous quality control programs and equipment to ensure that each bit has been manufactured with precision and accuracy and that it will give the long-lasting performance you expect from a CMT orange tool. CMT is in the process of adopting the directives set out in ISO 9001 which will give SPC quality control by an independent party under the Common Market Directives ISO 9001. Quality control is the final step of the production process, but it's just as important as the first.

WE RECYCLE

The water used during production must be pure and free from contaminants or hard minerals like iron or calcium which can build up and damage the machinery. CMT filters and purifies its water using a reverse osmosis system located inside the plant. Also the oil used in grinding and machining our tools must be clean and absolutely free of contaminants. Clean oil, after enough use, gets dirty, so we filter and reprocess dirty oil on the premises. This is our way of guaranteeing the quality of the oil we use, as well as contributing to help protect the environment.

OUR TRADEMARK COLOR ORANGE

As the story goes, we began small. We also put orange color surface coating on our tools, then we put our tools on the market and soon our orange tools were all over the world. Now, any woodworker anywhere in the world can tell you that orange tools means CMT, and that CMT means quality. Here at CMT we know we produce quality. You should too. That's why we have trademarked the color orange on woodworking tools - it's your guarantee that you are getting a genuine high-quality CMT product.



Loading the automated multi-axis CNC sharpening machines.



Fully automated assembly and marking.





Saw blades

| PRODUCTS | PAGE |
|--|----------------|
| Multi-rip saw blades | 9 - 10 |
| Building contractors saw blades | 11 |
| Universal saw blades | 11 ~ 15 |
| Saw blades for melamine and laminated | 15 ~ 18 |
| DP saw blades & scoring | 19 |
| Panel sizing saw blades | 20 |
| Scoring saw blades | 21 - 22 |
| Saw blades for aluminium and non-ferrous materials | 22 - 23 |
| Saw blades for metal and special materials | 24 - 25 |
| ITK Plus saw blades | 26 ~ 28 |
| Saw blades for portable machines | 29 ~ 32 |
| Grooving saw blades | 33 - 34 |
| Saw blade accessories | 35 |
| Portable machine index | 36 - 37 |
| Saw blade index | 38 ~ 44 |

HOW WE PRODUCE OUR HIGH QUALITY BLADES

CMT stands for quality, which means we put quality into everything we do. It only makes sense. At CMT we figure that if our router bits are going to be top quality, high-performance and orange, then our saw blades should be too. And to do that, we simply follow the same guidelines for our blades that we do for our bits: start with a solid design, use only the best materials and manufacture with skill and care. And of course, make sure they are trademark orange.



DESIGN

The simplicity of a circular saw blade design is in reality a complexity of technical considerations. Each blade has to make a certain type of cut, and this requires careful analysis of hook and grind angles, gullet designs, to location of sound dampening slots and the thickness of the blade - just to name a few. So in order for us to get the best design for our blades - and for you to get the best performance from them - we use the same method that we use to engineer our router bits: we combine the knowledgeable minds and experience of our technical department and the latest computer technology. The result is a superior blade that has some rather special “standard” features:

Anti-vibration design. The anti-vibration cuts in the blade do exactly what their name implies: they are the anti in anti-vibration. This translates into less chattering during cutting and consequently it lengthens the life of the blade. Anti-vibration also means a flawless cut, so stabilizers and scoring blades are no longer necessary.

Expansion slots. These little hook-shaped cuts in the blade help to reduce noise while regulating the expansion and contraction of the blade as it generates heat during cutting operations.



Grinding and tensioning the blades.

MATERIALS

When it comes down to it, saw blades are much like router bits - it's just two components: steel and carbide. So in selecting the raw materials, we are every bit as picky with our saw blades as we are with our router bits. Besides, why mess with a winning formula like superior steel and tungsten carbide?

Steel. It's the heart of the blade, so CMT uses only the finest steel available: super 42-44 Rockwell hardness steel.

Carbide. The cutting tips of every CMT blade are made from the best grades of micrograin carbide.

MANUFACTURING

CMT saw blades are machined on automated CNC machines, from start to finish. The advanced technology and precision of these machines ensures uniform quality on every blade while giving us the possibility to carry out more efficient quality controls.

Laser cutting. The steel plate of the blade is laser cut, NEVER die cut, from superior strength steel. This way of cutting steel is not only extremely precise but it makes it possible to cut harder strengths of steel and does not stress the plate while cutting, so the resulting blade is flat and true and more resistant to warping.

Grinding and tensioning. After it has been cut, the blade is polished and tensioned, the evidence of which can be seen in the superior finish and a tension ring that are visible on the blade. Then the central bore is ground to a smooth finish so that the blade will fit precisely on the saw arbor and will have perfect concentricity during rotation. The seats for the carbide teeth are also ground, making sure that the carbide tips fit perfectly, providing the right conditions for making a secure braze.



Silver-copper-silver sandwich brazing. Once again, experience has been a good teacher. Automated brazing with a special silver-copper-silver “sandwich” brazing compound yields excellent results and reduces the chances of failed welds. In addition, this combination of metals is critical during brazing because as the steel body and the carbide tipped teeth are heated and cooled, they expand and contract at different rates. The copper layer acts as a buffer and keeps the carbide from cracking during cool down shrinkage. When woodworking, the copper provides flexibility and resistance to impact which in turn protects the carbide tips and steel shoulders when cutting through harder substances or knots in the wood.



Specially formulated carbide tips. What is true for router bit carbide tips is also true for the carbide tips on saw blades: what’s good for one type of blade may not be good for another. At CMT, we have studied carbide formulas and their impact on blade performance and have developed specially formulated carbide tips to match each blade’s application. Larger blades require an extra-fine harder carbide that holds its edge and resharpenes easily, while smaller blades need a special carbide that can withstand the occasional nail or imperfections that often occur in construction work. For each blade and each use, there is carbide made especially for it.



Sharpening and laser marking. The final step is sharpening the micrograin carbide teeth. During the sharpening phase, each angle is ground to razor-sharp precision - down to the Milacron - on multi-axis CNC machines. We also laser mark our blades so you have all the details about the blade type and its uses, right there on the blade.



Sharpening the carbide tips.

Packaging and instructions. CMT blades are packed and protected for shipping, display and storage in either a sturdy cardboard box or in a patented heavy duty HDPE plastic case that’s as durable as our tools. Illustrated instructions for resharpening are included with your CMT blade so that you have all the details you need to keep the blade sharp, which will also help you extend the life of the blade.



CMT ORANGE TOOLS. Manufacturers of high quality woodworking tools since 1962, we are still proud to put “Made in Italy” on all our orange tools.

Maximize your saw's performance

| BLADE'S RANGE | ORANGE CHROME | INDUSTRIAL / XTREME | ITK PLUS |
|--------------------------|--|--|--|
| PERFORMANCE | SUPERIOR ★★★★★ | BEST ★★★★★ | BETTER ★★★ |
| DESCRIPTION | <p>Designed for professional woodworkers who require high precision and durability from their saw blades. Special chrome carbide reduces tooth abrasion, whereas the chrome plated body protects against rust, corrosion and guarantees long-lasting performance.</p>  | <p>Designed for fine woodworkers, finish carpenters, construction and industrial users who run their blades all day long demanding ultimate precision and extended life, while conquering the most challenging applications.</p>  | <p>Designed for the professional contractor and remodeler, CMT's ITK Plus delivers a clean, fast, effortless cut through wood and wood composite material. With a nice balance of features to price the ITK Plus line is a great value.</p>  |
| USER | Professional Woodworker | Professional | Contractor & Remodeler |
| USAGE | Run All Day | Run All Day | Daily Use |
| PRICE POINT | Premium | Premium | Mid |
| MATERIALS | Wood, plywood, OSB, laminate, melamine, mouldings, MDF. | Wood, Wood with nails, Plywood, OSB, Laminate, Melamine, MDF, Non-Ferrous, Metals, Stainless Steel, Plastics, Fiberglass, Solid Surface. | Wood, Composite Decking, Plywood, OSB, Laminate, Melamine, MDF, Fibercement. |
| STEEL PLATE | LASER-CUT PREMIUM QUALITY STEEL PLATE Made of 46-48 HRC precision German steel which is laser-cut to provide tighter tolerances ensuring longer life and more accurate cuts. | LASER-CUT PREMIUM QUALITY STEEL PLATE Made of 46-48 HRC precision German steel which is laser-cut to provide tighter tolerances ensuring longer life and more accurate cuts. | HEAVY-DUTY LASER-CUT PLATE Made of a thin & strong plate, laser cut from the finest steel which is then hardened to 44 HRC to ensure a longer life and more accurate cuts. |
| CARBIDE TEETH |  <p>INDUSTRIAL CHROMIUM MICROGRAIN CARBIDE Cutting teeth are made from a specially formulated chromium micrograin carbide which stays sharper longer by reducing cutting edge abrasion, improving cut quality and tool life.</p> |  <p>INDUSTRIAL CHROMIUM MICROGRAIN CARBIDE Special formulated chromium micrograin carbide which stays sharper longer by reducing cutting edge abrasion, improving cut quality and tool life.</p> |  <p>INDUSTRIAL SINTERHIP HI-DENSITY CARBIDE™ The new process SinterHIP (high temperature 1025°C and high pressure 105 bar) creates a porosity-free and Hi-Density carbide which provides a longer cutting life than tradition carbide.</p> |
| KERF | THICK | FULL KERF | THIN-KERF |
| BRAZING |  <p>TRI-METAL BRAZING The Silver-Copper-Silver tri-metal brazing process lets the teeth withstand the severe impact caused by cutting harder woods and composite material.</p> |  <p>TRI-METAL BRAZING The Silver-Copper-Silver tri-metal brazing process lets the teeth withstand the severe impact caused by cutting harder woods and composite material.</p> | <p>SILVER BRAZING The silver brazing process lets the teeth withstand the standard impact caused by cutting soft woods and composite material.</p> |
| COATING |  <p>CHROME COATING Blade plate is covered with a chrome layer to protect your tool against corrosion and rust, guaranteeing a longer tool life.</p> | <p>HARD LACQUER Protects against corrosion and rust.</p> |  <p>NON-STICK ORANGE SHIELD COATING Keeps the blade running cool, reduces pitch build up and protects against corrosion. Ideal for all types of wood including wet lumber.</p> |
| EXPANSION SLOTS | LASER-CUT HEAT EXPANSION SLOTS Are engineered to allow the blade to expand when heat build-up occurs from use, preventing blade warping. | LASER-CUT HEAT EXPANSION SLOTS Are engineered to allow the blade to expand when heat build-up occurs from use, preventing blade warping. | LASER-CUT HEAT EXPANSION SLOTS Are engineered to allow the blade to expand when heat build-up occurs from use, preventing blade warping. |
| SOUND DAMPENING CHANNELS |  <p>LASER-CUT SLOTS FILLED WITH SOUND-DAMPENING MATERIAL Slots are filled with polyurethane to reduce vibrations and noise (10% less than standard saw blades), improving cut quality and blade life.</p> | LASER-CUT SOUND-DAMPENING CHANNELS Are specifically designed to dampen running noise and control wobbling caused by unwanted harmonic vibration. | LASER-CUT SOUND-DAMPENING CHANNELS Are specifically designed to dampen running noise and control wobbling caused by unwanted harmonic vibration. |
| TENSIONING RINGS | TENSIONING RING A visible tension ring on the blade body provides stability during cut and perfect concentricity during rotation. | TENSIONING RING A visible tension ring on the blade body provides stability during cut and perfect concentricity during rotation. | ✗ |
| SHARPENING |  <p>PRECISION MIRROR FINISH SHARPENING Each tooth is ground to razor sharp precision on a multi-axis CNC machine which creates the perfect edge angles, guaranteeing extra-clean cuts and extended life. Featuring less than 0.25 µm Rmax in edge roughness.</p> |  <p>PRECISION MIRROR FINISH SHARPENING Each tooth is ground to razor sharp precision on a multi-axis CNC machine which creates the perfect edge angles, guaranteeing extra-clean cuts and extended life. Featuring less than 0.25 µm Rmax in edge roughness.</p> |  <p>SHEAR ANGLE SHARPENING The shear angle grind on the teeth's front face produces smooth cuts, while reducing the cutting force needed and improving cutting speed, setting a new standard for performance.</p> |




279



APPLICATION: for rip cuts where the rakers prevent the wood contact with the steel plate.
MACHINES: multi-rip machines with one or two shafts.
MATERIAL: wet or dry soft and hardwood.

| | | |
|--|---------------------|--------------|
| | ISO: | K20 |
| | HV10: | 1.640 |
| | N/mm ² : | 2.200 |

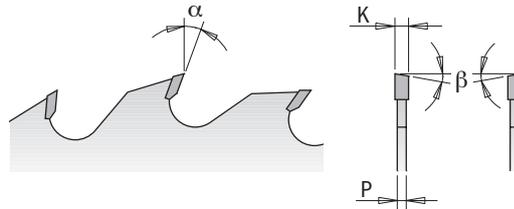

EXCELLENT Multiple rip wood

| D mm | B mm | Pin Hole | Key way mm | Z | K mm | P mm | α | β | ORDER NO. |
|------|------|----------|------------|------|------|------|-----|---------|--------------------|
| 250 | 30 | COMBI3 | | 20+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.020.10M |
| 250 | 70 | | 21 x 5 | 20+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.020.10V |
| 250 | 80 | | 13 x 5 | 20+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.020.10W |
| 300 | 30 | COMBI3 | | 24+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.024.12M |
| 300 | 60 | | 21 x 5 | 24+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.024.12U |
| 300 | 70 | | 21 x 5 | 24+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.024.12V |
| 300 | 80 | | 13 x 5 | 24+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.024.12W |
| 350 | 30 | COMBI3 | | 28+4 | 3,5 | 2,5 | 18° | 10° ATB | 279.028.14M |
| 350 | 60 | | 21 x 5 | 28+4 | 3,5 | 2,5 | 18° | 10° ATB | 279.028.14U |
| 350 | 70 | | 21 x 5 | 28+4 | 3,5 | 2,5 | 18° | 10° ATB | 279.028.14V |
| 350 | 80 | | 14 x 5 | 28+4 | 3,5 | 2,5 | 18° | 10° ATB | 279.028.14W |
| 400 | 30 | COMBI3 | | 28+6 | 4,0 | 2,8 | 18° | 10° ATB | 279.028.16M |
| 400 | 70 | | 21 x 5 | 28+6 | 4,0 | 2,8 | 18° | 10° ATB | 279.028.16V |

Multi-rip anti-kickback saw blades *industrial line*




278



APPLICATION: for rip cuts where the special steel plate prevents vibrations during work
MACHINES: multi-rip machines with one or two shafts.
MATERIAL: dry soft and hardwood.

| | | |
|--|---------------------|--------------|
| | ISO: | K20 |
| | HV10: | 1.640 |
| | N/mm ² : | 2.200 |


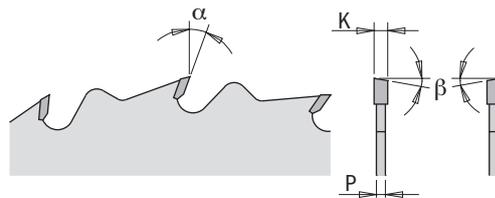


EXCELLENT Multiple rip wood

| D mm | B mm | Pin Hole | Key way mm | Z | K mm | P mm | α | β | ORDER NO. |
|------|------|----------|------------|----|------|------|-----|---------|--------------------|
| 300 | 30 | COMBI3 | | 28 | 3,2 | 2,2 | 18° | 10° ATB | 278.028.12M |
| 300 | 70 | | 21 x 5 | 28 | 3,2 | 2,2 | 18° | 10° ATB | 278.028.12V |
| 350 | 30 | COMBI3 | | 36 | 3,5 | 2,5 | 18° | 10° ATB | 278.036.14M |
| 350 | 70 | | 21 x 5 | 36 | 3,5 | 2,5 | 18° | 10° ATB | 278.036.14V |

Thin-kerf multi-rip saw blades with rakers *industrial line***280****APPLICATION:** for rip cuts where the thin-kerf reduces material wastes.**MACHINES:** multi-rip machines with one or two shafts.**MATERIAL:** wet or dry hardwood.



| | | |
|--|---------------|--------------|
| | ISO: | K20 |
| | HV10: | 1.640 |
| | N/mm²: | 2.200 |

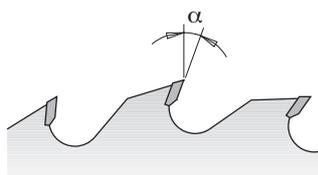

| D mm | B mm | Key way mm | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|---------------|------|---------|---------|----------|---------|--------------------|
| 180 | 40 | | 21+3 | 2,5 | 1,8 | 18° | FLAT | 280.021.07S |
| 200 | 40 | | 21+3 | 2,5 | 1,8 | 18° | FLAT | 280.021.08S |
| 250 | 70 | 21 x 5 | 20+4 | 2,7 | 1,8 | 18° | 10° ATB | 280.020.10V |
| 250 | 80 | 13 x 5 | 20+4 | 2,7 | 1,8 | 18° | 10° ATB | 280.020.10W |
| 300 | 70 | 21 x 5 | 24+4 | 2,7 | 1,8 | 18° | 10° ATB | 280.024.12V |
| 300 | 80 | 13 x 5 | 24+4 | 2,7 | 1,8 | 18° | 10° ATB | 280.024.12W |

Thick-kerf multi-rip saw blades with rakers *industrial line***277****APPLICATION:** for rip cuts. Mounted on the sides of gang rip saws, these act as shoulder saw blades and help ensure stability and reduce vibrations under extreme work load.**MACHINES:** multi-rip machines with one or two shafts.**MATERIAL:** thick wet or dry hardwood.

| | | |
|--|---------------|--------------|
| | ISO: | K20 |
| | HV10: | 1.640 |
| | N/mm²: | 2.200 |

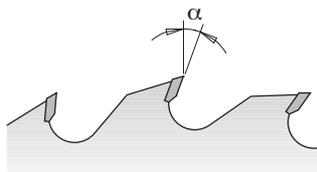

| D mm | B mm | Key way mm | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|---------------|------|---------|---------|----------|---------|--------------------|
| 300 | 30 | | 24+4 | 4,0 | 2,8 | 18° | 10° ATB | 277.024.12M |
| 300 | 70 | 21 x 5 | 24+4 | 4,0 | 2,8 | 18° | 10° ATB | 277.024.12V |
| 300 | 80 | 13 x 5 | 24+4 | 4,0 | 2,8 | 18° | 10° ATB | 277.024.12W |
| 350 | 30 | | 24+6 | 4,2 | 2,8 | 18° | 10° ATB | 277.024.14M |
| 350 | 70 | 21 x 5 | 24+6 | 4,2 | 2,8 | 18° | 10° ATB | 277.024.14V |




286

APPLICATION: for rip and crosscuts especially designed for building contractors.
MACHINES: table saws and portable machines.
MATERIAL: soft and hardwood and panels with nails, metal clips and pieces of concrete.



| | | |
|--|---------------------|--------------|
| | ISO: | K20 |
| | HV10: | 1.550 |
| | N/mm ² : | 2.600 |

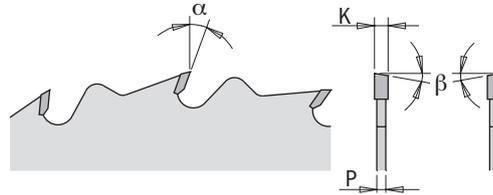

EXCELLENT Soft wood with nails, screw, concrete, etc.

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|----------------|---------|--------------|----|---------|---------|----------|---------|--------------------|
| 250 | 30 | COMBI3 | 16 | 2,8 | 1,8 | 15° | 5° ATB | 286.016.10M |
| 300 | 30 | COMBI3 | 20 | 2,8 | 1,8 | 15° | 5° ATB | 286.020.12M |
| 315 | 30 | COMBI3 | 24 | 3,2 | 2,2 | 15° | 5° ATB | 286.024.13M |
| 350 | 30 | COMBI3 | 24 | 3,2 | 2,2 | 15° | 5° ATB | 286.024.14M |
| 400 | 30 | COMBI3 | 28 | 3,2 | 2,2 | 15° | 5° ATB | 286.028.16M |
| 450 | 30 | 2/10/60 | 32 | 3,8 | 2,8 | 15° | 5° ATB | 286.032.18M |
| 500 | 30 | 2/10/60 | 36 | 3,8 | 2,8 | 15° | 5° ATB | 286.036.20M |
| 550 | 30 | 2/10/60 | 40 | 4,2 | 3,2 | 15° | 5° ATB | 286.040.22M |
| 600 | 30 | 2/10/60 | 40 | 4,2 | 3,2 | 15° | 5° ATB | 286.040.24M |
| new 700 | 30 | 2/10/60 | 46 | 4,4 | 3,2 | 15° | 5° ATB | 286.046.28M |

Shop tips: Use our reduction ring from 30 to 25mm order n. 299.225.00 (for rip saw blades Ø250-300-315)
 Use our reduction ring from 30 to 25mm order n. 299.228.00 (for rip saw blades Ø350 and larger)

Rip saw blades *industrial line*




285-290-293

APPLICATION: for rip and glue line rip cuts.
MACHINES: table and special saws, portable and ripping machines for automatic or manual feeding.
MATERIAL: soft and hardwood.






| | | |
|--|---------------------|--------------|
| | ISO: | K10 |
| | HV10: | 1.765 |
| | N/mm ² : | 2.150 |

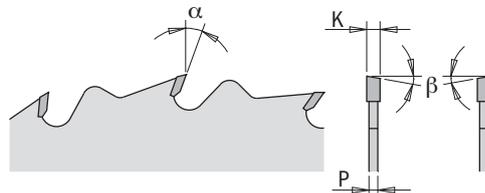

EXCELLENT Rip wood

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|------------------|----|---------|---------|----------|---------|--------------------|
| 250* | 30 | COMBI3 | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.250.24M |
| 270* | 30 | 2/7/42 | 28 | 2,8 | 1,8 | 20° | 10° ATB | 290.270.28M |
| 300 | 30 | COMBI3 | 24 | 3,2 | 2,2 | 20° | 10° ATB | 293.024.12M |
| 300 | 35 | | 24 | 3,2 | 2,2 | 20° | 10° ATB | 293.024.12R |
| 305 | 30 | 2/10/60 | 28 | 2,8 | 1,8 | 20° | 10° ATB | 293.028.22M |
| 315* | 30 | COMBI3 | 28 | 3,2 | 2,2 | 20° | 10° ATB | 293.028.12M |
| 315* | 30 | 2/10/60 + 2/7/42 | 36 | 3,2 | 1,8 | 15° | 5° ATB | 285.036.13M |
| 350 | 30 | COMBI3 | 28 | 3,5 | 2,5 | 20° | 10° ATB | 293.028.14M |
| 350 | 35 | | 28 | 3,5 | 2,5 | 20° | 10° ATB | 293.028.14R |
| 400 | 30 | COMBI3 | 36 | 3,5 | 2,5 | 20° | 10° ATB | 285.036.16M |
| 450 | 30 | 2/10/60 | 36 | 3,8 | 2,8 | 20° | 10° ATB | 285.036.18M |
| 500 | 30 | COMBI3 | 44 | 4,0 | 2,8 | 20° | 10° ATB | 285.044.20M |

*Non-low noise

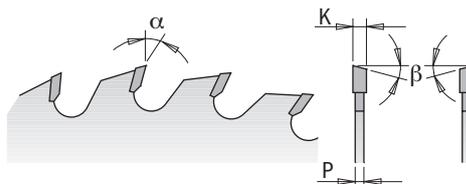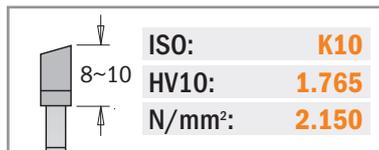Rip & crosscut saw blades *industrial line***285-291-294****APPLICATION:** for optimal quality rip and crosscuts.**MACHINES:** table and special saws, portable machines.**MATERIAL:** soft and hardwood, wood-based panels.

| D mm | B mm | Pin Hole  | Z | K mm | P mm | α | β | ORDER NO. |
|------------------------|---------|---|----|---------|---------|-----------|---------|--------------------|
| 200 | 30 | 2/10/60 + 2/7/42 | 36 | 3,2 | 2,2 | 15° | 10° ATB | 285.036.08M |
| 200 | 30 | 2/10/60 + 2/7/42 | 48 | 3,2 | 2,2 | 15° | 15° ATB | 285.048.08M |
| 250* | 20 | COMBI3 | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10H |
| 250 | 30 | COMBI3 | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10M |
| 250 | 30 | COMBI3 | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.048.10M |
| 250 | 30 | COMBI3 | 60 | 3,2 | 2,2 | 10° | 15° ATB | 285.060.10M |
| 250 | 35 | | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10R |
| 250 | 35 | | 60 | 3,2 | 2,2 | 10° | 15° ATB | 285.060.10R |
| <small>NEW</small> 254 | 30 | COMBI3 | 48 | 2,4 | 1,8 | - 5° Neg. | 15° ATB | 294.048.10M |
| <small>NEW</small> 254 | 30 | COMBI3 | 60 | 2,4 | 1,8 | - 5° Neg. | 15° ATB | 294.060.10M |
| 260 | 30 | 2/10/60 + 2/7/42 | 48 | 2,8 | 1,8 | 15° | 10° ATB | 285.048.11M |
| 260 | 30 | 2/10/60 + 2/7/42 | 60 | 2,8 | 1,8 | 10° | 15° ATB | 285.060.11M |
| <small>NEW</small> 260 | 30 | COMBI3 | 60 | 2,5 | 1,8 | - 5° Neg. | 15° ATB | 294.060.11M |
| 270* | 30 | 2/7/42 | 42 | 2,8 | 1,8 | 15° | 15° ATB | 291.270.42M |
| 275 | 20 | | 42 | 3,2 | 2,2 | 15° | 10° ATB | 285.042.11H |
| 280* | 30 | 2/10/60 + 2/7/42 | 64 | 2,8 | 1,8 | 10° | 15° ATB | 295.064.11M |
| 300* | 20 | COMBI3 | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.048.12H |
| 300 | 30 | COMBI3 | 36 | 3,2 | 2,2 | 15° | 10° ATB | 285.036.12M |
| 300 | 30 | COMBI3 | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.048.12M |
| 300 | 30 | COMBI3 | 60 | 3,2 | 2,2 | 15° | 10° ATB | 285.060.12M |
| 300 | 30 | COMBI3 | 72 | 3,2 | 2,2 | 10° | 15° ATB | 285.072.12M |
| 300 | 35 | | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.048.12R |
| 300 | 35 | | 72 | 3,2 | 2,2 | 10° | 15° ATB | 285.072.12R |
| 305* | 30 | 2/10/60 + 2/7/42 | 54 | 2,8 | 1,8 | -5° Neg. | 15° ATB | 294.054.22M |
| 315* | 30 | COMBI3 | 54 | 3,2 | 2,2 | 15° | 10° ATB | 294.054.12M |
| 350 | 30 | COMBI3 | 54 | 3,5 | 2,5 | 15° | 10° ATB | 285.054.14M |
| 350 | 30 | COMBI3 | 72 | 3,5 | 2,5 | 15° | 10° ATB | 285.072.14M |
| 350 | 30 | COMBI3 | 84 | 3,5 | 2,5 | 10° | 15° ATB | 285.084.14M |
| 350 | 35 | | 54 | 3,5 | 2,5 | 15° | 10° ATB | 285.054.14R |
| 350 | 35 | | 84 | 3,5 | 2,5 | 10° | 15° ATB | 285.084.14R |
| 400 | 30 | COMBI3 | 48 | 3,5 | 2,5 | 20° | 10° ATB | 285.048.16M |
| 400 | 30 | COMBI3 | 60 | 3,5 | 2,5 | 10° | 15° ATB | 285.060.16M |
| 450 | 30 | 2/10/60 | 54 | 3,8 | 2,8 | 15° | 15° ATB | 285.054.18M |
| 450 | 30 | 2/10/60 | 66 | 3,8 | 2,8 | 10° | 15° ATB | 285.066.18M |
| 500 | 30 | 2/10/60 | 60 | 3,8 | 2,8 | 15° | 15° ATB | 285.060.20M |
| 500 | 30 | 2/10/60 | 72 | 3,8 | 2,8 | 10° | 15° ATB | 285.072.20M |
| <small>NEW</small> 550 | 30 | 2/10/60 | 60 | 4,2 | 3,2 | 10° | 15° ATB | 285.060.22M |
| <small>NEW</small> 550 | 30 | 2/10/60 | 96 | 4,2 | 3,2 | 10° | 15° ATB | 285.096.22M |
| <small>NEW</small> 600 | 30 | 2/10/60 | 66 | 4,2 | 3,2 | 10° | 15° ATB | 285.066.24M |
| <small>NEW</small> 700 | 30 | 2/10/60 | 72 | 4,4 | 3,2 | 10° | 15° ATB | 285.072.28M |

*Non-low noise



285-294

APPLICATION: for optimal quality crosscuts.
MACHINES: table and sizing saws, portable machines.
MATERIAL: soft, hard and exotic wood, wood-based panels.




EXCELLENT

Two-sided melamine Plywood

GOOD

Rip wood Cross wood

ISO: **KCR06**
 HV10: **1.950**
 N/mm²: **2.300**

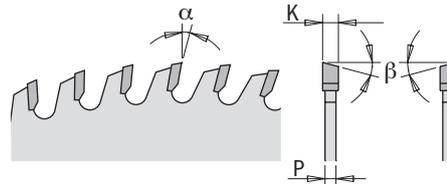

| D | B | Pin Hole | Z | K | P | α | β | ORDER NO. |
|-----|----|------------------|-----|-----|-----|----------|---------|--------------------|
| mm | mm | | | mm | mm | | | |
| 150 | 30 | 2/7/42 | 48 | 3,2 | 2,2 | 5° | 15° ATB | 285.048.06M |
| 160 | 20 | 2/6/32 | 48 | 2,2 | 1,6 | 5° | 15° ATB | 285.160.48H |
| 180 | 30 | 2/7/42 | 56 | 3,2 | 2,2 | 5° | 15° ATB | 285.056.07M |
| 200 | 30 | 2/10/60 + 2/7/42 | 64 | 3,2 | 2,2 | 5° | 15° ATB | 285.064.08M |
| 250 | 30 | COMBI3 | 80 | 3,2 | 2,2 | 5° | 15° ATB | 285.080.10M |
| 250 | 35 | | 80 | 3,2 | 2,2 | 5° | 15° ATB | 285.080.10R |
| 300 | 30 | COMBI3 | 96 | 3,2 | 2,2 | 5° | 15° ATB | 285.096.12M |
| 300 | 35 | | 96 | 3,2 | 2,2 | 5° | 15° ATB | 285.096.12R |
| 305 | 30 | COMBI3 | 72 | 3,2 | 2,2 | 10° | 15° ATB | 285.072.22M |
| 305 | 30 | COMBI3 | 72 | 3,2 | 2,2 | -5° Neg. | 15° ATB | 294.072.22M |
| 315 | 30 | 2/10/60 + 2/7/42 | 72 | 3,2 | 2,2 | 10° | 15° ATB | 285.072.13M |
| 350 | 30 | COMBI3 | 108 | 3,5 | 2,5 | 5° | 15° ATB | 285.108.14M |
| 350 | 35 | | 108 | 3,5 | 2,5 | 5° | 15° ATB | 285.108.14R |
| 400 | 30 | COMBI3 | 96 | 3,5 | 2,5 | 10° | 15° ATB | 285.096.16M |
| 400 | 30 | 2/10/60 + 2/7/42 | 120 | 3,5 | 2,5 | 10° | 15° ATB | 285.120.16M |

Super finishing saw blades for cutting frames *XTreme line*




285.5 XTREME

APPLICATION: for optimal quality crosscuts on moulds and end trimming for perfect joints.
MACHINES: table and sizing saws, single or double mitre saws.
MATERIAL: soft and hardwood, MDF.



Double side grind

ISO: **KCR06**
 HV10: **1.950**
 N/mm²: **2.300**

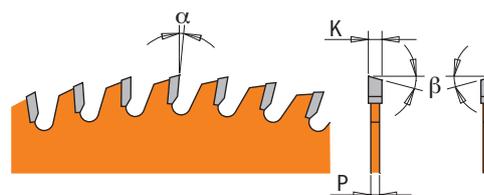

EXCELLENT

Wooden frames MDF and PVC



| D | B | Pin Hole | Z | K | P | α | β | ORDER NO. |
|-----|----|----------|----|-----|-----|----------|---------|--------------------|
| mm | mm | | | mm | mm | | | |
| 250 | 30 | COMBI3 | 80 | 3,0 | 2,5 | 10° | 20° ATB | 285.580.10M |
| 300 | 30 | COMBI3 | 96 | 3,0 | 2,5 | 10° | 20° ATB | 285.596.12M |

Orange PTFE coated blades: a great choice for the shop that keeps its blades running all day, every day. With their heavy-gauge plate, these blades have the stamina for saws with lots of power.

Low noise & Chrome coated saw blades with ATB grind




285 ORANGE CHROME™

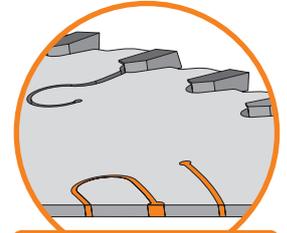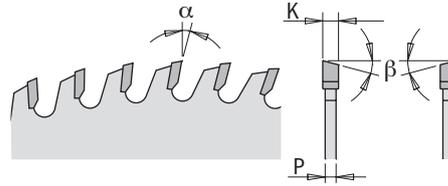
FILLED SLOTS
APPLICATION: for optimal quality rip and crosscuts.

MACHINES: table and special saws, portable machines.

MATERIAL: soft and hardwood, wood-based panels.

| | | |
|--|--------------------------|--------------|
| | ISO: | KCR01 |
| | HV10: | 1.870 |
| | N/mm²: | 2.200 |

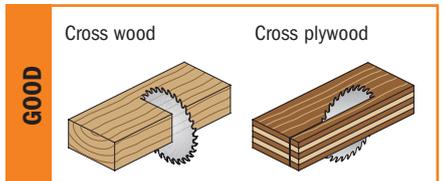


| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|--------------|----|---------|---------|----------|---------|--------------------|
| 250 | 30 | COMBI3 | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.640.10M |
| 300 | 30 | COMBI3 | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.648.12M |
| 350 | 30 | COMBI3 | 54 | 3,5 | 2,5 | 15° | 10° ATB | 285.654.14M |

APPLICATION: for optimal quality crosscuts.

MACHINES: table and sizing saws, portable machines.

MATERIAL: soft, hard and exotic wood, wood-based panels.

| | | |
|--|--------------------------|--------------|
| | ISO: | KCR06 |
| | HV10: | 1.930 |
| | N/mm²: | 2.300 |

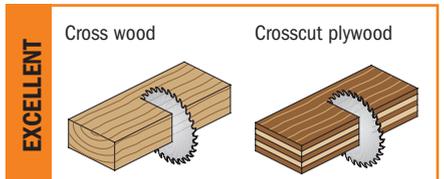


| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|--------------|----|---------|---------|----------|---------|--------------------|
| 250 | 30 | COMBI3 | 60 | 3,2 | 2,2 | 10° | 15° ATB | 285.660.10M |
| 300 | 30 | COMBI3 | 72 | 3,2 | 2,2 | 10° | 15° ATB | 285.672.12M |
| 350 | 30 | COMBI3 | 84 | 3,5 | 2,5 | 10° | 15° ATB | 285.684.14M |

APPLICATION: for high-quality cross cutting.

MACHINES: table and sizing saws, portable machines.

MATERIAL: soft, hard and exotic wood, wood-based panels, one-side veneered, paper-base laminate and thermoplastic material.

| | | |
|--|--------------------------|--------------|
| | ISO: | KCR06 |
| | HV10: | 1.930 |
| | N/mm²: | 2.300 |

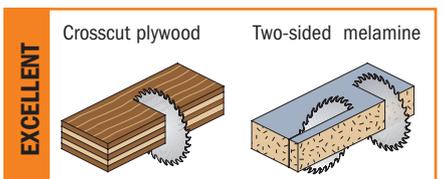

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|--------------|-----|---------|---------|----------|---------|--------------------|
| 250 | 30 | COMBI3 | 80 | 3,2 | 2,2 | 5° | 15° ATB | 285.680.10M |
| 300 | 30 | COMBI3 | 96 | 3,2 | 2,2 | 5° | 15° ATB | 285.696.12M |
| 350 | 30 | COMBI3 | 108 | 3,5 | 2,5 | 5° | 15° ATB | 285.708.14M |




274 XTREME



APPLICATION: for high-quality cross cutting.
MACHINES: table and sizing saws, portable machines.
MATERIAL: soft, hard and exotic wood, wood-based panels, one-side veneered, paper-base laminate and thermoplastic material.

| | |
|---------------------|--------------|
| ISO: | KCR06 |
| HV10: | 1.950 |
| N/mm ² : | 2.300 |

Max run out tolerance 0,05mm

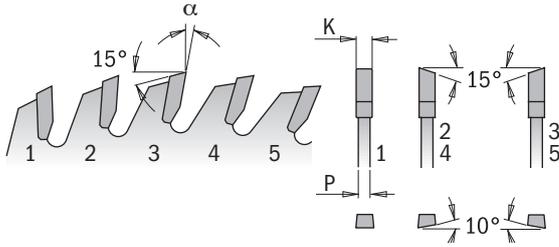

EXCELLENT

| | | | |
|--------------------|---------|----------------|------------------------------------|
| Two-sided melamine | Plywood | Molduras y PVC | For all non-ferrous metals and PVC |
|--------------------|---------|----------------|------------------------------------|

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|------|------|----------|-----|------|------|-----|-----------|--------------------|
| 250 | 30 | COMBI3 | 80 | 3,2 | 2,2 | 15° | 1FTG+4ATB | 274.080.10M |
| 300 | 30 | COMBI3 | 100 | 3,2 | 2,2 | 15° | 1FTG+4ATB | 274.100.12M |

Fine cut-off saw blades for two-sided melamine *industrial line*





287



APPLICATION: for sizing cuts, perfect finish with high feed rate and long tool life without using scoring blade.
MACHINES: single or double-sided laminated panels with hard coating and veneered.
MATERIAL: one-side or double side laminated and hard coating panels, thermoplastic.

| | |
|---------------------|--------------|
| ISO: | KCR06 |
| HV10: | 1.950 |
| N/mm ² : | 2.300 |

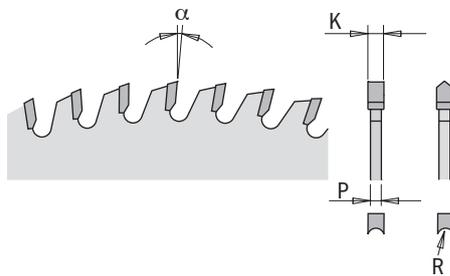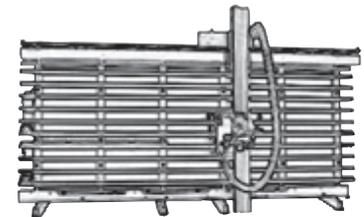

EXCELLENT

| | | |
|------------|------------------|--------------------|
| Cross wood | Crosscut plywood | Two-sided melamine |
|------------|------------------|--------------------|

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|----------------------------|------|----------|----|------|------|-----|-----|--------------------|
| Positive hook angle | | | | | | | | |
| 160 | 20 | 2/6/32 | 34 | 2,6 | 1,8 | 10° | HDF | 287.034.06H |
| 220 | 30 | 2/7/42 | 42 | 3,2 | 2,2 | 10° | HDF | 287.042.09M |
| 250 | 30 | COMBI3 | 48 | 3,2 | 2,2 | 10° | HDF | 287.048.10M |
| 303 | 30 | COMBI3 | 60 | 3,2 | 2,2 | 10° | HDF | 287.060.12M |
| Negative hook angle | | | | | | | | |
| 220 | 30 | 2/7/42 | 42 | 3,2 | 2,2 | -6° | HDF | 287.043.09M |
| 250 | 30 | COMBI3 | 48 | 3,2 | 2,2 | -6° | HDF | 287.049.10M |
| 303 | 30 | COMBI3 | 60 | 3,2 | 2,2 | -6° | HDF | 287.061.12M |

Fine cut-off saw blades for two-sided melamine *industrial line*







283


APPLICATION: for sizing cuts, perfect finishing on both sides of double-sided panels without using scoring blades.

MACHINES: table and vertical saws, sizing and portable machines.


MATERIAL: single or double-sided laminated panels with coating and veneered.

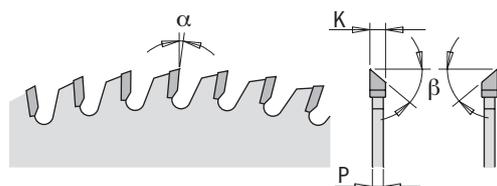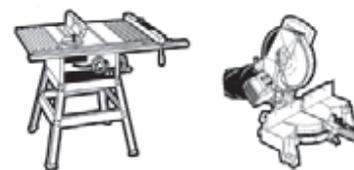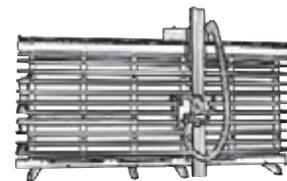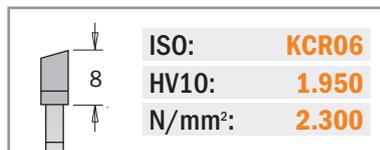
EXCELLENT


Cross wood



Crosscut plywood



Two-sided melamine



| D mm | B mm | Pin Hole  | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|---|-----|---------|---------|----------|---------|--------------------|
| 220* | 30 | 2/7/42 | 64 | 3,2 | 2,2 | -5° | 40° ATB | 283.064.09M |
| 250 | 30 | COMBI3 | 80 | 3,2 | 2,2 | -2° | 40° ATB | 283.080.10M |
| 300 | 30 | COMBI3 | 96 | 3,2 | 2,2 | 2° | 40° ATB | 283.096.12M |
| 350 | 30 | COMBI3 | 108 | 3,5 | 2,5 | 5° | 40° ATB | 283.108.14M |

*Non-low noise

Fine cut-off saw blades for melamine two-sided *XTreme line*






210 XTREME


APPLICATION: for sizing cuts, perfect finishing on both sides on bilaminated panels without using scoring blade.

MACHINES: table and vertical saws, sizing and portable machines.

MATERIAL: one-side or double-sided laminated panels with coating and veneered.

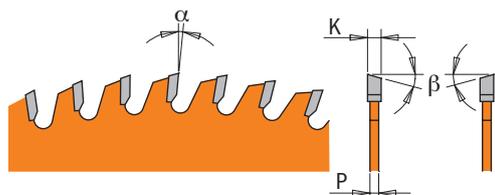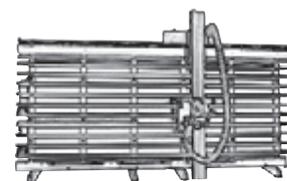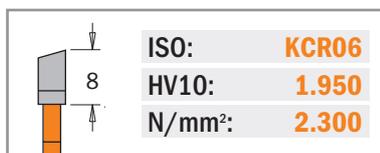
EXCELLENT


Cross wood



Plywood



Two-sided melamine



| D mm | B mm | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|----|---------|---------|----------|---------|--------------------|
| 250 | 30 | 80 | 3,2 | 2,2 | 5° | 40° ATB | 210.080.10M |
| 300 | 30 | 96 | 3,2 | 2,2 | 5° | 40° ATB | 210.096.12M |

Orange PTFE coated blades: a great choice for the shop that keeps its blades running all day, every day. With their heavy-gauge plate, these blades have the stamina for saws with lots of power.


Low noise & Chrome coated saw blades with TCG grind





281 ORANGE CHROME™



APPLICATION: for sizing cuts, perfect finishing by using scoring blades.
MACHINES: table saws, horizontal and vertical sizing machines.
MATERIAL: single or double-sided plastic-laminated panels.

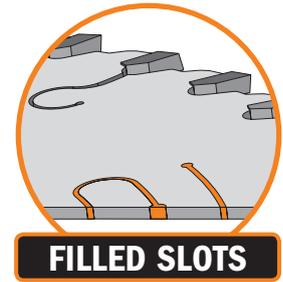

| | | |
|--|--------|--------------|
| | ISO: | KCR05 |
| | HV10: | 2.150 |
| | N/mm²: | 2.500 |

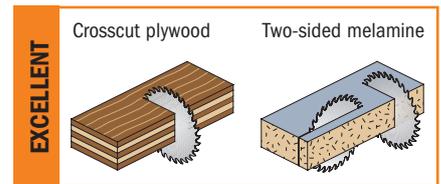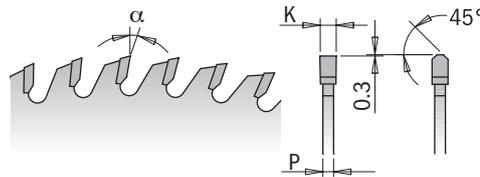

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|------|------|----------|-----|------|------|----------|---------|--------------------|
| 250 | 30 | COMBI3 | 80 | 3,2 | 2,2 | 5° | TCG | 281.680.10M |
| 300 | 30 | COMBI3 | 72 | 3,2 | 2,2 | 10° | TCG | 281.672.12M |
| 300 | 30 | COMBI3 | 96 | 3,2 | 2,2 | 5° | TCG | 281.696.12M |
| 350 | 30 | COMBI3 | 108 | 3,5 | 2,5 | 5° | TCG | 281.708.14M |

Melamine and laminated long-lasting saw blades xTreme line






295 xTreme





APPLICATION: for sizing cuts, perfect finishing without using scoring blade.
MACHINES: table saws, horizontal and vertical sizing machines.
MATERIAL: double-sided laminated panels.

| | | |
|--|--------|--------------|
| | ISO: | KCR05 |
| | HV10: | 2.150 |
| | N/mm²: | 2.500 |


Max run out tolerance 0,05mm

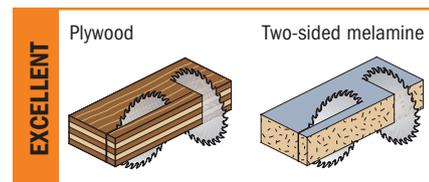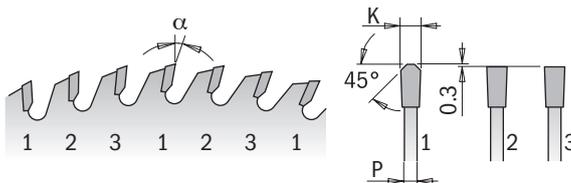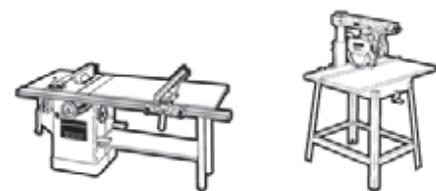

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|------|------|----------|-----|------|------|----------|---------|--------------------|
| 250 | 30 | COMBI3 | 78 | 3,2 | 2,2 | 10° | FFT | 295.078.10M |
| 300 | 30 | COMBI3 | 96 | 3,2 | 2,2 | 10° | FFT | 295.096.12M |
| 350 | 30 | COMBI3 | 108 | 3,5 | 2,5 | 10° | FFT | 295.108.14M |

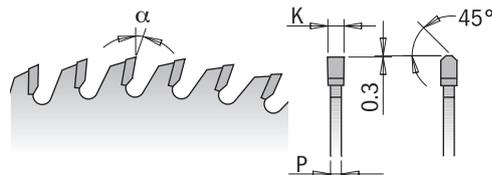
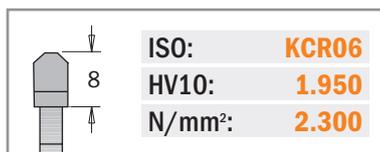
Laminated and chipboard saw blades *industrial line***281****APPLICATION:** for sizing cuts, perfect finishing by using scoring blades.**MACHINES:** table saws, horizontal and vertical sizing machines.**MATERIAL:** single or double-sided plastic-laminated panels.**EXCELLENT**

Two-sided melamine Crosscut plywood

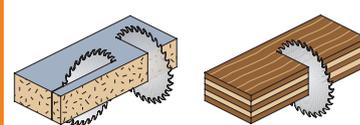


| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|--------------|--------------|-----|---------|---------|----------|---------|---------------------|
| 160 | 20 (Virutex) | 4/7/32 45° | 40 | 2,2 | 1,6 | 10° | TCG | 281.160.40H |
| 160* | 20 | 2/6/32 | 40 | 2,2 | 1,6 | 10° | TCG | 281.160.40H2 |
| 200* | 30 | 2/7/42 | 64 | 3,2 | 2,2 | 10° | TCG | 281.064.08M |
| 220* | 30 | 2/7/42 | 64 | 3,2 | 2,2 | 10° | TCG | 281.064.09M |
| 250 | 30 | COMBI3 | 60 | 3,2 | 2,2 | 10° | TCG | 281.060.10M |
| 250 | 30 | COMBI3 | 80 | 3,2 | 2,2 | 10° | TCG | 281.080.10M |
| 300 | 30 | COMBI3 | 72 | 3,2 | 2,2 | 10° | TCG | 281.072.12M |
| 300 | 30 | COMBI3 | 96 | 3,2 | 2,2 | 10° | TCG | 281.096.12M |
| 350 | 30 | COMBI3 | 84 | 3,5 | 2,5 | 10° | TCG | 281.084.14M |
| 350 | 30 | COMBI3 | 108 | 3,5 | 2,5 | 10° | TCG | 281.108.14M |

*Non-low noise

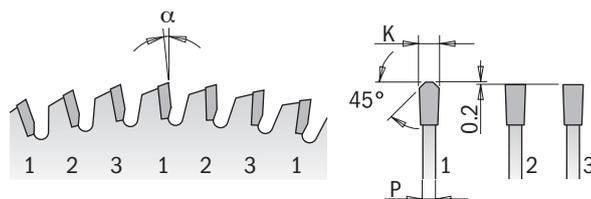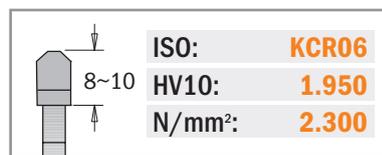Laminated and chipboard saw blades *XTreme line***281 XTREME****APPLICATION:** for sizing cuts, perfect finishing without using scoring blade.**MACHINES:** table saws, horizontal and vertical sizing machines.**MATERIAL:** single or double-sided laminated panels.**EXCELLENT**

Two-sided melamine Plywood

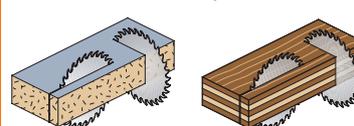

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|--------------|----|---------|---------|----------|---------|--------------------|
| 220 | 30 | COMBI3 | 63 | 3,2 | 2,2 | -3° | FFT | 281.063.09M |
| 250 | 30 | COMBI3 | 60 | 3,2 | 2,2 | -3° | FFT | 281.061.10M |
| 250 | 30 | COMBI3 | 81 | 3,2 | 2,2 | -3° | FFT | 281.081.10M |
| 300 | 30 | COMBI3 | 72 | 3,2 | 2,2 | -3° | FFT | 281.073.12M |
| 300 | 30 | COMBI3 | 96 | 3,2 | 2,2 | -3° | FFT | 281.097.12M |

DP laminated and chipboard saw blades *XTreme line*



237 XTREME




APPLICATION: for sizing cuts, perfect finishing (using scoring blade) and increased tool life up to 50 times longer than HW blades thanks to a special polycrystalline diamond formula. The best quality/price ratio!

MACHINES: table saws, horizontal and vertical sizing machines.

MATERIAL: one-side or double-sided plastic-laminated panels, MDF and HDF.

50X
LONGER LIFE
THAN CARBIDE

| | | |
|--|------------|--------|
| | ISO: | 2µm |
| | HV10: | 10.000 |
| | Reafilabe: | 6x |

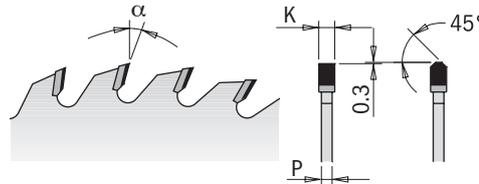

EXCELLENT

Two-sided melamine Wood products

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|------|------|----------|----|------|------|-----|---------|-------------|
| 250 | 30 | COMBI3 | 48 | 3,2 | 2,2 | 10° | 45° TCG | 237.048.10M |
| 300 | 30 | COMBI3 | 60 | 3,2 | 2,2 | 10° | 45° TCG | 237.060.12M |
| 300 | 30 | COMBI3 | 96 | 3,2 | 2,2 | 15° | 45° TCG | 237.096.12M |
| 350 | 30 | COMBI3 | 72 | 3,5 | 2,4 | 15° | 45° TCG | 237.072.14M |

High-quality nickel-plated saw blades with anti-friction and anti-corrosion properties.

DP conical scoring blades *XTreme line*



238 XTREME




APPLICATION: for chip-free scoring of the plastic-laminated panels; increased tool life up to 50 times longer than HW blades thanks to a special polycrystalline diamond formula. The best quality/price ratio!

MACHINES: horizontal and vertical sizing machines equipped with scoring device.

MATERIAL: one-side or double-sided plastic-laminated panels, MDF and HDF.

50X
LONGER LIFE
THAN CARBIDE

| | | |
|--|------------|--------|
| | ISO: | 2µm |
| | HV10: | 10.000 |
| | Reafilabe: | 6x |

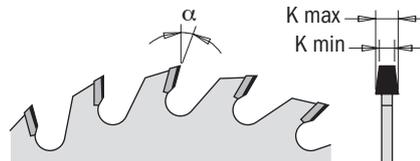

EXCELLENT

Two-sided melamine Wood products

| D mm | B mm | Z | K mm | α | β | ORDER NO. |
|------|------|----|---------|----|---------|-------------|
| 120 | 20 | 20 | 3,1-3,7 | 5° | CONICAL | 238.120.20H |
| 125 | 20 | 20 | 3,1-3,7 | 5° | CONICAL | 238.125.20H |

High-quality nickel-plated saw blades with anti-friction and anti-corrosion properties.

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets




CNC router cutter & chucks

Industrial dowel drills




Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts

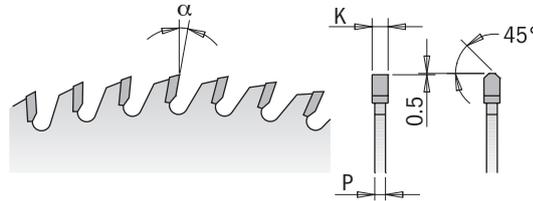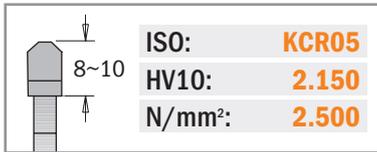Panel sizing saw blades *industrial line***281-282****APPLICATION:** for sizing single sheets and multiple panels.**MACHINES:** horizontal panel sizing machines.**MATERIAL:** single or double-sided plastic-laminated panels, MDF.

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|----------------|---------|--------------------|-----|---------|---------|----------|---------|---------------------|
| 250 | 30 | COMBI3 | 60 | 3,2 | 2,2 | 10° | TCG | 281.060.10M |
| 250 | 30 | COMBI3 | 80 | 3,2 | 2,2 | 10° | TCG | 281.080.10M |
| 300 | 30 | COMBI3 | 60 | 4,4 | 3,2 | 16° | TCG | 282.060.12M |
| 300 | 30 | COMBI3 | 72 | 3,2 | 2,2 | 10° | TCG | 281.072.12M |
| 300 | 30 | COMBI3 | 96 | 3,2 | 2,2 | 10° | TCG | 281.096.12M |
| 300 | 75 | | 60 | 4,4 | 3,2 | 16° | TCG | 282.060.12X |
| 300 | 80 | COMBI5 | 60 | 4,4 | 3,2 | 16° | TCG | 282.060.12W |
| new 320 | 65 | 2/9/100 + 2/9/110 | 60 | 4,4 | 3,2 | 16° | TCG | Y282.060.13J |
| 350 | 30 | COMBI3 | 54 | 4,4 | 3,2 | 16° | TCG | 282.054.14M |
| 350 | 30 | COMBI3 | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.14M |
| 350 | 30 | COMBI3 | 108 | 3,5 | 2,5 | 10° | TCG | 281.108.14M |
| 350 | 50 | 3/12,5/80 | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.14T |
| 350 | 60 | 2/14/100 | 72 | 4,4 | 3,2 | 16° | TCG | Y282.072.14U |
| 350 | 75 | 4/15/105 + 3/7/100 | 54 | 4,4 | 3,2 | 16° | TCG | 282.054.14X |
| 350 | 75 | 4/15/105 + 3/7/100 | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.14X |
| 350 | 80 | COMBI5 | 54 | 4,4 | 3,2 | 16° | TCG | 282.054.14W |
| 350 | 80 | COMBI5 | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.14W |
| 355 | 30 | 2/7/42 + 2/10/60 | 72 | 4,4 | 3,2 | 16° | TCG | S282.03556 |
| 380 | 60 | COMBI7 | 72 | 4,8 | 3,5 | 16° | TCG | 282.072.15U |
| 400 | 30 | 2/10/60 | 60 | 4,4 | 3,2 | 16° | TCG | 282.060.16M |
| 400 | 30 | 2/10/60 | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.16M |
| 400 | 60 | COMBI7 | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.16U |
| 400 | 75 | 4/15/105 | 60 | 4,4 | 3,2 | 16° | TCG | 282.060.16X |
| 400 | 75 | 4/15/105 | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.16X |
| 400 | 80 | COMBI5 | 60 | 4,4 | 3,2 | 16° | TCG | 282.060.16W |
| 400 | 80 | COMBI5 | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.16W |
| 430 | 75 | 4 /15/105 | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.17X |
| 430 | 80 | COMBI5 | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.17W2 |
| 450 | 60 | COMBI7 | 72 | 4,8 | 3,5 | 16° | TCG | 282.072.18U |
| 450 | 80 | COMBI5 | 72 | 4,8 | 3,5 | 16° | TCG | 282.072.18W2 |
| 500 | 60 | COMBI7 | 72 | 4,8 | 3,5 | 16° | TCG | 282.072.20U |
| 500 | 80 | COMBI5 | 72 | 4,8 | 3,5 | 16° | TCG | Y282.072.20W |
| 550 | 100 | | 72 | 5,2 | 3,5 | 16° | TCG | 282.072.22A |

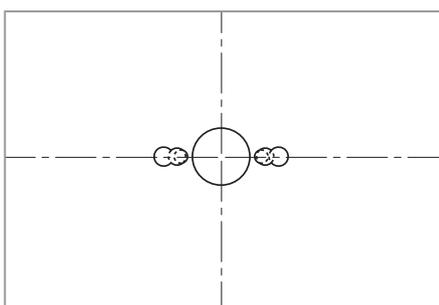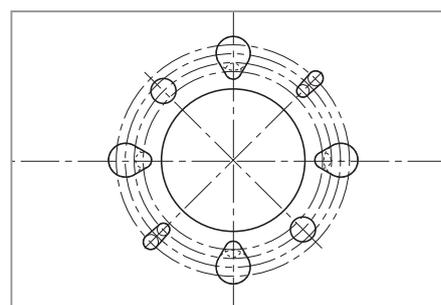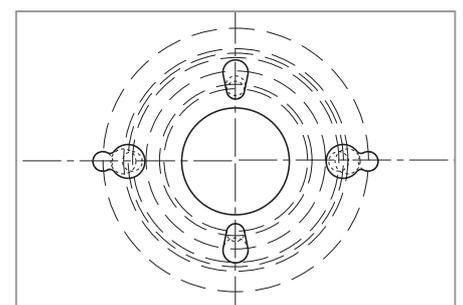**COMBI3**2/7/42mm
2/9/46,4mm
2/10/60mm**COMBI5**2/7/110mm
2/8,4/130mm
2/14/110mm
4/9/100mm
4/19/120mm**COMBI7**2/10/80mm
1/11/85mm
2/11/115mm
2/11/148mm
2/14/100mm
2/14/125mm
2/19/120mm



288



APPLICATION: for chip-free scoring on plastic-laminated panels.

MACHINES: horizontal and vertical sizing machines equipped with scoring device for vertical adjustment.

MATERIAL: single or double-sided plastic-laminated panels, MDF.



| | |
|---------------------|--------------|
| ISO: | KCR05 |
| HV10: | 2.150 |
| N/mm ² : | 2.500 |

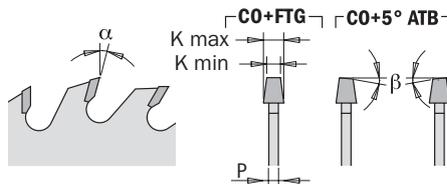

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|-------------------|----|---------|---------|-----|-----------|----------------------|
| 80 | 20 | | 12 | 3,1-4,0 | 2,2 | 10° | CO+FTG | S288.080.12H |
| 100 | 20 | | 20 | 3,1-4,0 | 2,5 | 5° | CO+5° ATB | 288.100.20H |
| 100 | 22 | | 20 | 3,1-4,0 | 2,5 | 5° | CO+5° ATB | 288.100.20K |
| 120 | 20 | | 24 | 3,1-4,0 | 2,5 | 5° | CO+5° ATB | 288.120.24H |
| 120 | 20 | | 24 | 3,4-4,2 | 2,5 | 5° | CO+5° ATB | 288.120.24H1 |
| 120 | 22 | | 24 | 3,1-4,0 | 2,5 | 5° | CO+5° ATB | 288.120.24K |
| 125 | 20 | | 24 | 3,1-4,0 | 2,5 | 5° | CO+5° ATB | 288.125.24H |
| 125 | 20 | | 24 | 3,4-4,2 | 2,5 | 5° | CO+5° ATB | 288.125.24H1 |
| 125 | 20 | | 24 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.125.24H2 |
| 125 | 22 | | 24 | 3,1-4,0 | 2,5 | 5° | CO+5° ATB | 288.125.24K |
| 125 | 45 | | 24 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.125.24Q |
| 140 | 16 | 1/6/33 | 24 | 3,1-4,0 | 2,2 | 10° | CO+FTG | Y288.140.24E |
| 150 | 45 | | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.150.36Q |
| 160 | 45 | 3/11/70 | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.160.36Q |
| 160 | 55 | 3/7/66 | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.160.360 |
| 160 | 55 | 3/7/66 + 3/6/84 | 36 | 4,7-6,0 | 3,5 | 10° | CO+FTG | Y288.160.3602 |
| 180 | 20 | | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | Y288.180.36H |
| 180 | 30 | | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.180.36M |
| 180 | 45 | | 36 | 4,7-6,0 | 3,5 | 10° | CO+FTG | 288.180.36Q |
| 180 | 55 | | 36 | 5,0-6,2 | 3,5 | 10° | CO+FTG | 288.180.360 |
| 180 | 50 | 3/12,5/80 | 44 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.180.44T |
| 200 | 20 | | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.200.36H |
| 200 | 45 | | 36 | 4,7-6,0 | 3,5 | 10° | CO+FTG | 288.200.36Q |
| 200 | 45 | | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | Y288.200.36Q2 |
| 200 | 65 | 2/9/100 + 2/9/110 | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.200.36J |
| 215 | 50 | 3/15/80 | 42 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.215.42T |
| 300 | 50 | 3/15/80 | 48 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.300.48T |
| 300 | 65 | 2/9/100 + 2/9/110 | 72 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.300.72J |

Adjustable scoring blades *industrial line*





289

APPLICATION: for chip-free scoring on plastic-laminated panels.

MACHINES: horizontal and vertical sizing machines equipped with scoring device not allowing for cutting depth adjustment.

MATERIAL: single or double-sided plastic-laminated panels, MDF.

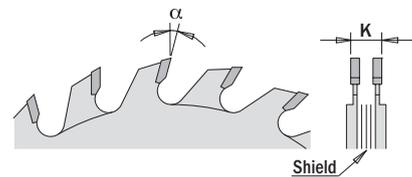

| D mm | B mm | Pin Hole | Z | K mm | α | β | ORDER NO. | Spare parts |
|---------|---------|----------------|-------|---------|-----|------|--------------------|-----------------|
| 70 | 20 | 2/3,1 - 3,8/32 | 8+8 | 2,8-3,6 | 15° | FLAT | 289.070.16H | 299.000.05H |
| 80 | 20 | 2/3,1 - 3,8/42 | 10+10 | 2,8-3,6 | 15° | FLAT | 289.080.20H | 299.000.06H |
| 100 | 20 | 2/3,1 - 3,8/42 | 10+10 | 2,8-3,6 | 15° | FLAT | 289.100.20H | 299.000.02K |
| 100 | 22 | 2/3,1 - 3,8/42 | 10+10 | 2,8-3,6 | 15° | FLAT | 289.100.20K | 299.000.02K |
| 120 | 20 | 2/3,1 - 3,8/42 | 12+12 | 2,8-3,6 | 15° | FLAT | 289.120.24H | 299.000.02K |
| 120 | 22 | 2/3,1 - 3,8/42 | 12+12 | 2,8-3,6 | 15° | FLAT | 289.120.24K | 299.000.02K |
| 120 | 50 | 4/6,2 - 10/62 | 12+12 | 2,8-3,6 | 15° | FLAT | 289.120.24T | |
| 125 | 20 | 2/3,1 - 3,8/42 | 12+12 | 2,8-3,6 | 15° | FLAT | 289.125.24H | 299.000.02K |
| 125 | 22 | 2/3,1 - 3,8/42 | 12+12 | 2,8-3,6 | 15° | FLAT | 289.125.24K | 299.000.02K |

Industrial chrome-coated scoring blades

new

CMT ORANGE TOOLS™




288 conical






ORANGE CHROME™

289 adjustable







288

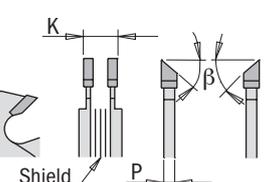**APPLICATION:** for chip-free scoring on plastic-laminated panels.**MACHINES:** horizontal and vertical sizing machines equipped with scoring device.**MATERIAL:** single or double-sided plastic-laminated panels, MDF.ISO: **KCR05**HV10: **2.150**N/mm²: **2.500**

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|--------------|-------|---------|---------|-----|-----------|--------------------|
| 120 | 20 | | 24 | 3,1-4,3 | 2,2 | 0° | CO+6° ATB | 288.720.24H |
| 120 | 22 | | 24 | 3,1-4,3 | 2,2 | 0° | CO+6° ATB | 288.720.24K |
| 125 | 20 | | 24 | 3,1-4,3 | 2,2 | 0° | CO+6° ATB | 288.725.24H |
| 120 | 20 | 2/4,2/42 | 12+12 | 2,8-3,6 | | 11° | 5° ATB | 289.720.24H |
| 120 | 22 | 2/4,2/42 | 12+12 | 2,8-3,6 | | 11° | 5° ATB | 289.720.24K |
| 125 | 20 | 2/4,2/42 | 12+12 | 2,8-3,6 | | 11° | 5° ATB | 289.725.24H |

Non-ferrous metal and plastic material saw blades *industrial line*

284

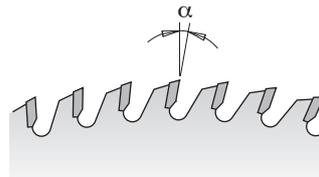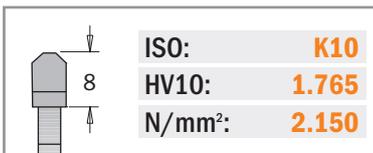APPLICATION: for cutting and dividing tubes, drawn products and solid blocks.**MACHINES:** table saws, single or double mitre saws with mechanical clamping of the workpiece.**MATERIAL:** aluminium, brass, copper alloys, plastic, composite materials.**WARNING:** it is recommended to properly clamp the workpiece during cutting operations and to use a liquid lubricant.
Wax stick for lubrication NOT RECOMMENDED.

Saw blades for portable machines. Positive hook angle

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|--------------|----|---------|---------|----|-----|---------------------|
| 160 | 20 | - | 24 | 2,2 | 1,6 | 5° | TCG | Y284.160.24H |
| 190 | 30 | - | 30 | 2,6 | 2,2 | 5° | TCG | Y284.190.30M |

Remarks: in plastic carry case.

Saw blades for industrial machines. Positive hook angle

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|--------------|-----|---------|---------|----|-----|--------------------|
| 250 | 32 | 2/12/64 | 80 | 3,2 | 2,5 | 5° | TCG | 284.080.10P |
| 300 | 32 | 2/12/64 | 96 | 3,2 | 2,5 | 5° | TCG | 284.096.12P |
| 350 | 32 | 2/12/64 | 92 | 3,2 | 2,5 | 5° | TCG | 284.092.14P |
| 350 | 32 | 2/12/64 | 108 | 3,2 | 2,5 | 5° | TCG | 284.108.14P |
| 400 | 32 | 2/12/64 | 96 | 3,8 | 3,2 | 5° | TCG | 284.096.16P |
| 420 | 32 | 2/12/64 | 96 | 3,8 | 3,2 | 5° | TCG | 284.096.17P |
| 450 | 32 | 2/12/64 | 108 | 3,8 | 3,2 | 5° | TCG | 284.108.18P |
| 500 | 32 | 2/12/64 | 120 | 4,0 | 3,2 | 5° | TCG | 284.120.20P |



Remarks: in cardboard box.



296-297



- APPLICATION:** for cutting and dividing tubes, drawn products and solid blocks.
MACHINES: single or double mitre saws, radial saws.
 Recommended use with the saw blade over the workpiece.
 Use series 296 for portable machines.
MATERIAL: aluminium, brass, copper alloys, plastic, composite material, melamine and laminated panels.
WARNING: it is recommended to use a liquid lubricant.
 Wax stick for lubrication NOT RECOMMENDED.

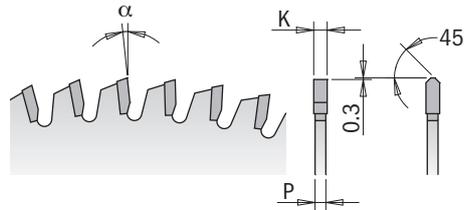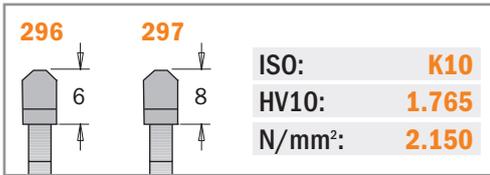

EXCELLENT For all non-ferrous metals and PVC Two-sided melamine

Saw blades for portable machines. Negative hook angle

| D mm | B mm | Pin Hole ⊕⊗⊕ | Z | K mm | P mm | α | β | ORDER NO. |
|---------|------------------|-----------------|----|---------|---------|----------|-----|---------------------|
| 120* | 20 | 2/5,5/30 | 36 | 1,8 | 1,2 | -6° Neg. | TCG | 296.120.36H |
| 160* | 20 | 2/6/32 | 40 | 2,2 | 1,6 | -6° Neg. | TCG | 296.160.40H |
| 160* | 20 | 2/6/32 | 56 | 2,2 | 1,6 | -6° Neg. | TCG | 296.160.56H |
| 180* | 20 | 2/6/32 | 40 | 2,8 | 2,2 | -6° Neg. | TCG | 296.180.40H |
| 190* | 30 | 2/7/42 | 40 | 2,8 | 2,2 | -6° Neg. | TCG | 296.190.40M |
| 190* | 30 | 2/7/42 | 64 | 2,8 | 2,2 | -6° Neg. | TCG | 296.190.64M |
| 190* | 20 (Festool® FF) | Key 5/7/2,5 | 64 | 2,8 | 2,2 | -6° Neg. | TCG | 296.190.64FF |
| 200* | 30 | COMBI3 | 48 | 2,8 | 2,2 | -6° Neg. | TCG | 296.200.48M |
| 210* | 30 | 2/7/42 | 48 | 2,8 | 2,2 | -6° Neg. | TCG | 296.210.48M |
| 210* | 30 | 2/7/42 | 64 | 2,8 | 2,2 | -6° Neg. | TCG | 296.210.64M |
| 216* | 30 | | 64 | 2,8 | 2,2 | -6° Neg. | TCG | 297.064.09M |
| 225* | 30 | 2/7/42 | 64 | 2,8 | 2,2 | -6° Neg. | TCG | 296.225.64M |
| 230* | 30 | 2/7/42 | 48 | 2,8 | 2,2 | -6° Neg. | TCG | 296.230.48M |
| 235* | 30 | 2/7/42 | 48 | 2,8 | 2,2 | -6° Neg. | TCG | 296.235.48M |

*Non-low noise

Remarks: in plastic carry case.

Saw blades to fit on trim- and mitre saws, table saws and combined joinery machines. Negative hook angle


| D mm | B mm | Pin Hole ⊕⊗⊕ | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|------------------|-----|---------|---------|----------|-----|---------------------|
| 250 | 30 | COMBI3 | 80 | 3,2 | 2,5 | -6° Neg. | TCG | 297.080.10M |
| 250 | 32 | 2/12/64 | 80 | 3,2 | 2,5 | -6° Neg. | TCG | 297.080.10P |
| 254 | 30 | COMBI3 | 80 | 3,2 | 2,5 | -5° Neg. | TCG | 297.081.10M |
| 260 | 30 | 2/10/60 + 2/7/42 | 80 | 2,8 | 2,2 | -6° Neg. | TCG | 297.080.11M |
| 280* | 30 | 2/10/60 + 2/7/42 | 64 | 3,2 | 2,5 | -6° Neg. | TCG | 297.064.11M |
| 300 | 30 | COMBI3 | 96 | 3,2 | 2,5 | -6° Neg. | TCG | 297.096.12M |
| 300 | 32 | 2/12/64 | 96 | 3,2 | 2,5 | -6° Neg. | TCG | 297.096.12P |
| 305* | 30 | 2/10/60 + 2/7/42 | 96 | 3,2 | 2,5 | -6° Neg. | TCG | 297.096.13M |
| 315 | 30 | 2/10/60 + 2/7/42 | 96 | 3,2 | 2,5 | -6° Neg. | TCG | 297.096.23M |
| 330 | 30 | COMBI3 | 96 | 3,2 | 2,5 | -6° Neg. | TCG | 297.096.33M |
| 330 | 32 | COMBI3 | 96 | 3,2 | 2,5 | -6° Neg. | TCG | 297.096.33P |
| 350 | 30 | COMBI3 | 108 | 3,2 | 2,5 | -6° Neg. | TCG | 297.108.14M |
| 350 | 32 | 4/12/64 | 108 | 3,2 | 2,5 | -6° Neg. | TCG | 297.108.14P |
| 400 | 30 | 2/10/60 | 120 | 3,8 | 3,2 | -6° Neg. | TCG | 297.120.16M |
| 400 | 32 | 4/12/64 | 108 | 3,8 | 3,2 | -6° Neg. | TCG | 297.108.16P |
| 450 | 30 | 2/10/60 | 140 | 3,8 | 3,2 | -6° Neg. | TCG | Y297.140.18M |
| 450 | 32 | 2/12/64 | 108 | 3,8 | 3,2 | -6° Neg. | TCG | 297.108.18P |
| 500 | 32 | 2/12/64 | 120 | 4,0 | 3,2 | -6° Neg. | TCG | 297.120.20P |

*Non-low noise


Remarks: in cardboard box.

Dry cutter saw blades *industrial line***226****APPLICATION:** for crosscutting on different kinds of materials.**MACHINES:** dry-cutter and mitre saws without lubrication.**MATERIAL:** for ferrous materials and constructional steel.**WARNING:** not recommended for non-ferrous metals, wood, glass, concrete, plastic.

| | |
|---------------------|--------------|
| ISO: | K30 |
| HV10: | 1.520 |
| N/mm ² : | 2.300 |

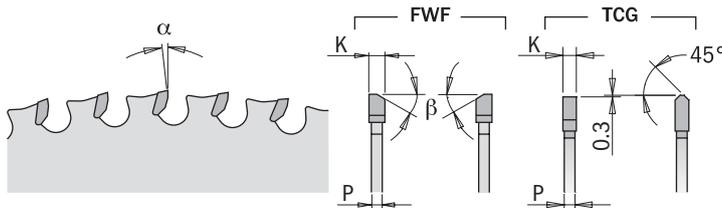**EXCELLENT**

For iron, steel, PVC, compound materials, melamine

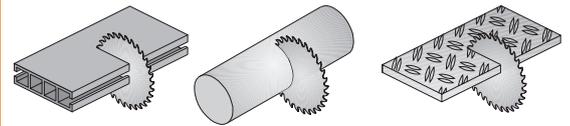

| D mm | B mm | Pin Hole | RPM suggested | RPM max | Z | K mm | P mm | α | β | ORDER NO. |
|----------------|---------|--------------|------------------|------------|----|---------|---------|----------|---------|--------------------|
| 136,5* | 10 | | 5500 | 10900 | 30 | 1,5 | 1,2 | 0° | TCG | 226.030.05 |
| 136,5* | 20 | | 5500 | 10900 | 30 | 1,5 | 1,2 | 0° | TCG | 226.030.05H |
| 160 | 20 | 2/6/32 | 4700 | 9300 | 30 | 2,0 | 1,6 | 0° | TCG | 226.030.06H |
| 165 | 15,87<> | | 4600 | 9000 | 36 | 1,5 | 1,2 | 0° | TCG | 226.036.06 |
| 165 | 20 | 2/6/32 | 4600 | 9000 | 36 | 1,5 | 1,2 | 0° | TCG | 226.036.06H |
| 184 | 15,87<> | | 4100 | 8000 | 48 | 2,0 | 1,6 | 0° | TCG | 226.048.07 |
| 190 | 30 | 2/7/42 | 4000 | 8000 | 40 | 2,0 | 1,6 | 0° | TCG | 226.040.07M |
| 210 | 15,87<> | | 3600 | 7300 | 48 | 2,2 | 1,8 | 0° | TCG | 226.048.08 |
| 210 | 30 | 2/7/42 | 3600 | 7300 | 48 | 2,2 | 1,8 | 0° | TCG | 226.048.08M |
| new 216 | 30 | 2/7/42 | 3500 | 7000 | 48 | 2,2 | 1,8 | 0° | TCG | 226.047.09M |
| 235 | 30 | 2/7/42 | 3200 | 6400 | 48 | 2,2 | 1,8 | 0° | TCG | 226.048.09M |
| 254 | 15,87 | | 3000 | 5900 | 48 | 2,2 | 1,8 | 0° | 8° FWF | 226.048.10 |
| 254 | 15,87 | | 3000 | 5900 | 60 | 2,2 | 1,8 | 0° | 8° FWF | 226.060.10 |
| 254** | 30 | COMBI3 | 3000 | 5900 | 60 | 2,2 | 1,8 | 0° | 8° FWF | 226.060.10M |
| 305 | 25,4 | | 2500 | 4900 | 60 | 2,2 | 1,8 | 0° | 8° FWF | 226.060.12 |
| 305 | 25,4 | | 2500 | 4900 | 80 | 2,2 | 1,8 | 0° | 8° FWF | 226.080.12 |
| 305** | 30 | COMBI3 | 2500 | 4900 | 80 | 2,2 | 1,8 | 0° | 8° FWF | 226.080.12M |
| new 355 | 25,4 | | 2100 | 4200 | 72 | 2,2 | 1,8 | 0° | 8° FWF | 226.072.14 |
| 355 | 25,4 | | 2100 | 4200 | 90 | 2,2 | 1,8 | 0° | 8° FWF | 226.090.14 |
| 355** | 30 | COMBI3 | 2100 | 4200 | 90 | 2,2 | 1,8 | 0° | 8° FWF | 226.090.14M |

*Non-low noise

** Remarks: in cardboard box.

Industrial XTreme saw blades for stainless steel

new CERMET

| D mm | B mm | Pin Hole | RPM suggested. | RPM max | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|--------------|-------------------|------------|----|---------|---------|----------|---------|--------------------|
| 160 | 20 | 2/6/32 | 4700 | 9300 | 40 | 1,8 | 1,4 | 10° | TCG | 226.540.06H |
| 184 | 15,87<> | | 4100 | 8000 | 48 | 2,0 | 1,6 | 10° | TCG | 226.548.07 |
| 190 | 30 | 2/7/42 | 4000 | 8000 | 48 | 1,8 | 1,4 | 10° | TCG | 226.548.07M |
| 216 | 30 | 2/7/42 | 3600 | 6900 | 56 | 1,8 | 1,4 | 10° | TCG | 226.556.09M |
| 250** | 30 | COMBI3 | 3000 | 5900 | 72 | 2,2 | 1,8 | 10° | 8° FWF | 226.572.10M |
| 254 | 15,87 | | 3000 | 5900 | 72 | 2,2 | 1,8 | 10° | 8° FWF | 226.572.10 |
| 300** | 30 | COMBI3 | 2500 | 4900 | 80 | 2,2 | 1,8 | 10° | 8° FWF | 226.580.12M |
| 305 | 25,4 | | 2500 | 4900 | 80 | 2,2 | 1,8 | 10° | 8° FWF | 226.580.12 |
| 355 | 25,4 | | 2100 | 4200 | 90 | 2,2 | 1,8 | 10° | 8° FWF | 226.590.14 |
| 355** | 30 | COMBI3 | 2100 | 4200 | 90 | 2,2 | 1,8 | 10° | 8° FWF | 226.590.14M |

** Remarks: in cardboard box.




223

APPLICATION: for swirl free cuts.
MACHINES: table saws and Panel sizing.
MATERIAL: solid surface materials (Dupont Corian®, Wilsonart Gibraltar®, SSV Fountainhead®, Varicor®, etc.) and thick plastic.
WARNING: not recommended for use on mitre saws.



| | | |
|--|---------------------|--------------|
| | ISO: | KCR06 |
| | HV10: | 1.950 |
| | N/mm ² : | 2.300 |

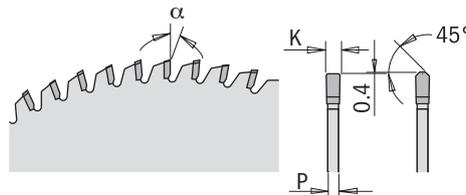

EXCELLENT

| | |
|---------------|---------------|
| Solid surface | Thick plastic |
| | |

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|--------------|----|---------|---------|----|------|--------------------|
| 250 | 30 | COMBI3 | 72 | 3,2 | 2,5 | 0° | MTCG | 223.072.10M |
| 300 | 30 | COMBI3 | 84 | 3,2 | 2,5 | 0° | MTCG | 223.084.12M |

PVC & plexiglass saw blades *Industrial line*




222

APPLICATION: for perfect cuts without melting and scratching.
MACHINES: table saws, Panel sizing and mitre saws.
MATERIAL: thin plastic, plexiglass, vinyl, plywood, laminated flooring.



| | | |
|--|---------------------|--------------|
| | ISO: | KCR06 |
| | HV10: | 1.950 |
| | N/mm ² : | 2.300 |

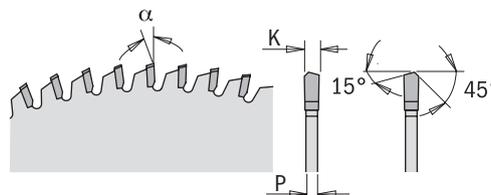

EXCELLENT

| | |
|----------------------|--------------|
| Plexiglass and Vinyl | Thin plastic |
| | |

GOOD

| | |
|---------|--------------------|
| Plywood | Two-sided melamine |
| | |

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|--------------|----|---------|---------|-----|------|--------------------|
| 250 | 30 | COMBI3 | 80 | 2,8 | 2,2 | -3° | MATB | 222.080.10M |
| 300 | 30 | COMBI3 | 96 | 2,8 | 2,2 | -3° | MATB | 222.096.12M |

ITK Plus ripping saw blades

new

CMT ORANGE TOOLS™




| | |
|---------------------|--------------|
| ISO: | K20 |
| HV10: | 1.550 |
| N/mm ² : | 2.300 |

271

APPLICATION: for rip cuts at high-speed rotation. The blade considerably reduces material waste thanks to the thin-kerf design. Particularly suitable for valuable wood.

MACHINES: miter saws, table saws, portable and cordless saws.

MATERIAL: soft and hardwood.

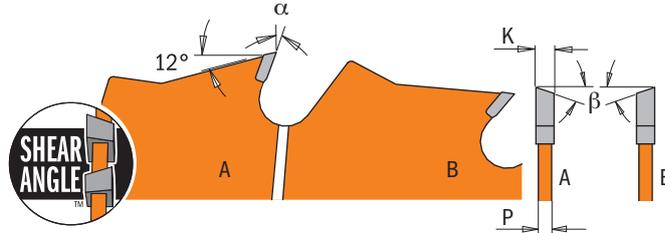

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|--------------|----|---------|---------|----------|--------------------|--------------------|
| 250 | 30 | COMBI3 | 24 | 2,4 | 1,6 | 20° | 10° ATB + 8° Shear | 271.250.24M |
| 300 | 30 | COMBI3 | 24 | 2,6 | 1,8 | 22° | 10° ATB + 8° Shear | 271.300.24M |

ITK Plus rip and crosscut saw blades

new





| | |
|---------------------|--------------|
| ISO: | K20 |
| HV10: | 1.550 |
| N/mm ² : | 2.300 |

271

APPLICATION: for rip and crosscuts at high-speed rotation. The blade considerably reduces material waste thanks to the thin-kerf design. Particularly suitable for valuable wood.

MACHINES: miter saws, table saws, portable and corless saws.

MATERIAL: soft and hardwood, plywood.



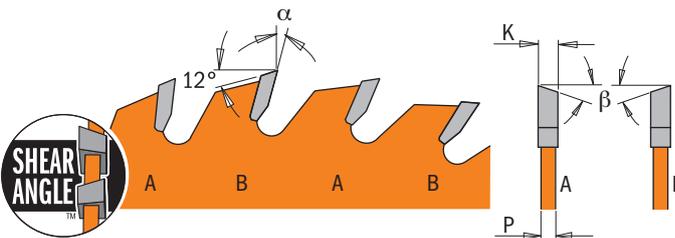


| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|----------------|--------------|----|---------|---------|----------|--------------------|--------------------|
| 136 | 20 (+10) | | 18 | 1,5 | 1,0 | 20° | 10° ATB + 8° Shear | 271.136.18H |
| 150 | 20 (+16) | | 24 | 1,5 | 1,0 | 18° | 10° ATB + 8° Shear | 271.150.24H |
| 160 | 20 (+16) | 2/6/32 | 24 | 1,7 | 1,1 | 18° | 10° ATB + 8° Shear | 271.160.24H |
| 165 | 20 (+15,87) | 2/6/32 | 24 | 1,7 | 1,1 | 18° | 10° ATB + 8° Shear | 271.165.24H |
| 184 | 20 (+16+15,87) | 2/7/42 | 24 | 1,7 | 1,1 | 20° | 10° ATB + 8° Shear | 271.184.24H |
| 184 | 30 | 2/7/42 | 24 | 1,7 | 1,1 | 20° | 10° ATB + 8° Shear | 271.184.24M |
| 190 | 30 (+20+16) | 2/7/42 | 24 | 1,7 | 1,1 | 20° | 10° ATB + 8° Shear | 271.190.24M |
| 200 | 30 | 2/7/42 | 36 | 1,8 | 1,2 | 15° | 10° ATB + 8° Shear | 271.200.36M |
| 210 | 30 (+25) | 2/7/42 | 36 | 1,8 | 1,2 | 15° | 10° ATB + 8° Shear | 271.210.36M |
| 216 | 30 | | 36 | 1,8 | 1,2 | -5° Neg. | 10° ATB + 8° Shear | 271.216.36M |
| 235 | 30 (+25) | 2/7/42 | 36 | 2,4 | 1,6 | 18° | 10° ATB + 8° Shear | 271.235.36M |
| 250 | 30 | COMBI3 | 42 | 2,4 | 1,6 | 18° | 10° ATB + 8° Shear | 271.250.42M |
| 300 | 30 | COMBI3 | 48 | 2,6 | 1,8 | 18° | 10° ATB + 8° Shear | 271.300.48M |



272

APPLICATION: for rip and crosscuts at high-speed rotation. The blade considerably reduces material waste thanks to the thin-kerf design. Particularly suitable for valuable wood.
MACHINES: miter saws, table saws, portable and cordless saws.
MATERIAL: soft and hardwood, plywood.

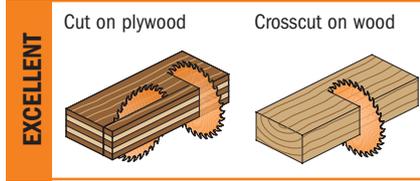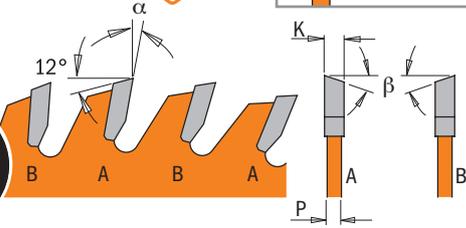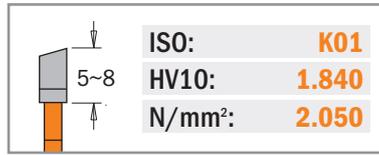




| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|----------------|----------|----|---------|---------|----------|--------------------|--------------------|
| 136 | 20 (+10) | | 36 | 1,5 | 1,0 | 18° | 10° ATB + 8° Shear | 272.136.36H |
| 150 | 20 (+16) | | 40 | 1,5 | 1,0 | 16° | 10° ATB + 8° Shear | 272.150.40H |
| 160 | 20 (+16) | 2/6/32 | 40 | 1,7 | 1,1 | 16° | 10° ATB + 8° Shear | 272.160.40H |
| 165 | 20 (+15,87) | 2/6/32 | 36 | 1,7 | 1,1 | 20° | 10° ATB + 8° Shear | 272.165.36H |
| 184 | 20 (+16+15,87) | 2/7/42 | 40 | 1,7 | 1,1 | 18° | 10° ATB + 8° Shear | 272.184.40H |
| 184 | 30 | 2/7/42 | 40 | 1,7 | 1,1 | 18° | 10° ATB + 8° Shear | 272.184.40M |
| 190 | 30 (+20+16) | 2/7/42 | 42 | 1,7 | 1,1 | 18° | 10° ATB + 8° Shear | 272.190.42M |
| 200 | 30 | 2/7/42 | 48 | 1,8 | 1,2 | 15° | 10° ATB + 8° Shear | 272.200.48M |
| 210 | 30 (+25) | 2/7/42 | 48 | 1,8 | 1,2 | 15° | 10° ATB + 8° Shear | 272.210.48M |
| 216 | 30 | | 48 | 1,8 | 1,2 | -5° Neg. | 10° ATB + 8° Shear | 272.216.48M |
| 235 | 30 (+25) | 2/7/42 | 48 | 2,4 | 1,6 | 18° | 10° ATB + 8° Shear | 272.235.48M |
| 250 | 30 | COMBI3 | 60 | 2,4 | 1,6 | 15° | 10° ATB + 8° Shear | 272.250.60M |
| 300 | 30 | COMBI3 | 72 | 2,6 | 1,8 | 15° | 10° ATB + 8° Shear | 272.300.72M |

ITK Plus fine cut-off saw blades



273

APPLICATION: for crosscuts and finish cuts. The blade considerably reduces material waste thanks to the thin-kerf design. Particularly suitable for valuable wood.
MACHINES: miter saws, table saws, portable and cordless saws.
MATERIAL: soft and hardwood, exotic wood, plywood and laminates.

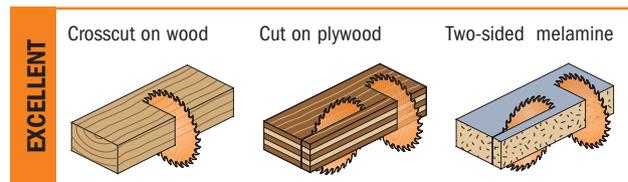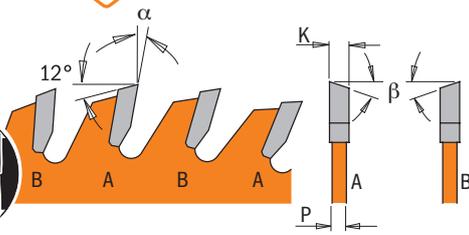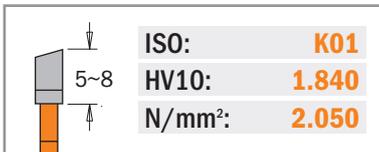

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|-------------|----------|----|---------|---------|----------|--------------------|--------------------|
| 160 | 20 (+16) | 2/6/32 | 56 | 1,7 | 1,1 | 12° | 10° ATB + 8° Shear | 273.160.56H |
| 190 | 30 (+20+16) | 2/7/42 | 64 | 1,7 | 1,1 | 15° | 10° ATB + 8° Shear | 273.190.64M |
| 216 | 30 | | 64 | 1,8 | 1,2 | -5° Neg. | 10° ATB + 8° Shear | 273.216.64M |
| 250 | 30 | COMBI3 | 80 | 2,4 | 1,6 | 12° | 10° ATB + 8° Shear | 273.250.80M |
| 300 | 30 | COMBI3 | 96 | 2,6 | 1,8 | 12° | 10° ATB + 8° Shear | 273.300.96M |

Saw blades for building contractors *for portable machines*

250-251


APPLICATION: for rip cuts especially designed for building contractors.

MACHINES: portable and cordless machines.

MATERIAL: single and hardwood, panels with nails, metal clips and pieces of concrete.




*Kit 10 pcs.

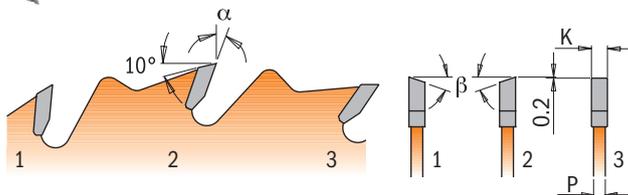


EXCELLENT

Rip cut on wood (serie 250)



Crosscut on wood (serie 251)



| D mm | B mm | Z | K mm | P mm | α | β | ORDER NO. |
|---------|-----------------------|----|---------|---------|----------|----------------|------------------------|
| 184 | 15,87 \triangleleft | 24 | 1,9 | 1,2 | 20° | 1FTG+2/20° ATB | 250.024.07 |
| 184 | 15,87 \triangleleft | 24 | 1,9 | 1,2 | 20° | 1FTG+2/20° ATB | 250.024.07-X10* |
| 184 | 15,87 \triangleleft | 40 | 1,9 | 1,2 | 20° | 1FTG+4/20° ATB | 251.040.07 |
| 184 | 15,87 \triangleleft | 40 | 1,9 | 1,2 | 20° | 1FTG+4/20° ATB | 251.040.07-X10* |

Ultra thin-kerf saw blades *for cordless saws*

new



271-272-226

APPLICATION (series 271-272): for rip and crosscuts where the ultra thin-kerf reduces material wastes.


MACHINES (series 271-272): portable cordless machines.

MATERIAL (series 271-272): soft and hardwood, plywood.




EXCELLENT

Rip cut on wood (serie 271)




EXCELLENT

Crosscut on wood (serie 272)



EXCELLENT


Metals and PVC (serie 226)



APPLICATION (series 226): for crosscuts of different kinds of materials.

MACHINES (series 226): portable cordless machines.

MATERIAL (series 226): for ferrous materials and construction steel.

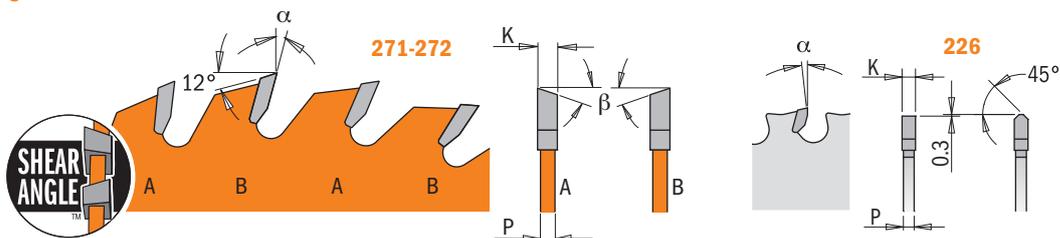

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|--|-----------------------|--------------|----|---------|---------|----------|--------------------|--------------------|
| Ripping cordless saw blades (series 271) | | | | | | | | |
| 136 | 20 (+10) | | 18 | 1,5 | 1,0 | 20° | 10° ATB + 8° Shear | 271.136.18H |
| 165 | 20 (+15,87) | 2/6/32 | 24 | 1,7 | 1,1 | 18° | 10° ATB + 8° Shear | 271.165.24H |
| 184 | 20 (+16+15,87) | 2/7/42 | 24 | 1,7 | 1,1 | 20° | 10° ATB + 8° Shear | 271.184.24H |
| Crosscutting cordless saw blades (series 272) | | | | | | | | |
| 136 | 20 (+10) | | 36 | 1,5 | 1,0 | 18° | 10° ATB + 8° Shear | 272.136.36H |
| 165 | 20 (+15,87) | 2/6/32 | 36 | 1,7 | 1,1 | 20° | 10° ATB + 8° Shear | 272.165.36H |
| 184 | 20 (+16+15,87) | 2/7/42 | 40 | 1,7 | 1,1 | 18° | 10° ATB + 8° Shear | 272.184.40H |
| Metal, PVC and compound material cordless saw blades (series 226) | | | | | | | | |
| 136,5 | 10 | | 30 | 1,5 | 1,2 | 0° | TCG | 226.030.05 |
| 136,5 | 20 | | 30 | 1,5 | 1,2 | 0° | TCG | 226.030.05H |
| 165 | 15,87 \triangleleft | | 36 | 1,5 | 1,2 | 0° | TCG | 226.036.06 |


DP saw blades for ultra-hard materials



60X
LONGER LIFE
THAN CARBIDE

236

APPLICATION: for rip and crosscuts on abrasive materials.
MACHINES: mitre saws, portable and cordless machines.
MATERIAL: cement fibre boards (Hardieplank® and Hardiepanel®), plasterboard, solid wood, panel materials, plastic.

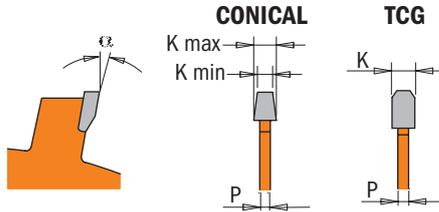

GOOD

Hardieplank® and Hardiepanel®, chipboard, MDF, Corian, Duroplast, Formica, Thermoplast, and plasterboard.

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|------|----------|----------|----|---------|------|-----|---------|--------------------|
| 160 | 20 | 2/6/32 | 4 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.160.04H |
| 160 | 20 | 2/6/32 | 10 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.160.10H |
| 180 | 20 | 2/6/32 | 4 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.180.04H |
| 184 | 15,87<-> | | 4 | 1,8 | 1,4 | 12° | TCG | 236.004.07 |
| 190 | 30 | 2/7/42 | 4 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.190.04M |
| 190 | 30 | 2/7/42 | 12 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.190.12M |
| 216 | 30 | | 14 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.216.14M |
| 230 | 30 | 2/7/42 | 4 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.230.04M |
| 250 | 30 | COMBI3 | 16 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.250.16M |
| 254 | 15,87 | | 6 | 2,2 | 1,6 | 12° | TCG | 236.006.10 |
| 300 | 30 | COMBI3 | 20 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.300.20M |
| 305 | 25,4 | | 8 | 2,2 | 1,6 | 12° | TCG | 236.008.12 |


Rip saw blades for portable machines



290

APPLICATION: for rip cuts.
MACHINES: mitre saws and portable machines.
MATERIAL: soft and hardwood.

ISO: K10
HV10: 1.765
N/mm²: 2.150

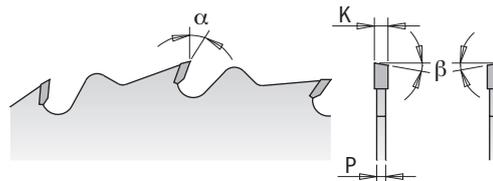

EXCELLENT

Rip cut on wood

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|------|------|----------|----|------|------|----------|---------|---------------------|
| 150 | 20 | | 12 | 2,4 | 1,4 | 20° | 10° ATB | 290.150.12H |
| 160 | 16 | | 12 | 2,2 | 1,6 | 20° | 10° ATB | 290.160.12E |
| 160 | 20 | 2/6/32 | 12 | 2,2 | 1,6 | 20° | 10° ATB | 290.160.12H |
| 180 | 30 | 2/7/42 | 12 | 2,6 | 1,6 | 20° | 10° ATB | 290.180.12M |
| 190 | 16 | 2/6/32 | 12 | 2,6 | 1,6 | 20° | 10° ATB | 290.190.12E |
| 190 | 20 | 2/6/32 | 12 | 2,6 | 1,6 | 20° | 10° ATB | 290.190.12H |
| 190 | 30 | 2/7/42 | 12 | 2,6 | 1,6 | 20° | 10° ATB | 290.190.12M |
| 200 | 30 | 2/7/42 | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.200.24M |
| 210 | 30 | 2/7/42 | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.210.24M |
| 216 | 30 | | 24 | 2,8 | 1,8 | -5° Neg. | 15° ATB | 290.216.24M |
| 220 | 30 | 2/7/42 | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.220.24M |
| 230 | 30 | 2/7/42 | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.230.24M |
| 235 | 25 | | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.235.24L |
| 235 | 30 | 2/7/42 | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.235.24M |
| 240 | 30 | 2/7/42 | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.240.24M |
| 250 | 30 | COMBI3 | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.250.24M* |
| 270 | 30 | 2/7/42 | 28 | 2,8 | 1,8 | 20° | 10° ATB | 290.270.28M* |

* Industrial quality

Contractor saw blade masterpack

new

CMT ORANGE TOOLS™





K (Contractor)

MACHINES: portable benchtop and table saws.**MATERIAL:** soft/hard wood, plywood, osb panels.

Designed for construction project, remodeler and DIY, these blades deliver solid performance at a very economical price.



Kit 10 pcs.

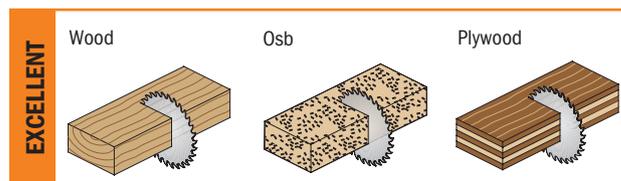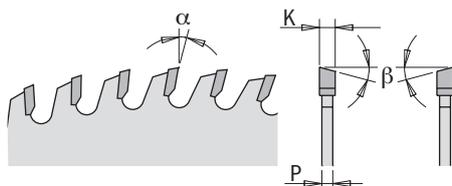

| DESCRIPTION | D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|-------------------------------|------|------|----------|----|------|------|----------|---------|-------------|
| Crosscut (pack 10 blades) | 160 | 20 | 2/6/32 | 24 | 2,2 | 1,4 | 15° | 15° ATB | K16024H-X10 |
| Fine cut-off (pack 10 blades) | 160 | 20 | 2/6/32 | 40 | 2,2 | 1,4 | 15° | 15° ATB | K16040H-X10 |
| Crosscut (pack 10 blades) | 190 | 30 | 2/7/42 | 24 | 2,2 | 1,4 | 20° | 10° ATB | K19024M-X10 |
| Crosscut (pack 10 blades) | 216 | 30 | | 24 | 2,4 | 1,6 | -5° Neg. | 15° ATB | K21624M-X10 |
| Fine cut-off (pack 10 blades) | 216 | 30 | | 48 | 2,4 | 1,6 | -5° Neg. | 15° ATB | K21648M-X10 |
| Crosscut (pack 5 blades) | 250 | 30 | COMBI3 | 40 | 2,6 | 1,8 | 15° | 10° ATB | K25040M-X05 |


Ultra thin-kerf saw blades for cordless saws



298

APPLICATION: for cutting grass, bushes and small trees.**MACHINES:** hedge trimmers.**MATERIAL:** grass, bushes and small trees.**WARNING:** please always wear safety glasses and ear protection and read the safety recommendations provided.

| | |
|---------------------|----------------|
| ISO: | SPECIAL |
| HV10: | 1.550 |
| N/mm ² : | 2.600 |

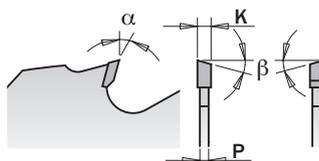

| D mm | B mm | RPM max | Z | K mm | P mm | α | β | ORDER NO. |
|------|------|---------|----|------|------|-----|---------|-------------|
| 250 | 20 | 12.000 | 20 | 2,2 | 1,4 | 15° | 10° ATB | 298.250.20H |
| 250 | 25,4 | 12.000 | 20 | 2,2 | 1,4 | 15° | 10° ATB | 298.250.20 |







285-291

APPLICATION: for rip and crosscuts.





MACHINES: table and mitre saws, portable machines.

MATERIAL: soft and hardwood, plywood.

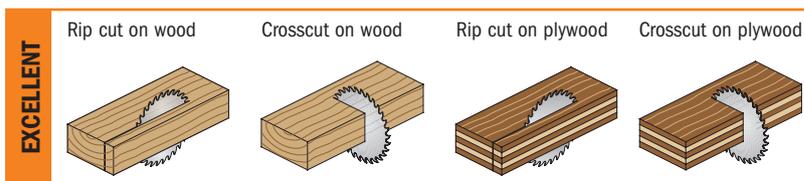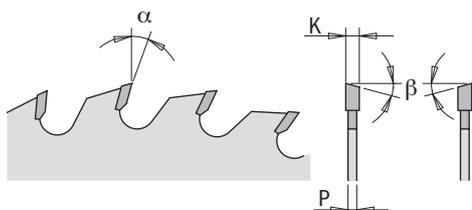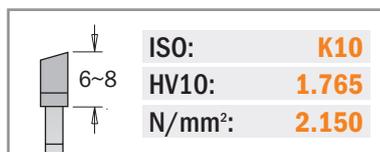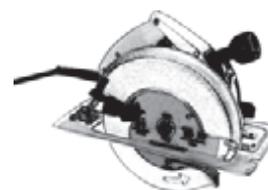

| D mm | B mm | Pin Hole  | Z | K mm | P mm | α | β | ORDER NO. |
|---------|------------------|---|----|---------|---------|----------|---------|---------------------|
| 120 | 20 | 2/5,5/30 | 18 | 1,8 | 1,2 | 15° | 15° ATB | 291.120.18H* |
| 125 | 20 | | 20 | 2,4 | 1,4 | 15° | 15° ATB | 291.125.20H |
| 130 | 20 | | 20 | 2,4 | 1,4 | 15° | 15° ATB | 291.130.20H |
| 140 | 20 | | 20 | 2,4 | 1,4 | 15° | 15° ATB | 291.140.20H |
| 150 | 16 | | 24 | 2,4 | 1,4 | 15° | 15° ATB | 291.150.24E |
| 150 | 20 | | 24 | 2,4 | 1,4 | 15° | 15° ATB | 291.150.24H |
| 160 | 16 | | 24 | 2,2 | 1,6 | 15° | 15° ATB | 291.160.24E |
| 160 | 20 | 2/6/32 | 24 | 2,2 | 1,6 | 15° | 15° ATB | 291.160.24H |
| 160 | 30 | 2/7/42 | 24 | 2,2 | 1,6 | 15° | 15° ATB | 291.160.24M |
| 165 | 20 | 2/6/32 | 24 | 2,6 | 1,6 | 15° | 15° ATB | 291.165.24H |
| 165 | 30 | 2/7/42 | 24 | 2,6 | 1,6 | 15° | 15° ATB | 291.165.24M |
| 170 | 30 | 2/7/42 | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.170.24M |
| 180 | 20 | 2/6/32 | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.180.24H |
| 180 | 30 | 2/7/42 | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.180.24M |
| 184 | 16 | | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.184.24E |
| 184 | 30 | | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.184.24M |
| 190 | 16 | 2/6/32 | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.190.24E |
| 190 | 20 | 2/6/32 | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.190.24H |
| 190 | 30 | 2/7/42 | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.190.24M |
| 190 | 20 (Festool® FF) | Key 5/7/2,5 | 32 | 2,6 | 1,6 | 10° | 10° ATB | 291.190.32FF |
| 200 | 30 | 2/7/42 | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.200.36M |
| 210 | 25 | | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.210.36L |
| 210 | 30 | 2/7/42 | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.210.36M |
| 216 | 30 | | 48 | 2,8 | 1,8 | -5° Neg. | 15° ATB | 291.216.48M |
| 220 | 30 | 2/7/42 | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.220.36M |
| 225 | 30 | 2/7/42 | 36 | 2,8 | 1,8 | 20° | 15° ATB | 291.225.36M |
| 230 | 30 | 2/7/42 | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.230.36M |
| 235 | 25 | | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.235.36L |
| 235 | 30 | 2/7/42 | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.235.36M |
| 240 | 30 | 2/7/42 | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.240.36M |
| 250 | 20 | COMBI3 | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10H* |
| 250 | 30 | COMBI3 | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10M* |
| 260 | 30 | 2/10/60 + 2/7/42 | 48 | 2,8 | 1,8 | 15° | 10° ATB | 285.048.11M* |
| 270 | 30 | 2/7/42 | 42 | 2,8 | 1,8 | 15° | 15° ATB | 291.270.42M* |

* Industrial quality

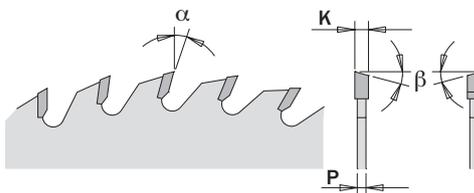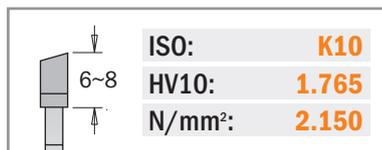Fine cut-off saw blades *for portable machines***281-285-292****APPLICATION:** for crosscuts, perfect finishing.**MACHINES:** table and mitre saws, portable machines.**MATERIAL:** soft, hard and exotic wood, wood-based panels, one-sided veneered, paper-based laminated.

| | D mm | B mm | Pin Hole  | Z | K mm | P mm | α | β | ORDER NO. |
|-----|---------|------------------|---|----|---------|---------|----------|---------|---------------------|
| NEW | 120 | 20 | 2/5,5/30 | 36 | 1,8 | 1,2 | 10° | 15° ATB | 292.120.36H* |
| | 120 | 20 | 2/5,5/30 | 40 | 1,8 | 1,2 | 10° | 15° ATB | 292.120.40H |
| NEW | 125 | 20 | - | 36 | 2,4 | 1,4 | 15° | 15° ATB | 292.125.36H |
| NEW | 130 | 20 | - | 36 | 2,4 | 1,4 | 15° | 15° ATB | 292.130.36H |
| NEW | 140 | 20 | - | 36 | 2,4 | 1,4 | 15° | 15° ATB | 292.140.36H |
| | 150 | 20 | - | 40 | 2,4 | 1,4 | 15° | 15° ATB | 292.150.40H |
| | 160 | 16 | - | 40 | 2,2 | 1,6 | 10° | 15° ATB | 292.160.40E |
| | 160 | 20 | 2/6/32 | 40 | 2,2 | 1,6 | 10° | 15° ATB | 292.160.40H |
| | 160 | 20 (Virutex) | 4/7/32 (45°) | 40 | 2,2 | 1,6 | 10° | TCG | 281.160.40H |
| NEW | 160* | 20 | 2/6/32 | 40 | 2,2 | 1,6 | 10° | TCG | 281.160.40H2 |
| | 160 | 30 | 2/7/42 | 40 | 2,2 | 1,6 | 10° | 15° ATB | 292.160.40M |
| | 160 | 20 | 2/7/42 | 56 | 2,2 | 1,6 | 15° | 15° ATB | 292.160.56H |
| | 165 | 20 | 2/6/32 | 40 | 2,6 | 1,6 | 10° | 15° ATB | 292.165.40H |
| NEW | 165 | 20 | 2/7/42 | 56 | 2,2 | 1,6 | 15° | 15° ATB | 292.165.56H |
| | 165 | 30 | 2/7/42 | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.165.40M |
| | 170 | 30 | 2/7/42 | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.170.40M |
| | 180 | 20 | 2/6/32 | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.180.40H |
| | 180 | 30 | 2/7/42 | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.180.40M |
| | 184 | 16 | | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.184.40E |
| | 184 | 30 | | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.184.40M |
| | 190 | 16 | 2/6/32 | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.190.40E |
| | 190 | 20 | 2/6/32 | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.190.40H |
| | 190 | 30 | 2/7/42 | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.190.40M |
| | 190 | 30 | 2/7/42 | 64 | 2,6 | 1,6 | 15° | 15° ATB | 292.190.64M |
| | 190 | 20 (Festool® FF) | 5/7/2,5 | 48 | 2,4 | 1,6 | 10° | 15° ATB | 292.190.48FF |
| | 200 | 30 | 2/7/42 | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.200.48M |
| | 210 | 25 | | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.210.48L |
| | 210 | 30 | 2/7/42 | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.210.48M |
| | 210 | 30 | 2/7/42 | 64 | 2,8 | 1,8 | 15° | 15° ATB | 292.210.64M |
| | 216 | 30 | | 64 | 2,8 | 1,8 | -5° Neg. | 15° ATB | 292.216.64M |
| NEW | 216 | 30 | | 80 | 2,8 | 1,8 | -5° Neg. | 15° ATB | 292.216.80M |
| | 220 | 30 | 2/7/42 | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.220.48M |
| | 225 | 30 | 2/7/42 | 48 | 2,8 | 1,8 | 10° | 15° ATB | 292.225.48M |
| | 230 | 30 | 2/7/42 | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.230.48M |
| | 230 | 30 | 2/7/42+2/10/60 | 64 | 2,8 | 1,8 | 15° | 15° ATB | 292.230.64M |
| | 235 | 25 | | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.235.48L |
| | 235 | 30 | 2/7/42 | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.235.48M |
| | 240 | 30 | 2/7/42 | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.240.48M |
| | 250 | 30 | COMBI3 | 60 | 3,2 | 2,2 | 10° | 15° ATB | 285.060.10M* |
| | 260 | 30 | 2/10/60 + 2/7/42 | 60 | 2,8 | 1,8 | 10° | 15° ATB | 285.060.11M* |

* Industrial quality


Precision dado

230 CMT thoroughly researched the shortcomings of "standard" dado sets and learned what cabinet makers required most from an "ideal" dado.



The result was the superior CMT precision dado, designed with the following features:

- anti-kickback design to reduce the possibility of overfeeding that can occur when cutting mass material.
- splinter resistant cuts in veneer plywood, melamine and hard and soft woods;
- shim sets included for cuts between 6,35mm (1/4") and 22,23mm (7/8").


Precise cuts for accurate fitting dado-groove joints.

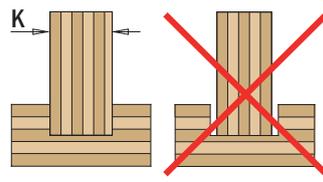



Set includes:

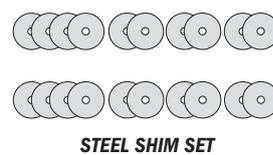

| Shims set contains | |
|--------------------|------------|
| No. | Shim Width |
| 4 | 0.1mm |
| 2 | 0.2mm |
| 2 | 0.3mm |
| 2 | 0.5mm |

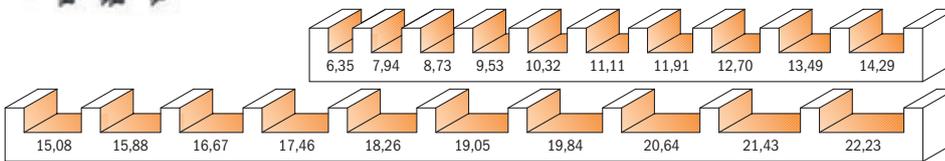


| K mm | Number of required inside blades | | |
|-------|----------------------------------|-------|-------|
| | 1,6mm | 2,4mm | 3,2mm |
| 6,35 | 0 | 0 | 0 |
| 7,94 | 1 | 0 | 0 |
| 8,73 | 0 | 1 | 0 |
| 9,53 | 0 | 0 | 1 |
| 10,32 | 1 | 1 | 0 |
| 11,11 | 1 | 0 | 1 |
| 11,91 | 0 | 1 | 1 |
| 12,70 | 0 | 0 | 2 |
| 13,49 | 1 | 1 | 1 |
| 14,29 | 1 | 0 | 2 |
| 15,08 | 0 | 1 | 2 |
| 15,88 | 0 | 0 | 3 |
| 16,67 | 1 | 1 | 2 |
| 17,46 | 1 | 0 | 3 |
| 18,26 | 0 | 1 | 3 |
| 19,05 | 0 | 0 | 4 |
| 19,84 | 1 | 1 | 3 |
| 20,64 | 1 | 0 | 4 |
| 21,43 | 0 | 1 | 4 |
| 22,23 | 1 | 1 | 4 |

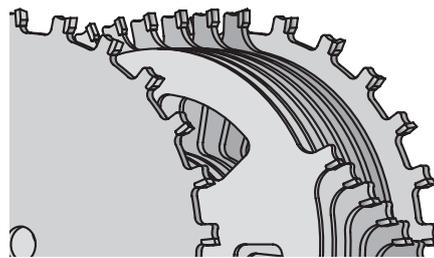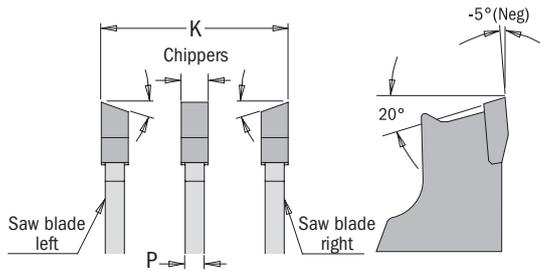




| D mm | B mm | Z | P (inside blades) | | | K min. | K max. | α | β | ORDER NO. |
|------|-------|----|-------------------|--------|--------|--------|--------|-----|---------|--------------------|
| | | | 3,2mm | 2,4mm | 1,6mm | | | | | |
| 150 | 15,87 | 20 | 4 pcs. | 1 pcs. | 1 pcs. | 6,35 | 22,23 | -5° | FTG+ATB | 230.520.06 |
| 200 | 15,87 | 24 | 4 pcs. | 1 pcs. | 1 pcs. | 6,35 | 22,23 | -5° | FTG+ATB | 230.524.08 |
| 200 | 30 | 24 | 4 pcs. | 1 pcs. | 1 pcs. | 6,35 | 22,23 | -5° | FTG+ATB | 230.524.08M |



Set includes:



| Shims set contains | |
|--------------------|------------|
| No. | Shim Width |
| 3 | 0.1mm |
| 2 | 0.2mm |
| 1 | 0.3mm |
| 1 | 0.5mm |

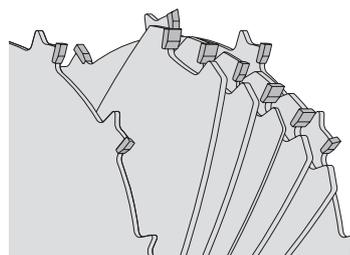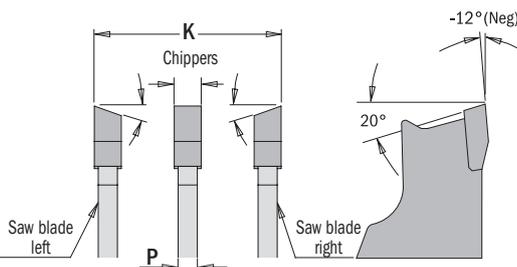

| K mm | Number of required inside blades | |
|-------|----------------------------------|-------|
| | 1,6mm | 3,2mm |
| 6,35 | 0 | 0 |
| 7,94 | 1 | 0 |
| 9,53 | 0 | 1 |
| 11,11 | 1 | 1 |
| 12,70 | 0 | 2 |
| 14,29 | 1 | 2 |
| 15,88 | 0 | 3 |
| 17,46 | 1 | 3 |
| 19,05 | 0 | 4 |
| 20,64 | 1 | 4 |

| D mm | B mm | Z | P (inside blades) | | K min. | K max. | α | β | ORDER NO. |
|------|-------|----|-------------------|--------|--------|--------|------|---------|-------------------|
| | | | 3,2mm | 1,6mm | | | | | |
| 200 | 15,87 | 12 | 4 pcs. | 1 pcs. | 6,35 | 20,64 | -12° | FTG+ATB | 230.012.08 |

Grooving saw blades *industrial line*


240

APPLICATION: for grooving cuts or for rebating, chamfering, grooving and profiling as a set of tools.

MACHINES: **double-end tenoner and** moulding machines.

MATERIAL: soft and hardwood, wood-based panels, plastic.

| | |
|---------------------|--------------|
| ISO: | K01 |
| HV10: | 1.840 |
| N/mm ² : | 2.050 |



The new design allows multi-rip grooves using different kerf thickness.


| D mm | B mm | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|----|---------|---------|----------|---------|--------------------|
| 150 | 30 | 12 | 2,0 | 1,4 | 15° | FLAT | 240.020.06M |
| 150 | 35 | 12 | 2,0 | 1,4 | 15° | FLAT | 240.020.06R |
| 150 | 30 | 12 | 3,0 | 2,0 | 15° | FLAT | 240.030.06M |
| 150 | 35 | 12 | 3,0 | 2,0 | 15° | FLAT | 240.030.06R |
| 150 | 30 | 12 | 4,0 | 3,0 | 15° | FLAT | 240.040.06M |
| 150 | 35 | 12 | 4,0 | 3,0 | 15° | FLAT | 240.040.06R |
| 150 | 30 | 12 | 5,0 | 3,0 | 15° | FLAT | 240.050.06M |
| 150 | 35 | 12 | 5,0 | 3,0 | 15° | FLAT | 240.050.06R |
| 150 | 30 | 12 | 6,0 | 3,0 | 15° | FLAT | 240.060.06M |
| 150 | 35 | 12 | 6,0 | 3,0 | 15° | FLAT | 240.060.06R |
| 180 | 30 | 18 | 3,0 | 2,0 | 15° | FLAT | 240.030.07M |
| 180 | 35 | 18 | 3,0 | 2,0 | 15° | FLAT | 240.030.07R |
| 180 | 30 | 18 | 4,0 | 3,0 | 15° | FLAT | 240.040.07M |
| 180 | 35 | 18 | 4,0 | 3,0 | 15° | FLAT | 240.040.07R |
| 180 | 30 | 18 | 5,0 | 3,0 | 15° | FLAT | 240.050.07M |
| 180 | 35 | 18 | 5,0 | 3,0 | 15° | FLAT | 240.050.07R |
| 180 | 30 | 18 | 6,0 | 3,0 | 15° | FLAT | 240.060.07M |
| 180 | 35 | 18 | 6,0 | 3,0 | 15° | FLAT | 240.060.07R |

Biscuit joiner saw blades



240-241

CMT's 100mm biscuit joiner saw blades with orange PTFE industrial coating trademark make biscuit joints quickly and easily. High-grade German steel and 8 micrograin carbide-tipped teeth guarantee years of use. These blades fit Lamello, Dewalt, Porter-Cable, Skil, Bosch, Freud and other popular biscuit joints models.

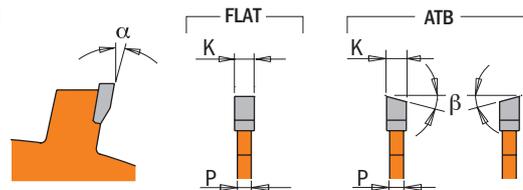

| D mm | B mm | Pin Hole | Z | K mm | P mm | α | β | ORDER NO. |
|---------|---------|----------------|---|---------|---------|----------|---------|-------------------|
| 100 | 22 | 4/4,5 - 9,5/36 | 6 | 3,96 | 3,0 | 18° | 10° ATB | 240.006.04 |
| 100 | 22 | 4/4,5 - 9,5/36 | 8 | 3,96 | 3,0 | 15° | 10° ATB | 240.008.04 |
| 100* | 22 | - | 8 | 3,96 | 3,1-3,9 | 15° | FLAT | 241.008.04 |


* For Virutex, Porter-Cable machines

Mini-spot circular saw blade for Lamello



240.004.04

The new CMT mini-spot saw blade is ideal for any type of repairing on solid wood. Resin, knots and other wood flaws are no longer a problem. Thanks to this product and original patches the cut points will be covered up perfectly. After repairing, the patches will practically be invisible, because the wood and patches grains will match in the same direction. For use with Lamello or other machines.

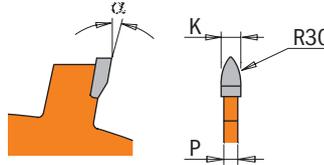

| D mm | B mm | Z | K mm | P mm | α | β | ORDER NO. |
|------|------|---|------|------|-----|-----|-------------------|
| 100 | 22 | 4 | 8,0 | 6,0 | 18° | R30 | 240.004.04 |

Balance blade & sanding disks



299.11

Before starting a saw project, balance your CMT blade in your table saw with the CMT balance blade and sanding disk. Mount the balance blade in your table saw and line it up with a square for accuracy. Remove the balance blade and mount your saw blade for true and precise cuts. You can also use the balance blade as a sander by attaching a self-stick sandpaper.



| D mm | B mm | P mm | ORDER NO. |
|------|-------|------|--------------------|
| 200 | 15,87 | 2,8 | 299.111.00 |
| 200 | 30 | 2,8 | 299.111.00M |
| 250 | 15,87 | 2,8 | 299.112.00 |
| 250 | 30 | 2,8 | 299.112.00M |

Saw blades stabilizers



299.10


The CMT blade stabilizer virtually eliminates rim vibration to make cleaner, straighter cuts and extend the life of your CMT saw blade. It also helps eliminate distracting noise caused by vibration during cutting.

NOTE: use on stationary saws only. Each order includes 2 stabilizers.



| DESCRIPTION | D mm | B mm | P mm | ORDER NO. |
|--------------------------------|------|-------|------|--------------------|
| Stabilizer (2 pcs.) for Ø200mm | 75 | 15,87 | 3,0 | 299.101.00 |
| Stabilizer (2 pcs.) for Ø200mm | 75 | 30 | 3,0 | 299.101.00M |
| Stabilizer (2 pcs.) for Ø250mm | 125 | 15,87 | 3,0 | 299.102.00 |
| Stabilizer (2 pcs.) for Ø250mm | 125 | 30 | 3,0 | 299.102.00M |
| Stabilizer (2 pcs.) for Ø300mm | 152 | 25,4 | 3,0 | 299.103.00 |
| Stabilizer (2 pcs.) for Ø300mm | 152 | 30 | 3,0 | 299.103.00M |

Reduction rings for saw blades

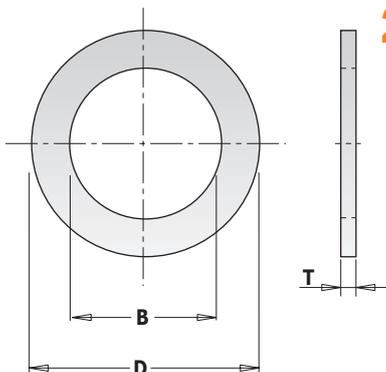

299

| D mm | B mm | T mm | ORDER NO. | D mm | B mm | T mm | ORDER NO. |
|-------------------------|-------|------|-------------------|------|-------|------|--------------------------------------|
| 15,87 | 10 | 1,2 | 299.218.00 | 30 | 15 | 1,4 | 299.240.00 <small>new</small> |
| 15,87 | 12,7 | 1,2 | 299.217.00 | 30 | 15,87 | 1,4 | 299.211.00 |
| 20 | 12,7 | 1,2 | 299.221.00 | 30 | 16 | 1,4 | 299.223.00 |
| 20 | 16 | 1,2 | 299.222.00 | 30 | 16 | 2,0 | 299.226.00 |
| 20 | 18 | 1,4 | 299.236.00 | 30 | 18 | 1,4 | 299.232.00 |
| <small>new</small> 22,2 | 15 | 1,4 | 299.237.00 | 30 | 19,05 | 1,4 | 299.241.00 <small>new</small> |
| <small>new</small> 22,2 | 16 | 1,4 | 299.242.00 | 30 | 20 | 1,4 | 299.224.00 |
| <small>new</small> 22,2 | 20 | 1,4 | 299.238.00 | 30 | 22 | 1,4 | 299.231.00 |
| 25,4 | 15,87 | 1,4 | 299.216.00 | 30 | 20 | 2,0 | 299.227.00 |
| 25,4 | 19,05 | 1,4 | 299.213.00 | 30 | 25 | 1,4 | 299.225.00 |
| 25,4 | 20 | 1,4 | 299.214.00 | 30 | 25 | 2,0 | 299.228.00 |
| <small>new</small> 25,4 | 20 | 2,3 | 299.220.00 | 30 | 25,4 | 2,0 | 299.212.00 |
| 25,4 | 22 | 1,4 | 299.215.00 | 32 | 30 | 2,0 | 299.229.00 |
| <small>new</small> 25,4 | 22,2 | 1,4 | 299.239.00 | 35 | 30 | 2,0 | 299.230.00 |
| <small>new</small> 25,4 | 22,2 | 2,3 | 299.219.00 | 35 | 32 | 2,0 | 299.233.00 |

Saw blades for portable machines

| MACHINE | DxB mm |
|---|-----------|
| AEG | |
| HK 125 | 120x20 |
| HK 125 A, HK 125 B, HK 125 H | 125x20 |
| TKS 42, PC 300 | 132x20 |
| HK 40, TK 40, TKS 42 | 140x20 |
| HK 86, HK 707 | 143x19 |
| HK 45, HK 717, HK 727 | 150x19 |
| AHK 52, HK 45 A, HK 46, HK 46 S, HK 46 N, HKS 46, HKS 46 S, HKS 46 N, HK 50, HK 52, HKS 52, HK 737 | 150x20 |
| HK 55, HK 55 A, HK 55 B, HKS 55, | 160x20 |
| HK 160 A, HK 160B, KS 55 S, KS 55 SE | 190x30 |
| HKS 64 A, HK 65, HK 65 A, HKS 65, HKS 65 A, HK 66, HKS 66, HKS 66, HKSE 66, HK 190, K 66, K 66 E, K 66 S, K 66 SE, KS 65, KS 66 S | 190x30 |
| HK 200 | 200x25 |
| HK 201 | 200x30 |
| HK 75, HK 75 A, HKS 75 | 210x30 |
| HKS 35, HKS 85 | 230x30 |
| HK 240 | 240x30 |
| MK 65 | 280x30 |
| ALKO | |
| Basic 205 GK | 205x18 |
| Pro 250 GK | 250x20 |
| Basic, HS 3, HS 4, Hobby, Holzmeister H, Holzmeister S, Holzmeister NHS, Pro-X | 315x30 |
| W 450, W 500 450x30 | |
| W 50 Profi, W 450, W 500 | 500x30 |
| RM 60, W 60 | 600x30 |
| RM 70, RZ 70, TWM 70, TWZ 700, W 70 | 700x30 |
| ALPHA-TOOLS | |
| KS 250 | 205x18 |
| ATIKA | |
| Toptronic | 250x30 |
| ATK 315 H, BTA 90, HAT 315 | 315x30 |
| ABH 400, ABK 400, BTH 400, BTK 400 | 400x30 |
| ABH 450, ABK 450, ATU 450, | 450x30 |
| BTH 450, BTK 450, BTU 450, BWK 450 | 500x30 |
| ABH 500, ABK 500, BTH 500, BTK 500, BTU 500, BWK 500 | 500x30 |
| AVOLA | |
| LH 315, TZV 315, TVZ 315 W | 315x30 |
| ITZH 350, ITZH 350 W 350 30, ZB 400, | 450x30 |
| ZBV 400 400 30IC 450, ZB 450, ZBV 450 | |
| ZB 500, ZBV 500 | 500x30 |
| BWS 550 | 550x30 |
| KWK 600, RK 600 | 600x30 |
| BWS 700, BWTS 700, KWK 700 | 700x30 |
| BLACK & DECKER | |
| D 984, D 985, DN 55, DN 56, | 125x12,75 |
| DN 254, DN 984, DN 985 | |
| KC 1440 SK | 136x10 |
| BD 227, BD 228, BD 846, CD 600, DN 227, | 140x12,75 |
| DN 227 H, KS 40, KS 227, KS 840, KS 846, P 3501 | |
| P 88-09 (Akku, 12 V) | 150x20 |
| BD 228, BD 228 CK, BD 228 L, | 156x12,75 |
| DN 57, DN 228, SR 352, SR 352 E, P 3601 | |
| BD 855, GKS 54 CE, KS 55, KS 855, KS 855 N, M 336, M 975, M 976 U 336, U 975, U 976 | 160x16 |
| BD 229, BD 865, BD 865 E, DN 59, DN 229, DN 229, GD 60, HD 100, HD 1000, | 180x16 |
| HD 1200 P, HD 2062, KS 65 K, KS 865, KS 865 E, KS 865 KN, SEC 718, SR 300, SR 362 E, P 37-03, P 37-05 | |
| HD 1200 | 180x20 |
| BD 365 | 190x30 |
| M 338, U 338 | 200x16 |
| BD 88, BD 800, DN 800, | 210x30 |
| DN 810, HD 2075 S HD 20755, | |
| KS 800, KS 805, KS 810, KS 810 A, | |
| P 38-02, PS 174, SEC 818, SR 700 | |
| BOSCH | |
| GUF 4-22 A, PSF 22 (Schatten-fugensäge) | 105x20 |
| PKS 38, PKS 40, PKS 40 S, S 43 | 130x16 |
| 1551, 1559 | 140x20 |
| GKS 12 V, GKS 46, PKS 46, | 150x16 |
| PKS 416, PKS 48, S 1, S 33 | |
| GKS 24 V, GKS 54, GKS 54 C, | 160x16 |
| GKS 54 CE, GKS 54 E, GKS 59, KS 550, PKS 54, PKS 54 CE | |
| 1552, 1556, 1563, GKS 55 | 170x30 |
| 0550, 1550, 1553, 1557, 1560 | 180x30 |
| P 300, PKS 65 | 190x16 |
| 0051, 1553, 1564, GKS 65, GKS 66, | 190x30 |
| GKS 66 CE, GKS 68 B, GKS 68 BC, GKS 68 CE, P 30, PKS 66, PKS 66 CE | |
| 0551, 1561 | 200x30 |
| 1554, 1558, 1565, 1588, GKS 72 S | 210x30 |
| GCM 8 S | 216x30 |
| 0052, 0552, 1562, 1566, 1662, GKS 85 S | 230x30 |
| 1555 | 240x30 |
| GCM 10, GCM 10 S, GCM 10 | 250x30 |
| SD, GTS 10 | 250x30 |
| GCM 12, GCM 12 S | 305x30 |

| MACHINE | DxB mm |
|---|--------|
| CASAIS | |
| SC 650 | 150x20 |
| VSC 65 | 200x30 |
| HKS 2000 | 210x30 |
| SC 320 | 230x30 |
| DEWALT | |
| DW 935 K, DW 936 K | 136x10 |
| DW 351 | 150x20 |
| DW 007 K, DW 007 KH | 165x10 |
| DC 390 KA, DC 390 KA/3, DC 390 KB | 165x20 |
| DW 62 | 184x16 |
| DW 365 | 190x30 |
| DW 700, DW 701, DW 707 | 216x30 |
| DW 383 | 235x30 |
| DW 86 | 240x30 |
| DW 100, DW 110, DW 111 | 250x16 |
| DW 120, DW 125, DW 150, DW 170, DW 250, | 250x30 |
| DW 252, DW 320, DW 702, DW 703, DW 710, | |
| DW 742, DW 743, DW 744, DW 720 K, | |
| DW 746 K, DW 1251, DW 1370, DW 1501, | |
| DW 1503 | |
| DW 709, DW 711 | 260x30 |
| DW 721, DW 722 K, DW 725 K, DW 726 K, | 300x30 |
| DW 810, DW1370, DW 1935/31L, 142 DS, | |
| 160 DS, 1635, 1875, 2155 | |
| MC 20 | 300x32 |
| DW 704, DW 705, DW 706, | 305x30 |
| DW 708, D 27105 | 350x30 |
| DW 728 K, DW 729 K, 1600 S, C 14 | |
| C 14, 1600 S, 1635 GL, 2155 G | 400x30 |
| 6 K, 6 L, DA 1635 | 500x30 |
| EINHELL | |
| BT-CS 1200, HES 55, HES 160 | 160x20 |
| RT-CS 165 | 165x16 |
| BHS 1300 | 184x16 |
| BT-CS 1400 | 190x20 |
| RT-CS 190 L | 190x30 |
| BT-TS 800 | 200x16 |
| HES 200 | 200x30 |
| RT-TS 920 | 205x16 |
| RT-FF 1220 U | 205x30 |
| BT-MS 210, BT-SM 2050, KGST | 210x30 |
| 210, RT-SM 305 L, RT-TS 1221 | |
| KGST 500 | 250x20 |
| BT-MS 250 L, BT-SM 3100, | 250x30 |
| BT-TS 1500 U, KGS 250, KGS, 300 UG, | |
| KGS 301, KGS 330, KGTN 245, KGTN 250, | |
| RT-SM 430 U, RT-TS, 1725 U, RT-TS 1825 U, | |
| RT-UD, 1825, RT-UD 1825, RT-XM 305 U | |
| RT-SM 330 U | 305x30 |
| RT-CC 315 U, RT-TS 2031 U, RT-TS 2231 DU | 215x30 |
| BT-LC 400/1 | 400x30 |
| BT-LC 500 | 450x30 |
| BT-LC 700 D | 700x30 |
| ELEKTRA BECKUM | |
| Multi 180 | 200x30 |
| KS 205 | 205x18 |
| KS 210, GKS 255, P200, PK 200, | 210x30 |
| PK 220, UK 220 W, UK 220 E | |
| Secanta | 220x30 |
| PK 250, PK 255, KGT 500, KGS | 250x20 |
| 300, KGT 550, UK 330, KS 250 | |
| KGS 250, KGS 250 K, KGS 300, KGS 301, | 250x30 |
| KGS 303, KGS 330, KGS 331, KGT 250, | |
| KGT 500, KGT 501, KGT 550, KS 250, KS | |
| 304, Multi 260, Multi 310, PK 250, | |
| PK 255, PK 2800, PK 3100, PK | |
| 4200, PK 6000, PKF 255, UK250, UK 330 | |
| PK 300, PK 300 K, PKV 300 G | 300x30 |
| KS 304 | 304x30 |
| 1800, 2200, 2800, 3100, 4100, | 315x30 |
| Combi und Standard HS 315, | |
| Combi HSG, TKHS 315, TK, HS 315 E | |
| TK 350 | 350x30 |
| BKH 400, BKS 400, BKS 450, | 400x30 |
| BS 3100 W, BS 4200, BS 5500 W | |
| BKH 450, BKS 450, BS 6000 D, | 450x30 |
| BS 8000 D | |
| BKH 450, BS 6000 D, BS 8000 D | 500x30 |
| BW 400, BW 600, BW 700 | 600x30 |
| BW 700, BW 750, BW 4000 | 700x30 |
| ELU/DEWALT | |
| MKK 26 | 86x12 |
| MH 25, MH 25 K | 100x12 |
| DS 140 Double Schatten-fugensäge | 105x22 |
| MHA 14 KA, MHA 18 KA | 136x10 |
| MH 151, MH 151/10, MHA 151 | 150x20 |
| MH 18, MH 30, MH 82, MH 182, PS 174 | 150x30 |
| MH 55, MH 155 | 170x30 |
| MH 65 | 180x30 |
| MH 165, MH 265 | 190x30 |
| MH 30, MH 82, MH 182 | 230x30 |
| ETS 41, PS 174, PS 274, PS 244 E | 216x30 |
| MH 85, MH 286 | 240x30 |

| MACHINE | DxB mm |
|---|----------|
| ELU/DEWALT (vervolg) | |
| ETS 21, ETS 23, ETS 31, ETS 33, KSU 101, | 250x30 |
| RAS 1251, RAS 1253, RKS 1251, RKS 1253, | |
| TGS 71, TGS 170, TGS 171, TGS 172, | |
| TGS 173, TGS 271, TGS 273 | |
| EMTS 711 | 260x30 |
| ETS 3001, ETS 3003, PS 374 | 300x30 |
| EMS 705, PS 374 | 305x30 |
| RKS 1603 | 350x30 |
| MTS 24 | 355x25,4 |
| RSA 133/25 | 500x30 |
| ELUMATEC | |
| KS 101, MGS 460 | 254x32 |
| DG 163, RS 160, TS 161 | 280x32 |
| KS 101, MGS 460 | 300x32 |
| MGS 72/04, MGS 73/23 | 330x32 |
| DG 79/03-05, DG 79/50, SA 73/25 | 330x32 |
| DG 79/30-32, DG 79/51, MGS | 380x32 |
| 72/30, MGS 73/33, SA 73/35 | |
| DG 102, DG 104, DG 140, MGS | 420x30 |
| 105, MGS 461, SA 103/25 | |
| DG 142, MGS 142, SA 142 | 500x30 |
| DG 204, DG 240, MGS 205 | 550x30 |
| EMCO | |
| Universal | 200x15 |
| Rex 2000, Super 1011 | 250x20 |
| KS 80, MK 81 | 250x30 |
| EUMENIA | |
| ML 50 L | 220x30 |
| FEIN | |
| SSK 646, SSL 646 | 150x20 |
| SSK 660 | 160x20 |
| SSK 661 | 210x30 |
| FELDER | |
| KF 700 | 250x30 |
| BF 6-26, BF 6-31, BF 6-41, | 315x30 |
| BF 31, K 37, KFS 37 | |
| FELISATI | |
| TP 751 | 150x20 |
| TP 756 | 160x20 |
| TP 765 | 190x20 |
| TP 781 | 230x30 |
| T 84, T 85, T 87, T 770, T 771, | 250x20 |
| T 777, T 777 B, T 777 CE, T 778, T 867 GS | |
| M 74, M 75, M 76, M 77, T 84, | 250x30 |
| T 85, T 87, T 88 | |
| T 82, T 83, T 91, T 91 CE, T 97 CE | 300x30 |
| FERM | |
| FZT 250, FZT 250 EN | 250x30 |
| FESTOOL | |
| AUF 35-S3, AUF 35-S4 | 105x20 |
| AUF 35-S2 | 120x20 |
| AF 45 E, AXF 45 | 150x30 |
| AP 55, AP 55 E, AP 55 E-FS, AP 55 FS, | 160x20 |
| ATF 55, ATF 55 E, ATF 55 EB, ATF 55 E-FS, | |
| ATF 55 FS, AP 55 EB, TS 55, TS 55 | |
| EQ, TS 55 EBQ, TS 55 Q | |
| AAU, AU 50, AUP 50 | 160x30 |
| AM 42 A, AM 42 S, AM 42 T, AMT 42 S, | 170x33 |
| AT 55 B, AT 55 C, AT 55 E, ATU 42-S, | |
| AU 42 S, AUT 42 S, AXT 50 LA, AXT 55 | |
| AU 55 S, AU 60 P, AU 60 S, A | 180x30 |
| UP 60 S, AUT 60 S | |
| AP 65, AP 65 E, AP 65 E-FS, AP 65 EB, | 190x30 |
| AP 65 EB-FS, AT 65, AT 65 E, AT 65 E-FS, | |
| AT 65 EB, AT 65 EB-FS | |
| AD 65, AP 68 E, AP 65 S, AU 65 S, | 200x30 |
| AUP 65 S, AUT 65 S, AXP 65, AXP 200 | |
| TS 75, TS 75 EBQ, TS 75 | 210x30 |
| EBQ-FS, TS 75 EQ | |
| Symmetric SYM 70 | 216x30 |
| AU 77 S | 220x30 |
| CS 70, CS 70 EB | 225x30 |
| AU 80 S | 230x30 |
| AP 85, AP 85 E, AP 85 E-FS, AP 85 E-TS, | 240x30 |
| AP 85 EB, AP 88, AP 88 E, AXP 85 | |
| AD 85, AD 100, AE 85, AE 88 | 250x30 |
| Kapex KS 88, Kapex KS 120 | 260x30 |
| AXP 130, AXP 132 E, BD 125 | 330x30 |
| BD 145, BD 145/1 | 400x30 |
| BD 170 | 450x30 |
| FEZER | |
| KG 20 | 200x18 |
| KG 205 | 205x18 |
| KG 25 | 250x32 |
| KG 30 | 300x32 |
| KG 40 S | 400x32 |
| AB 600 | 600x32 |
| FLOTT/FLOTTJET/KRAKU | |
| 1000, 2000, Profi 3000 | 250x20 |
| KS 1011, TKS 2011 D, TKS 2011 W, | 250x30 |
| KS 2011 D, KS 2011 W, KS 2012, 3011, | |
| Profi 2000, Profi 2001, | |
| Profi 3011, Uni-Profi 2011 | |
| FKS 3000, KKS 305 M | 315x30 |



Saw blades for portable machines

| MACHINE | DxB mm | MACHINE | DxB mm | MACHINE | DxB mm |
|---|-----------|--|-----------|---|-----------|
| GRAULE | | | | | |
| AKF F, AKF 4/200 | 200x40 | 2260, 2270 | 140x30 | BTk 1, KS 1155 S, Magnum, TK 1256 | 165x20 |
| AKF 2, AKF 4/250, AKF 6/250, KS, TS | 250x40 | 2103, 2104, 2105, 2106, 2107, | 160x30 | 6317 S | 180x20 |
| 85 N, AGL, AGT, AKF 6/300, Typ 85, ZS 85 | 300x40 | 2108, HKU 50 | | KS 655, KS 1266, KS 1468 S, | 190x20 |
| Typ 135, ZS 135, ZS 135 N | 350x40 | 1563, 2115, 2266, 2271, 2281 | 170x30 | KS 4345 S, KS 4346 S, KS5348, | |
| Typ 170, ZS 170, ZS 170 N | 420x40 | 2112, 2272, 2291, HKU 55 | 180x30 | KSE 1668, Robert | |
| ZS 200 | 520x50 | 2114, 2116, 2117, 2119, 2126, | 190x30 | KGSE 1670, KSE 1678 S-Signal, | 210x30 |
| GIUDE | | 2127, 2269, 2282 | | Magnum TK 1066, TKU 225 | |
| GTK 721 | 205x18 | 2113, 2292, 2555, HK 201 | 200x30 | 6322 S | 220x30 |
| GTK 800 | 205x20 | 2267, 2284, PKS 267 | 210x30 | KS 1785 S, KS 6323 S | 240x30 |
| GKS 1100 P, GRK 210/300, | 210x30 | Leistungssäge 2141 | 216x30 | TK 1633, TKU 1633, TKU 1693 | 250x30 |
| GUKS 2100, KT 210 | | 2267, 2274, 2279, 2284, HKU 75, PKS | 220x30 | TK 1688, TK 1688 D | 315x30 |
| GFO 1401 | 216x30 | 2118, 2120, 2171, 2279, 2293, 2294 | 230x30 | PANASONIC | |
| GKS 250 L, GKS 250 T, GRK | 250x20 | 2128, 2268, HKD 65 | 240x30 | EY 3501 | 110x20 |
| 250/300, GRK 250/500 | | HKD 85, HKD 275, HKD 1212, PKS 1210, | 300x30 | EY 3530 | 135x20 |
| TK 2500 UG, GFO 1801 | 254x20 | PKS 1211, PKS 1213, PKS 1225, | | PERLES | |
| TK 2400 ECO | 254x30 | PKS 1230 303 | | 25 S | 100x12 |
| GTKS 315 | 315x30 | HKS 130, HKS 150, HKS 276 | 350x30 | SC 47 C | 140x20 |
| GWS 400 Eco | 400x30 | HKS 2136 | 380x30 | KS 50, Peugeot, SC 53 C | 150x20 |
| GWS 450 Eco | 450x30 | HKS 155, HKS 277, HKS B 7 K, BTK 155 | 400x30 | PIP 50 S | 180x20 |
| FP 600 Plus, GWS 600 EC, | 600x30 | JEPSON | | KS 85 | 230x30 |
| GWS 600 HM, QWS 600 | | 8219 | 192x20 | PROTOOL | |
| DTW 700, DWS 700, DWS 700 Z, GWS 700, | 700x30 | 9211 D | 255x25,4 | CSP 55-2, CSP 56 EQ, | 160x20 |
| FP 700 Plus, GWS 700 HM, GWS 700 EC, | | 9312 E, 9430 | 305x25,4 | CSP 56 Q, CSP 68 | |
| PRS 700/7 HMF, PTW 700/7 | | 9314, 9435 | 355x25,4 | CSP 68 E | 190x30 |
| HMF, PWS 700/7 HMF | | KITY | | CSP 85 | 240x30 |
| HAAGER | | 626 | 150x20 | ROBLAND | |
| HTK 200 | 200x30 | 510, 616, 617, 2617 | 180x15 | K 210 - 260 | 240x30 |
| HKGS 250, HMS 10 RA | 250x20 | 0419, 7419, 0618, Kombi 2000, | 200x30 | X 260 | 250x30 |
| GKS 250 HR, HBTS 10 A | 250x30 | Kombi 5023, Junior 6 | | K 310, X 310 | 300x30 |
| HTK 300 | 300x30 | 618 | 250x30 | ROCKWELL | |
| HAFFNER | | 1609, 1619, 5619, 6619, 9619 2 | 70x30 | 346, 63416 | 170x16 |
| RF 60 | 100x20 | 819 | 315x30 | 315, 4500, 63417 | 184x16 |
| KSU 40 | 120x20 | KRESS | | 368, 63418 | 220x20 |
| KSU 105, KSU 125 | 125x20 | CHKS 6050, CHKS 6055 | 160x20 | SCHEER | |
| KSU 50 | 160x20 | CHKS 6060, 1400 HKS, 1500 KS, 1800 KSE | 190x20 | HM 5, HM 6 | 100x22 |
| KSU 110 | 170x30 | MAFFEL | | MS 50 | 150x16 |
| KSU 60, KSU 113 | 180x20 | A 35, FS 35, KSS 300, KSP 40 | 120x20 | MS 45, MS 45 E | 150x20 |
| KSU 60 alt | 200x30 | SF 32, X 40, XE 40 | 125x20 | FM | 160x16 |
| GL 136 | 200x20 | A 55, B 55, FU 50, KSP 55, KSP 55 F, | 160x20 | MS 55 | 160x20 |
| AKS | 210x30 | KSS 330, KSS 400, KST 55, MKS 55, MS 55, | | FM | 180x16 |
| AS 75, KS 75, RS 75 | 220x30 | MT 55, PS 52, PSS 3000, PS 3100, X 55, | | MS 65, MKS 65 | 190x30 |
| 140, KL 177, KL 178, KSU 118 | 220x30 | XE 55 | | MS 70 | 200x30 |
| HSU 85, KL 176, KS 85, KSU 85, | 250x30 | KS 320 | 160x30 | MS 80 | 220x30 |
| SP 187, US 85 | | Erika 55 | 180x30 | MS 85 | 230x30 |
| AKS, GS 1, GS 2W, GS 2 D, GS 150, GS 163, | 250x30 | Erika 60, KSP 65, KSP 65 F, MS 65, MKS 65 | 190x30 | FM 10, A 3100, A 4200 | 240x30 |
| GS 165, GS 166, KL 140, SP 189, SP 195, | | B 65, X 72 | 200x30 | SCHEPPACH | |
| SP 196, SP 197, SP 198, TGS 161, | | AS 65, FUS 65 | 210x20 | KG 205 | 205x18 |
| TGS 162, TGS 163, TGS 198 | | MS 75, MKS 75 | 210x20 | TS 2000 | 200x30 |
| MK 251 B | 300x32 | Erika 70 E, MKS 85 | 225x20 | Capas 1, Capas 2 | 216x30 |
| 950, GS 146, GS 147, GS 148, GS 155, | 330x30 | KSP 85, KSP 85 FC | 230x30 | KG 250, TKG 250, TS 2500 | 250x20 |
| GS 156, GS 157, GS 158, GS 165, GS 166, | | B 82 | 240x30 | KSE 250, TS 2500, KG 260, TKG | 250x30 |
| GS 183, GS 183 M, KS 120, KS 155, | | Erika 85, MS 85, MKS 85, MKS 85 S | 250x30 | 260, KG 280, TKG 280 | |
| SP 221, SP 223, SP 224, TGS 168, TGS 169, | | A 85, Erika 65, FS 65, FU 585, FUS 85 | 280x30 | Capas 3, TKG 305 E | 305x30 |
| TGS 200, TK 42, US 151 | | Erika 70 L, Erika 70 K | 290x20 | TS 315 GT, TS 400, TS 4010, TKU | 315x30 |
| DGS 180, DGS 182, GSM 180, GSA 180 | 350x30 | Biberex, MKS 105, Monika, | 315x30 | BSH 400 | 400x30 |
| GS 159, GS 160 | 340x30 | TFK 85 L, TFK 85 K | | BSH 500 | 500x30 |
| MK 350 Vario | 400x32 | KRESS | | SKIL | |
| DGS 123, DGS 124, DGS 180, DGS 181, | 500x30 | Biber, FS 85 | 325x30 | 22501 B | 125 |
| DGS 182, DGS 184, DGS 184 E, DGS 188, | | MKS 130 EC | 330x30 | 5140 A, 5140 B, 5240 | 130 |
| DGS 185, GS 183, GS 184, GS 188 M, | | MKS 125, MKS 125 E | 355x30 | 532 | 140 |
| GS 188 P, GSA 184 E, KS 155, ZS 640, | | MKS 145, MKS 145 EC | 370x30 | 533, 553, 5246, 1800 H, 1850 H | 150 |
| ZS 800 | | BK 3, BKS 4, FS 130, FS 130 S, TD 3, VKS 1 | 400x30 | 416 H, 534, 536, 552 B, 1408 H, | 160 |
| DGS 187, DGS 202, GS 161, | 600x30 | MKS 165, MKS 165 EC, FS 130K | 410x30 | 1409 H, 1410 H, 1440 H, 5750 A | |
| GS 162, US 161, US 162 30 | | TDH 4, TDH 425 | 425x30 | 77 U, 537 U, 553 B, 553 H, | 184 |
| HANNING | | BK 4, BKV 4, BKS 5, FSG 165, | 450x30 | 559 U, 574 U, 599 U, 857 | |
| TK 20 N, TK 20 S, TK 200, | 200x16 | MKS 185 EC, TDH 5, TDH 450 | | 1865, 1866, 5266, 5565, 5566, | 190 |
| TK 300, ZK 205, HKS 250 | 250x16 | BKV 5, BKS 6, TDH 5-170 | 500x30 | 5666, 5866 A, 1899, 1965 U, 1986 | |
| 3 VS, HTK 315/1.6, HTK 315/2.1, | 315x30 | FSG 200 | 550x30 | 554 B, 554 H, 825, 858, 1524 H, 1873 H | 210 |
| HTK 315/3.0, HTK 315/3 SV, HTK 315/4.0 | | FSG 240 K | 640x30 | 555 H, 1525 H, 1886 H, 1985 U | 230 |
| HANSEATIC | | MAKITA | | 1523 H, 1526 H, 1899 H | 260 |
| PSC 160 D | 160x20 | 4341 S, BTK 0, KS 0852 S, 61+2, 52 S | 150x20 | STAYER | |
| HILTI | | 5600 NB, 5600 RDW | 160x20 | CP 50 | 150x20 |
| WSC 55 | 160x20 | 167, 0846 S, 0946 S, 5600 BR, 5603 R, | 165x20 | KS 700, SC 205, TKS 2000 | 205x18 |
| WSC 85 | 230x30 | 5604 R, TK 1256, KS 1155, KST 1157 S, | | SC 250, SC 251, SCU 75 | 250x20 |
| HERCULES | | KSTE 1357, S-Signal, SBTK 1, SR 1600 | | SC 260, SCE 1610, SLL 250 | 250x30 |
| KG 205 | 205x16 | 5500 S, 5800 B, 5801 B, 6317 S | 180x20 | TD 305 | 305x25,4 |
| TKS 250 UV | 250x16 | 5800 BR, SR 1800 | 185x20 | TIP | |
| BK 315/1 | 315x30 | 4346 S, KS 65, KS 1266 S, KS | 190x20 | HKS 160 | 160x20 |
| HITACHI | | 1468, KS 4345 S, KSE 1668, TK 5348 | | HKS 200 | 200x16 |
| C 5 Y | 125x20 | 5703 R, 5705 R, 5017 RKB | 190x30 | TKS 250 | 250x15,8 |
| C 5, FC 5, FC 5 SA | 150x20 | Radial-Eudora 5700 | 200x25 | TGS 250 | 250x25,4 |
| C 6, C 6 DA, C 60 A, FC 65 A, FC 6 SA | 160x20 | LS 0810, SR 2100 | 210x25 | ULMIA | |
| C 6 BU, C 6 U, C 6 DD-Akku, FC 6 SB | 165x30 | KGS E 1670 S, KSE 1678 S | 210x30 | 1409 B | 160x20 |
| C 6 SA, PSU 6 | 170x30 | 6322 S | 220x30 | 1706, 1708 | 200x16 |
| C 7 U, C 7 BU, FC 7 SA, PSM 7, PSM 7 A, | 190x30 | SR 2300, SR 5900 B, SR 5900 BR | 235x25 | 1710 S, 1710 R | 250x15,8 |
| PSU 7 C 8 U, C 8 FA, PSM 8, PSU 8 | 210x30 | 5903 R | 235x30 | Gecombineerde machines | 300x25,4 |
| C 8 FC, C 8 FS | 216x30 | KS 1785, KS 6323 S | 240x30 | WEGOMA | |
| C 9 U | 235x30 | LS 1013, LS 1014 | 260x25 | TB 204 | 105x22 |
| PSM 9, PSM 9 A, PSU 9 | 240x30 | SR 2600 | 266x25 | HS 50 | 150x20 |
| U 210 | 250x30 | 5103 R, SR 2600 | 270x30 | TS 250 | 250x30 |
| C 10 FB, C 10 FCA, C 10 FCS, C 10 RA | 255x30 | 5100 BR | 335x25 | S 4 D, S 4 W | 350x30 |
| C 13 U, PSU 13 | 335x30 | 5143 R | 355x30 | TS 400 | 400x30 |
| C 15 FC | 380x30 | METABO | | Industrial dowel drills | |
| HOLZ-HER (REICH) | | F 0520 | 100x22 | Bits for hand power tools | |
| Derby 2110, Mosquito 2111, Mosquito 2171 | 132x30 | 4340 S, BHK 2, BHK 3, 4345 S 140 20 | 140x13 | Power tools & accessories | |
| | | 4341 S, BTK 0, 61 + 2, KS 52, | 150x20 | Display cabinets & spare parts | |
| | | KS 0846 S, KS 0852 S | | | |

Saw blade index

| D mm | B mm | APPLICATION | Z | K mm | P mm | α | β | ORDER NO. | PAGE |
|---------|----------|--------------------|-------|--------------|---------|----------|--------------------|--------------|------|
| 70 | 20 | Panel sizing | 8+8 | 2,8-3,6 | | 15° | FLAT | 289.070.16H | 21 |
| 80 | 20 | Panel sizing | 12 | 3,1-4,0 | 2,2 | 10° | CO+FTG | S288.080.12H | 21 |
| 80 | 20 | Panel sizing | 10+10 | 2,8-3,6 | | 15° | FLAT | 289.080.20H | 21 |
| 100 | 20 | Panel sizing | 20 | 3,1-4,0 | 2,5 | 5° | CO+5° ATB | 288.100.20H | 21 |
| 100 | 22 | Panel sizing | 20 | 3,1-4,0 | 2,5 | 5° | CO+5° ATB | 288.100.20K | 21 |
| 100 | 20 | Panel sizing | 10+10 | 2,8-3,6 | | 15° | FLAT | 289.100.20H | 21 |
| 100 | 22 | Panel sizing | 10+10 | 2,8-3,6 | | 15° | FLAT | 289.100.20K | 21 |
| 100 | 22 | Grooving | 6 | 3,96 | 3,0 | 18° | 10°ATB | 240.006.04 | 34 |
| 100 | 22 | Grooving | 8 | 3,96 | 3,0 | 15° | 10°ATB | 240.008.04 | 34 |
| 100 | 22 | Grooving | 8 | 3,96 | 3,1-3,9 | 15° | FLAT | 241.008.04 | 34 |
| 100 | 22 | Grooving | 4 | 8,0 | 6,0 | 18° | R30 | 240.004.04 | 35 |
| 120 | 20 | Two-sided melamine | 20 | 3,1-3,7 | | 5° | CONICAL | 238.120.20H | 19 |
| 120 | 20 | Panel sizing | 24 | 3,1-4,0 | 2,5 | 5° | CO+5° ATB | 288.120.24H | 21 |
| 120 | 20 | Panel sizing | 24 | 3,4-4,2 | 2,5 | 5° | CO+5° ATB | 288.120.24H1 | 21 |
| 120 | 22 | Panel sizing | 24 | 3,1-4,0 | 2,5 | 5° | CO+5° ATB | 288.120.24K | 21 |
| 120 | 20 | Panel sizing | 12+12 | 2,8-3,6 | | 15° | FLAT | 289.120.24H | 21 |
| 120 | 22 | Panel sizing | 12+12 | 2,8-3,6 | | 15° | FLAT | 289.120.24K | 21 |
| 120 | 50 | Panel sizing | 12+12 | 2,8-3,6 | | 15° | FLAT | 289.120.24T | 21 |
| 120 | 20 | Panel sizing | 24 | 3,1-4,3 | 2,2 | 0° | CO+6° ATB | 288.720.24H | 22 |
| 120 | 22 | Panel sizing | 24 | 3,1-4,3 | 2,2 | 0° | CO+6° ATB | 288.720.24K | 22 |
| 120 | 20 | Panel sizing | 12+12 | 2,8-3,6 | | 11° | 5° ATB | 289.720.24H | 22 |
| 120 | 22 | Panel sizing | 12+12 | 2,8-3,6 | | 11° | 5° ATB | 289.720.24K | 22 |
| 120 | 20 | Aluminium | 36 | 1,8 | 1,2 | -6° Neg. | TCG | 296.120.36H | 23 |
| 120 | 20 | Portables machines | 18 | 1,8 | 1,2 | 15° | 15° ATB | 291.120.18H | 31 |
| 120 | 20 | Portables machines | 36 | 1,8 | 1,2 | 10° | 15° ATB | 292.120.36H | 32 |
| 120 | 20 | Portables machines | 40 | 1,8 | 1,2 | 10° | 15° ATB | 292.120.40H | 32 |
| 125 | 20 | Two-sided melamine | 20 | 3,1-3,7 | | 5° | CONICAL | 238.125.20H | 19 |
| 125 | 20 | Panel sizing | 24 | 3,1-4,0 | 2,5 | 5° | CO+5° ATB | 288.125.24H | 21 |
| 125 | 20 | Panel sizing | 24 | 3,4-4,2 | 2,5 | 5° | CO+5° ATB | 288.125.24H1 | 21 |
| 125 | 20 | Panel sizing | 24 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.125.24H2 | 21 |
| 125 | 22 | Panel sizing | 24 | 3,1-4,0 | 2,5 | 5° | CO+5° ATB | 288.125.24K | 21 |
| 125 | 45 | Panel sizing | 24 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.125.24Q | 21 |
| 125 | 20 | Panel sizing | 12+12 | 2,8-3,6 | | 15° | FLAT | 289.125.24H | 21 |
| 125 | 22 | Panel sizing | 12+12 | 2,8-3,6 | | 15° | FLAT | 289.125.24K | 21 |
| 125 | 20 | Panel sizing | 24 | 3,1-4,3 | 2,2 | 0° | CO+6° ATB | 288.725.24H | 22 |
| 125 | 20 | Panel sizing | 12+12 | 2,8-3,6 | | 11° | 5° ATB | 289.725.24H | 22 |
| 125 | 20 | Portables machines | 20 | 2,4 | 1,4 | 15° | 15° ATB | 291.125.20H | 31 |
| 125 | 20 | Portables machines | 36 | 2,4 | 1,4 | 15° | 15° ATB | 292.125.36H | 32 |
| 130 | 20 | Portables machines | 20 | 2,4 | 1,4 | 15° | 15° ATB | 291.130.20H | 31 |
| 130 | 20 | Portables machines | 36 | 2,4 | 1,4 | 15° | 15° ATB | 292.130.36H | 32 |
| 136 | 20 (+10) | Portables machines | 18 | 1,5 | 1,0 | 20° | 10° ATB + 8° Shear | 271.136.18H | 26 |
| 136 | 20 (+10) | Portables machines | 36 | 1,5 | 1,0 | 18° | 10° ATB + 8° Shear | 272.136.36H | 27 |
| 136,5 | 10 | Metal | 30 | 1,5 | 1,2 | 0° | TCG | 226.030.05 | 24 |
| 136,5 | 20 | Metal | 30 | 1,5 | 1,2 | 0° | TCG | 226.030.05H | 24 |
| 140 | 16 | Panel sizing | 24 | 3,1-4,0 | 2,2 | 10° | CO+FTG | Y288.140.24E | 21 |
| 140 | 20 | Portables machines | 20 | 2,4 | 1,4 | 15° | 15° ATB | 291.140.20H | 31 |
| 140 | 20 | Portables machines | 36 | 2,4 | 1,4 | 15° | 15° ATB | 292.140.36H | 32 |
| 150 | 30 | Wood | 48 | 3,2 | 2,2 | 5° | 15° ATB | 285.048.06M | 13 |
| 150 | 45 | Panel sizing | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.150.36Q | 21 |
| 150 | 20 (+16) | Portables machines | 24 | 1,5 | 1,0 | 18° | 10° ATB + 8° Shear | 271.150.24H | 26 |
| 150 | 20 (+16) | Portables machines | 40 | 1,5 | 1,0 | 16° | 10° ATB + 8° Shear | 272.150.40H | 27 |
| 150 | 20 | Portables machines | 12 | 2,4 | 1,4 | | 10° ATB | 290.150.12H | 29 |
| 150 | 16 | Portables machines | 24 | 2,4 | 1,4 | 15° | 15° ATB | 291.150.24E | 31 |
| 150 | 20 | Portables machines | 24 | 2,4 | 1,4 | 15° | 15° ATB | 291.150.24H | 31 |
| 150 | 20 | Portables machines | 40 | 2,4 | 1,4 | 15° | 15° ATB | 292.150.40H | 32 |
| 150 | 15,87 | Grooving | 20 | 6,35 - 22,23 | | -5° | FTG+ATB | 230.520.06 | 33 |
| 150 | 30 | Grooving | 12 | 2,0 | 1,4 | 15° | FLAT | 240.020.06M | 34 |
| 150 | 35 | Grooving | 12 | 2,0 | 1,4 | 15° | FLAT | 240.020.06R | 34 |
| 150 | 30 | Grooving | 12 | 3,0 | 2,0 | 15° | FLAT | 240.030.06M | 34 |
| 150 | 35 | Grooving | 12 | 3,0 | 2,0 | 15° | FLAT | 240.030.06R | 34 |
| 150 | 30 | Grooving | 12 | 4,0 | 3,0 | 15° | FLAT | 240.040.06M | 34 |
| 150 | 35 | Grooving | 12 | 4,0 | 3,0 | 15° | FLAT | 240.040.06R | 34 |
| 150 | 30 | Grooving | 12 | 5,0 | 3,0 | 15° | FLAT | 240.050.06M | 34 |
| 150 | 35 | Grooving | 12 | 5,0 | 3,0 | 15° | FLAT | 240.050.06R | 34 |
| 150 | 30 | Grooving | 12 | 6,0 | 3,0 | 15° | FLAT | 240.060.06M | 34 |
| 150 | 35 | Grooving | 12 | 6,0 | 3,0 | 15° | FLAT | 240.060.06R | 34 |
| 160 | 20 | Wood | 48 | 2,2 | 1,6 | 5° | 15° ATB | 285.160.48H | 13 |
| 160 | 20 | Two-sided melamine | 34 | 2,6 | 1,8 | 10° | HDF | 287.034.06H | 15 |
| 160 | 20 | Portables machines | 40 | 2,2 | 1,6 | 10° | TCG | 281.160.40H | 18 |

| D mm | B mm | APPLICATION | Z | K mm | P mm | α | β | ORDER NO. | PAGE |
|---------|----------------|--------------------|------|---------|---------|----------|--------------------|---------------|------|
| 160 | 20 | Portables machines | 40 | 2,2 | 1,6 | 10° | TCG | 281.160.40H2 | 18 |
| 160 | 45 | Panel sizing | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.160.36Q | 21 |
| 160 | 55 | Panel sizing | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.160.360 | 21 |
| 160 | 55 | Panel sizing | 36 | 4,7-6,0 | 3,5 | 10° | CO+FTG | Y288.160.3602 | 21 |
| 160 | 20 | Aluminium | 24 | 2,2 | 1,6 | 5° | TCG | Y284.160.24H | 22 |
| 160 | 20 | Aluminium | 40 | 2,2 | 1,6 | -6° Neg. | TCG | 296.160.40H | 23 |
| 160 | 20 | Aluminium | 56 | 2,2 | 1,6 | -6° Neg. | TCG | 296.160.56H | 23 |
| 160 | 20 | Metal | 30 | 2,0 | 1,6 | 0° | TCG | 226.030.06H | 24 |
| 160 | 20 | Metal | 40 | 1,8 | 1,4 | 10° | TCG | 226.540.06H | 24 |
| 160 | 20 (+16) | Portables machines | 24 | 1,7 | 1,1 | 18° | 10° ATB + 8° Shear | 271.160.24H | 26 |
| 160 | 20 (+16) | Portables machines | 40 | 1,7 | 1,1 | 16° | 10° ATB + 8° Shear | 272.160.40H | 27 |
| 160 | 20 (+16) | Portables machines | 56 | 1,7 | 1,1 | 12° | 10° ATB + 8° Shear | 273.160.56H | 27 |
| 160 | 16 | Portables machines | 12 | 2,2 | 1,6 | 20° | 10° ATB | 290.160.12E | 29 |
| 160 | 20 | Abrasive materials | 4 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.160.04H | 29 |
| 160 | 20 | Abrasive materials | 10 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.160.10H | 29 |
| 160 | 20 | Portables machines | 12 | 2,2 | 1,6 | 20° | 10° ATB | 290.160.12H | 29 |
| 160 | 24 | Portables machines | 24 | 2,2 | 1,4 | 15° | 15° ATB | K16024H-X10 | 30 |
| 160 | 40 | Portables machines | 40 | 2,2 | 1,4 | 15° | 15° ATB | K16040H-X10 | 30 |
| 160 | 16 | Portables machines | 24 | 2,2 | 1,6 | 15° | 15° ATB | 291.160.24E | 31 |
| 160 | 20 | Portables machines | 24 | 2,2 | 1,6 | 15° | 15° ATB | 291.160.24H | 31 |
| 160 | 30 | Portables machines | 24 | 2,2 | 1,6 | 15° | 15° ATB | 291.160.24M | 31 |
| 160 | 16 | Portables machines | 40 | 2,2 | 1,6 | 10° | 15° ATB | 292.160.40E | 32 |
| 160 | 20 | Portables machines | 40 | 2,2 | 1,6 | 10° | 15° ATB | 292.160.40H | 32 |
| 160 | 20 (Virutex) | Portables machines | 40 | 2,2 | 1,6 | 10° | TCG | 281.160.40H | 32 |
| 160 | 20 | Portables machines | 40 | 2,2 | 1,6 | 10° | TCG | 281.160.40H2 | 32 |
| 160 | 30 | Portables machines | 40 | 2,2 | 1,6 | 10° | 15° ATB | 292.160.40M | 32 |
| 160 | 20 | Portables machines | 56 | 2,2 | 1,6 | 15° | 15° ATB | 292.160.56H | 32 |
| 165 | 15,87<> | Metal | 36 | 1,5 | 1,2 | 0° | TCG | 226.036.06 | 24 |
| 165 | 20 | Metal | 36 | 1,5 | 1,2 | 0° | TCG | 226.036.06H | 24 |
| 165 | 20 (+15,87) | Portables machines | 24 | 1,7 | 1,1 | 18° | 10° ATB + 8° Shear | 271.165.24H | 26 |
| 165 | 20 (+15,87) | Portables machines | 36 | 1,7 | 1,1 | 20° | 10° ATB + 8° Shear | 272.165.36H | 27 |
| 165 | 20 | Portables machines | 24 | 2,6 | 1,6 | 15° | 15° ATB | 291.165.24H | 31 |
| 165 | 30 | Portables machines | 24 | 2,6 | 1,6 | 15° | 15° ATB | 291.165.24M | 31 |
| 165 | 20 | Portables machines | 56 | 2,2 | 1,6 | 15° | 15° ATB | 292.165.56H | 32 |
| 165 | 20 | Portables machines | 40 | 2,6 | 1,6 | 10° | 15° ATB | 292.165.40H | 32 |
| 165 | 30 | Portables machines | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.165.40M | 32 |
| 170 | 30 | Portables machines | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.170.24M | 31 |
| 170 | 30 | Portables machines | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.170.40M | 32 |
| 180 | 20 | Abrasive materials | 4 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.180.04H | 29 |
| 180 | 40 | Multitrip | 21+3 | 2,5 | 1,8 | 18° | FLAT | 280.021.07S | 10 |
| 180 | 30 | Wood | 56 | 3,2 | 2,2 | 5° | 15° ATB | 285.056.07M | 13 |
| 180 | 20 | Panel sizing | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | Y288.180.36H | 21 |
| 180 | 30 | Panel sizing | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.180.36M | 21 |
| 180 | 45 | Panel sizing | 36 | 4,7-6,0 | 3,5 | 10° | CO+FTG | 288.180.36Q | 21 |
| 180 | 55 | Panel sizing | 36 | 5,0-6,2 | 3,5 | 10° | CO+FTG | 288.180.360 | 21 |
| 180 | 50 | Panel sizing | 44 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.180.44T | 21 |
| 180 | 20 | Aluminium | 40 | 2,8 | 2,2 | -6° Neg. | TCG | 296.180.40H | 23 |
| 180 | 30 | Portables machines | 12 | 2,6 | 1,6 | 20° | 10° ATB | 290.180.12M | 29 |
| 180 | 20 | Portables machines | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.180.24H | 31 |
| 180 | 30 | Portables machines | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.180.24M | 31 |
| 180 | 20 | Portables machines | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.180.40H | 32 |
| 180 | 30 | Portables machines | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.180.40M | 32 |
| 180 | 30 | Grooving | 18 | 3,0 | 2,0 | 15° | FLAT | 240.030.07M | 34 |
| 180 | 35 | Grooving | 18 | 3,0 | 2,0 | 15° | FLAT | 240.030.07R | 34 |
| 180 | 30 | Grooving | 18 | 4,0 | 3,0 | 15° | FLAT | 240.040.07M | 34 |
| 180 | 35 | Grooving | 18 | 4,0 | 3,0 | 15° | FLAT | 240.040.07R | 34 |
| 180 | 30 | Grooving | 18 | 5,0 | 3,0 | 15° | FLAT | 240.050.07M | 34 |
| 180 | 35 | Grooving | 18 | 5,0 | 3,0 | 15° | FLAT | 240.050.07R | 34 |
| 180 | 30 | Grooving | 18 | 6,0 | 3,0 | 15° | FLAT | 240.060.07M | 34 |
| 180 | 35 | Grooving | 18 | 6,0 | 3,0 | 15° | FLAT | 240.060.07R | 34 |
| 184 | 15,87<> | Abrasive materials | 4 | 1,8 | 1,4 | 12° | TCG | 236.004.07 | 29 |
| 184 | 15,87<> | Metal | 48 | 2,0 | 1,6 | 0° | TCG | 226.048.07 | 24 |
| 184 | 15,87<> | Metal | 48 | 2,0 | 1,6 | 10° | TCG | 226.548.07 | 24 |
| 184 | 20 (+16+15,87) | Portables machines | 24 | 1,7 | 1,1 | 20° | 10° ATB + 8° Shear | 271.184.24H | 26 |
| 184 | 30 | Portables machines | 24 | 1,7 | 1,1 | 20° | 10° ATB + 8° Shear | 271.184.24M | 26 |
| 184 | 20 (+16+15,87) | Portables machines | 40 | 1,7 | 1,1 | 18° | 10° ATB + 8° Shear | 272.184.40H | 27 |
| 184 | 30 | Portables machines | 40 | 1,7 | 1,1 | 18° | 10° ATB + 8° Shear | 272.184.40M | 27 |
| 184 | 15,87 <> | Portables machines | 24 | 1,9 | 1,2 | 20° | 1FTG+2/20° ATB | 250.024.07 | 28 |
| 184 | 15,87 <> | Portables machines | 40 | 1,9 | 1,2 | 20° | 1FTG+4/20° ATB | 251.040.07 | 28 |

Saw blade index

| D mm | B mm | APPLICATION | Z | K mm | P mm | α | β | ORDER NO. | PAGE |
|---------|------------------|--------------------|------|--------------|---------|----------|--------------------|---------------|------|
| 184 | 16 | Portables machines | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.184.24E | 31 |
| 184 | 30 | Portables machines | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.184.24M | 31 |
| 184 | 16 | Portables machines | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.184.40E | 32 |
| 184 | 30 | Portables machines | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.184.40M | 32 |
| 190 | 30 | Abrasive materials | 4 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.190.04M | 29 |
| 190 | 30 | Abrasive materials | 12 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.190.12M | 29 |
| 190 | 30 | Aluminium | 30 | 2,6 | 2,2 | 5° | TCG | Y284.190.30M | 22 |
| 190 | 30 | Aluminium | 40 | 2,8 | 2,2 | -6° Neg. | TCG | 296.190.40M | 23 |
| 190 | 30 | Aluminium | 64 | 2,8 | 2,2 | -6° Neg. | TCG | 296.190.64M | 23 |
| 190 | 20 (Festool® FF) | Aluminium | 64 | 2,8 | 2,2 | -6° Neg. | TCG | 296.190.64FF | 23 |
| 190 | 30 | Metal | 40 | 2,0 | 1,6 | 0° | TCG | 226.040.07M | 24 |
| 190 | 30 | Metal | 48 | 1,8 | 1,4 | 10° | TCG | 226.548.07M | 24 |
| 190 | 30 (+20+16) | Portables machines | 24 | 1,7 | 1,1 | 20° | 10° ATB + 8° Shear | 271.190.24M | 26 |
| 190 | 30 (+20+16) | Portables machines | 42 | 1,7 | 1,1 | 18° | 10° ATB + 8° Shear | 272.190.42M | 27 |
| 190 | 30 (+20+16) | Portables machines | 64 | 1,7 | 1,1 | 15° | 10° ATB + 8° Shear | 273.190.64M | 27 |
| 190 | 16 | Portables machines | 12 | 2,6 | 1,6 | 20° | 10° ATB | 290.190.12E | 29 |
| 190 | 20 | Portables machines | 12 | 2,6 | 1,6 | 20° | 10° ATB | 290.190.12H | 29 |
| 190 | 30 | Portables machines | 12 | 2,6 | 1,6 | 20° | 10° ATB | 290.190.12M | 29 |
| 190 | 24 | Portables machines | 24 | 2,2 | 1,4 | 20° | 10° ATB | K19024M-X10 | 30 |
| 190 | 16 | Portables machines | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.190.24E | 31 |
| 190 | 20 | Portables machines | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.190.24H | 31 |
| 190 | 30 | Portables machines | 24 | 2,6 | 1,6 | 20° | 10° ATB | 291.190.24M | 31 |
| 190 | 20 (Festool® FF) | Portables machines | 32 | 2,6 | 1,6 | 10° | 10° ATB | 291.190.32FF | 31 |
| 190 | 16 | Portables machines | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.190.40E | 32 |
| 190 | 20 | Portables machines | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.190.40H | 32 |
| 190 | 30 | Portables machines | 40 | 2,6 | 1,6 | 15° | 15° ATB | 292.190.40M | 32 |
| 190 | 30 | Portables machines | 64 | 2,6 | 1,6 | 15° | 15° ATB | 292.190.64M | 32 |
| 190 | 20 (Festool® FF) | Portables machines | 48 | 2,4 | 1,6 | 10° | 15° ATB | 292.190.48FF | 32 |
| 200 | 40 | Multirip | 21+3 | 2,5 | 1,8 | 18° | FLAT | 280.021.08S | 10 |
| 200 | 30 | Wood | 36 | 3,2 | 2,2 | 15° | 10° ATB | 285.036.08M | 12 |
| 200 | 30 | Wood | 48 | 3,2 | 2,2 | 15° | 15° ATB | 285.048.08M | 12 |
| 200 | 30 | Wood | 64 | 3,2 | 2,2 | 5° | 15° ATB | 285.064.08M | 13 |
| 200 | 30 | Portables machines | 64 | 3,2 | 2,2 | 10° | TCG | 281.064.08M | 18 |
| 200 | 20 | Panel sizing | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.200.36H | 21 |
| 200 | 45 | Panel sizing | 36 | 4,7-6,0 | 3,5 | 10° | CO+FTG | 288.200.36Q | 21 |
| 200 | 45 | Panel sizing | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | Y288.200.36Q2 | 21 |
| 200 | 65 | Panel sizing | 36 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.200.36J | 21 |
| 200 | 30 | Aluminium | 48 | 2,8 | 2,2 | -6° Neg. | TCG | 296.200.48M | 23 |
| 200 | 30 | Portables machines | 36 | 1,8 | 1,2 | 15° | 10° ATB + 8° Shear | 271.200.36M | 26 |
| 200 | 30 | Portables machines | 48 | 1,8 | 1,2 | 15° | 10° ATB + 8° Shear | 272.200.48M | 27 |
| 200 | 30 | Portables machines | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.200.24M | 29 |
| 200 | 30 | Portables machines | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.200.36M | 31 |
| 200 | 30 | Portables machines | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.200.48M | 32 |
| 200 | 15,87 | Grooving | 24 | 6,35 - 22,23 | | -5° | FTG+ATB | 230.524.08 | 33 |
| 200 | 30 | Grooving | 24 | 6,35 - 22,23 | | -5° | FTG+ATB | 230.524.08M | 33 |
| 200 | 15,87 | Grooving | 12 | 6,35 - 20,64 | | -12° | FTG+ATB | 230.012.08 | 33 |
| 210 | 30 | Aluminium | 48 | 2,8 | 2,2 | -6° Neg. | TCG | 296.210.48M | 23 |
| 210 | 30 | Aluminium | 64 | 2,8 | 2,2 | -6° Neg. | TCG | 296.210.64M | 23 |
| 210 | 15,87< | Metal | 48 | 2,2 | 1,8 | 0° | TCG | 226.048.08 | 24 |
| 210 | 30 | Metal | 48 | 2,2 | 1,8 | 0° | TCG | 226.048.08M | 24 |
| 210 | 30 (+25) | Portables machines | 36 | 1,8 | 1,2 | 15° | 10° ATB + 8° Shear | 271.210.36M | 26 |
| 210 | 30 (+25) | Portables machines | 48 | 1,8 | 1,2 | 15° | 10° ATB + 8° Shear | 272.210.48M | 27 |
| 210 | 30 | Portables machines | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.210.24M | 29 |
| 210 | 25 | Portables machines | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.210.36L | 31 |
| 210 | 30 | Portables machines | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.210.36M | 31 |
| 210 | 25 | Portables machines | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.210.48L | 32 |
| 210 | 30 | Portables machines | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.210.48M | 32 |
| 210 | 30 | Portables machines | 64 | 2,8 | 1,8 | 15° | 15° ATB | 292.210.64M | 32 |
| 215 | 50 | Panel sizing | 42 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.215.42T | 21 |
| 216 | 30 | Abrasive materials | 14 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.216.14M | 29 |
| 216 | 30 | Aluminium | 64 | 2,8 | 2,2 | -6° Neg. | TCG | 297.064.09M | 23 |
| 216 | 30 | Metal | 48 | 2,2 | 1,8 | 0° | TCG | 226.047.09M | 24 |
| 216 | 30 | Metal | 56 | 1,8 | 1,4 | 10° | TCG | 226.556.09M | 24 |
| 216 | 30 | Portables machines | 36 | 1,8 | 1,2 | -5° Neg. | 10° ATB + 8° Shear | 271.216.36M | 26 |
| 216 | 30 | Portables machines | 48 | 1,8 | 1,2 | -5° Neg. | 10° ATB + 8° Shear | 272.216.48M | 27 |
| 216 | 30 | Portables machines | 64 | 1,8 | 1,2 | -5° Neg. | 10° ATB + 8° Shear | 273.216.64M | 27 |
| 216 | 30 | Portables machines | 24 | 2,8 | 1,8 | -5° Neg. | 15° ATB | 290.216.24M | 29 |
| 216 | 24 | Portables machines | 24 | 2,4 | 1,6 | -5° Neg. | 15° ATB | K21624M-X10 | 30 |
| 216 | 48 | Portables machines | 48 | 2,4 | 1,6 | -5° Neg. | 15° ATB | K21648M-X10 | 30 |

| D mm | B mm | APPLICATION | Z | K mm | P mm | α | β | ORDER NO. | PAGE |
|---------|----------|--------------------|------|---------|---------|----------|--------------------|-------------|------|
| 216 | 30 | Portables machines | 48 | 2,8 | 1,8 | -5° Neg. | 15° ATB | 291.216.48M | 31 |
| 216 | 30 | Portables machines | 64 | 2,8 | 1,8 | -5° Neg. | 15° ATB | 292.216.64M | 32 |
| 216 | 30 | Portables machines | 80 | 2,8 | 1,8 | -5° Neg. | 15° ATB | 292.216.80M | 32 |
| 220 | 30 | Two-sided melamine | 42 | 3,2 | 2,2 | 10° | HDF | 287.042.09M | 15 |
| 220 | 30 | Two-sided melamine | 42 | 3,2 | 2,2 | -6° | HDF | 287.043.09M | 15 |
| 220 | 30 | Two-sided melamine | 64 | 3,2 | 2,2 | -5° | 40° ATB | 283.064.09M | 16 |
| 220 | 30 | Portables machines | 64 | 3,2 | 2,2 | 10° | TCG | 281.064.09M | 18 |
| 220 | 30 | Two-sided melamine | 63 | 3,2 | 2,2 | -3° | FFT | 281.063.09M | 18 |
| 220 | 30 | Portables machines | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.220.24M | 29 |
| 220 | 30 | Portables machines | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.220.36M | 31 |
| 220 | 30 | Portables machines | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.220.48M | 32 |
| 225 | 30 | Aluminium | 64 | 2,8 | 2,2 | -6° Neg. | TCG | 296.225.64M | 23 |
| 225 | 30 | Portables machines | 36 | 2,8 | 1,8 | 20° | 15° ATB | 291.225.36M | 31 |
| 225 | 30 | Portables machines | 48 | 2,8 | 1,8 | 10° | 15° ATB | 292.225.48M | 32 |
| 230 | 30 | Abrasive materials | 4 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.230.04M | 29 |
| 230 | 30 | Aluminium | 48 | 2,8 | 2,2 | -6° Neg. | TCG | 296.230.48M | 23 |
| 230 | 30 | Portables machines | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.230.24M | 29 |
| 230 | 30 | Portables machines | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.230.36M | 31 |
| 230 | 30 | Portables machines | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.230.48M | 32 |
| 230 | 30 | Portables machines | 64 | 2,8 | 1,8 | 15° | 15° ATB | 292.230.64M | 32 |
| 235 | 30 | Aluminium | 48 | 2,8 | 2,2 | -6° Neg. | TCG | 296.235.48M | 23 |
| 235 | 30 | Metal | 48 | 2,2 | 1,8 | 0° | TCG | 226.048.09M | 24 |
| 235 | 30 (+25) | Portables machines | 36 | 2,4 | 1,6 | 18° | 10° ATB + 8° Shear | 271.235.36M | 26 |
| 235 | 30 (+25) | Portables machines | 48 | 2,4 | 1,6 | 18° | 10° ATB + 8° Shear | 272.235.48M | 27 |
| 235 | 25 | Portables machines | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.235.24L | 29 |
| 235 | 30 | Portables machines | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.235.24M | 29 |
| 235 | 25 | Portables machines | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.235.36L | 31 |
| 235 | 30 | Portables machines | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.235.36M | 31 |
| 235 | 25 | Portables machines | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.235.48L | 32 |
| 235 | 30 | Portables machines | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.235.48M | 32 |
| 240 | 30 | Portables machines | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.240.24M | 29 |
| 240 | 30 | Portables machines | 36 | 2,8 | 1,8 | 15° | 15° ATB | 291.240.36M | 31 |
| 240 | 30 | Portables machines | 48 | 2,8 | 1,8 | 15° | 15° ATB | 292.240.48M | 32 |
| 250 | 30 | Abrasive materials | 16 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.250.16M | 29 |
| 250 | 30 | Multirip | 20+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.020.10M | 9 |
| 250 | 70 | Multirip | 20+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.020.10V | 9 |
| 250 | 80 | Multirip | 20+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.020.10W | 9 |
| 250 | 70 | Multirip | 20+4 | 2,7 | 1,8 | 18° | 10° ATB | 280.020.10V | 10 |
| 250 | 80 | Multirip | 20+4 | 2,7 | 1,8 | 18° | 10° ATB | 280.020.10W | 10 |
| 250 | 30 | Abrasive materials | 16 | 2,8 | 1,8 | 15° | 5° ATB | 286.016.10M | 11 |
| 250 | 30 | Wood | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.250.24M | 11 |
| 250 | 30 | Wood | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10M | 12 |
| 250 | 30 | Wood | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.048.10M | 12 |
| 250 | 30 | Wood | 60 | 3,2 | 2,2 | 10° | 15° ATB | 285.060.10M | 12 |
| 250 | 35 | Wood | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10R | 12 |
| 250 | 35 | Wood | 60 | 3,2 | 2,2 | 10° | 15° ATB | 285.060.10R | 12 |
| 250 | 30 | Wood | 80 | 3,2 | 2,2 | 5° | 15° ATB | 285.080.10M | 13 |
| 250 | 35 | Wood | 80 | 3,2 | 2,2 | 5° | 15° ATB | 285.080.10R | 13 |
| 250 | 30 | Wood | 80 | 3,0 | 2,5 | 10° | 20° ATB | 285.580.10M | 13 |
| 250 | 30 | Wood | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.640.10M | 14 |
| 250 | 30 | Wood | 60 | 3,2 | 2,2 | 10° | 15° ATB | 285.660.10M | 14 |
| 250 | 30 | Two-sided melamine | 80 | 3,2 | 2,2 | 5° | 15° ATB | 285.680.10M | 14 |
| 250 | 30 | Two-sided melamine | 80 | 3,2 | 2,2 | 15° | 1FTG+4ATB | 274.080.10M | 15 |
| 250 | 30 | Two-sided melamine | 48 | 3,2 | 2,2 | 10° | HDF | 287.048.10M | 15 |
| 250 | 30 | Two-sided melamine | 48 | 3,2 | 2,2 | -6° | HDF | 287.049.10M | 15 |
| 250 | 30 | Two-sided melamine | 80 | 3,2 | 2,2 | -2° | 40° ATB | 283.080.10M | 16 |
| 250 | 30 | Two-sided melamine | 80 | 3,2 | 2,2 | 5° | 40° ATB | 210.080.10M | 16 |
| 250 | 30 | Two-sided melamine | 80 | 3,2 | 2,2 | 5° | TCG | 281.680.10M | 17 |
| 250 | 30 | Two-sided melamine | 78 | 3,2 | 2,2 | 10° | FFT | 295.078.10M | 17 |
| 250 | 30 | Portables machines | 60 | 3,2 | 2,2 | 10° | TCG | 281.060.10M | 18 |
| 250 | 30 | Portables machines | 80 | 3,2 | 2,2 | 10° | TCG | 281.080.10M | 18 |
| 250 | 30 | Two-sided melamine | 60 | 3,2 | 2,2 | -3° | FFT | 281.061.10M | 18 |
| 250 | 30 | Two-sided melamine | 81 | 3,2 | 2,2 | -3° | FFT | 281.081.10M | 18 |
| 250 | 30 | Two-sided melamine | 48 | 3,2 | 2,2 | 10° | 45° TCG | 237.048.10M | 19 |
| 250 | 30 | Two-sided melamine | 60 | 3,2 | 2,2 | 10° | TCG | 281.060.10M | 20 |
| 250 | 30 | Two-sided melamine | 80 | 3,2 | 2,2 | 10° | TCG | 281.080.10M | 20 |
| 250 | 32 | Aluminium | 80 | 3,2 | 2,5 | 5° | TCG | 284.080.10P | 22 |
| 250 | 30 | Aluminium | 80 | 3,2 | 2,5 | -6° Neg. | TCG | 297.080.10M | 23 |
| 250 | 32 | Aluminium | 80 | 3,2 | 2,5 | -6° Neg. | TCG | 297.080.10P | 23 |

Saw blade index

| D mm | B mm | APPLICATION | Z | K mm | P mm | α | β | ORDER NO. | PAGE |
|---------|---------|--------------------|------|---------|---------|----------|--------------------|-------------|------|
| 250 | 30 | Metal | 72 | 2,2 | 1,8 | 10° | 8° FWF | 226.572.10M | 24 |
| 250 | 30 | Corian | 72 | 3,2 | 2,5 | 0° | MTCG | 223.072.10M | 25 |
| 250 | 30 | Corian | 80 | 2,8 | 2,2 | -3° | MATB | 222.080.10M | 25 |
| 250 | 30 | Portables machines | 24 | 2,4 | 1,6 | 20° | 10° ATB + 8° Shear | 271.250.24M | 26 |
| 250 | 30 | Portables machines | 42 | 2,4 | 1,6 | 18° | 10° ATB + 8° Shear | 271.250.42M | 26 |
| 250 | 30 | Portables machines | 60 | 2,4 | 1,6 | 15° | 10° ATB + 8° Shear | 272.250.60M | 27 |
| 250 | 30 | Portables machines | 80 | 2,4 | 1,6 | 12° | 10° ATB + 8° Shear | 273.250.80M | 27 |
| 250 | 30 | Portables machines | 24 | 2,8 | 1,8 | 20° | 10° ATB | 290.250.24M | 29 |
| 250 | 40 | Portables machines | 40 | 2,6 | 1,8 | 15° | 10° ATB | K25040M-X05 | 30 |
| 250 | 20 | Garden | 20 | 2,2 | 1,4 | 15° | 10° ATB | 298.250.20H | 30 |
| 250 | 25,4 | Garden | 20 | 2,2 | 1,4 | 15° | 10° ATB | 298.250.20 | 30 |
| 250 | 20 | Portables machines | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10H | 31 |
| 250 | 30 | Portables machines | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10M | 31 |
| 250 | 30 | Portables machines | 60 | 3,2 | 2,2 | 10° | 15° ATB | 285.060.10M | 32 |
| 250 | 20 | Wood | 40 | 3,2 | 2,2 | 15° | 10° ATB | 285.040.10H | 12 |
| 254 | 15,87 | Abrasive materials | 6 | 2,2 | 1,6 | 12° | TCG | 236.006.10 | 29 |
| 254 | 30 | Wood | 48 | 2,4 | 1,8 | -5° Neg. | 15° ATB | 294.048.10M | 12 |
| 254 | 30 | Wood | 60 | 2,4 | 1,8 | -5° Neg. | 15° ATB | 294.060.10M | 12 |
| 254 | 30 | Aluminium | 80 | 3,2 | 2,5 | -5° Neg. | TCG | 297.081.10M | 23 |
| 254 | 15,87 | Metal | 48 | 2,2 | 1,8 | 0° | 8° FWF | 226.048.10 | 24 |
| 254 | 15,87 | Metal | 60 | 2,2 | 1,8 | 0° | 8° FWF | 226.060.10 | 24 |
| 254 | 30 | Metal | 60 | 2,2 | 1,8 | 0° | 8° FWF | 226.060.10M | 24 |
| 254 | 15,87 | Metal | 72 | 2,2 | 1,8 | 10° | 8° FWF | 226.572.10 | 24 |
| 260 | 30 | Wood | 48 | 2,8 | 1,8 | 15° | 10° ATB | 285.048.11M | 12 |
| 260 | 30 | Wood | 60 | 2,8 | 1,8 | 10° | 15° ATB | 285.060.11M | 12 |
| 260 | 30 | Wood | 60 | 2,5 | 1,8 | -5° Neg. | 15° ATB | 294.060.11M | 12 |
| 260 | 30 | Aluminium | 80 | 2,8 | 2,2 | -6° Neg. | TCG | 297.080.11M | 23 |
| 260 | 30 | Portables machines | 48 | 2,8 | 1,8 | 15° | 10° ATB | 285.048.11M | 31 |
| 260 | 30 | Portables machines | 60 | 2,8 | 1,8 | 10° | 15° ATB | 285.060.11M | 32 |
| 270 | 30 | Wood | 28 | 2,8 | 1,8 | 20° | 10° ATB | 290.270.28M | 11 |
| 270 | 30 | Portables machines | 28 | 2,8 | 1,8 | 20° | 10° ATB | 290.270.28M | 29 |
| 270 | 30 | Portables machines | 42 | 2,8 | 1,8 | 15° | 15° ATB | 291.270.42M | 31 |
| 270 | 30 | Wood | 42 | 2,8 | 1,8 | 15° | 15° ATB | 291.270.42M | 12 |
| 275 | 20 | Wood | 42 | 3,2 | 2,2 | 15° | 10° ATB | 285.042.11H | 12 |
| 280 | 30 | Aluminium | 64 | 3,2 | 2,5 | -6° Neg. | TCG | 297.064.11M | 23 |
| 280 | 30 | Wood | 64 | 2,8 | 1,8 | 10° | 15° ATB | 295.064.11M | 12 |
| 300 | 30 | Abrasive materials | 20 | 2,1-2,2 | 1,6 | 12° | CONICAL | 236.300.20M | 29 |
| 300 | 30 | Multirip | 24+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.024.12M | 9 |
| 300 | 60 | Multirip | 24+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.024.12U | 9 |
| 300 | 70 | Multirip | 24+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.024.12V | 9 |
| 300 | 80 | Multirip | 24+4 | 3,2 | 2,2 | 18° | 10° ATB | 279.024.12W | 9 |
| 300 | 30 | Multirip | 28 | 3,2 | 2,2 | 18° | 10° ATB | 278.028.12M | 9 |
| 300 | 70 | Multirip | 28 | 3,2 | 2,2 | 18° | 10° ATB | 278.028.12V | 9 |
| 300 | 70 | Multirip | 24+4 | 2,7 | 1,8 | 18° | 10° ATB | 280.024.12V | 10 |
| 300 | 80 | Multirip | 24+4 | 2,7 | 1,8 | 18° | 10° ATB | 280.024.12W | 10 |
| 300 | 30 | Multirip | 24+4 | 4,0 | 2,8 | 18° | 10° ATB | 277.024.12M | 10 |
| 300 | 70 | Multirip | 24+4 | 4,0 | 2,8 | 18° | 10° ATB | 277.024.12V | 10 |
| 300 | 80 | Multirip | 24+4 | 4,0 | 2,8 | 18° | 10° ATB | 277.024.12W | 10 |
| 300 | 30 | Abrasive materials | 20 | 2,8 | 1,8 | 15° | 5° ATB | 286.020.12M | 11 |
| 300 | 30 | Wood | 24 | 3,2 | 2,2 | 20° | 10° ATB | 293.024.12M | 11 |
| 300 | 35 | Wood | 24 | 3,2 | 2,2 | 20° | 10° ATB | 293.024.12R | 11 |
| 300 | 30 | Wood | 36 | 3,2 | 2,2 | 15° | 10° ATB | 285.036.12M | 12 |
| 300 | 30 | Wood | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.048.12M | 12 |
| 300 | 30 | Wood | 60 | 3,2 | 2,2 | 15° | 10° ATB | 285.060.12M | 12 |
| 300 | 30 | Wood | 72 | 3,2 | 2,2 | 10° | 15° ATB | 285.072.12M | 12 |
| 300 | 35 | Wood | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.048.12R | 12 |
| 300 | 35 | Wood | 72 | 3,2 | 2,2 | 10° | 15° ATB | 285.072.12R | 12 |
| 300 | 30 | Wood | 96 | 3,2 | 2,2 | 5° | 15° ATB | 285.096.12M | 13 |
| 300 | 35 | Wood | 96 | 3,2 | 2,2 | 5° | 15° ATB | 285.096.12R | 13 |
| 300 | 30 | Wood | 96 | 3,0 | 2,5 | 10° | 20° ATB | 285.596.12M | 13 |
| 300 | 30 | Wood | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.648.12M | 14 |
| 300 | 30 | Wood | 72 | 3,2 | 2,2 | 10° | 15° ATB | 285.672.12M | 14 |
| 300 | 30 | Two-sided melamine | 96 | 3,2 | 2,2 | 5° | 15° ATB | 285.696.12M | 14 |
| 300 | 30 | Two-sided melamine | 100 | 3,2 | 2,2 | 15° | 1FTG+4ATB | 274.100.12M | 15 |
| 300 | 30 | Two-sided melamine | 96 | 3,2 | 2,2 | 2° | 40° ATB | 283.096.12M | 16 |
| 300 | 30 | Two-sided melamine | 96 | 3,2 | 2,2 | 5° | 40° ATB | 210.096.12M | 16 |
| 300 | 30 | Two-sided melamine | 72 | 3,2 | 2,2 | 10° | TCG | 281.672.12M | 17 |
| 300 | 30 | Two-sided melamine | 96 | 3,2 | 2,2 | 5° | TCG | 281.696.12M | 17 |
| 300 | 30 | Two-sided melamine | 96 | 3,2 | 2,2 | 10° | FFT | 295.096.12M | 17 |

| D mm | B mm | APPLICATION | Z | K mm | P mm | α | β | ORDER NO. | PAGE |
|---------|---------|--------------------|------|---------|---------|----------|--------------------|--------------|------|
| 300 | 30 | Portables machines | 72 | 3,2 | 2,2 | 10° | TCG | 281.072.12M | 18 |
| 300 | 30 | Portables machines | 96 | 3,2 | 2,2 | 10° | TCG | 281.096.12M | 18 |
| 300 | 30 | Two-sided melamine | 72 | 3,2 | 2,2 | -3° | FFT | 281.073.12M | 18 |
| 300 | 30 | Two-sided melamine | 96 | 3,2 | 2,2 | -3° | FFT | 281.097.12M | 18 |
| 300 | 30 | Two-sided melamine | 60 | 3,2 | 2,2 | 10° | 45° TCG | 237.060.12M | 19 |
| 300 | 30 | Two-sided melamine | 96 | 3,2 | 2,2 | 15° | 45° TCG | 237.096.12M | 19 |
| 300 | 30 | Two-sided melamine | 60 | 4,4 | 3,2 | 16° | TCG | 282.060.12M | 20 |
| 300 | 30 | Two-sided melamine | 72 | 3,2 | 2,2 | 10° | TCG | 281.072.12M | 20 |
| 300 | 30 | Two-sided melamine | 96 | 3,2 | 2,2 | 10° | TCG | 281.096.12M | 20 |
| 300 | 75 | Two-sided melamine | 60 | 4,4 | 3,2 | 16° | TCG | 282.060.12X | 20 |
| 300 | 80 | Two-sided melamine | 60 | 4,4 | 3,2 | 16° | TCG | 282.060.12W | 20 |
| 300 | 50 | Panel sizing | 48 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.300.48T | 21 |
| 300 | 65 | Panel sizing | 72 | 4,3-5,5 | 3,2 | 10° | CO+FTG | 288.300.72J | 21 |
| 300 | 32 | Aluminium | 96 | 3,2 | 2,5 | 5° | TCG | 284.096.12P | 22 |
| 300 | 30 | Aluminium | 96 | 3,2 | 2,5 | -6° Neg. | TCG | 297.096.12M | 23 |
| 300 | 32 | Aluminium | 96 | 3,2 | 2,5 | -6° Neg. | TCG | 297.096.12P | 23 |
| 300 | 30 | Metal | 80 | 2,2 | 1,8 | 10° | 8° FWF | 226.580.12M | 24 |
| 300 | 30 | Corian | 84 | 3,2 | 2,5 | 0° | MTCG | 223.084.12M | 25 |
| 300 | 30 | Corian | 96 | 2,8 | 2,2 | -3° | MATB | 222.096.12M | 25 |
| 300 | 30 | Portables machines | 24 | 2,6 | 1,8 | 22° | 10° ATB + 8° Shear | 271.300.24M | 26 |
| 300 | 30 | Portables machines | 48 | 2,6 | 1,8 | 18° | 10° ATB + 8° Shear | 271.300.48M | 26 |
| 300 | 30 | Portables machines | 72 | 2,6 | 1,8 | 15° | 10° ATB + 8° Shear | 272.300.72M | 27 |
| 300 | 30 | Portables machines | 96 | 2,6 | 1,8 | 12° | 10° ATB + 8° Shear | 273.300.96M | 27 |
| 300 | 20 | Wood | 48 | 3,2 | 2,2 | 15° | 10° ATB | 285.048.12H | 12 |
| 303 | 30 | Two-sided melamine | 60 | 3,2 | 2,2 | 10° | HDF | 287.060.12M | 15 |
| 303 | 30 | Two-sided melamine | 60 | 3,2 | 2,2 | -6° | HDF | 287.061.12M | 15 |
| 305 | 25,4 | Abrasive materials | 8 | 2,2 | 1,6 | 12° | TCG | 236.008.12 | 29 |
| 305 | 30 | Wood | 28 | 2,8 | 1,8 | 20° | 10° ATB | 293.028.22M | 11 |
| 305 | 30 | Wood | 72 | 3,2 | 2,2 | 10° | 15° ATB | 285.072.22M | 13 |
| 305 | 30 | Wood | 72 | 3,2 | 2,2 | -5° Neg. | 15° ATB | 294.072.22M | 13 |
| 305 | 30 | Aluminium | 96 | 3,2 | 2,5 | -6° Neg. | TCG | 297.096.13M | 23 |
| 305 | 25,4 | Metal | 60 | 2,2 | 1,8 | 0° | 8° FWF | 226.060.12 | 24 |
| 305 | 25,4 | Metal | 80 | 2,2 | 1,8 | 0° | 8° FWF | 226.080.12 | 24 |
| 305 | 30 | Metal | 80 | 2,2 | 1,8 | 0° | 8° FWF | 226.080.12M | 24 |
| 305 | 25,4 | Metal | 80 | 2,2 | 1,8 | 10° | 8° FWF | 226.580.12 | 24 |
| 305 | 30 | Wood | 54 | 2,8 | 1,8 | -5° Neg. | 15° ATB | 294.054.22M | 12 |
| 315 | 30 | Abrasive materials | 24 | 3,2 | 2,2 | 15° | 5° ATB | 286.024.13M | 11 |
| 315 | 30 | Wood | 28 | 3,2 | 2,2 | 20° | 10° ATB | 293.028.12M | 11 |
| 315 | 30 | Wood | 72 | 3,2 | 2,2 | 10° | 15° ATB | 285.072.13M | 13 |
| 315 | 30 | Aluminium | 96 | 3,2 | 2,5 | -6° Neg. | TCG | 297.096.23M | 23 |
| 315 | 30 | Wood | 36 | 3,2 | 1,8 | 15° | 10° ATB | 285.036.13M | 12 |
| 315 | 30 | Wood | 54 | 3,2 | 2,2 | 15° | 10° ATB | 294.054.12M | 12 |
| 320 | 65 | Two-sided melamine | 60 | 4,4 | 3,2 | 16° | TCG | Y282.060.13J | 20 |
| 330 | 30 | Aluminium | 96 | 3,2 | 2,5 | -6° Neg. | TCG | 297.096.33M | 23 |
| 330 | 32 | Aluminium | 96 | 3,2 | 2,5 | -6° Neg. | TCG | 297.096.33P | 23 |
| 350 | 30 | Multirip | 28+4 | 3,5 | 2,5 | 18° | 10° ATB | 279.028.14M | 9 |
| 350 | 60 | Multirip | 28+4 | 3,5 | 2,5 | 18° | 10° ATB | 279.028.14U | 9 |
| 350 | 70 | Multirip | 28+4 | 3,5 | 2,5 | 18° | 10° ATB | 279.028.14V | 9 |
| 350 | 80 | Multirip | 28+4 | 3,5 | 2,5 | 18° | 10° ATB | 279.028.14W | 9 |
| 350 | 30 | Multirip | 36 | 3,5 | 2,5 | 18° | 10° ATB | 278.036.14M | 9 |
| 350 | 70 | Multirip | 36 | 3,5 | 2,5 | 18° | 10° ATB | 278.036.14V | 9 |
| 350 | 30 | Multirip | 24+6 | 4,2 | 2,8 | 18° | 10° ATB | 277.024.14M | 10 |
| 350 | 70 | Multirip | 24+6 | 4,2 | 2,8 | 18° | 10° ATB | 277.024.14V | 10 |
| 350 | 30 | Abrasive materials | 24 | 3,2 | 2,2 | 15° | 5° ATB | 286.024.14M | 11 |
| 350 | 30 | Wood | 28 | 3,5 | 2,5 | 20° | 10° ATB | 293.028.14M | 11 |
| 350 | 35 | Wood | 28 | 3,5 | 2,5 | 20° | 10° ATB | 293.028.14R | 11 |
| 350 | 30 | Wood | 54 | 3,5 | 2,5 | 15° | 10° ATB | 285.054.14M | 12 |
| 350 | 30 | Wood | 72 | 3,5 | 2,5 | 15° | 10° ATB | 285.072.14M | 12 |
| 350 | 30 | Wood | 84 | 3,5 | 2,5 | 10° | 15° ATB | 285.084.14M | 12 |
| 350 | 35 | Wood | 54 | 3,5 | 2,5 | 15° | 10° ATB | 285.054.14R | 12 |
| 350 | 35 | Wood | 84 | 3,5 | 2,5 | 10° | 15° ATB | 285.084.14R | 12 |
| 350 | 30 | Wood | 108 | 3,5 | 2,5 | 5° | 15° ATB | 285.108.14M | 13 |
| 350 | 35 | Wood | 108 | 3,5 | 2,5 | 5° | 15° ATB | 285.108.14R | 13 |
| 350 | 30 | Wood | 54 | 3,5 | 2,5 | 15° | 10° ATB | 285.654.14M | 14 |
| 350 | 30 | Wood | 84 | 3,5 | 2,5 | 10° | 15° ATB | 285.684.14M | 14 |
| 350 | 30 | Two-sided melamine | 108 | 3,5 | 2,5 | 5° | 15° ATB | 285.708.14M | 14 |
| 350 | 30 | Two-sided melamine | 108 | 3,5 | 2,5 | 5° | 40° ATB | 283.108.14M | 16 |
| 350 | 30 | Two-sided melamine | 108 | 3,5 | 2,5 | 5° | TCG | 281.708.14M | 17 |
| 350 | 30 | Two-sided melamine | 108 | 3,5 | 2,5 | 10° | FFT | 295.108.14M | 17 |

Saw blade index

| D mm | B mm | APPLICATION | Z | K mm | P mm | α | β | ORDER NO. | PAGE |
|---------|---------|--------------------|------|---------|---------|----------|---------|--------------|------|
| 350 | 30 | Portables machines | 84 | 3,5 | 2,5 | 10° | TCG | 281.084.14M | 18 |
| 350 | 30 | Portables machines | 108 | 3,5 | 2,5 | 10° | TCG | 281.108.14M | 18 |
| 350 | 30 | Two-sided melamine | 72 | 3,5 | 2,4 | 15° | 45° TCG | 237.072.14M | 19 |
| 350 | 30 | Two-sided melamine | 54 | 4,4 | 3,2 | 16° | TCG | 282.054.14M | 20 |
| 350 | 30 | Two-sided melamine | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.14M | 20 |
| 350 | 30 | Two-sided melamine | 108 | 3,5 | 2,5 | 10° | TCG | 281.108.14M | 20 |
| 350 | 50 | Two-sided melamine | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.14T | 20 |
| 350 | 60 | Two-sided melamine | 72 | 4,4 | 3,2 | 16° | TCG | Y282.072.14U | 20 |
| 350 | 75 | Two-sided melamine | 54 | 4,4 | 3,2 | 16° | TCG | 282.054.14X | 20 |
| 350 | 75 | Two-sided melamine | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.14X | 20 |
| 350 | 80 | Two-sided melamine | 54 | 4,4 | 3,2 | 16° | TCG | 282.054.14W | 20 |
| 350 | 80 | Two-sided melamine | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.14W | 20 |
| 350 | 32 | Aluminium | 92 | 3,2 | 2,5 | 5° | TCG | 284.092.14P | 22 |
| 350 | 32 | Aluminium | 108 | 3,2 | 2,5 | 5° | TCG | 284.108.14P | 22 |
| 350 | 30 | Aluminium | 108 | 3,2 | 2,5 | -6° Neg. | TCG | 297.108.14M | 23 |
| 350 | 32 | Aluminium | 108 | 3,2 | 2,5 | -6° Neg. | TCG | 297.108.14P | 23 |
| 355 | 30 | Two-sided melamine | 72 | 4,4 | 3,2 | 16° | TCG | S282.03556 | 20 |
| 355 | 25,4 | Metal | 72 | 2,2 | 1,8 | 0° | 8° FWF | 226.072.14 | 24 |
| 355 | 25,4 | Metal | 90 | 2,2 | 1,8 | 0° | 8° FWF | 226.090.14 | 24 |
| 355 | 30 | Metal | 90 | 2,2 | 1,8 | 0° | 8° FWF | 226.090.14M | 24 |
| 355 | 25,4 | Metal | 90 | 2,2 | 1,8 | 10° | 8° FWF | 226.590.14 | 24 |
| 355 | 30 | Metal | 90 | 2,2 | 1,8 | 10° | 8° FWF | 226.590.14M | 24 |
| 380 | 60 | Two-sided melamine | 72 | 4,8 | 3,5 | 16° | TCG | 282.072.15U | 20 |
| 400 | 30 | Multirip | 28+6 | 4,0 | 2,8 | 18° | 10° ATB | 279.028.16M | 9 |
| 400 | 70 | Multirip | 28+6 | 4,0 | 2,8 | 18° | 10° ATB | 279.028.16V | 9 |
| 400 | 30 | Abrasive materials | 28 | 3,2 | 2,2 | 15° | 5° ATB | 286.028.16M | 11 |
| 400 | 30 | Wood | 36 | 3,5 | 2,5 | 20° | 10° ATB | 285.036.16M | 11 |
| 400 | 30 | Wood | 48 | 3,5 | 2,5 | 20° | 10° ATB | 285.048.16M | 12 |
| 400 | 30 | Wood | 60 | 3,5 | 2,5 | 10° | 15° ATB | 285.060.16M | 12 |
| 400 | 30 | Wood | 96 | 3,5 | 2,5 | 10° | 15° ATB | 285.096.16M | 13 |
| 400 | 30 | Wood | 120 | 3,5 | 2,5 | 10° | 15° ATB | 285.120.16M | 13 |
| 400 | 30 | Two-sided melamine | 60 | 4,4 | 3,2 | 16° | TCG | 282.060.16M | 20 |
| 400 | 30 | Two-sided melamine | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.16M | 20 |
| 400 | 60 | Two-sided melamine | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.16U | 20 |
| 400 | 75 | Two-sided melamine | 60 | 4,4 | 3,2 | 16° | TCG | 282.060.16X | 20 |
| 400 | 75 | Two-sided melamine | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.16X | 20 |
| 400 | 80 | Two-sided melamine | 60 | 4,4 | 3,2 | 16° | TCG | 282.060.16W | 20 |
| 400 | 80 | Two-sided melamine | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.16W | 20 |
| 400 | 32 | Aluminium | 96 | 3,8 | 3,2 | 5° | TCG | 284.096.16P | 22 |
| 400 | 30 | Aluminium | 120 | 3,8 | 3,2 | -6° Neg. | TCG | 297.120.16M | 23 |
| 400 | 32 | Aluminium | 108 | 3,8 | 3,2 | -6° Neg. | TCG | 297.108.16P | 23 |
| 420 | 32 | Aluminium | 96 | 3,8 | 3,2 | 5° | TCG | 284.096.17P | 22 |
| 430 | 75 | Two-sided melamine | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.17X | 20 |
| 430 | 80 | Two-sided melamine | 72 | 4,4 | 3,2 | 16° | TCG | 282.072.17W2 | 20 |
| 450 | 30 | Abrasive materials | 32 | 3,8 | 2,8 | 15° | 5° ATB | 286.032.18M | 11 |
| 450 | 30 | Wood | 36 | 3,8 | 2,8 | 20° | 10° ATB | 285.036.18M | 11 |
| 450 | 30 | Wood | 54 | 3,8 | 2,8 | 15° | 15° ATB | 285.054.18M | 12 |
| 450 | 30 | Wood | 66 | 3,8 | 2,8 | 10° | 15° ATB | 285.066.18M | 12 |
| 450 | 60 | Two-sided melamine | 72 | 4,8 | 3,5 | 16° | TCG | 282.072.18U | 20 |
| 450 | 80 | Two-sided melamine | 72 | 4,8 | 3,5 | 16° | TCG | 282.072.18W2 | 20 |
| 450 | 32 | Aluminium | 108 | 3,8 | 3,2 | 5° | TCG | 284.108.18P | 22 |
| 450 | 30 | Aluminium | 140 | 3,8 | 3,2 | -6° Neg. | TCG | Y297.140.18M | 23 |
| 450 | 32 | Aluminium | 108 | 3,8 | 3,2 | -6° Neg. | TCG | 297.108.18P | 23 |
| 500 | 30 | Abrasive materials | 36 | 3,8 | 2,8 | 15° | 5° ATB | 286.036.20M | 11 |
| 500 | 30 | Wood | 44 | 4,0 | 2,8 | 20° | 10° ATB | 285.044.20M | 11 |
| 500 | 30 | Wood | 60 | 3,8 | 2,8 | 15° | 15° ATB | 285.060.20M | 12 |
| 500 | 30 | Wood | 72 | 3,8 | 2,8 | 10° | 15° ATB | 285.072.20M | 12 |
| 500 | 60 | Two-sided melamine | 72 | 4,8 | 3,5 | 16° | TCG | 282.072.20U | 20 |
| 500 | 80 | Two-sided melamine | 72 | 4,8 | 3,5 | 16° | TCG | Y282.072.20W | 20 |
| 500 | 32 | Aluminium | 120 | 4,0 | 3,2 | 5° | TCG | 284.120.20P | 22 |
| 500 | 32 | Aluminium | 120 | 4,0 | 3,2 | -6° Neg. | TCG | 297.120.20P | 23 |
| 550 | 30 | Abrasive materials | 40 | 4,2 | 3,2 | 15° | 5° ATB | 286.040.22M | 11 |
| 550 | 30 | Wood | 60 | 4,2 | 3,2 | 10° | 15° ATB | 285.060.22M | 12 |
| 550 | 30 | Wood | 96 | 4,2 | 3,2 | 10° | 15° ATB | 285.096.22M | 12 |
| 550 | 100 | Two-sided melamine | 72 | 5,2 | 3,5 | 16° | TCG | 282.072.22A | 20 |
| 600 | 30 | Abrasive materials | 40 | 4,2 | 3,2 | 15° | 5° ATB | 286.040.24M | 11 |
| 600 | 30 | Wood | 66 | 4,2 | 3,2 | 10° | 15° ATB | 285.066.24M | 12 |
| 700 | 30 | Abrasive materials | 46 | 4,4 | 3,2 | 15° | 5° ATB | 286.046.28M | 11 |
| 700 | 30 | Wood | 72 | 4,4 | 3,2 | 10° | 15° ATB | 285.072.28M | 12 |

QUALITY MATERIALS FOR OUTSTANDING PERFORMANCE

Produced by following state-of-the-art processes and by using high-tech machines, these jig saw blades have been specifically designed for precise cuts on soft & hardwood, plywood, OSB, laminates, plastics, HPL, multiplex panels, metals, ferrous & non-ferrous materials, aluminium, fiberglass and also stainless steel. These are made of three different materials.

What else? Geometry is important!

HCS

HCS (High Carbon Steel)

For use when cutting softwood, wood fiberboard and soft plastic.

BIM

BIM (Bimetal)

Suitable for use in hardwood, abrasive wooden and harder materials such as non-ferrous and ferrous metals. This special bond of HCS and HSS fits the most diverse needs.

Resistant to shank breakage thanks to its flexibility, this material lasts much longer than HCS and HSS.


An excellent value for your money.

HSS

HSS (High Speed Steel)

For use when cutting harder materials, such as metals, aluminium and non-ferrous metals.


MILLED & SIDE SET TEETH



Milled and side set teeth

Jig saw blades featuring this kind of geometry feature a quick rough cut into soft/hardwood, aluminium, plastic and non-ferrous metals.


MILLED & WAVY SET TEETH



Milled and wavy set teeth

Suitable for fine straight cuts into plywood, soft steel, aluminium, non-ferrous metals and plastic.

GROUND & SIDE SET TEETH



Ground and side set teeth

To be used for quick cuts in wood.

GROUND & TAPER GROUND TEETH




Ground and taper ground teeth

This geometry delivers fine and clear cuts in wood and plastic.



Guide to choosing the most suitable jig saw blade

| Serie | Material | Thickness | Line | Fine Straight | Coarse | Fine Curve | Coarse Curve | Pag. | | |
|-------------|--|--|---------------------|-----------------|---------|------------|--------------|---------|----|----|
| WOOD | Softwood | 1,5-15 | Fine | | | JT101AO | | 44 | | |
| | | 2-15 | Basic | | | JT119BO | | 47 | | |
| | | 3-65 | Fine, Splinter-Free | JT234X | | | | | 49 | |
| | | 3-30 | Fine | JT101B | | | | | 48 | |
| | | 3-30 | Fine, Splinter-Free | JT101BR | | | | | 48 | |
| | | 4-60 | Basic | | JT111C | | | | 47 | |
| | | 5-60 | Fast | | JT144D | | JT244D | | 47 | |
| | | 5-100 | Fast | | JT344D | | | | 48 | |
| | | 7-55 | Fine | JT101D | | | | | 49 | |
| | | 7-65 | Fine | JT301CD | | | | | 49 | |
| | Hardwood | 1,5-15 | Fine | | | | JT101AO | | 48 | |
| | | 3-30 | Fine | JT101B | | | | | 48 | |
| | | 3-30 | Fine, Splinter-Free | JT101BR | | | | | 48 | |
| | | 3-65 | Fine, Splinter-Free | JT234X | | | | | 49 | |
| | | 5-60 | Fast | | JT144D | | JT244D | | 47 | |
| | | 5-100 | Fast | | JT344D | | | | 48 | |
| | | 7-55 | Fine | JT101D | | | | | 49 | |
| | | 7-65 | Fine | JT301CD | | | | | 49 | |
| | | OSB | 2-15 | Basic | | | | JT119BO | | 47 |
| | | | 3-30 | Fine | JT101B | | | | | 48 |
| | 4-60 | | Basic | | JT111C | | | | 47 | |
| | 5-60 | | Fast | | JT144D | | JT244D | | 47 | |
| | 7-55 | | Fine | JT101D | | | | | 49 | |
| | Plywood | 1,5-15 | Fine | | | | JT101AO | | 48 | |
| | | 2-15 | Basic | | | | JT119BO | | 47 | |
| | | 3-30 | Fine | JT101B | | | | | 48 | |
| | | 3-30 | Fine, Splinter-Free | JT101BR | | | | | 48 | |
| | | 3-65 | Fine, Splinter-Free | JT234X | | | | | 49 | |
| | | 4-60 | Basic | | JT111C | | | | 47 | |
| | | 5-60 | Fast | | JT144D | | JT244D | | 47 | |
| | | 5-100 | Fast | | JT344D | | | | 48 | |
| | Construction Wood | <30 | Fine | JT101B | | | | | 48 | |
| | | 3-65 | Fine, Splinter-Free | JT234X | | | | | 49 | |
| | | <100 | Fast | | JT344D | | | | 48 | |
| | Chipboard | 2-15 | Basic | | | | JT119BO | | 47 | |
| | | 3-30 | Fine | JT101B | | | | | 48 | |
| | | 3-65 | Fine, Splinter-Free | JT234X | | | | | 49 | |
| | | 4-60 | Basic | | JT111C | | | | 47 | |
| | | 5-60 | Fast | | JT144D | | JT244D | | 47 | |
| | Laminated panels Kitchen Tops Worktops | 1,5-15 | Fine | | | | JT101AO | | 48 | |
| | | 1,5-15 | Fine, Long Life | JT101BIF | | | | | 49 | |
| | | 3-30 | Fine | JT101B | | | | | 48 | |
| | | 3-30 | Fine, Splinter-Free | JT101BR | | | | | 48 | |
| | | 3-65 | Fine, Splinter-Free | JT234X | | | | | 49 | |
| | METAL | Sheet metals | 1-3 | Basic | JT118A | | JT218A | | 50 | |
| | | | 1,5-10 | Fast, Long life | JT123X | | | | 50 | |
| | | | 2,5-6 | Basic | JT118B | | | | 50 | |
| | | Aluminium, non-ferrous | <30 | Fast | JT127D | | | | | 50 |
| | | | 1,5-10 | Fast | JT123X | | | | | 50 |
| | | Pipes | <30 | Fast | JT123X | | | | | 50 |
| | | Inox Sheets | 1,5-3 | Fast | JT123X | | | | | 50 |
| | PLASTIC | GRP (Fiberglass) Plastic (PP, PE, PVC, PA, PS) | <30 | Fast | JT127D | | | | 50 | |
| | | | <30 | Fine | JT101D | | | | 49 | |
| | | | <30 | Fast | JT123X | | | | 50 | |
| | | | 7-65 | Fine | JT301CD | | | | | 49 |

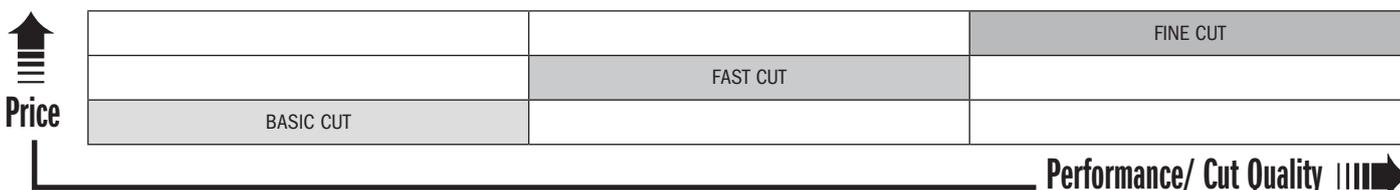




JT119B0

Curve cuts on softwood (2 ~ 15mm), plywood, OSB.


| Pack Quantity | I mm | L mm | TS Tooth spacing mm | ORDER NO. T shank |
|---------------|------|------|------------------------|----------------------|
| 5 | 50 | 76 | 2 | JT119B0-5 |



JT111C

Fast coarse cuts on softwood (4 ~ 60mm), plywood, OSB.


| Pack Quantity | I mm | L mm | TS Tooth spacing mm | ORDER NO. T shank |
|---------------|------|------|------------------------|----------------------|
| 5 | 75 | 100 | 3 | JT111C-5 |



JT144D

Very fast cuts, straight and coarse, on hard/soft woods (5 ~ 60mm), plywood, OSB. Plunge cutting.


| Pack Quantity | I mm | L mm | TS Tooth spacing mm | ORDER NO. T shank |
|---------------|------|------|------------------------|----------------------|
| 5 | 75 | 100 | 4 | JT144D-5 |
| 25 | 75 | 100 | 4 | JT144D-25 |
| 100 | 75 | 100 | 4 | JT144D-100 |



JT244D

Fast, curve, coarse cut on soft and hardwood from 5mm to 60mm, plywood, OSB. Plunge cutting.

| Pack Quantity | I mm | L mm | TS Tooth spacing mm | ORDER NO. T shank |
|---------------|------|------|------------------------|----------------------|
| 5 | 75 | 100 | 4 | JT244D-5 |



Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts


Jig saw blades for wood



JT344D

Very fast cuts, straight and coarse on thick construction timber, hard/soft woods (5 ~ 100mm), plywood, OSB.


| Pack Quantity | I mm | L mm | TS Tooth spacing mm | ORDER NO. T shank |
|---------------|------|------|------------------------|----------------------|
| 5 | 110 | 132 | 4 | JT344D-5 |



JT101A0

Curved cuts, fine finishing on both sides of surface on hard/soft woods, plywood, MDF, double sided laminates (1,5 ~ 15mm).


| Pack Quantity | I mm | L mm | TS Tooth spacing mm | ORDER NO. T shank |
|---------------|------|------|------------------------|----------------------|
| 5 | 50 | 76 | 1,4 | JT101A0-5 |



JT101B

Fine straight cuts on hard/soft woods, plywood, OSB and plastics (3 ~ 30mm). Plunge cutting.


| Pack Quantity | I mm | L mm | TS Tooth spacing mm | ORDER NO. T shank |
|---------------|------|------|------------------------|----------------------|
| 5 | 75 | 100 | 2,5 | JT101B-5 |
| 25 | 75 | 100 | 2,5 | JT101B-25 |



JT101BR

Straight cuts, fine finishing on the surface, on hard/soft woods, plywood, OSB, laminated panels, plastics (3 ~ 30mm). Reverse tooth.

| Pack Quantity | I mm | L mm | TS Tooth spacing mm | ORDER NO. T shank |
|---------------|------|------|------------------------|----------------------|
| 5 | 75 | 100 | 2,5 | JT101BR-5 |
| 25 | 75 | 100 | 2,5 | JT101BR-25 |






JT101D

Good straight cuts on hard/soft woods, plywood, OSB, plastics (7 ~ 55mm). Plunge cutting.

| Pack Quantity | I mm | L mm | TS Tooth spacing mm | ORDER NO. T shank | | | | | | |
|---------------|------|------|------------------------|----------------------|--|--|--|--|--|--|
| 5 | 75 | 100 | 4 | JT101D-5 | | | | | | |



JT301CD

Straight cuts, fine finishing, on hard/soft woods, plywood, laminates, plastics (7 ~ 65mm).

| Pack Quantity | I mm | L mm | TS Tooth spacing mm | ORDER NO. T shank | | | | | | |
|---------------|------|------|------------------------|----------------------|--|--|--|--|--|--|
| 5 | 90 | 116 | 3 | JT301CD-5 | | | | | | |



JT234X

Extra-clean splinter-free straight cuts on hard/soft woods, plywood, OSB, laminates (3 ~ 65mm).

| Pack Quantity | I mm | L mm | TS Tooth spacing mm | ORDER NO. T shank | | | | | | | |
|---------------|------|------|------------------------|----------------------|--|--|--|--|--|--|--|
| 5 | 90 | 116 | 2-3 | JT234X-5 | | | | | | | |



JT101BIF

Splinter-free cuts. Special for all laminates, HPL and multiplex panels (1,5 ~ 15mm).

| Pack Quantity | I mm | L mm | TS Tooth spacing mm | ORDER NO. T shank | | | |
|---------------|------|------|------------------------|----------------------|--|--|--|
| 5 | 58 | 83 | 1,7 | JT101BIF-5 | | | |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Jig saw blades for wood



JT118A

Straight cuts on thin sheet metals, ferrous and non-ferrous (1 ~ 3mm).

| Pack Quantity | l mm | L mm | TS Tooth spacing mm | ORDER NO. T shank |
|---------------|------|------|------------------------|----------------------|
| 5 | 50 | 76 | 1,2 | JT118A-5 |



JT218A

Curve cuts on thin sheet metals, ferrous and non-ferrous (1 ~ 3mm).

| Pack Quantity | l mm | L mm | TS Tooth spacing mm | ORDER NO. T shank |
|---------------|------|------|------------------------|----------------------|
| 5 | 50 | 76 | 1,2 | JT218A-5 |



JT118B

Straight cuts on medium-thick metals, ferrous and non-ferrous (2,5 ~ 6mm).


| Pack Quantity | l mm | L mm | TS Tooth spacing mm | ORDER NO. T shank |
|---------------|------|------|------------------------|----------------------|
| 5 | 50 | 76 | 2 | JT118B-5 |



JT123X

Straight cuts on thin to thick sheet metals (1,5 ~ 10mm), pipes, profiles in plastic and aluminium (diameter <30mm), stainless steel (1,5 ~ 3mm).

| Pack Quantity | l mm | L mm | TS Tooth spacing mm | ORDER NO. T shank | 1,5 ~ 10mm | <30mm | <30mm | <30mm | 1,5 ~ 3mm |
|---------------|------|------|------------------------|----------------------|---------------|--------------|-------------|-----------|-------------|
| 5 | 75 | 100 | 1,2-2,6 | JT123X-5 | Fine Straight | THIN & THICK | Sheet Metal | Aluminium | PVC Plastic |




JT127D

Special for aluminium, thin to thick (3 ~ 15mm), pipes + profiles, (diameter <30mm) as well as plastic and fiberglass.

| Pack Quantity | l mm | L mm | TS Tooth spacing mm | ORDER NO. T shank | 3 ~ 15mm | <30mm | <30mm | <30mm | 3 ~ 15mm |
|---------------|------|------|------------------------|----------------------|---------------|-------------|-----------|-------------|------------|
| 5 | 75 | 100 | 3 | JT127D-5 | Fine Straight | Sheet Metal | Aluminium | PVC Plastic | Fiberglass |



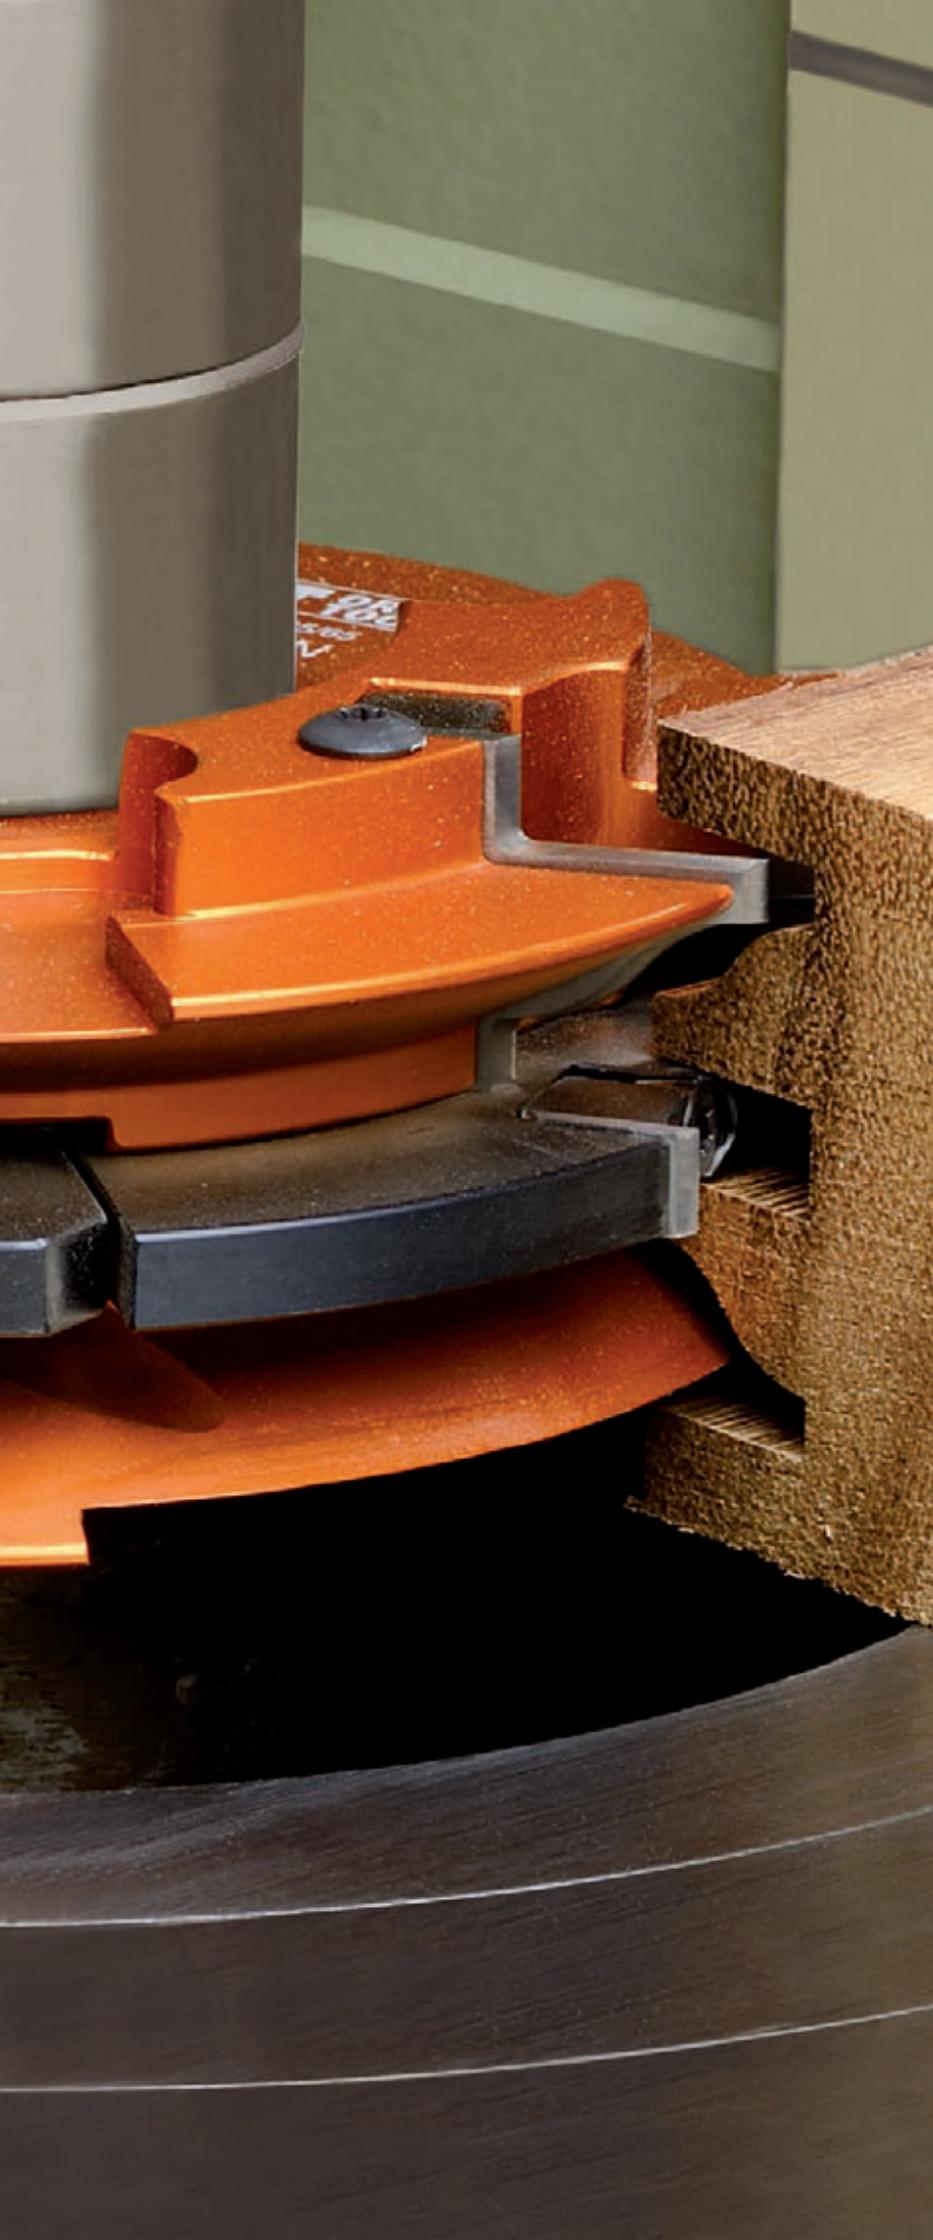

Tools with bore & knives

| PRODUCTS | PAGE |
|--|----------------|
| Rabbeting cutter heads | 52 - 53 |
| 3 piece adjustable grooving set | 54 - 55 |
| Planing and jointing spiral cutter heads | 56 |
| 2 piece adjustable rounding & chamfering set | 57 |
| Chamfer cutter heads | 58 - 59 |
| Multiradius roundover cutter heads | 60 ~ 62 |
| Jointing cutter heads | 63 ~ 65 |
| Panel cutter heads | 66 ~ 69 |
| Cutter heads for universal knives & sets | 70 ~ 72 |
| Profile knives and limiters | 73 ~ 86 |
| Blank knives and limiters (to be sharpened) | 87 |
| Bore reducers | 87 |
| HS corrugated back moulder knives | 88 |
| Magnetic knife setting jigs | 88 |
| Planer and jointer knives | 89 - 90 |
| HWM reversible knives for portable planers | 91 |
| HWM reversible knives | 92 - 93 |

Rabbeting cutter heads

694.100

These cutter heads have been designed for:

- rabbeting from top and from bottom
- jointing
- grooving




on your spindle moulder machines, double-end tenoner and edging machines.

Perfect on all materials, but better results are achieved using chipboard, MDF, wood composites, plastic materials and laminates. Improved design with shear angle.

TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 2 universal HWM straight knives 50x12x1,5mm [Z2]
- 4 universal HWM scoring knives 14x14x2mm [V4]
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives

Supplied in a solid plastic box.

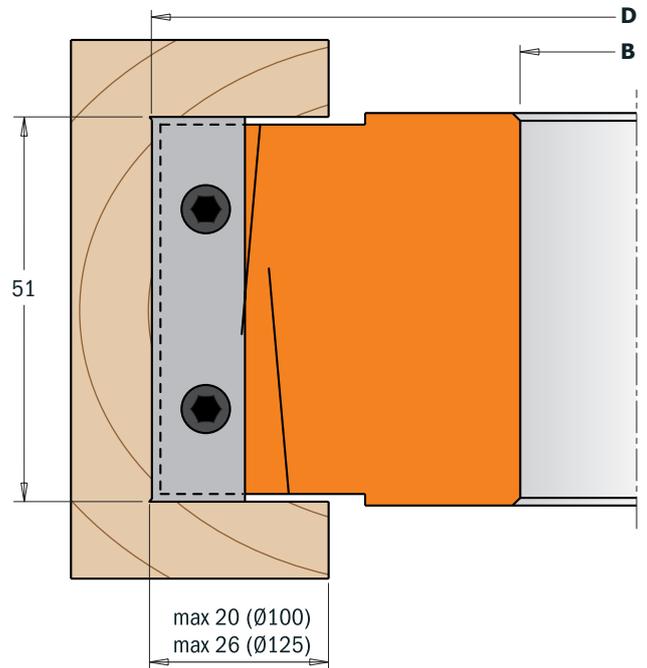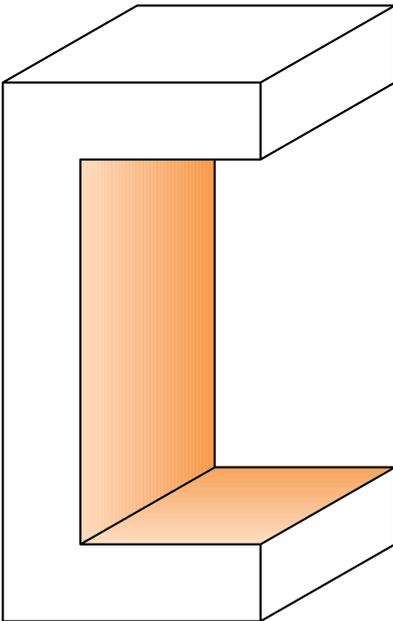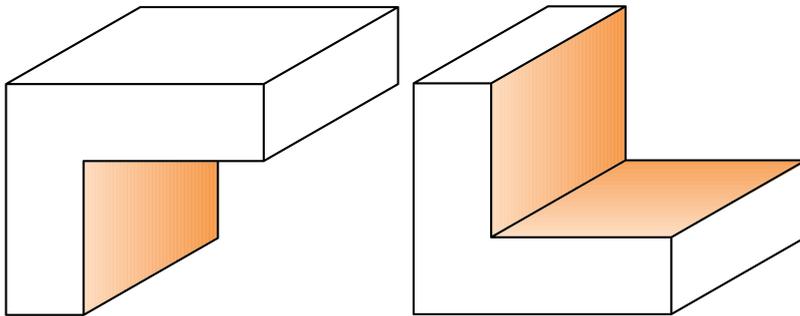

Drawings are 1:1 scale

Spare parts



| D mm | B mm | I mm | Z | RPM | ORDER NO. | | | | | | | |
|------|-------|------|-----|------------|-------------------|------------|------------|------------|------------|------------|------------|------------|
| 100 | 19,05 | 51 | 2+4 | 7500~12500 | 694.100.19 | 790.140.00 | 990.093.00 | 991.073.00 | 790.500.00 | 695.999.46 | 990.064.00 | 991.064.00 |
| 100 | 30 | 51 | 2+4 | 7500~12500 | 694.100.30 | 790.140.00 | 990.093.00 | 991.073.00 | 790.500.00 | 695.999.46 | 990.064.00 | 991.064.00 |
| 100 | 31,75 | 51 | 2+4 | 7500~12500 | 694.100.31 | 790.140.00 | 990.093.00 | 991.073.00 | 790.500.00 | 695.999.46 | 990.064.00 | 991.064.00 |
| 100 | 35 | 51 | 2+4 | 7500~12500 | 694.100.35 | 790.140.00 | 990.093.00 | 991.073.00 | 790.500.00 | 695.999.46 | 990.064.00 | 991.064.00 |
| 125 | 40 | 51 | 2+4 | 6100~10000 | 694.125.40 | 790.140.00 | 990.093.00 | 991.073.00 | 790.500.00 | 695.999.46 | 990.064.00 | 991.064.00 |
| 125 | 50 | 51 | 2+4 | 6100~10000 | 694.125.50 | 790.140.00 | 990.093.00 | 991.073.00 | 790.500.00 | 695.999.46 | 990.064.00 | 991.064.00 |



694.020

These cutter heads have been designed for:

- rabbeting from top and from bottom
- jointing
- grooving
- 40mm SP profile knives


on your spindle moulder machines, double-end tenoners and edging machines.

Perfect on all materials, but better results are achieved on chipboard, MDF, wood composites, plastic materials and laminates.


TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 2 universal HWM straight knives 40x12x1,5mm [Z2]
- 2 universal HWM scoring knives 14x14x2mm [V2]
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives




Supplied in a solid plastic box.

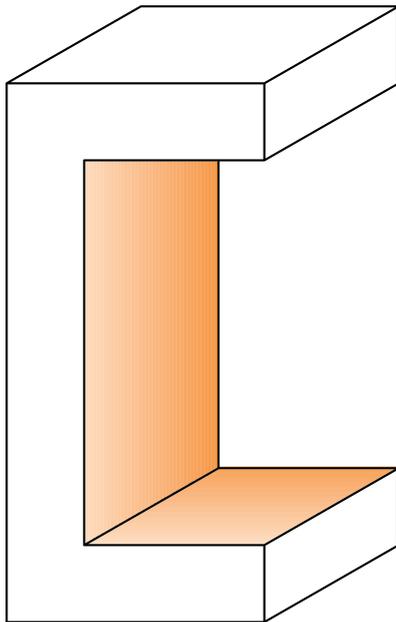

Drawing is 1:1 scale

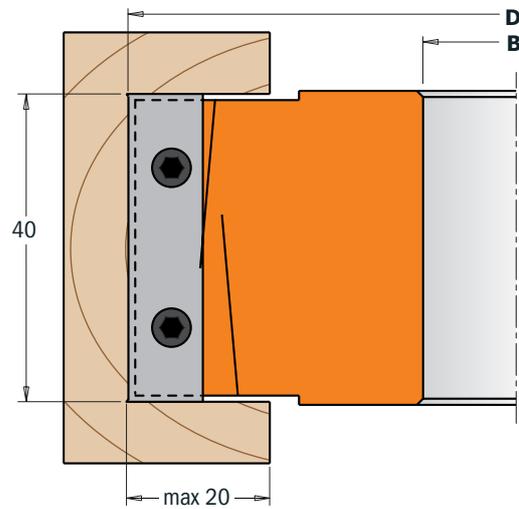

To use with all 40mm profile knives
(see from page 73 to page 82)

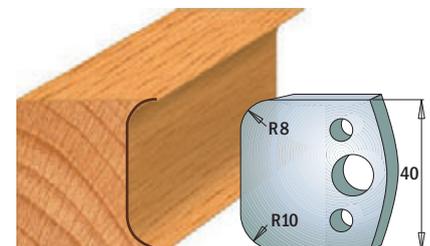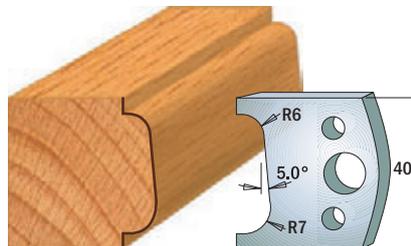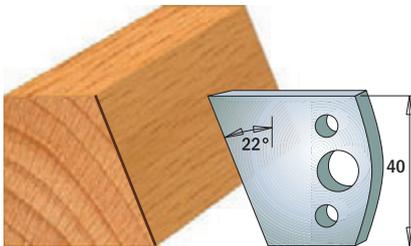

| D mm | B mm | I mm | Z | RPM | ORDER NO. | Spare parts | | | | | | |
|---------|---------|---------|-----|------------|-------------------|-------------|------------|------------|------------|------------|------------|------------|
| 98 | 30 | 40 | 2+2 | 7500~12500 | 694.020.30 | | | | | | | |
| 98 | 31,75 | 40 | 2+2 | 7500~12500 | 694.020.31 | 790.140.00 | 990.093.00 | 991.073.00 | 790.400.00 | 693.999.01 | 990.065.00 | 991.064.00 |
| 98 | 35 | 40 | 2+2 | 7500~12500 | 694.020.35 | 790.140.00 | 990.093.00 | 991.073.00 | 790.400.00 | 693.999.01 | 990.065.00 | 991.064.00 |
| 118 | 40 | 40 | 2+2 | 7500~12500 | 694.020.40 | 790.140.00 | 990.093.00 | 991.073.00 | 790.400.00 | 693.999.01 | 990.065.00 | 991.064.00 |
| 118 | 50 | 40 | 2+2 | 7500~12500 | 694.020.50 | 790.140.00 | 990.093.00 | 991.073.00 | 790.400.00 | 693.999.01 | 990.065.00 | 991.064.00 |

Spare parts

691.190 Pair of limiters 38x4x16mm

3 piece adjustable grooving sets



694.001




These cutter heads are the ideal tools to create precision slots and grooves on material from 4 to 15mm deep. These sets include:
 - 2 cutter heads type (A) Z4 + V4
 - 1 cutter head type (B) Z2
 - 12 spacer rings from 0,1 to 2mm

For use on your spindle moulder machines, double-end tenoner and shaper machines. Perfect grooving on all materials, but ideal on solid wood, plywood and laminated panels.

TECHNICAL DETAILS:

- Super-strength steel body
- 2 HWM Knives 7,65x12x1,5mm [Z2]
- 4 HWM Knives 18x18x1,5mm [Z4]
- 4 HWM Knives 14x14x1,2mm [V4]
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives

Supplied in a solid plastic box.

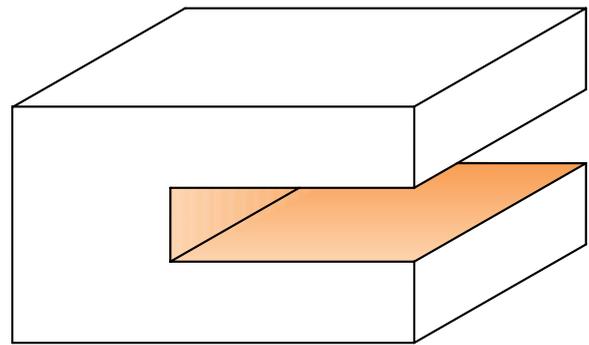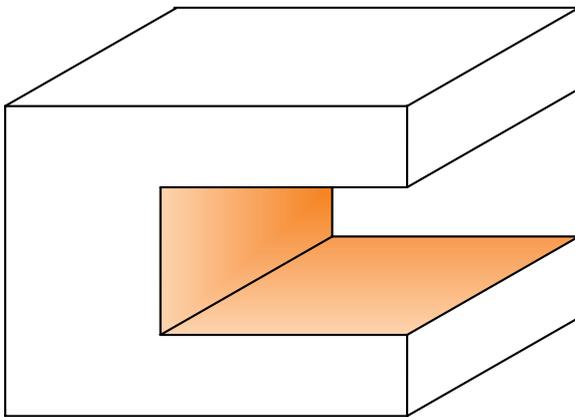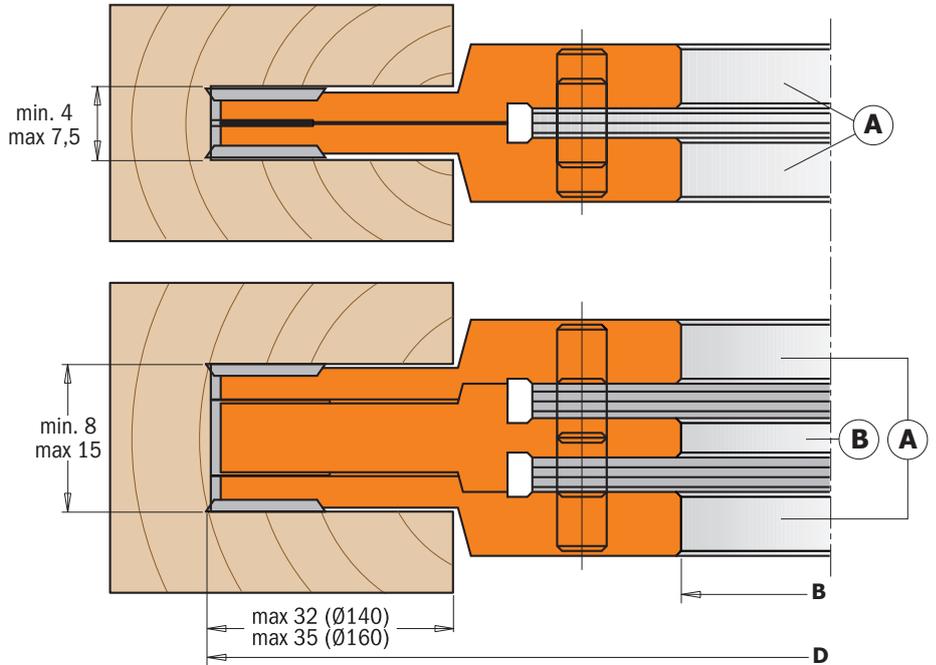

Drawings are 1:1 scale

| D mm | B mm | Z + V | RPM | ORDER NO. | Spare parts | | | |
|------|-------|-------|-----------|-------------------|-------------|------------|------------|-------------|
| 140 | 30 | 4+4 | 5500~9500 | 694.001.30 | | | | |
| 140 | 30 | 4+4 | 5500~9500 | 694.001.30 | 790.181.00 | 790.140.10 | 790.076.00 | 695.998.21 |
| 140 | 31,75 | 4+4 | 5500~9500 | 694.001.31 | 790.181.00 | 790.140.10 | 790.076.00 | 695.998.22 |
| 140 | 35 | 4+4 | 5500~9500 | 694.001.35 | 790.181.00 | 790.140.10 | 790.076.00 | 695.998.23 |
| 160 | 40 | 4+4 | 4800~8300 | 694.001.40 | 790.181.00 | 790.140.10 | 790.076.00 | 695.998.24N |
| 160 | 50 | 4+4 | 4800~8300 | 694.001.50 | 790.181.00 | 790.140.10 | 790.076.00 | 695.998.25N |

Spare parts

- For cutter heads (A)**
990.079.00 M4x3,2mm Torx screws
991.069.00 T9 Torx key
695.996.02 M4 (Ø12x1,7mm) threaded ring
695.996.01 M4 (Ø10x1,6mm) threaded ring

- For cutter heads (B)**
695.999.07 7x11x9,5mm wedge for knives
990.063.00 M5x18mm screw
991.072.00 T20 Torx key



694.021 - 694.022



These cutter heads are the ideal tools to create precision slots and grooves on material from 14 to 39mm deep. These sets include:



- 1 cutter head type (A) Z2 + V2
- 1 cutter head type (B) Z2 + V2
- spacer rings set

For use on your spindle moulder machines, double-end tenoners and shaper machines. Perfect grooving on all materials, but ideal on solid wood, plywood and laminated panels.


TECHNICAL DETAILS:

- Super-strength hard aluminium alloy body
- 694.021: 8 HWM Knives 13,6x13,6x2mm
- 694.022: 8 HWM Knives 19,5x12x1,5mm
- 4 HWM Scoring knives 14x14x2mm
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives

Supplied in a solid plastic box.

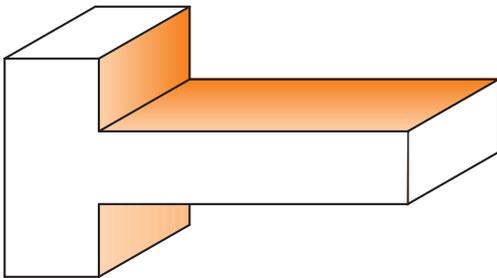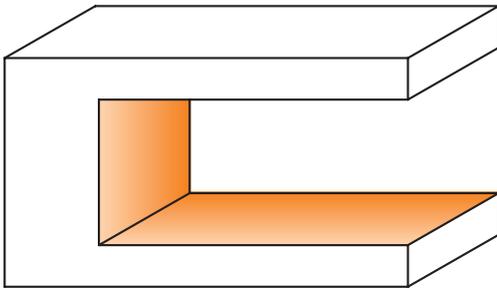

Drawings are 1:1 scale

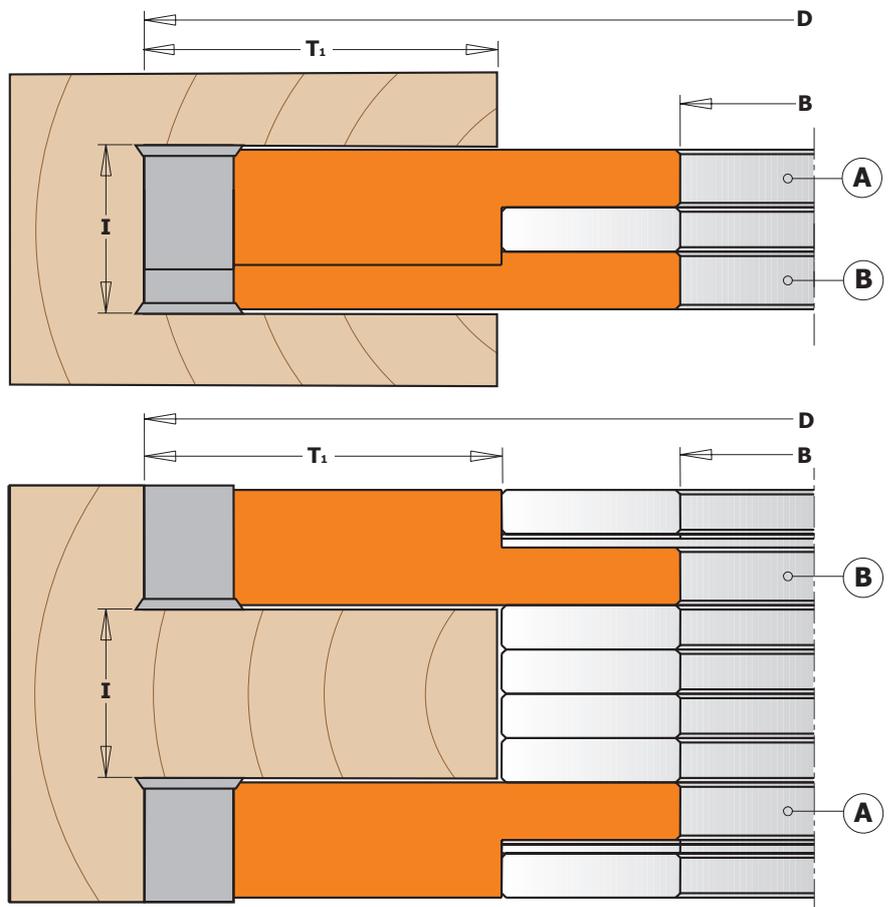

| D mm | I mm | B mm | T ₁ mm | Z | RPM | ORDER NO. | Spare parts | | | | | | | |
|------|-------|-------|-------------------|-----|-----------|-------------------|-------------|------------|------------|------------|--|------------|------------|------------|
| 150 | 14-28 | 30 | 59 | 4+4 | 5000~8000 | 694.021.30 | | | | | | 790.136.00 | 990.093.00 | 695.998.41 |
| 150 | 14-28 | 31,75 | 44 | 4+4 | 5000~8000 | 694.021.31 | 790.136.00 | 990.093.00 | | | | 790.136.00 | 990.093.00 | 695.998.42 |
| 150 | 14-28 | 35 | 44 | 4+4 | 5000~8000 | 694.021.35 | 790.136.00 | 990.093.00 | | | | 790.136.00 | 990.093.00 | 695.998.43 |
| 150 | 14-28 | 40 | 44 | 4+4 | 5000~8000 | 694.021.40 | 790.136.00 | 990.093.00 | | | | 790.136.00 | 990.093.00 | 695.998.44 |
| 160 | 14-28 | 50 | 44 | 4+4 | 5000~8000 | 694.021.50 | 790.136.00 | 990.093.00 | | | | 790.136.00 | 990.093.00 | 695.998.45 |
| 170 | 20-39 | 30 | 54 | 4+4 | 4400~7400 | 694.022.30 | 790.140.00 | 990.093.00 | 790.195.12 | 990.094.00 | | 790.140.00 | 990.093.00 | 695.998.46 |
| 170 | 20-39 | 31,75 | 54 | 4+4 | 4400~7400 | 694.022.31 | 790.140.00 | 990.093.00 | 790.195.12 | 990.094.00 | | 790.140.00 | 990.093.00 | 695.998.47 |
| 170 | 20-39 | 35 | 54 | 4+4 | 4400~7400 | 694.022.35 | 790.140.00 | 990.093.00 | 790.195.12 | 990.094.00 | | 790.140.00 | 990.093.00 | 695.998.48 |
| 170 | 20-39 | 40 | 54 | 4+4 | 4400~7400 | 694.022.40 | 790.140.00 | 990.093.00 | 790.195.12 | 990.094.00 | | 790.140.00 | 990.093.00 | 695.998.49 |
| 170 | 20-39 | 50 | 59 | 4+4 | 4400~7400 | 694.022.50 | 790.140.00 | 990.093.00 | 790.195.12 | 990.094.00 | | 790.140.00 | 990.093.00 | 695.998.50 |

Spare parts
991.072.00 T20 Torx key
991.073.00 T25 Torx key

Planing and jointing spiral cutter heads

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts



694.019


INSERT CARBIDE MAN Z12

These new cutter heads have been designed for planing and jointing on soft or hard wood and wooden boards on spindle moulder machines. Ideal for routing our curved elements by using a bearing guide (sold separately) and a template.

TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 12 HWM Knives 14x14x2mm (Z2) with 4 spiral indexing
- Tools for manual feed MAN

Supplied in a plastic twistpack.

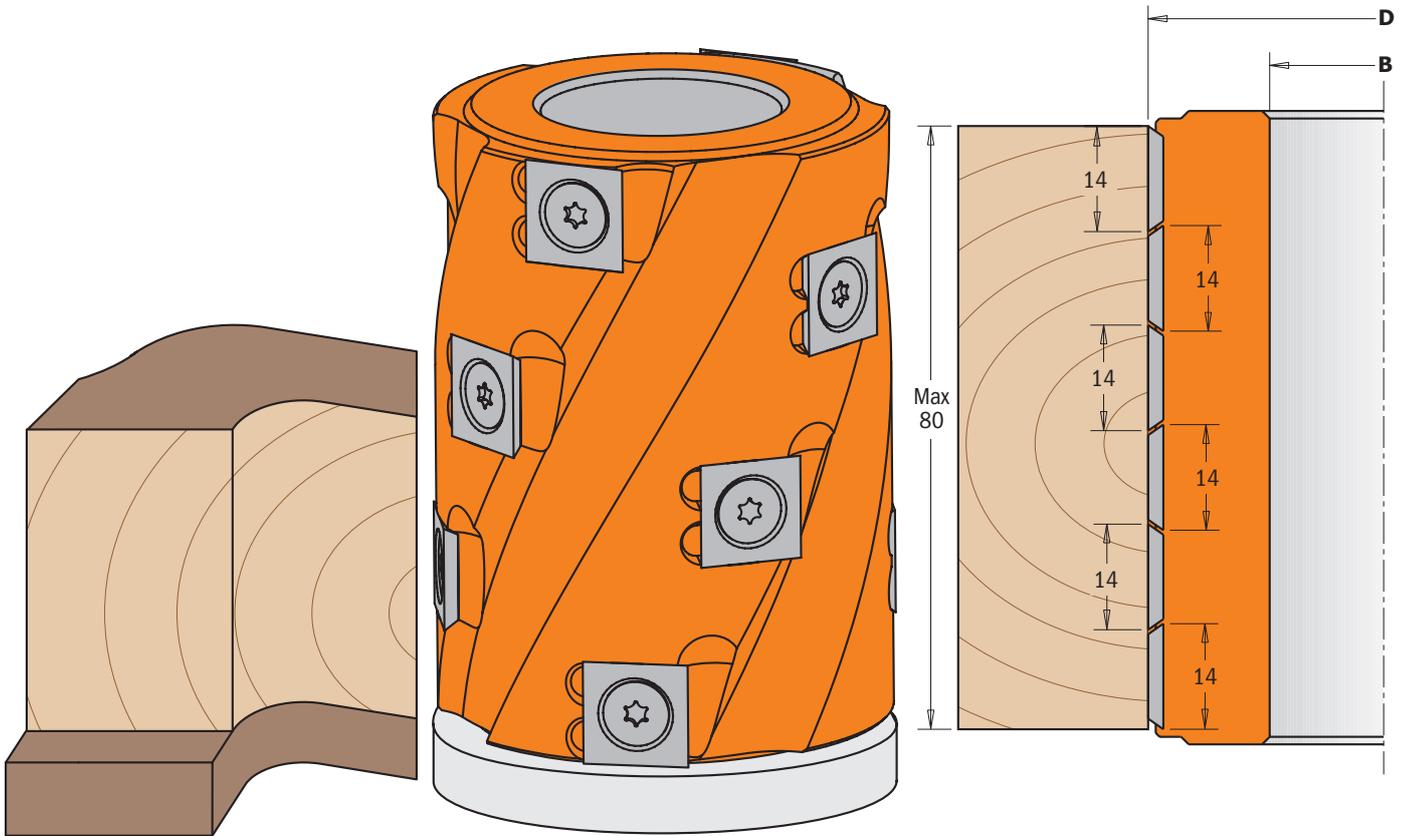


Optional bearing

Spare parts

| D mm | I mm | B mm | Z | RPM | ORDER NO. |  |  |  |
|------|------|------|----|------------|-------------------|---|---|---|
| 62 | 80 | 30 | 12 | 8000~12000 | 694.019.30 | 790.140.00 | 990.093.00 | 991.073.00 |
| 62 | 80 | 35 | 12 | 8000~12000 | 694.019.35 | 790.140.00 | 990.093.00 | 991.073.00 |
| 80 | 80 | 40 | 12 | 8000~12000 | 694.019.40 | 790.140.00 | 990.093.00 | 991.073.00 |
| 80 | 80 | 50 | 12 | 8000~12000 | 694.019.50 | 790.140.00 | 990.093.00 | 991.073.00 |

- Optional**
- 791.051.00** 30x62x16mm bearing
 - 791.052.00** 35x62x14mm bearing
 - 791.054.00** 40x80x18mm bearing
 - 791.053.00** 50x80x16mm bearing

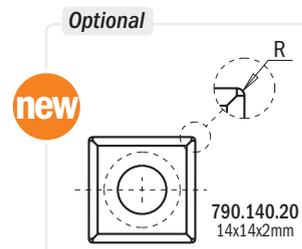

Note: Ideal for routing out curved elements by using an bearing guide (sold separately) and a template. In order to achieve an extra-fine finishing, you can order the optional knife 790.140.20.

2 piece adjustable rounding & chamfering sets



694.005




Innovative design, simple assembly and numerous possibilities. The CMT adjustable rounding and chamfering sets consist of two pieces, which are very easy to set up on your spindle moulder machine, allowing you to profile on solid wood and man-made boards (with or without coating). It supports five different knives for rounding over both top and bottom edges in one single pass with radius 2,3,4,5 or 6mm, and for 45° chamfering on material from 18mm to 50mm thick. The improved design with shear angle guarantees perfect finishing! For use on spindle moulder machines and double-end tenoners.

TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- One pair of HWM top knives radius 4mm and 45° chamfer (20x20,5x2mm) [Z2]
- One pair of HWM bottom knives radius 4mm and 45° chamfer (20x20,5x2mm) [Z2]
- Two HWM knives 50x12x1,5mm
- Set of 21 spacer rings from 0,1 to 3mm
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives

Supplied in a solid plastic box.

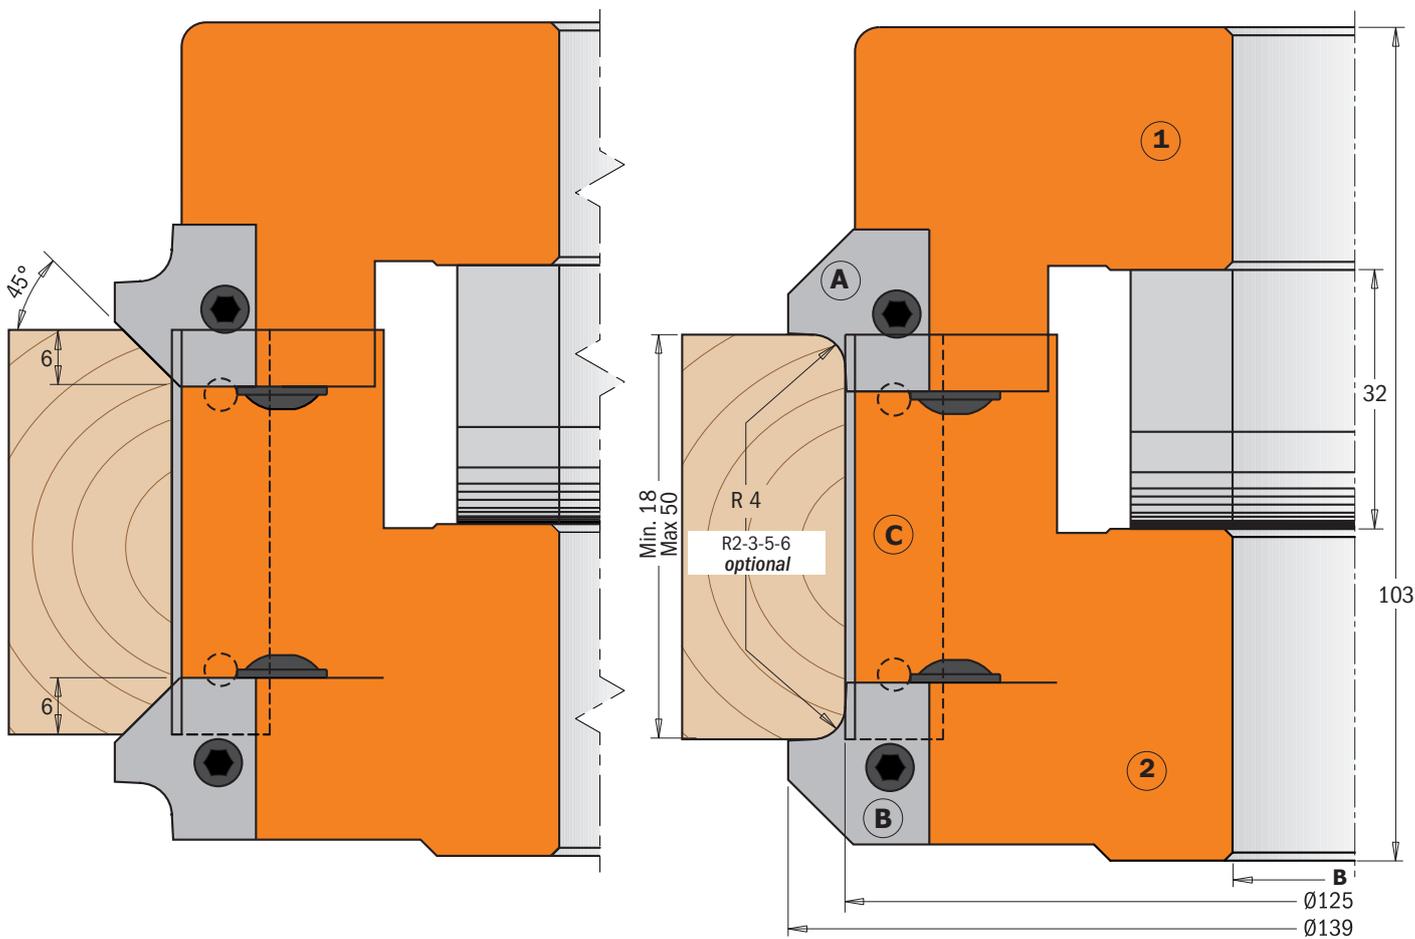

| D mm | B mm | Z | RPM | ORDER NO. |
|------|-------|-----|-----------|-------------------|
| 139 | 30 | 2+2 | 5500~9400 | 694.005.30 |
| 139 | 31,75 | 2+2 | 5500~9400 | 694.005.31 |
| 139 | 35 | 2+2 | 5500~9400 | 694.005.35 |
| 139 | 40 | 2+2 | 5500~9400 | 694.005.40 |
| 139 | 50 | 2+2 | 5500~9400 | 694.005.50 |

Spare parts

| 17x11x9,5mm | 46x11x9,5mm | 990.064.00 | 695.998.11 |
|-------------|-------------|------------|------------|
| 695.999.17 | 695.999.46 | 990.064.00 | 695.998.11 |
| 695.999.17 | 695.999.46 | 990.064.00 | 695.998.12 |
| 695.999.17 | 695.999.46 | 990.064.00 | 695.998.13 |
| 695.999.17 | 695.999.46 | 990.064.00 | 695.998.14 |
| 695.999.17 | 695.999.46 | 990.064.00 | 695.998.15 |

Spare parts

| | |
|-------------------|---|
| 695.005.A4 | R=4+45° pair of knives for roundover/chamfer (top) |
| 695.005.B4 | R=4+45° pair of knives for roundover/chamfer (bottom) |
| 790.500.00 | 50x12x1,5mm knives |
| 991.064.00 | 4mm hex key |
| 991.067.00 | 3mm hex key |

Optional

| | |
|-------------------|---|
| 695.005.A2 | R=2+45° pair of knives for roundover/chamfer (top) |
| 695.005.A3 | R=3+45° pair of knives for roundover/chamfer (top) |
| 695.005.A5 | R=5+45° pair of knives for roundover/chamfer (top) |
| 695.005.A6 | R=6+45° pair of knives for roundover/chamfer (top) |
| 695.005.B2 | R=2+45° pair of knives for roundover/chamfer (bottom) |
| 695.005.B3 | R=3+45° pair of knives for roundover/chamfer (bottom) |
| 695.005.B5 | R=5+45° pair of knives for roundover/chamfer (bottom) |
| 695.005.B6 | R=6+45° pair of knives for roundover/chamfer (bottom) |

45° chamfer cutter heads

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts

58



694.002






CMT chamfer cutter heads carry out clean accurate bevels and joints for excellent edge work. For use on spindle moulder machines, double-end tenoner and shaper machines. Perfect on all materials, but ideal on solid wood, veneered, panel and plastic-coated materials.

TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 2 HWM Knives 50x12x1,5mm [Z2]
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives

Supplied in a solid plastic box.

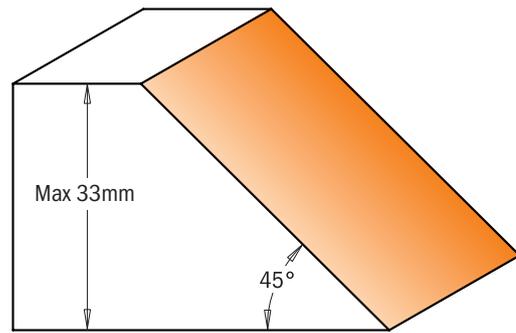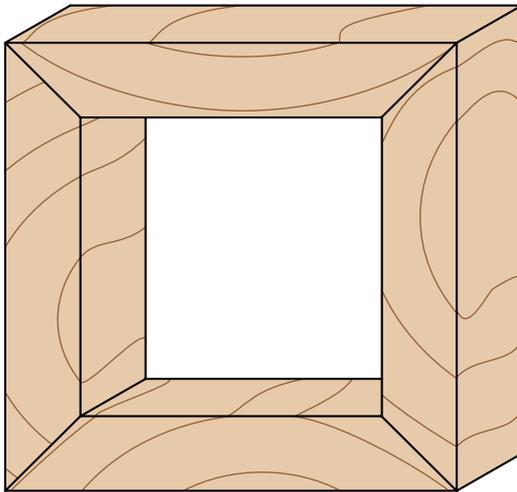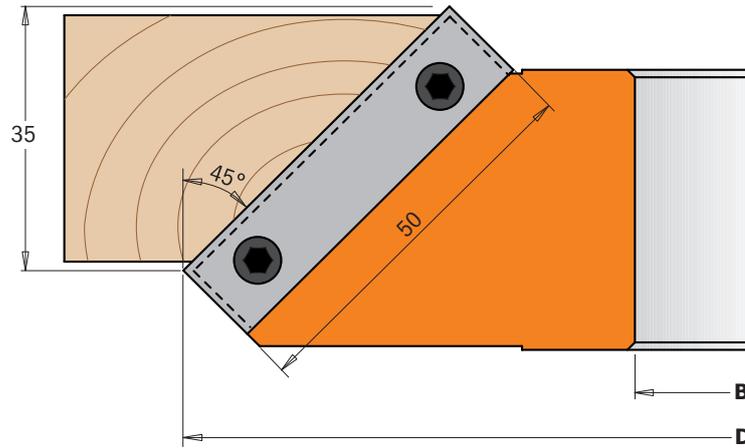

Drawing is 1:1 scale

| D mm | B mm | Z | RPM | ORDER NO. | Spare parts | | | |
|---------|---------|---|-----------|-------------------|-------------|------------|------------|------------|
| 150 | 30 | 2 | 5100~8800 | 694.002.30 | | | | |
| 150 | 31,75 | 2 | 5100~8800 | 694.002.31 | 790.500.00 | 695.999.42 | 990.064.00 | 991.064.00 |
| 150 | 35 | 2 | 5100~8800 | 694.002.35 | 790.500.00 | 695.999.42 | 990.064.00 | 991.064.00 |
| 150 | 40 | 2 | 5100~8800 | 694.002.40 | 790.500.00 | 695.999.42 | 990.064.00 | 991.064.00 |
| 160 | 50 | 2 | 4800~8300 | 694.002.50 | 790.500.00 | 695.999.42 | 990.064.00 | 991.064.00 |

Adjustable chamfer cutter heads with positive stop



694.018




These new adjustable chamfer cutter heads carry out precise cuts, accurate bevels and joints on wooden boards and solid timber. For use on your spindle moulder machines, double-end tenoner and shaper machines.

TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 2 HWM Knives 40x12x1,5mm (Z2)
- Tools for manual feed MAN
- Positive lock hold of HWM knives, swivel bodies infinitely adjustable on both sides from 0 to 45°, with positive stop every 7,5° step, thanks to the special built-in geared mechanism.

Supplied in a solid plastic box.

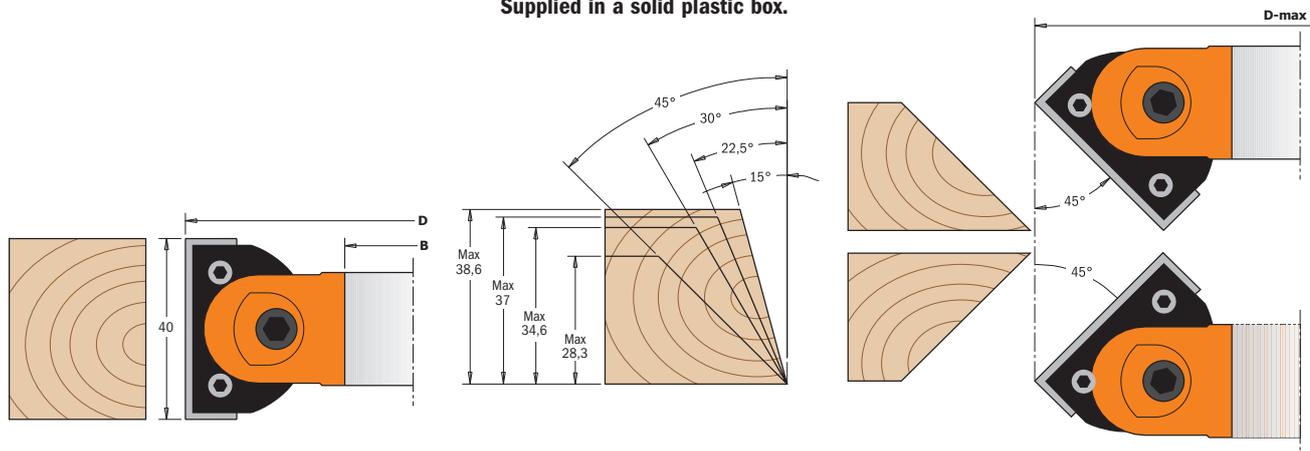

| D mm | I mm | B mm | Z | D_Max 45° mm | RPM | ORDER NO. |
|------|------|------|---|--------------|-----------|-------------------|
| 120 | 40 | 30 | 2 | 140 | 7000~9000 | 694.018.30 |
| 120 | 40 | 35 | 2 | 140 | 7000~9000 | 694.018.35 |
| 145 | 40 | 40 | 2 | 165 | 4800~7200 | 694.018.40 |
| 145 | 40 | 50 | 2 | 165 | 4800~7200 | 694.018.50 |

Spare parts

| Part | Part | Part | Part |
|------------|------------|------------|------------|
| | | | |
| 695.018.01 | 790.400.00 | 990.094.00 | 991.072.00 |
| 695.018.01 | 790.400.00 | 990.094.00 | 991.072.00 |
| 695.018.01 | 790.400.00 | 990.094.00 | 991.072.00 |
| 695.018.01 | 790.400.00 | 990.094.00 | 991.072.00 |

Spare parts **991.065.00** 5mm hex key

Professional adjustable chamfer cutter heads with gear box



694.017




These new professional adjustable chamfer cutter heads carry out precise cuts, accurate bevels and joints on wooden boards and solid timber. For use on your spindle moulder machines, double-end tenoner and shaper machines.

TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress.
- 2 HWM knives (50x14x1,5mm - Z2).
- Tools for manual feed (MAN).
- Positive lock hold of HWM knives.
- Swivel bodies infinitely adjustable on both sides from 0° to 45°, thanks to the special built-in geared mechanism.

Supplied in a solid plastic box.

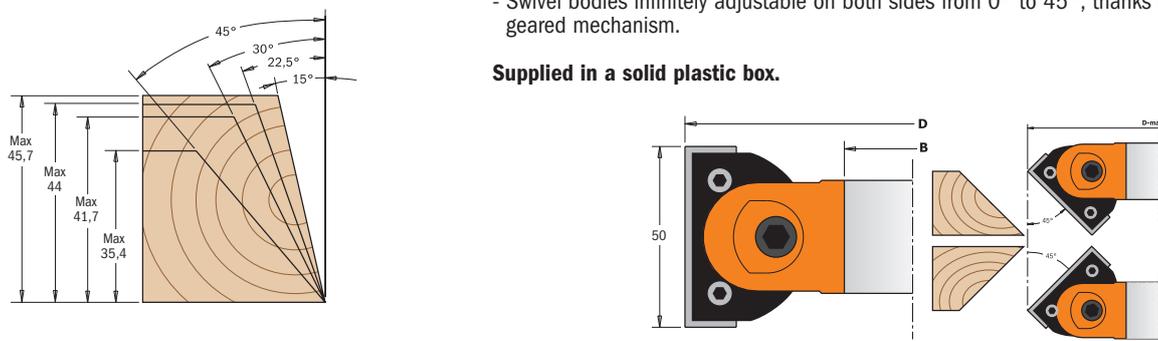

| D mm | I mm | B mm | Z | D_Max 45° mm | RPM | ORDER NO. |
|------|------|------|---|--------------|-----------|-------------------|
| 160 | 50 | 30 | 2 | 183 | 4800~6000 | 694.017.30 |
| 160 | 50 | 35 | 2 | 183 | 4800~6000 | 694.017.35 |
| 160 | 50 | 50 | 2 | 183 | 4800~6000 | 694.017.50 |

Spare parts

| Part | Part | Part | Part | Part |
|------------|------------|------------|------------|------------|
| | | | | |
| 695.017.01 | 790.500.00 | 695.999.48 | 990.106.00 | 991.067.00 |
| 695.017.01 | 790.500.00 | 695.999.48 | 990.106.00 | 991.067.00 |
| 695.017.01 | 790.500.00 | 695.999.48 | 990.106.00 | 991.067.00 |

Spare parts **991.081.00** 4mm hex key

Multiradius roundover cutter heads



694.003

Innovative cutter heads supporting three different knives for making six radius roundover profiles. Standard cutter heads are sold with knives featuring radii 5 and 10mm; two more knife sets are available for radii 4-8mm and 3-6mm. For use on spindle moulder machines, double-end tenoner and shaper machines. Perfect on all materials, but ideal on solid wood and panel materials.


TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 2 HWM knives radius 5/10mm (25x24,8x2mm) [Z2]
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives


Supplied in a solid plastic box.

Standard


Pair of knives **695.003.05**

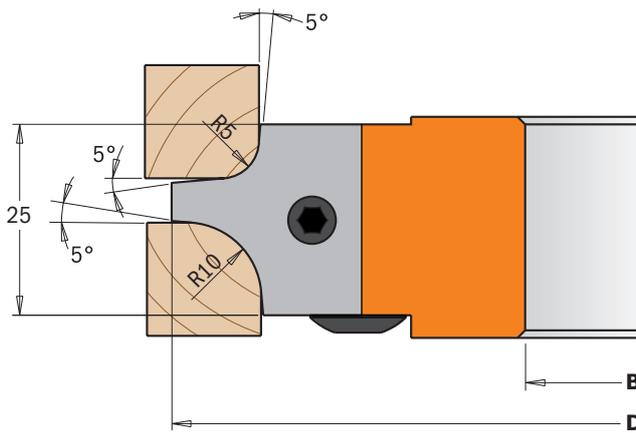

Optional

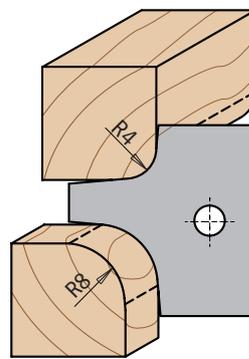

Pair of knives **695.003.04**

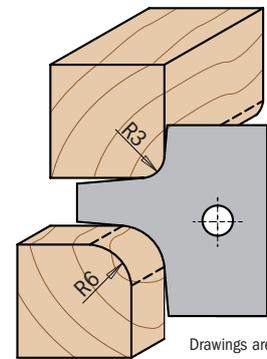

Pair of knives **695.003.03**

Drawings are 1:1 scale

| D mm | B mm | Z | RPM | ORDER NO. | Spare parts | | | |
|------|-------|---|------------|-------------------|-------------|------------|------------|------------|
| 113 | 30 | 2 | 6700~11000 | 694.003.30 | x2 | | | |
| 113 | 31,75 | 2 | 6700~11000 | 694.003.31 | 695.003.05 | 695.999.22 | 990.064.00 | 991.064.00 |
| 113 | 35 | 2 | 6700~11000 | 694.003.35 | 695.003.05 | 695.999.22 | 990.064.00 | 991.064.00 |
| 128 | 40 | 2 | 5900~9700 | 694.003.40 | 695.003.05 | 695.999.22 | 990.064.00 | 991.064.00 |
| 128 | 50 | 2 | 5900~9700 | 694.003.50 | 695.003.05 | 695.999.22 | 990.064.00 | 991.064.00 |

Optional
695.003.04 R=4/8mm (25x24,8x2mm) pair of profiled knives
695.003.03 R=3/6mm (25x24,8x2mm) pair of profiled knives

Saw blades
 Jig saw blades
 Tools with bore & Knives
 Router bits & sets
 CNC router cutter & chucks
 Industrial dowel drills
 Bits for hand power tools
 Power tools & accessories
 Display cabinets & spare parts



694.004



Innovative cutter heads supporting two different knives for making four radius roundover profiles. Standard cutter heads are sold with knives featuring radii 15 and 20mm; one more knife set is available for radii 12-18mm. For use on spindle moulder machines, double-end tenorer and shaper machines. Perfect on all materials, but ideal on solid wood and panel materials.


TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 2 HWM knives radius 15/20mm (45x34,5x2mm) [Z2]
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives


Supplied in a solid plastic box.

Standard

Pair of knives **695.004.15**

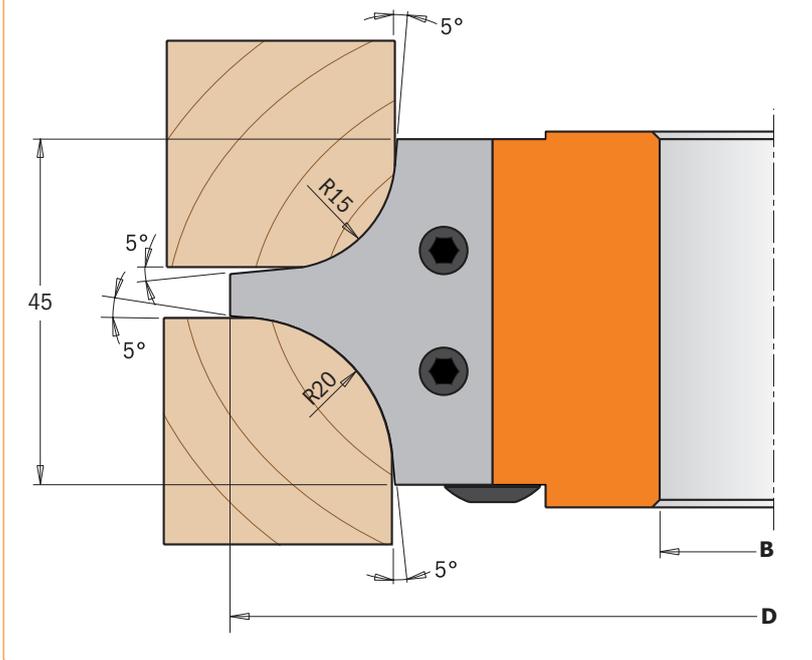

Optional

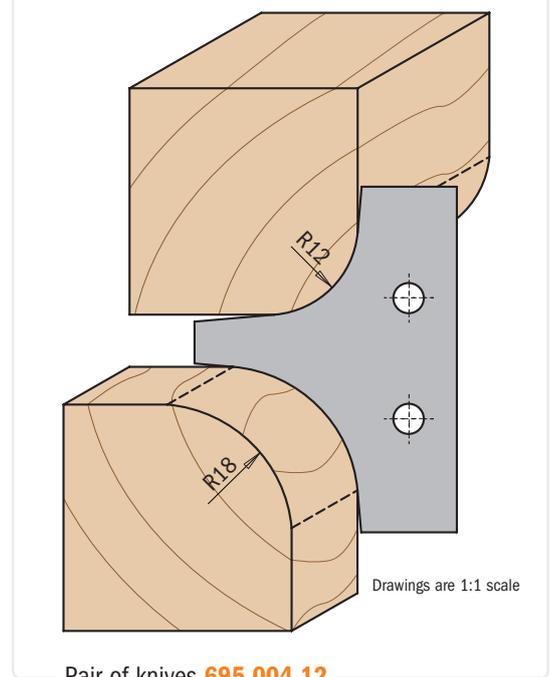

Pair of knives **695.004.12**

| D mm | B mm | Z | RPM | ORDER NO. |
|---------|---------|---|-----------|-------------------|
| 132 | 30 | 2 | 5700-9500 | 694.004.30 |
| 132 | 31,75 | 2 | 5700-9500 | 694.004.31 |
| 132 | 35 | 2 | 5700-9500 | 694.004.35 |
| 147 | 40 | 2 | 5100-8500 | 694.004.40 |
| 147 | 50 | 2 | 5100-8500 | 694.004.50 |

Spare parts



| | | | |
|------------|------------|------------|------------|
| 695.004.15 | 695.999.42 | 990.064.00 | 991.064.00 |
| 695.004.15 | 695.999.42 | 990.064.00 | 991.064.00 |
| 695.004.15 | 695.999.42 | 990.064.00 | 991.064.00 |
| 695.004.15 | 695.999.42 | 990.064.00 | 991.064.00 |
| 695.004.15 | 695.999.42 | 990.064.00 | 991.064.00 |

Optional 695.004.12 R=12/18mm (45x34,5x2mm) pair of profiled knives

Roundover and cove cutter heads

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts



694.007


These cutter heads are perfect for making furniture, doors and drawer fronts simply and stylishly by giving them a final touch with a CMT cove bit. It is also used for making perfect roundover profiles, drop leaf counters and table tops. You can use three different knives for carrying out roundover and cove profiles with radius 10, 12 and 15mm. For use on spindle moulder machines, double-end tenoner and shaper machines. Perfect on all materials, but ideal on solid wood and panel materials.



TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 2 HWM knives radius 10mm (34,8x29,3x2mm) [Z2]
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives


Supplied in a solid plastic box.

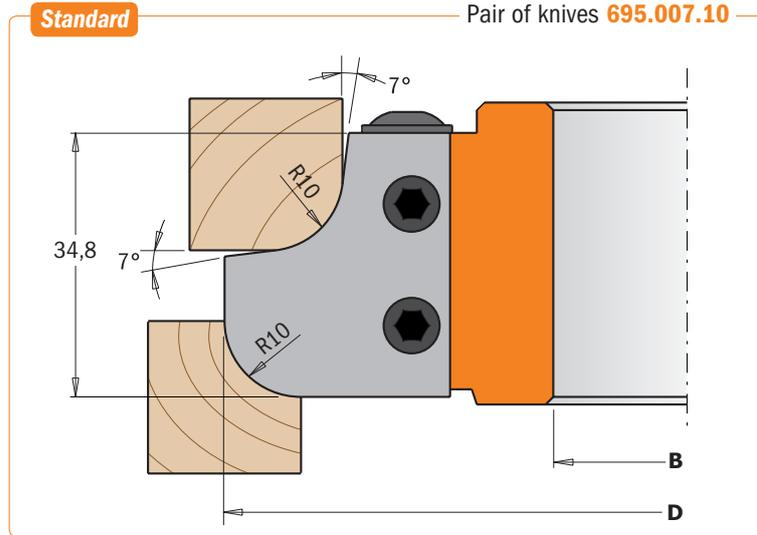

Optional

Pair of knives **695.007.12**

Pair of knives **695.007.15**

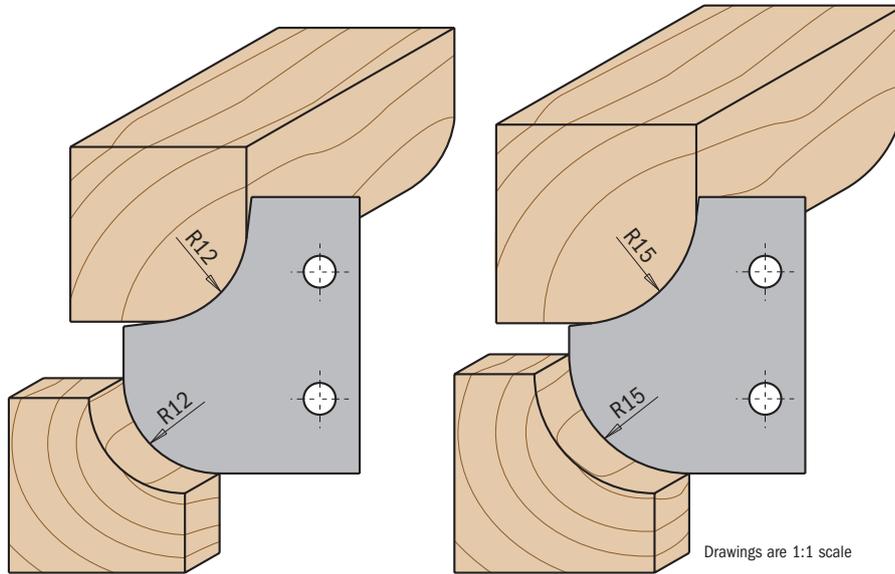

| D mm | B mm | Z | RPM | ORDER NO. | Spare parts | | | |
|------|-------|---|------------|-------------------|-------------|------------|------------|------------|
| 121 | 30 | 2 | 6300~10500 | 694.007.30 | x2 | | | |
| 121 | 31,75 | 2 | 6300~10500 | 694.007.31 | 695.007.10 | 695.999.31 | 990.064.00 | 991.064.00 |
| 121 | 35 | 2 | 6300~10500 | 694.007.35 | 695.007.10 | 695.999.31 | 990.064.00 | 991.064.00 |
| 136 | 40 | 2 | 5600~9300 | 694.007.40 | 695.007.10 | 695.999.31 | 990.064.00 | 991.064.00 |
| 136 | 50 | 2 | 5600~9300 | 694.007.50 | 695.007.10 | 695.999.31 | 990.064.00 | 991.064.00 |

Optional
695.007.12 R=12mm (34,8x29,3x2mm) pair of roundover/cove knives
695.007.15 R=15mm (34,8x29,3x2mm) pair of roundover/cove knives



694.008





The professional CMT finger joint cutter heads allow for making the most incredibly strong side-to-side joints on all wood types and composites. The tightness of the joint and the maximum glue surface make the joint itself stronger than an unworked piece of wood, in stock with maximum 47mm in thickness. Ideal for molding manufactures and furniture makers.

For use on spindle moulder machines, double-end tenoner and shaper machines. Perfect on all materials, but ideal on solid wood and panel materials.

TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 2 HWM knives 49,6x11,9x1,5mm [Z2]
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives

Supplied in a solid plastic box.

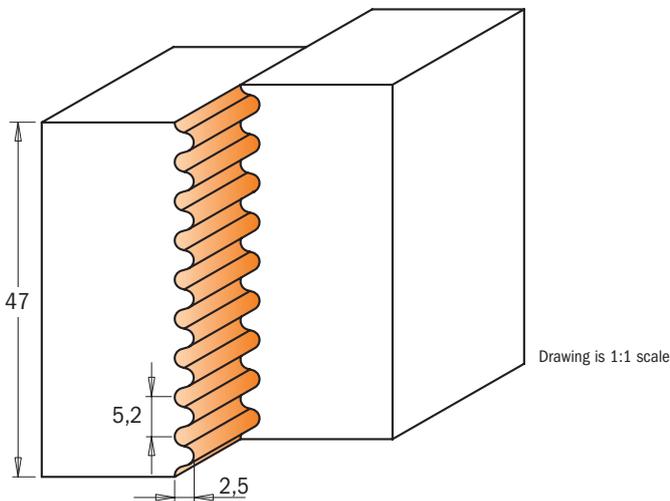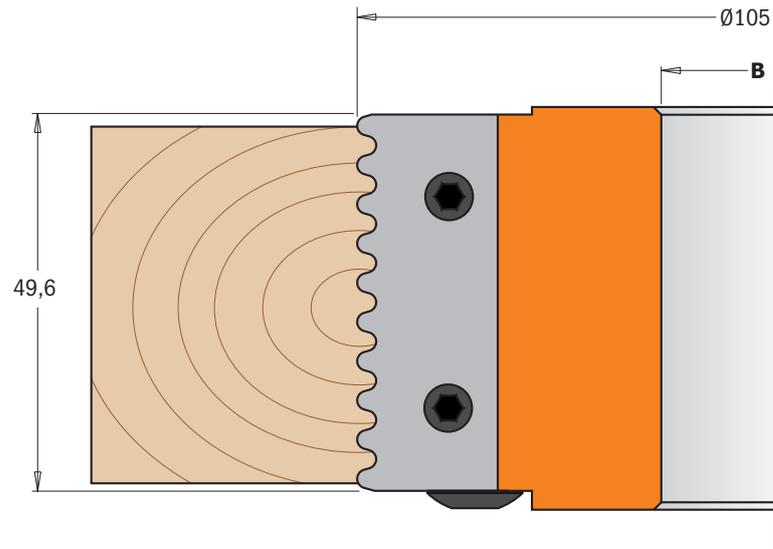

| D mm | B mm | Z | RPM | ORDER NO. | Spare parts | | | |
|---------|---------|---|------------|-------------------|-------------|------------|------------|------------|
| 105 | 30 | 2 | 7300~11500 | 694.008.30 | x2 | | | |
| 105 | 31,75 | 2 | 7300~11500 | 694.008.31 | 695.008.01 | 695.999.49 | 990.066.00 | 991.067.00 |
| 105 | 35 | 2 | 7300~11500 | 694.008.35 | 695.008.01 | 695.999.49 | 990.066.00 | 991.067.00 |
| 105 | 40 | 2 | 7300~11500 | 694.008.40 | 695.008.01 | 695.999.49 | 990.066.00 | 991.067.00 |
| 105 | 50 | 2 | 7300~11500 | 694.008.50 | 695.008.01 | 695.999.49 | 990.066.00 | 991.067.00 |

Optional

| | |
|---------------------|----------------------------|
| 695.998.2630 | Ø50x2,6x30mm guide ring |
| 695.998.2631 | Ø50x2,6x31,75mm guide ring |
| 695.998.2635 | Ø55x2,6x35mm guide ring |
| 695.998.2640 | Ø60x2,6x40mm guide ring |
| 695.998.2650 | Ø70x2,6x50mm guide ring |

Reverse glue joint cutter heads





694.009

The most unique and important feature of these CMT cutter heads is the capacity to produce almost indestructible glue joints quickly and accurately. Ideal for shaping wide dimension panels, doors and furniture pieces. By accurately centering the cutter head to the wood, the upper and lower vertical cutting edges will cut equal proportions. Simply run one side of the panel, turn the panel over, and then run the opposite side - you will produce perfectly harmonized reverse cuts matching up to make flawless joints. Excellent results on most materials, but ideal on solid wood, coated and uncoated man-made materials.

TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 2 HWM knives 40x18x2mm [Z2]
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives

Supplied in a solid plastic box.

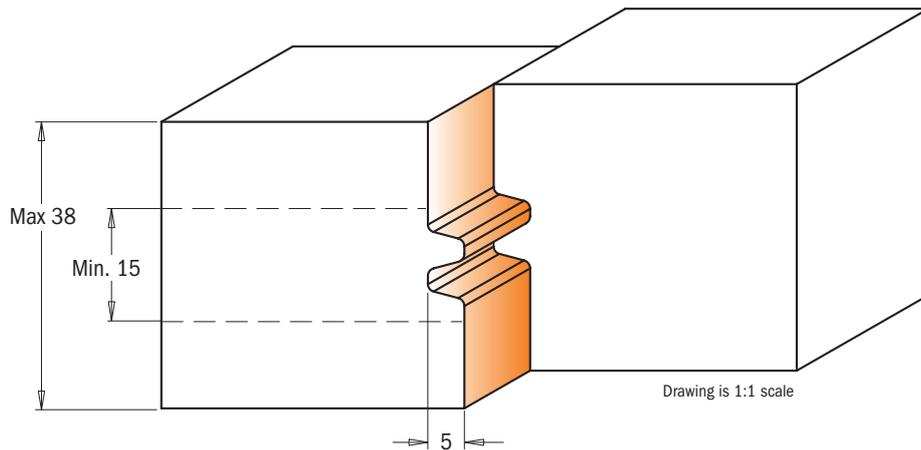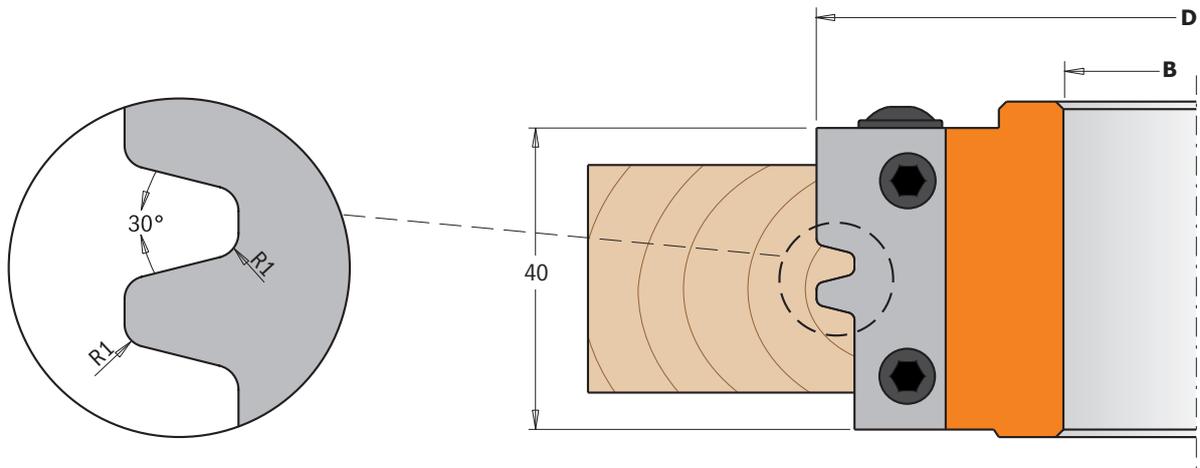

| D mm | B mm | Z | RPM | ORDER NO. | Spare parts | | | |
|------|-------|---|------------|-------------------|-------------|------------|------------|------------|
| 100 | 30 | 2 | 7500~12500 | 694.009.30 | x2 | | | |
| 100 | 31,75 | 2 | 7500~12500 | 694.009.31 | 695.009.01 | 695.999.38 | 990.064.00 | 991.064.00 |
| 100 | 35 | 2 | 7500~12500 | 694.009.35 | 695.009.01 | 695.999.38 | 990.064.00 | 991.064.00 |
| 120 | 40 | 2 | 6400~10500 | 694.009.40 | 695.009.01 | 695.999.38 | 990.064.00 | 991.064.00 |
| 120 | 50 | 2 | 6400~10500 | 694.009.50 | 695.009.01 | 695.999.38 | 990.064.00 | 991.064.00 |



694.011






CMT's lock miter cutter heads are ideal for milling miter joints in stock with maximum 28mm in thickness. Create boxes, stretcher bars, frames and any assortment of right angle or parallel joint projects. Two easy steps to produce perfectly fitting 45° miter joints: first, position your workpiece horizontally, then vertically. Also, create parallel glue joints in two steps: place your workpiece horizontally, internal side facing down, and then turn it facing up. For use on spindle moulder and shaper machines. Perfect on all materials, but ideal on solid wood and panels.

TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 2 HWM knives 43x23x2mm [Z2]
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives

Supplied in a solid plastic box.

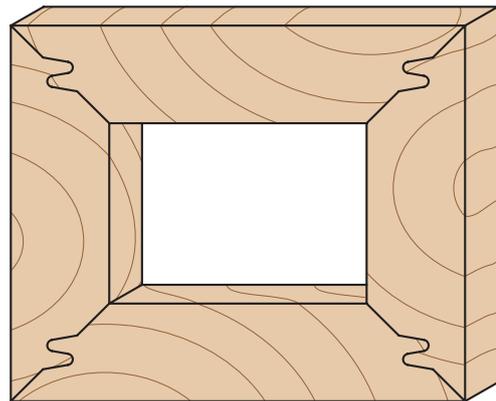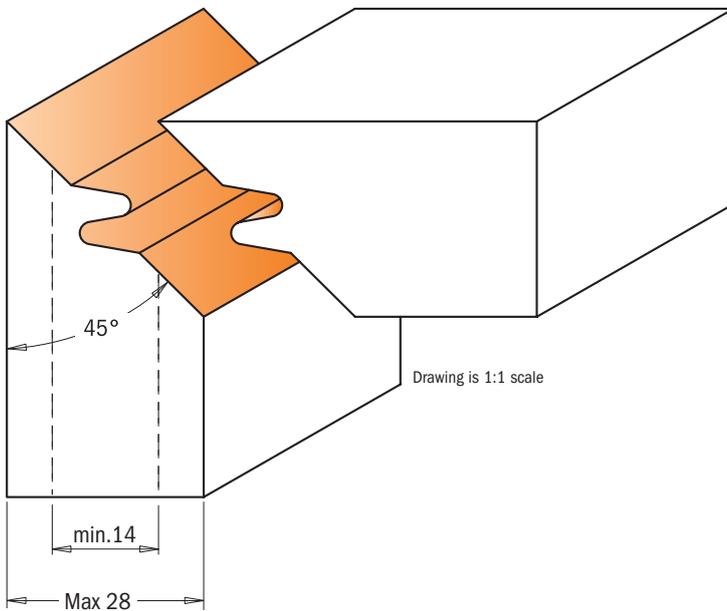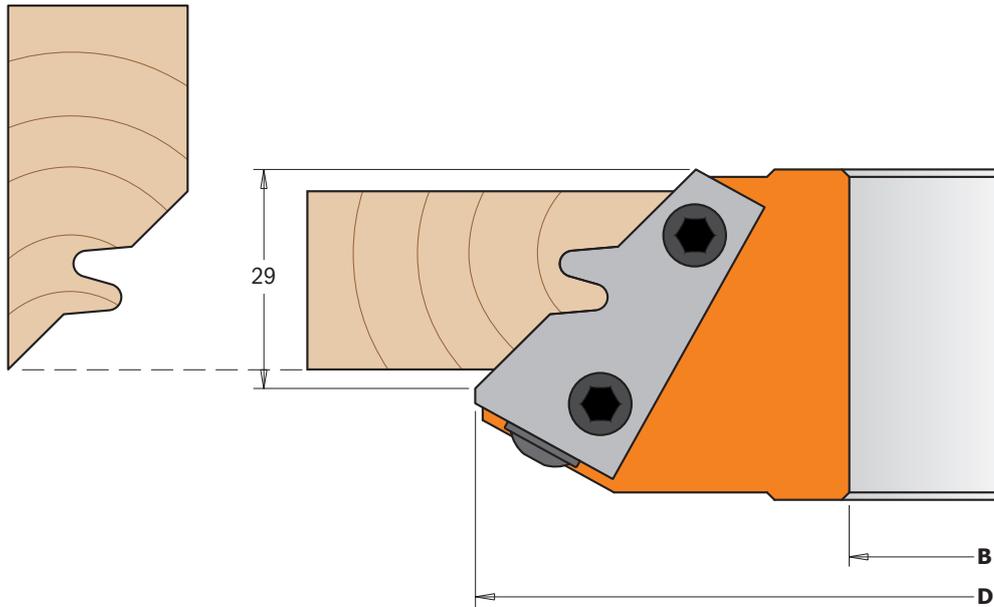

| D mm | B mm | Z | RPM | ORDER NO. |
|---------|---------|---|-----------|-------------------|
| 140 | 30 | 2 | 5500~9500 | 694.011.30 |
| 140 | 31,75 | 2 | 5500~9500 | 694.011.31 |
| 140 | 35 | 2 | 5500~9500 | 694.011.35 |
| 140 | 40 | 2 | 5500~9500 | 694.011.40 |
| 150 | 50 | 2 | 5100~8800 | 694.011.50 |

Spare parts

| Icon | Quantity | Part No. | Price |
|------|----------|------------|------------|
| | x2 | 695.011.01 | 695.999.42 |
| | | 990.064.00 | 991.064.00 |
| | | 990.064.00 | 991.064.00 |
| | | 990.064.00 | 991.064.00 |

Professional raised panel cutter heads







694.013

We offer the traditional approach to panel construction with these CMT raised panel cutter heads. Make classic raised panels on furniture, interior and cabinet doors on solid wood and wooden boards, and achieve three different profiles by adjusting the cutting depth. We recommend multiple passes for safe and accurate finishing. For use on spindle moulders. Perfect on all materials, but ideal on solid wood and panels.

TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 2 HWM Knives type (A) 19,8x11,9x1,5mm [Z2]
- 2 HWM Knives type (B) 60x11,9x1,5mm [Z2]
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives

Supplied in a solid plastic box.

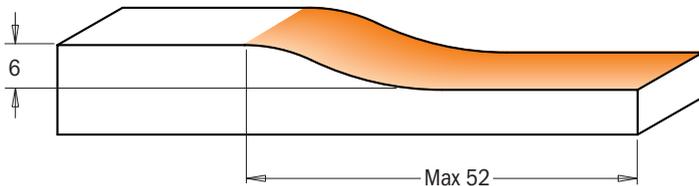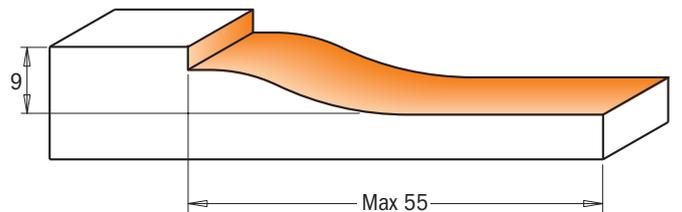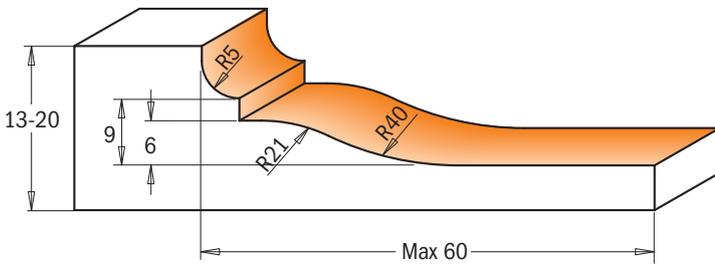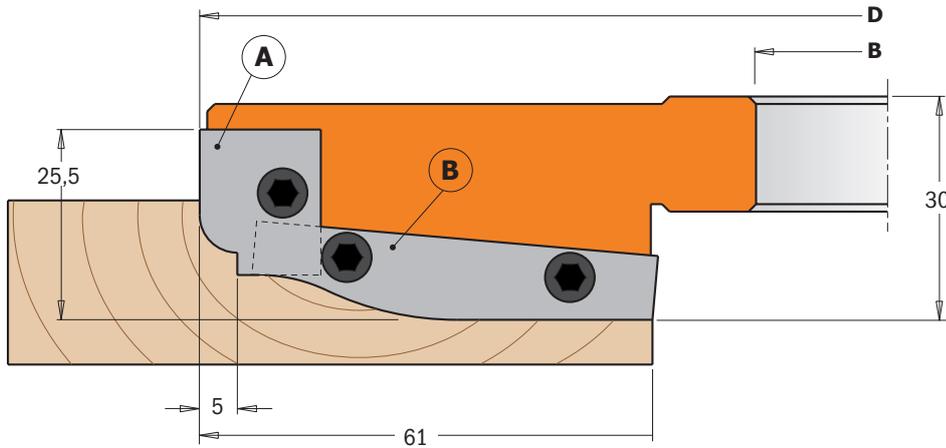

Drawings are 1:1 scale

| D mm | B mm | Z | RPM | ORDER NO. | Spare parts | | | | |
|------|-------|-----|-----------|-------------------|---------------|-------------|---------------|-------------|------------|
| 183 | 30 | 2+2 | 4100~7000 | 694.013.30 | 695.013.A1 x2 | 16x11x9,5mm | 695.999.16 x2 | 53x11x9,5mm | 990.066.00 |
| 183 | 31,75 | 2+2 | 4100~7000 | 694.013.31 | 695.013.A1 | 695.999.16 | 695.013.A2 | 695.999.53 | 990.066.00 |
| 183 | 35 | 2+2 | 4100~7000 | 694.013.35 | 695.013.A1 | 695.999.16 | 695.013.A2 | 695.999.53 | 990.066.00 |
| 200 | 40 | 2+2 | 3800~6400 | 694.013.40 | 695.013.A1 | 695.999.16 | 695.013.A2 | 695.999.53 | 990.066.00 |
| 200 | 50 | 2+2 | 3800~6400 | 694.013.50 | 695.013.A1 | 695.999.16 | 695.013.A2 | 695.999.53 | 990.066.00 |

Spare parts **991.083.00** 3x90x135mm hex key

1 piece rail & stile cutter heads



694.014



These are unique products made by combining two cutter heads, ideal for making furniture doors and drawers. By adjusting the height of the head it is possible to cut two perfectly fitting profiles with no waste of time or efforts to move the fence or to replace the tool. Save money by purchasing one single head and improve your production's efficiency. For use on spindle moulders. Perfect on hardwood and panels with thickness between 22mm and 25mm.



TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress
- 2 HWM Knives type (A) 40x24,5x2mm [Z2]
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives

Supplied in a solid plastic box.

Standard

Pair of knives **695.014A**





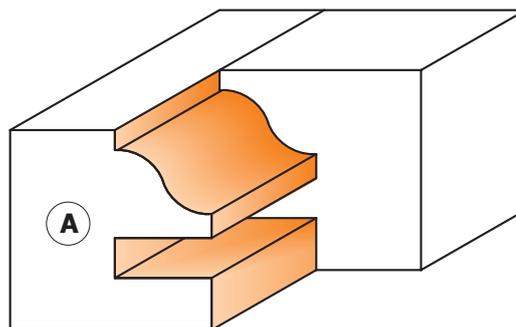
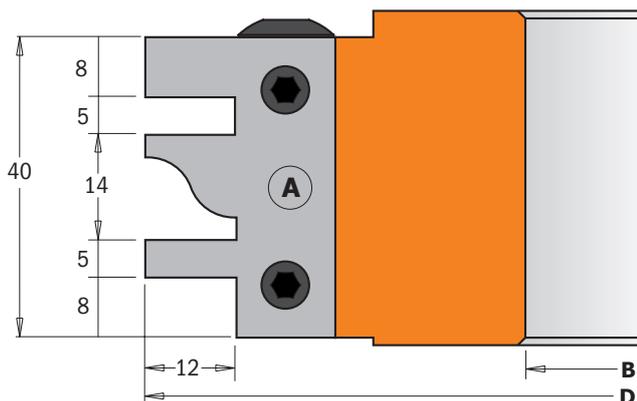


Drawing is 1:1 scale

Optional

Pair of knives **695.014B**

Pair of knives **695.014C**

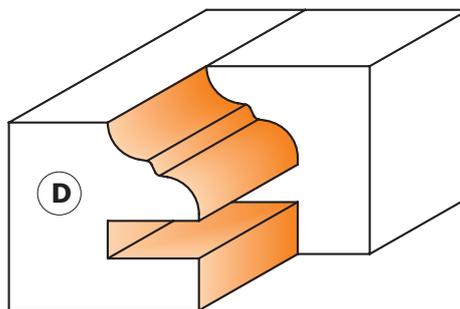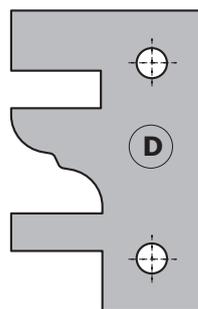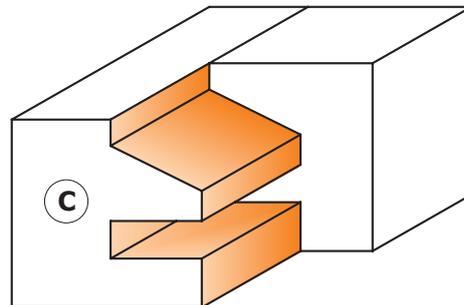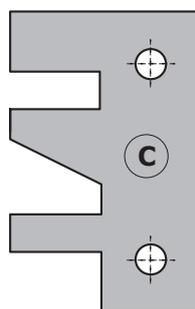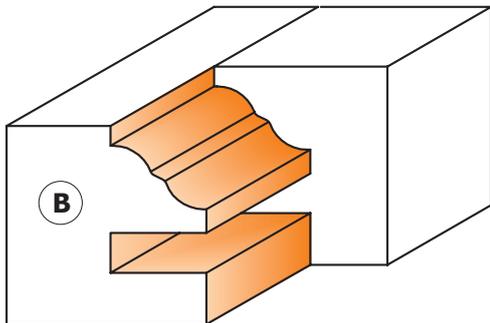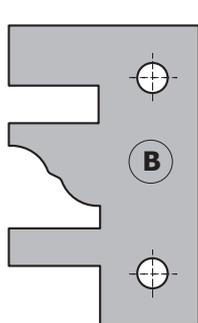

Drawings are 1:1 scale

Pair of knives **695.014D**

| D mm | B mm | Z | RPM | ORDER NO. | Spare parts | | | |
|------|-------|---|------------|-------------------|-------------|------------|------------|------------|
| 120 | 30 | 2 | 6400~10500 | 694.014.30 | x2 | | | |
| 120 | 31,75 | 2 | 6400~10500 | 694.014.31 | 695.014A | 695.999.39 | 990.066.00 | 991.067.00 |
| 120 | 35 | 2 | 6400~10500 | 694.014.35 | 695.014A | 695.999.39 | 990.066.00 | 991.067.00 |
| 120 | 40 | 2 | 6400~10500 | 694.014.40 | 695.014A | 695.999.39 | 990.066.00 | 991.067.00 |
| 130 | 50 | 2 | 5900~9700 | 694.014.50 | 695.014A | 695.999.39 | 990.066.00 | 991.067.00 |

Optional

| | |
|-----------------|-------------------------------------|
| 695.014B | 40x24,5x2mm pair of knives type (B) |
| 695.014C | 40x24,5x2mm pair of knives type (C) |
| 695.014D | 40x24,5x2mm pair of knives type (D) |

Profile and counter profile cutter head sets





694.015

These versatile sets have been designed to make furniture and doors on soft and hardwood. It allows the insertion of five different knives to produce the most popular and classical profiles. The adjustable cutter, included in the set, can also be used individually to carry out grooves from 8mm 15mm thick. For use on spindle moulders. Perfect on solid wood and panels with maximum 48mm (1-7/8") in thickness.

TECHNICAL DETAILS:

- Hard aluminium alloy body with high resistance to tensile and yield stress for cutter heads (1 & 2);
- Super-strength steel body for cutter head (3)
- 2 HWM knives type (A1) 25x29,8x2mm [Z2]
- 2 HWM knives type (A2) 25x29,8x2mm [Z2]
- 4 HWM knives 7,65x12x1,5mm [Z4]
- 4 HWM knives 14x14x2m for heads type (1 & 2)
- 12 spacer rings from 0,1 to 3mm for heads type (1 & 2)
- 12 spacer rings from 0,1 to 2mm for heads type (3)
- Tools for manual feed MAN
- Pins for the automatic positioning of the knives

Supplied in a solid plastic box.

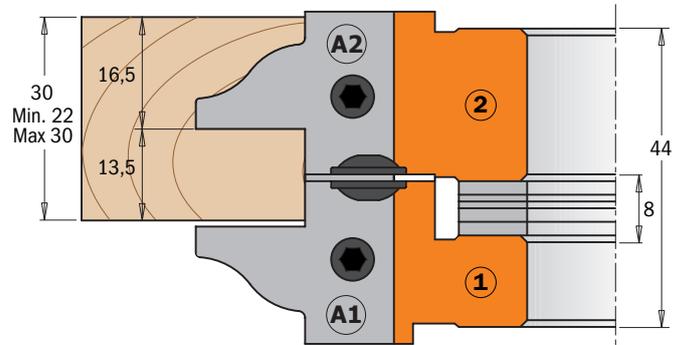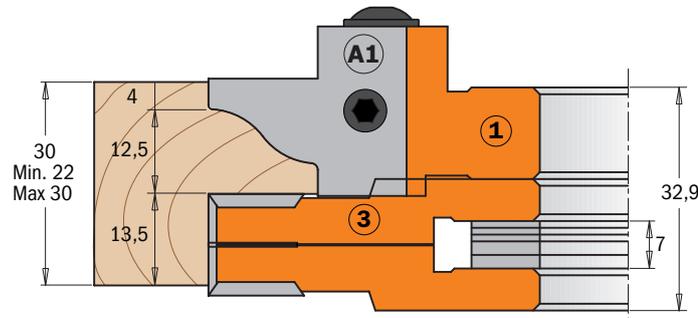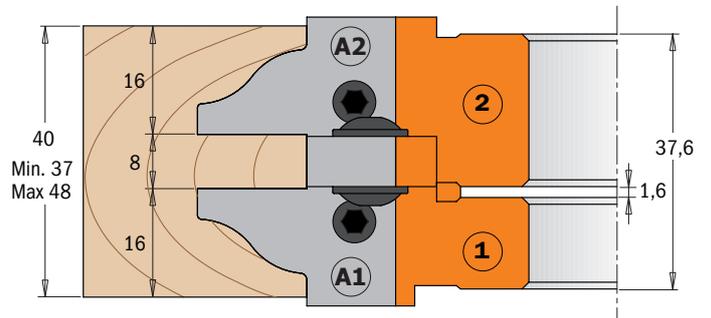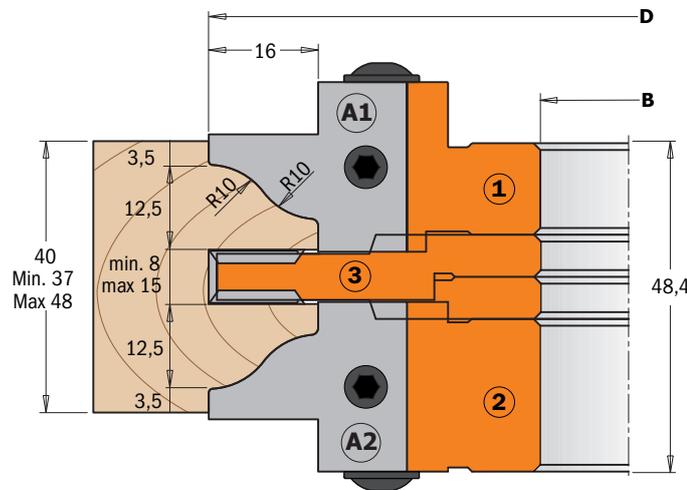

| D mm | B mm | Z + V | RPM | ORDER NO. |
|------|-------|-------|-----------|-------------------|
| 132 | 30 | 2+2 | 5700~9500 | 694.015.30 |
| 132 | 31,75 | 2+2 | 5700~9500 | 694.015.31 |
| 132 | 35 | 2+2 | 5700~9500 | 694.015.35 |
| 147 | 40 | 2+2 | 5100~8500 | 694.015.40 |
| 147 | 50 | 2+2 | 5100~8500 | 694.015.50 |

Spare parts

| Part | Part | Part |
|------------|------------|------------|
| 695.998.01 | 695.998.21 | 695.998.30 |
| 695.998.02 | 695.998.22 | 695.998.31 |
| 695.998.03 | 695.998.23 | 695.998.35 |
| 695.998.04 | 695.998.24 | 695.998.40 |
| 695.998.05 | 695.998.25 | |

Spare parts

Head type (1)

- 695.015.A1** 25x29,8x2mm HWM pair of knives (A1)
- 695.015.B1** 25x29,8x2mm HWM pair of knives (B1)
- 695.015.C1** 25x29,8x2mm HWM pair of knives (C1)
- 695.015.D1** 25x29,8x2mm HWM pair of knives (D1)
- 695.015.E1** 25x29,8x2mm HWM pair of knives (E1)
- 695.999.23** 23x11x9,5mm wedge for knives
- 990.066.00** M6x16mm screw
- 991.067.00** 3mm hex key

Head type (2)


- 695.015.A2** 25x29,8x2mm HWM pair of knives (A2)
- 695.015.B2** 25x29,8x2mm HWM pair of knives (B2)
- 695.015.C2** 25x29,8x2mm HWM pair of knives (C2)
- 695.015.D2** 25x29,8x2mm HWM pair of knives (D2)
- 695.015.E2** 25x29,8x2mm HWM pair of knives (E2)
- 695.999.24** 23x11x9,5mm wedge for knives
- 990.066.00** M6x16mm screws
- 991.067.00** 3mm hex key

Head type (3)


- 790.076.00** 7,65x12x1,5mm HWM knives
- 695.999.07** 6,8x11x9,5mm wedge for knives
- 990.063.00** M5x18mm screw
- 991.072.00** T20 hex key
- 790.140.00** 14x14x2mm HWM Knives
- 990.080.00** M5x6,5mm screw
- 991.073.00** T25 hex key

Standard

Pair of knives **695.015.A1** - Pair of knives **695.015.A2**


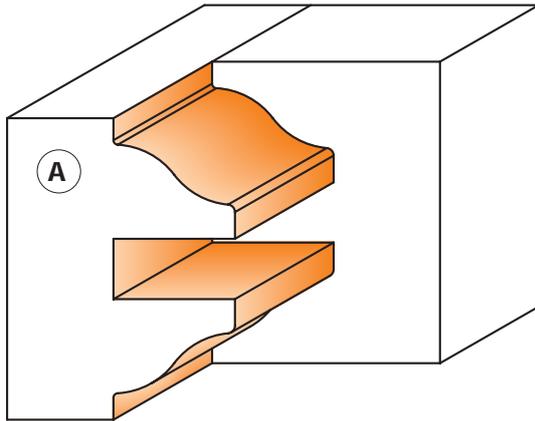


Drawings are 1:1 scale


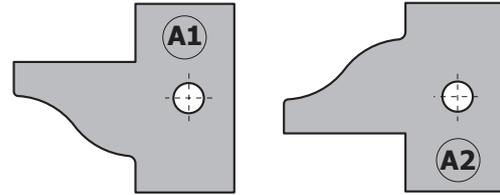


Optional



Pair of knives **695.015.B1**
Pair of knives **695.015.B2**

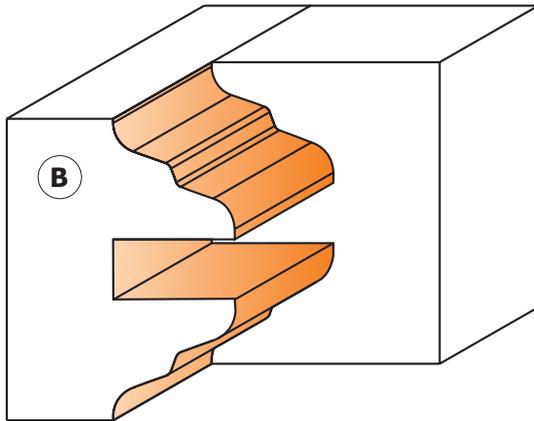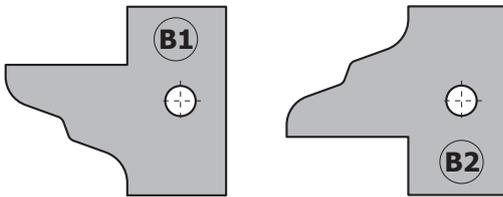



Pair of knives **695.015.C1**
Pair of knives **695.015.C2**

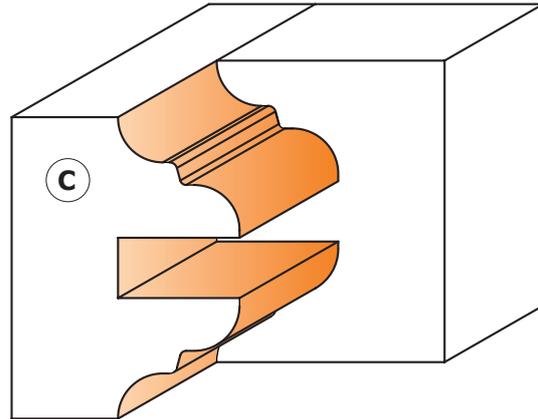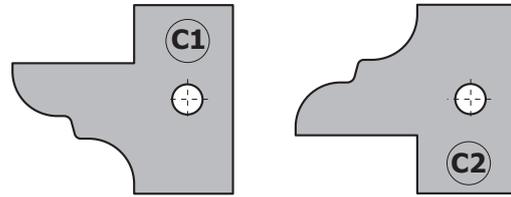

Pair of knives **695.015.D1**
Pair of knives **695.015.D2**

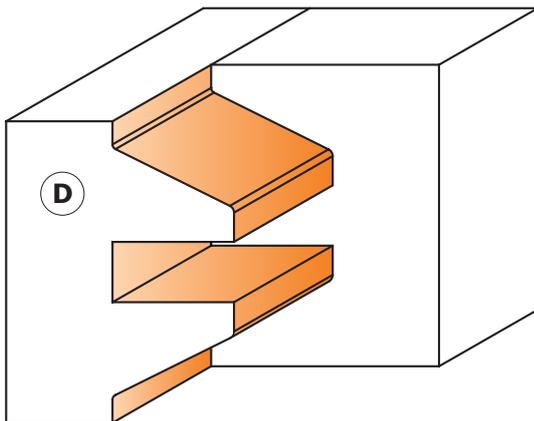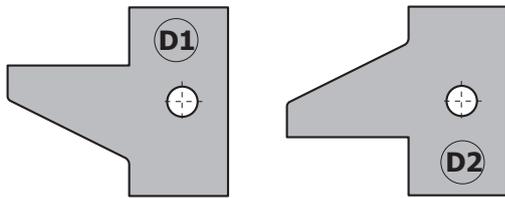

Pair of knives **695.015.E1**
Pair of knives **695.015.E2**

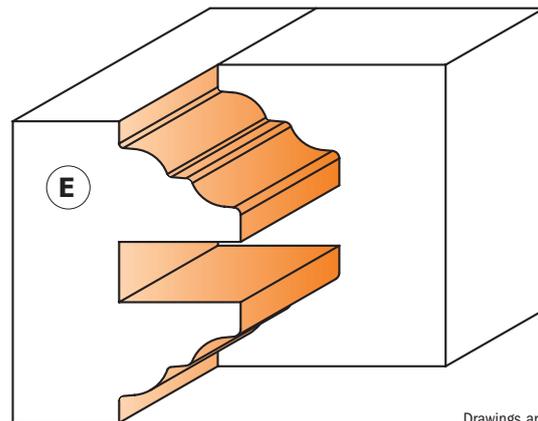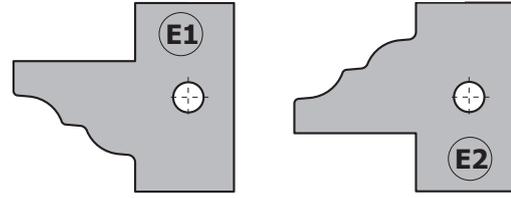

Drawings are 1:1 scale

Cutter heads without limiters





692

CMT cutter heads guarantee excellent performance for all your projects. For use on all types of moulder and spindle moulder machines.

TECHNICAL DETAILS:

- Hard aluminium or steel alloy cutter head without limiters, highly resistant to tensile and yield stress;
- Pair of universal straight knives;
- Tools for mechanical feed (MEC);
- Pins for the automatic positioning of the knives;
- Possibility to use knives with a height of 40mm or 50mm (order no. 690);

Supplied in a solid plastic box to contain up to 12 couples of knives.

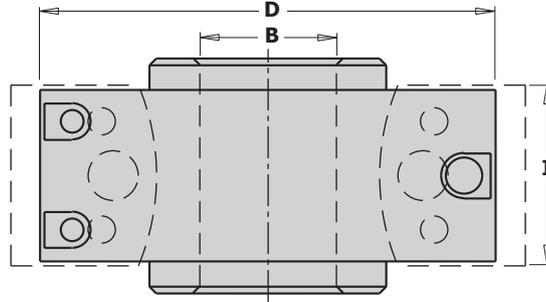

| D mm | I mm | B mm | RPM | ORDER NO. Steel body | ORDER NO. Aluminium body | Spare parts | | |
|------|-------|-------|-----------|----------------------|--------------------------|-------------|------------|------------|
| 78 | 40 | 19,05 | 7000~9000 | | 692.078.19* | | | |
| 78 | 40 | 30 | 7000~9000 | | 692.078.30* | 692.999.01 | 990.064.00 | 991.064.00 |
| 100 | 40-50 | 25,4 | 5500~8400 | | 692.100.26 | 692.999.01 | 990.064.00 | 991.064.00 |
| 100 | 40-50 | 30 | 5500~8400 | 692.101.30 | 692.100.30 | 692.999.01 | 990.064.00 | 991.064.00 |
| 100 | 40-50 | 31,75 | 5500~8400 | | 692.100.31 | 692.999.01 | 990.064.00 | 991.064.00 |
| 100 | 40-50 | 35 | 5500~8400 | 692.101.35 | 692.100.35 | 692.999.01 | 990.064.00 | 991.064.00 |
| 120 | 40-50 | 50 | 4800~7400 | 692.121.50 | 692.120.50 | 692.999.01 | 990.064.00 | 991.064.00 |

*For safety reasons we recommend the use of knives with a 40mm height only.

Cutter heads with limiters



693



CMT cutter heads guarantee excellent performance for all your projects. For use on all types of moulder and spindle moulder machines.

TECHNICAL DETAILS:

- Hard aluminium or steel alloy cutter head without limiters, highly resistant to tensile and yield stress;
- Pair of universal straight knives;
- Tools for manual feed (MAN);
- Pins for the automatic positioning of the knives;
- Possibility to use knives with a height of 40mm or 50mm (order no. 690) and limiters (order no. 691).


Made in compliance with the European Normative EN 847-1

Supplied in a solid plastic box to contain up to 12 couples of knives.

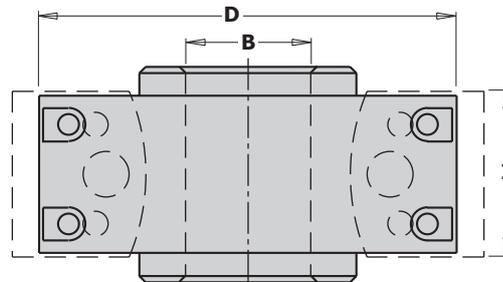

| D mm | I mm | B mm | RPM | ORDER NO. Steel body | ORDER NO. Aluminium body | Spare parts | | |
|------|-------|-------|-----------|----------------------|--------------------------|-------------|------------|------------|
| 78 | 40 | 30 | 7000~9000 | 693.078.30 | | | | |
| 100 | 40-50 | 30 | 5500~8400 | 693.101.30 | 693.100.30 | 693.999.01 | 990.065.00 | 991.064.00 |
| 100 | 40-50 | 31,75 | 5500~8400 | | 693.100.31 | 693.999.01 | 990.065.00 | 991.064.00 |
| 100 | 40-50 | 35 | 5500~8400 | 693.101.35 | 693.100.35 | 693.999.01 | 990.065.00 | 991.064.00 |
| 120 | 40-50 | 50 | 4800~7400 | 693.121.50 | 693.120.50 | 693.999.01 | 990.065.00 | 991.064.00 |

13 piece multiprofile cutter head sets without limiters




692




These sets are ideal for the professional woodworker for making joints and frames and include 3 essential profiles to produce kitchen doors. The cutter heads included in the sets allow the insertion of knives with a height of either 40mm or 50mm. Both cutter head and knives are stored in solid plastic cases to prevent damage.

These sets include:

- 1 cutter head in hard aluminium alloy with pins for the automatic positioning of the knives;
- 13 pairs of knives with a cutting height of 40mm.

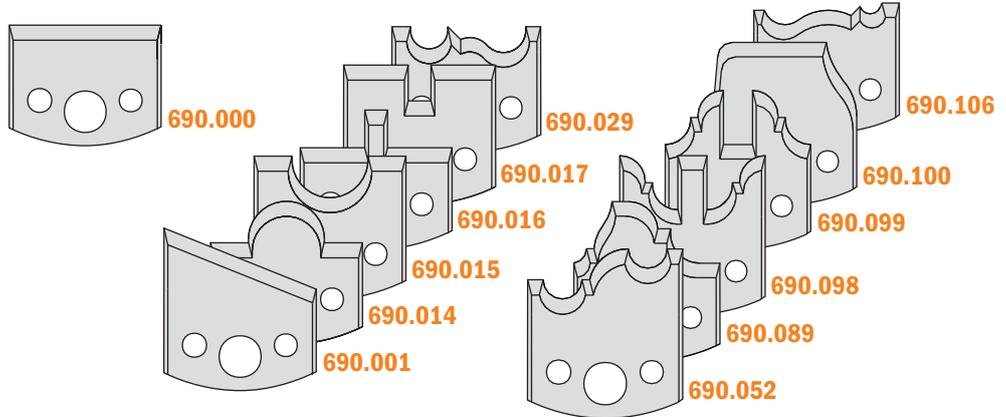

| D mm | I mm | B mm | RPM | ORDER NO. | Spare parts | | |
|---------|---------|---------|-----------|-------------------|-------------|------------|------------|
| 78 | 40 | 19,05 | 7000~9000 | 692.013.09 | | | |
| 78 | 40 | 30 | 7000~9000 | 692.013.01 | 692.999.01 | 990.064.00 | 991.064.00 |
| 100 | 40 | 25,4 | 5500~8400 | 692.013.10 | 692.999.01 | 990.064.00 | 991.064.00 |
| 100 | 40 | 30 | 5500~8400 | 692.013.02 | 692.999.01 | 990.064.00 | 991.064.00 |
| 100 | 40 | 31,75 | 5500~8400 | 692.013.11 | 692.999.01 | 990.064.00 | 991.064.00 |
| 100 | 40 | 35 | 5500~8400 | 692.013.03 | 692.999.01 | 990.064.00 | 991.064.00 |
| 120 | 40 | 50 | 4800~7400 | 692.013.04 | 692.999.01 | 990.064.00 | 991.064.00 |




692



These sets are ideal for the professional woodworker and include 13 profile knives for making joints, frames, multiple profiles, moldings and chamfers. The cutter head included in the sets allow the insertion of knives with a height of either 40mm or 50mm. Both cutter head and knives are stored in solid plastic cases to prevent damage.

These sets include:

- 1 cutter head in hard aluminium alloy with pins for the automatic positioning of the knives;
- 13 pairs of knives with a cutting height of 40mm.

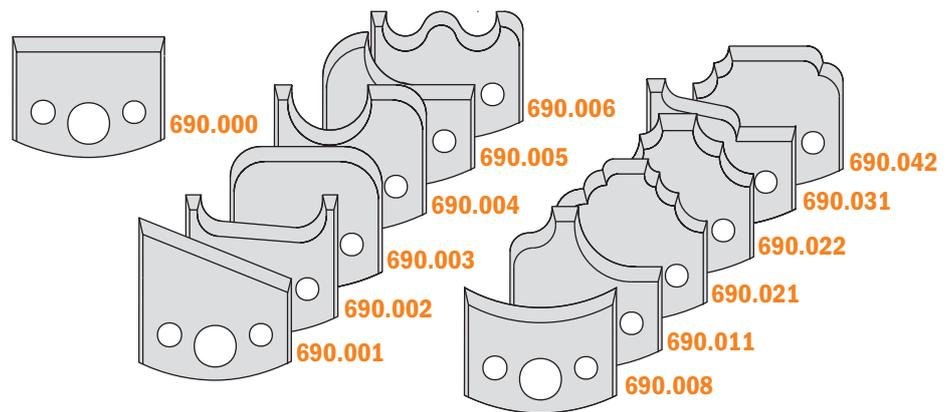

| D mm | I mm | B mm | RPM | ORDER NO. | Spare parts | | |
|---------|---------|---------|-----------|-------------------|-------------|------------|------------|
| 78 | 40 | 19,05 | 7000~9000 | 692.013.12 | | | |
| 78 | 40 | 30 | 7000~9000 | 692.013.05 | 692.999.01 | 990.064.00 | 991.064.00 |
| 100 | 40 | 25,4 | 5500~8400 | 692.013.13 | 692.999.01 | 990.064.00 | 991.064.00 |
| 100 | 40 | 30 | 5500~8400 | 692.013.06 | 692.999.01 | 990.064.00 | 991.064.00 |
| 100 | 40 | 31,75 | 5500~8400 | 692.013.14 | 692.999.01 | 990.064.00 | 991.064.00 |
| 100 | 40 | 35 | 5500~8400 | 692.013.07 | 692.999.01 | 990.064.00 | 991.064.00 |
| 120 | 40 | 50 | 4800~7400 | 692.013.08 | 692.999.01 | 990.064.00 | 991.064.00 |

7 piece multiprofile cutter head sets with limiters

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts





693


The professional woodworker has now the chance to make kitchen doors with a horizontal profile and male-and-female joints with two pairs of cutters. In fact, along with 7 profiled knives these sets also contains a specially designed cutter head that allows the insertion of knives with a height of either 40mm or 50mm, and safety limiters produced in compliance with the European normative EN 847-1. Both cutter head and knives are stored in solid plastic cases to prevent damage.

These sets include:

- 1 cutter head in hard aluminium alloy allowing the insertion of straight knives, limiters and pins for the automatic positioning of the knives;
- 7 pairs of knives with 40mm of cutting;
- 7 pairs of relative limiters.




690.000
691.000

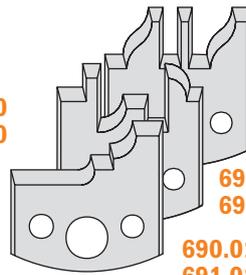

690.019
691.019

690.097
691.097

690.096
691.096

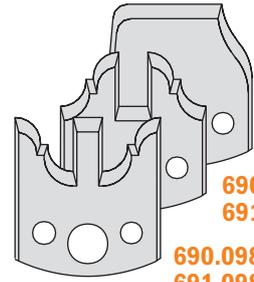

690.098
691.098

690.100
691.100

690.099
691.099

Spare parts



| D mm | l mm | B mm | RPM | ORDER NO. |
|------|------|------|-----------|-------------------|
| 100 | 40 | 30 | 5500~8400 | 693.013.01 |
| 100 | 40 | 35 | 5500~8400 | 693.013.02 |
| 120 | 40 | 50 | 4800~7400 | 693.013.03 |

| | | |
|------------|------------|------------|
| 693.999.01 | 990.065.00 | 991.064.00 |
| 693.999.01 | 990.065.00 | 991.064.00 |
| 693.999.01 | 990.065.00 | 991.064.00 |





693


CMT has designed these sets containing 7 profiled knives and a cutter head for making joints, frames and chamfers. The cutter heads allow the insertion of knives with a height of either 40mm or 50mm and safety limiters produced in compliance with the European normative EN 847-1. Both cutter head and knives are stored in solid plastic cases to prevent damage.

These sets include:

- 1 cutter head in hard aluminium alloy allowing the insertion of straight knives, limiters and pins for the automatic positioning of the knives;
- 7 pairs of knives with 40mm of cutting;
- 7 pairs of relative limiters.




690.000
691.000

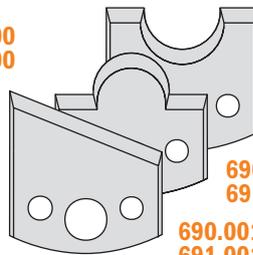

690.015
691.015

690.015
691.015

690.014
691.014

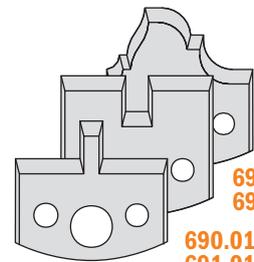

690.016
691.016

690.089
691.089

690.017
691.017

Spare parts




| D mm | l mm | B mm | RPM | ORDER NO. |
|------|------|------|-----------|-------------------|
| 100 | 40 | 30 | 5500~8400 | 693.013.04 |
| 100 | 40 | 35 | 5500~8400 | 693.013.05 |
| 120 | 40 | 50 | 4800~7400 | 693.013.06 |

| | | |
|------------|------------|------------|
| 693.999.01 | 990.065.00 | 991.064.00 |
| 693.999.01 | 990.065.00 | 991.064.00 |
| 693.999.01 | 990.065.00 | 991.064.00 |


Profile knives and limiters

Cutting length=40mm Thickness=4mm


SP

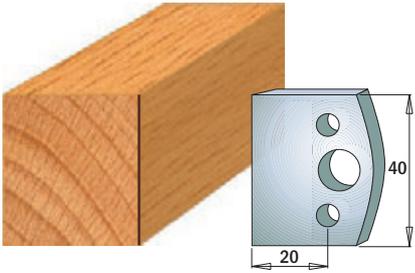


Pair of knives **690.000**
Pair of limiters **691.000**

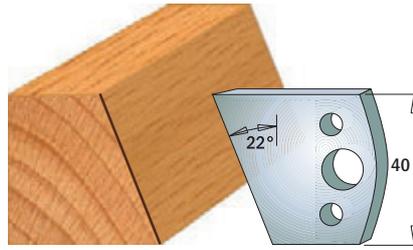


Pair of knives **690.001**
Pair of limiters **691.001**

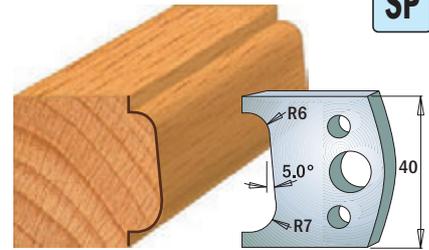


Pair of knives **690.002**
Pair of limiters **691.002**

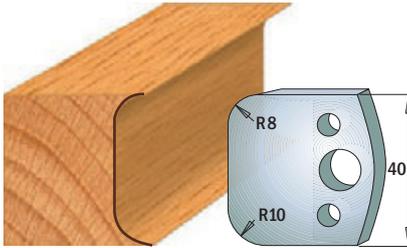


Pair of knives **690.003**
Pair of limiters **691.003**

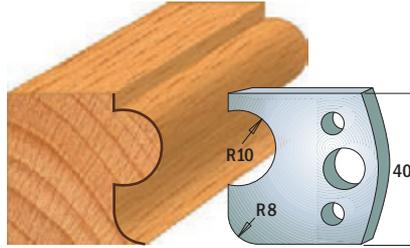


Pair of knives **690.004**
Pair of limiters **691.004**

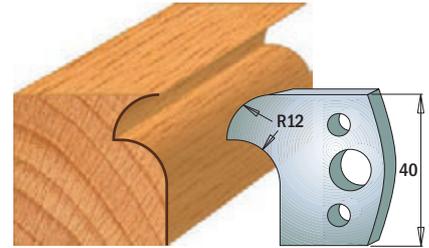


Pair of knives **690.005**
Pair of limiters **691.005**

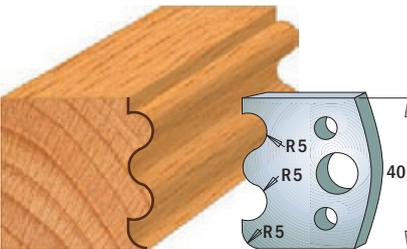


Pair of knives **690.006**
Pair of limiters **691.006**

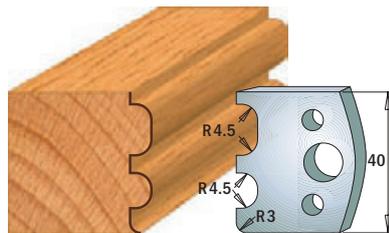


Pair of knives **690.007**
Pair of limiters **691.007**

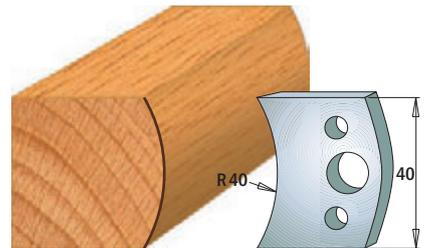


Pair of knives **690.008**
Pair of limiters **691.008**

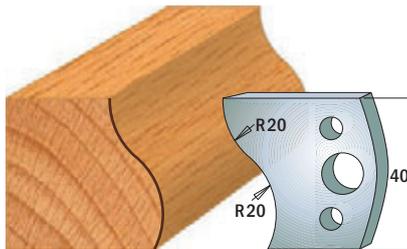


Pair of knives **690.009**
Pair of limiters **691.009**

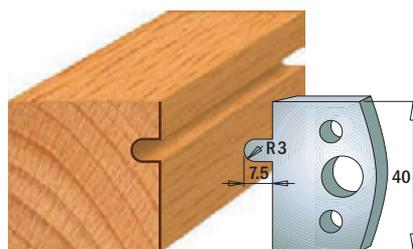


Pair of knives **690.010**
Pair of limiters **691.010**

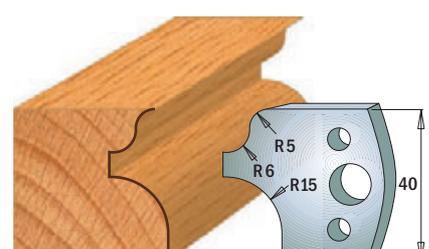


Pair of knives **690.011**
Pair of limiters **691.011**

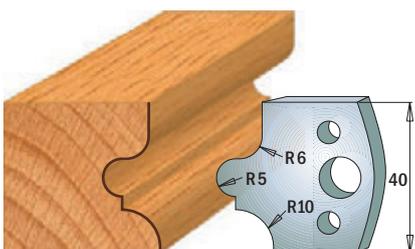

Pair of knives **690.012**
Pair of limiters **691.012**

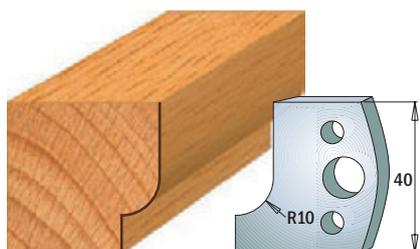

Pair of knives **690.013**
Pair of limiters **691.013**

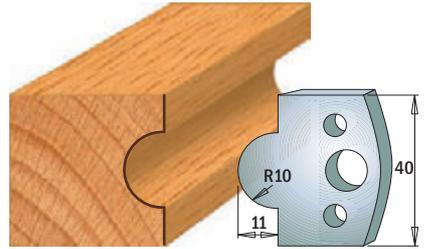

Pair of knives **690.014**
Pair of limiters **691.014**

Note: all knives and limiters only available in pairs

Drawings are 1:2 scale

Dimensions in mm.

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories


Display cabinets & spare parts

Profile knives and limiters


Cutting length=40mm Thickness=4mm

SP


Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

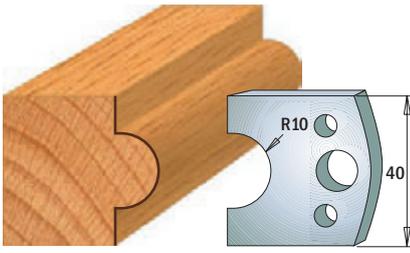


Pair of knives **690.015**
Pair of limiters **691.015**

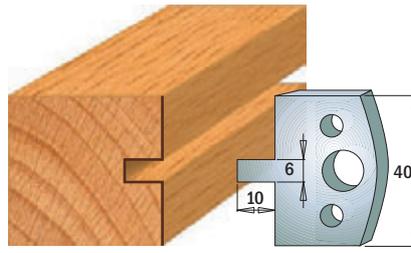


Pair of knives **690.016**
Pair of limiters **691.016**

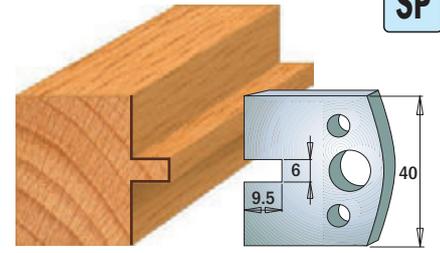


Pair of knives **690.017**
Pair of limiters **691.017**

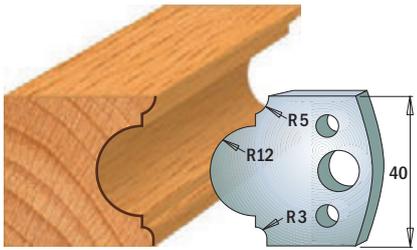


Pair of knives **690.018**
Pair of limiters **691.018**

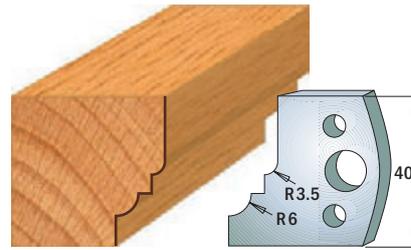


Pair of knives **690.019**
Pair of limiters **691.019**

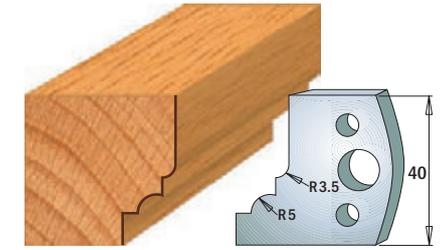


Pair of knives **690.020**
Pair of limiters **691.020**

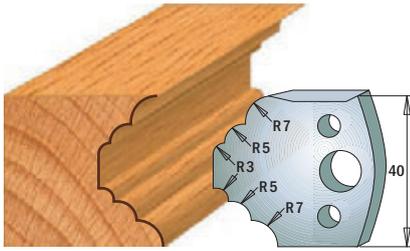


Pair of knives **690.021**
Pair of limiters **691.021**

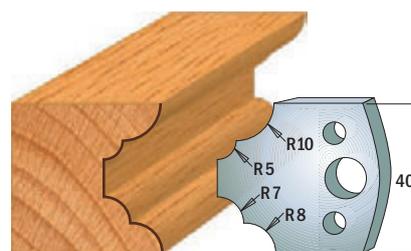


Pair of knives **690.022**
Pair of limiters **691.022**

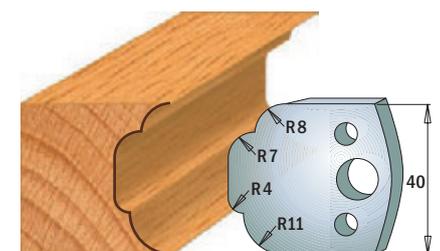


Pair of knives **690.023**
Pair of limiters **691.023**

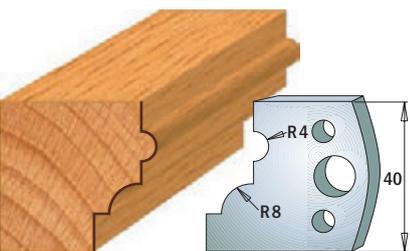


Pair of knives **690.024**
Pair of limiters **691.024**

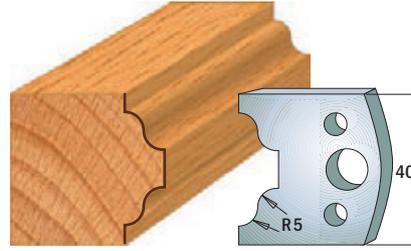


Pair of knives **690.025**
Pair of limiters **691.025**

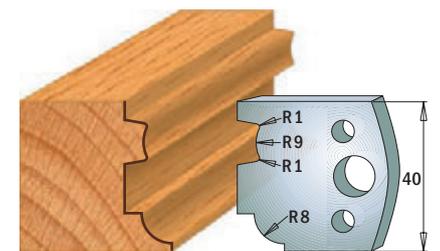


Pair of knives **690.026**
Pair of limiters **691.026**

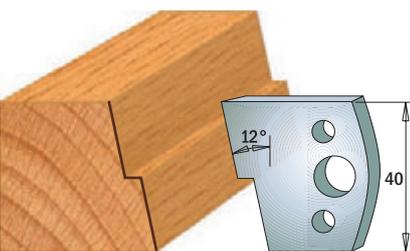

Pair of knives **690.027**
Pair of limiters **691.027**

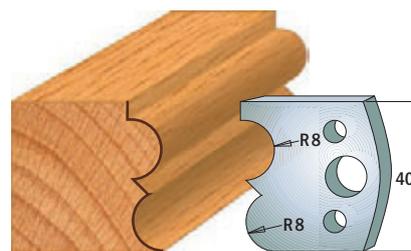

Pair of knives **690.028**
Pair of limiters **691.028**

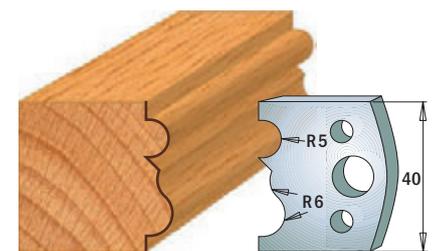

Pair of knives **690.029**
Pair of limiters **691.029**

Note: all knives and limiters only available in pairs


Drawings are 1:2 scale

Dimensions in mm.


Profile knives and limiters

Cutting length=40mm Thickness=4mm


SP

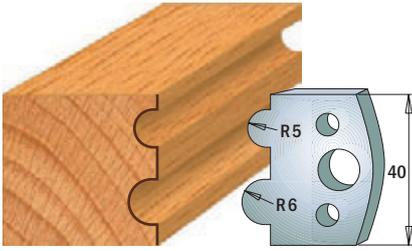


Pair of knives **690.030**
Pair of limiters **691.030**

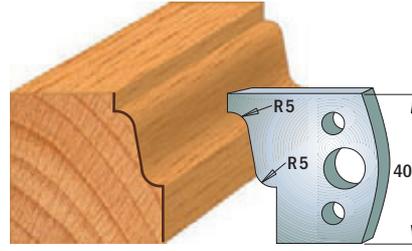


Pair of knives **690.031**
Pair of limiters **691.031**

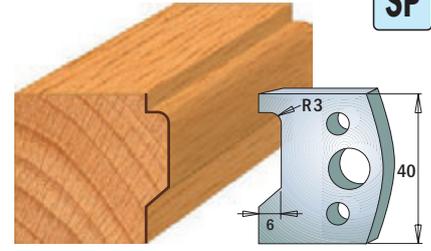


Pair of knives **690.032**
Pair of limiters **691.032**

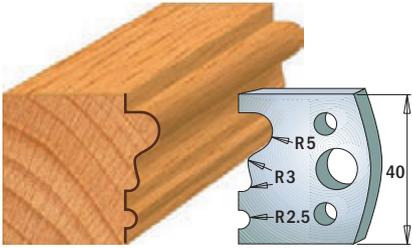


Pair of knives **690.033**
Pair of limiters **691.033**

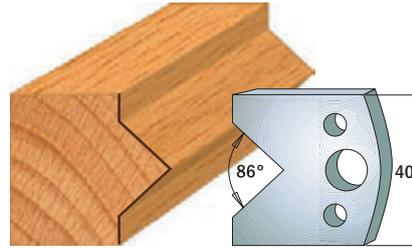


Pair of knives **690.034**
Pair of limiters **691.034**

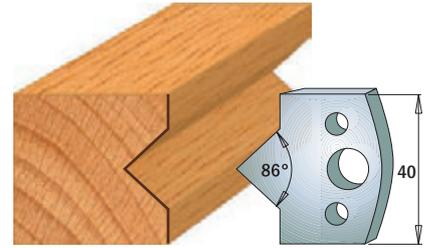


Pair of knives **690.035**
Pair of limiters **691.035**

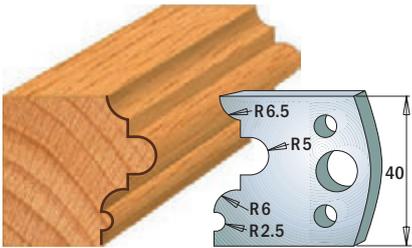


Pair of knives **690.036**
Pair of limiters **691.036**

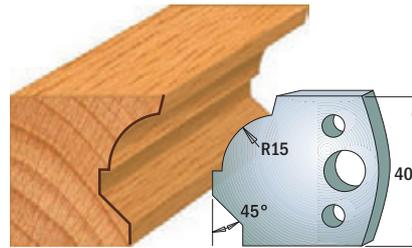


Pair of knives **690.037**
Pair of limiters **691.037**

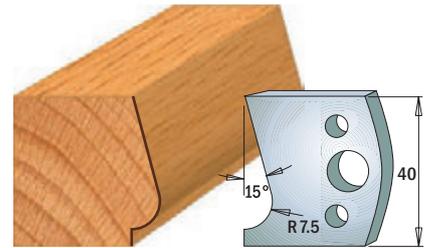


Pair of knives **690.038**
Pair of limiters **691.038**

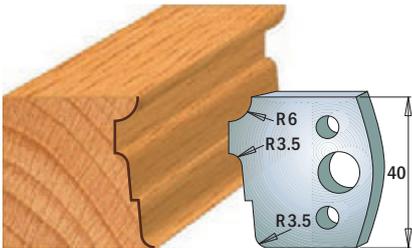


Pair of knives **690.039**
Pair of limiters **691.039**

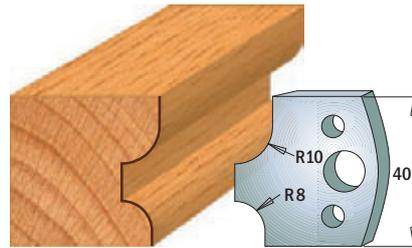


Pair of knives **690.040**
Pair of limiters **691.040**

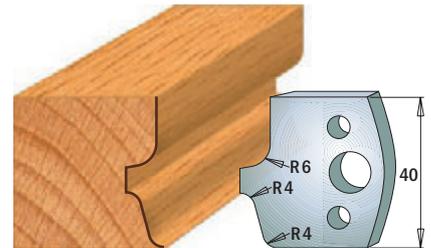


Pair of knives **690.041**
Pair of limiters **691.041**

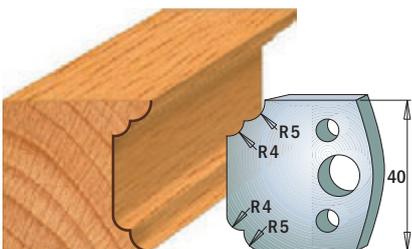

Pair of knives **690.042**
Pair of limiters **691.042**

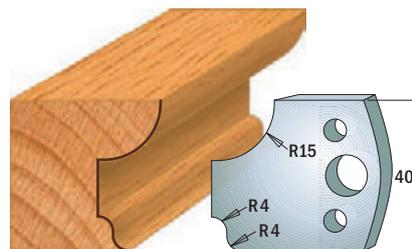

Pair of knives **690.043**
Pair of limiters **691.043**

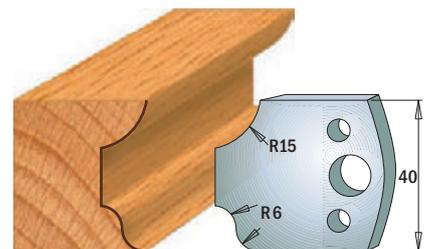

Pair of knives **690.044**
Pair of limiters **691.044**

Note: all knives and limiters only available in pairs

Drawings are 1:2 scale

Dimensions in mm.

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools


Power tools & accessories

Display cabinets & spare parts


Profile knives and limiters

Cutting length=40mm Thickness=4mm


SP

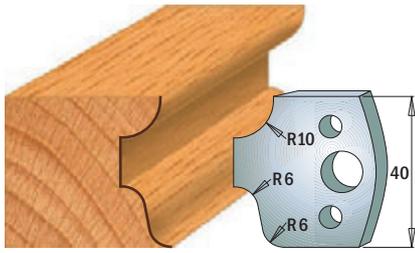


Pair of knives **690.045**
Pair of limiters **691.045**

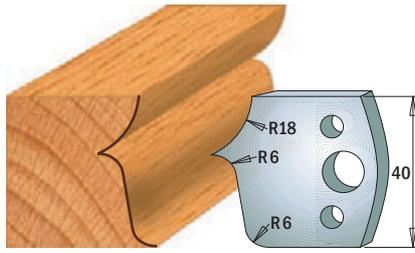


Pair of knives **690.046**
Pair of limiters **691.046**

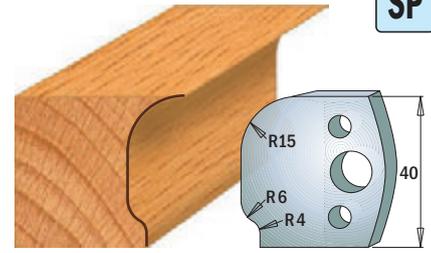


Pair of knives **690.047**
Pair of limiters **691.047**

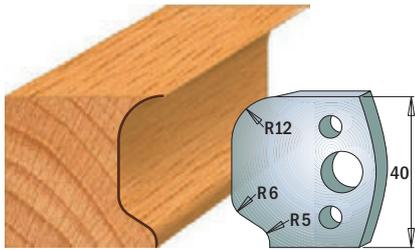


Pair of knives **690.048**
Pair of limiters **691.048**

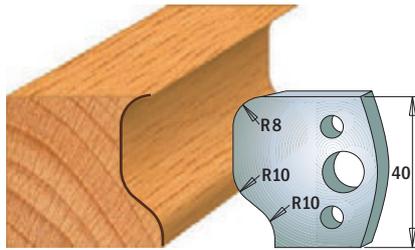


Pair of knives **690.049**
Pair of limiters **691.049**

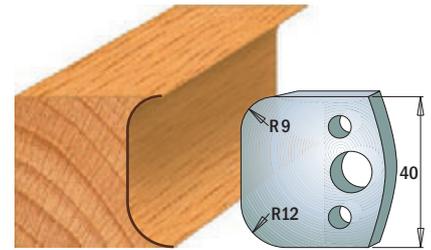


Pair of knives **690.050**
Pair of limiters **691.050**

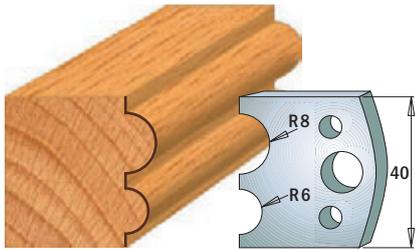


Pair of knives **690.051**
Pair of limiters **691.051**

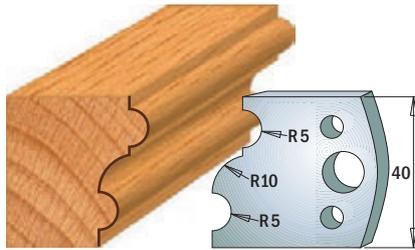


Pair of knives **690.052**
Pair of limiters **691.052**

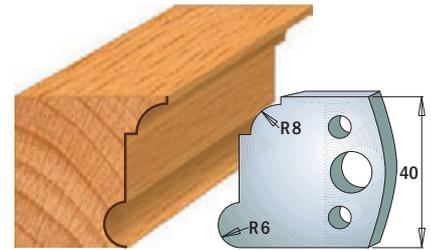


Pair of knives **690.053**
Pair of limiters **691.053**

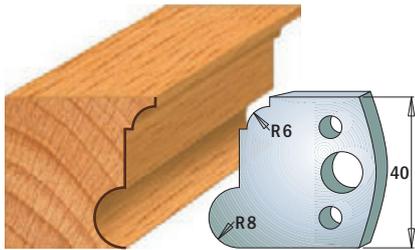


Pair of knives **690.054**
Pair of limiters **691.054**

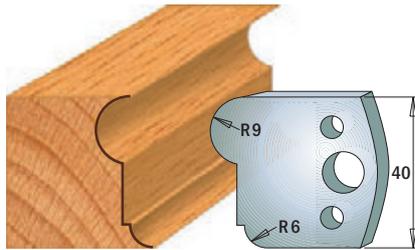


Pair of knives **690.055**
Pair of limiters **691.055**

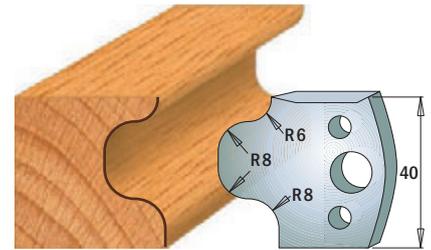


Pair of knives **690.056**
Pair of limiters **691.056**

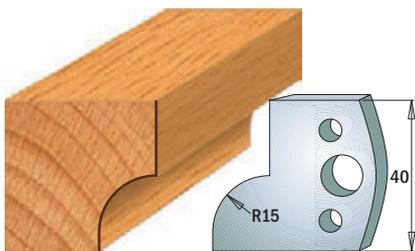

Pair of knives **690.057**
Pair of limiters **691.057**

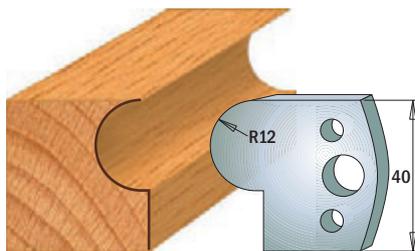

Pair of knives **690.058**
Pair of limiters **691.058**

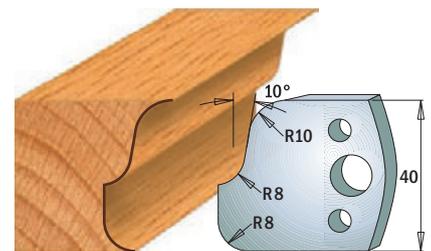

Pair of knives **690.059**
Pair of limiters **691.059**

Note: all knives and limiters only available in pairs

Drawings are 1:2 scale

Dimensions in mm.

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories


Display cabinets & spare parts

Profile knives and limiters


Cutting length=40mm Thickness=4mm




SP

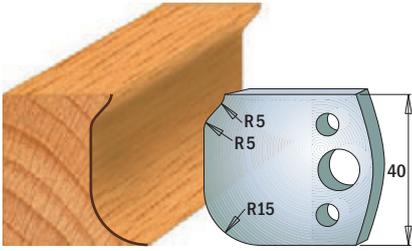


Pair of knives **690.060**
Pair of limiters **691.060**

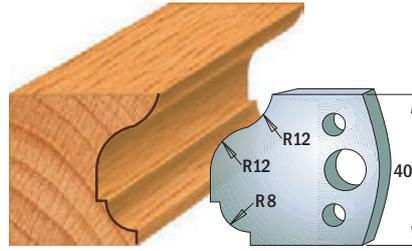


Pair of knives **690.061**
Pair of limiters **691.061**

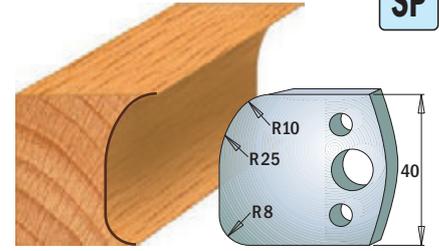


Pair of knives **690.062**
Pair of limiters **691.062**

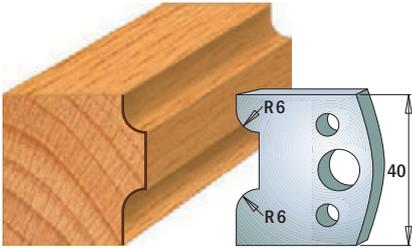


Pair of knives **690.063**
Pair of limiters **691.063**

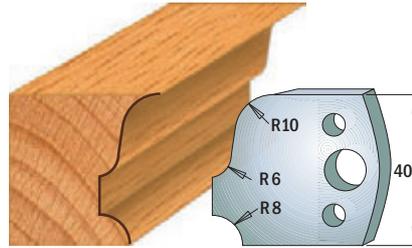


Pair of knives **690.064**
Pair of limiters **691.064**

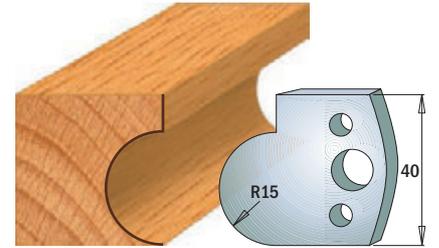


Pair of knives **690.065**
Pair of limiters **691.065**

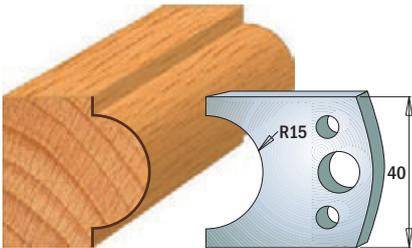


Pair of knives **690.066**
Pair of limiters **691.066**

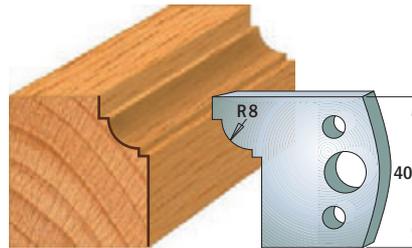


Pair of knives **690.067**
Pair of limiters **691.067**

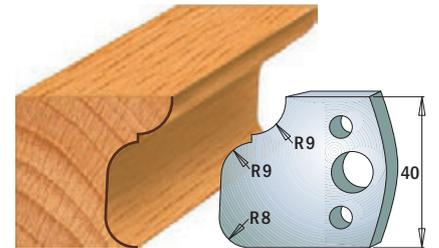


Pair of knives **690.068**
Pair of limiters **691.068**

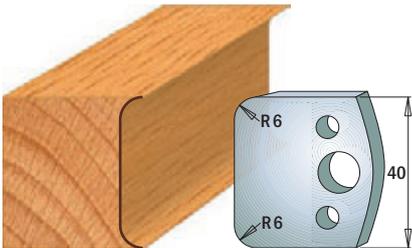


Pair of knives **690.069**
Pair of limiters **691.069**

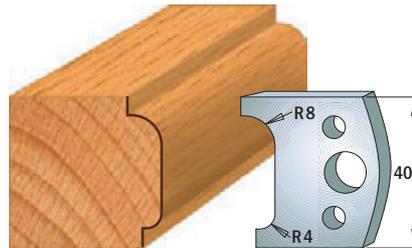


Pair of knives **690.070**
Pair of limiters **691.070**

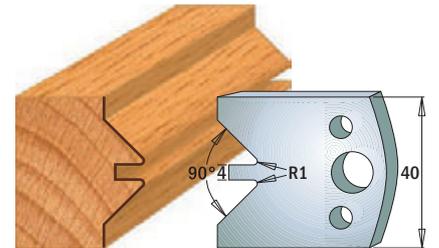


Pair of knives **690.071**
Pair of limiters **691.071**

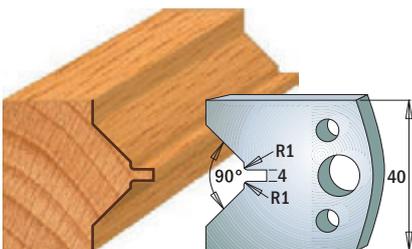

Pair of knives **690.072**
Pair of limiters **691.072**

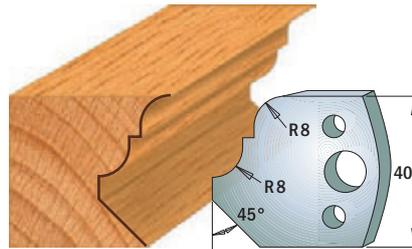

Pair of knives **690.073**
Pair of limiters **691.073**

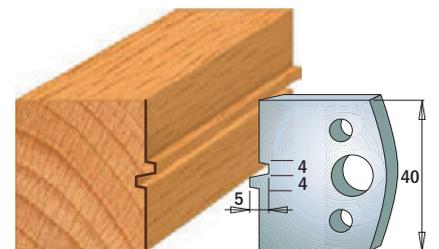

Pair of knives **690.074**
Pair of limiters **691.074**

Note: all knives and limiters only available in pairs


Drawings are 1:2 scale

Dimensions in mm.


Profile knives and limiters

Cutting length=40mm Thickness=4mm


SP

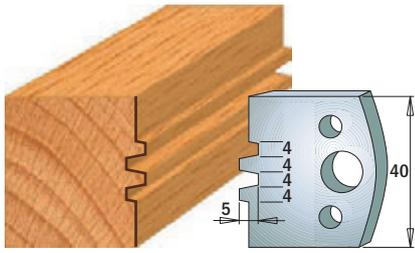


Pair of knives **690.075**
Pair of limiters **691.075**

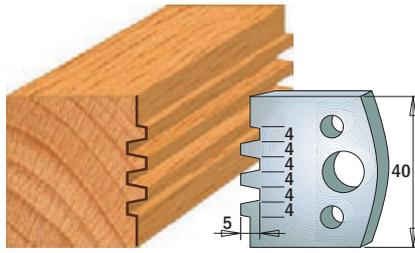


Pair of knives **690.076**
Pair of limiters **691.076**

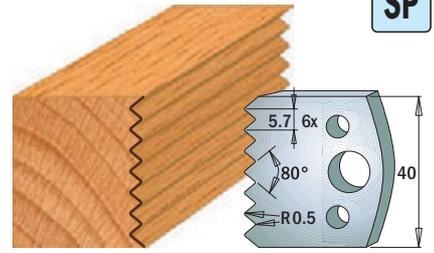


Pair of knives **690.077**
Pair of limiters **691.077**

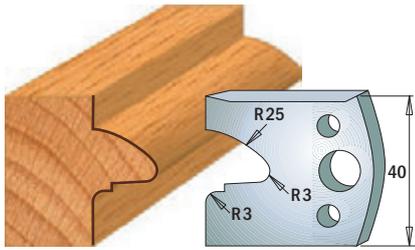


Pair of knives **690.078**
Pair of limiters **691.078**

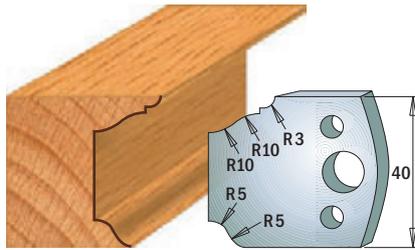


Pair of knives **690.079**
Pair of limiters **691.079**

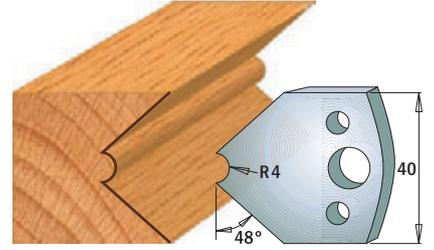


Pair of knives **690.080**
Pair of limiters **691.080**

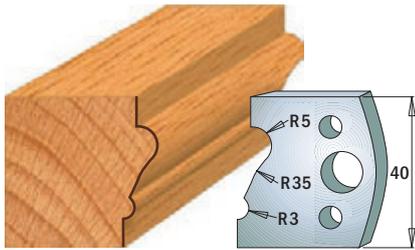


Pair of knives **690.081**
Pair of limiters **691.081**

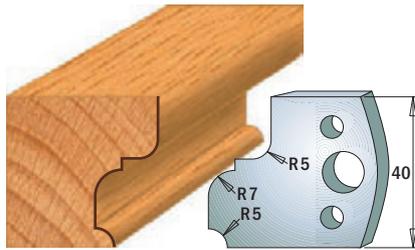


Pair of knives **690.082**
Pair of limiters **691.082**

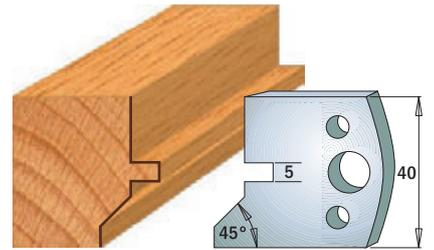


Pair of knives **690.083**
Pair of limiters **691.083**

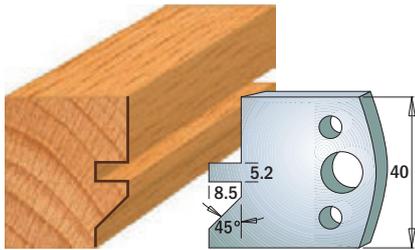


Pair of knives **690.084**
Pair of limiters **691.084**

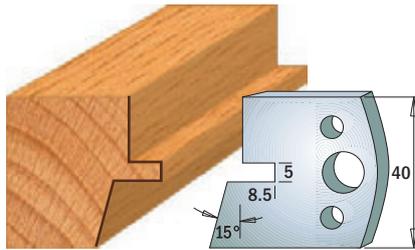


Pair of knives **690.085**
Pair of limiters **691.085**

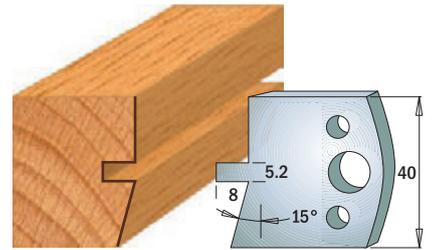


Pair of knives **690.086**
Pair of limiters **691.086**

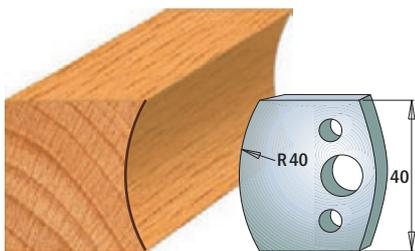

Pair of knives **690.087**
Pair of limiters **691.087**

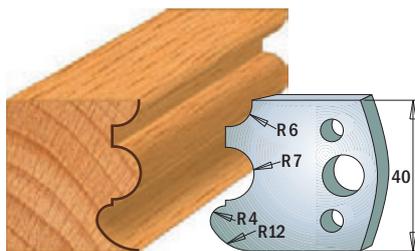

Pair of knives **690.088**
Pair of limiters **691.088**

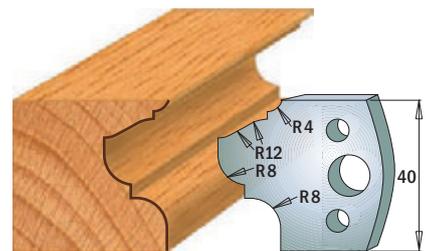

Pair of knives **690.089**
Pair of limiters **691.089**

Note: all knives and limiters only available in pairs

Drawings are 1:2 scale

Dimensions in mm.

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools


Power tools & accessories

Display cabinets & spare parts


Profile knives and limiters

Cutting length=40mm Thickness=4mm


SP

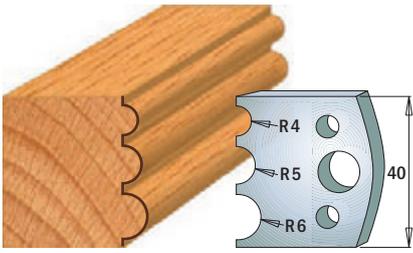


Pair of knives **690.090**
Pair of limiters **691.090**

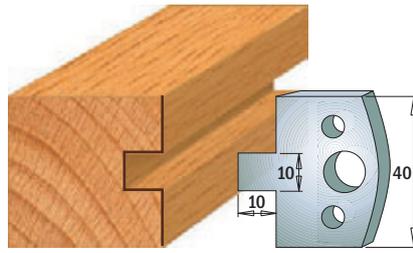


Pair of knives **690.091**
Pair of limiters **691.091**

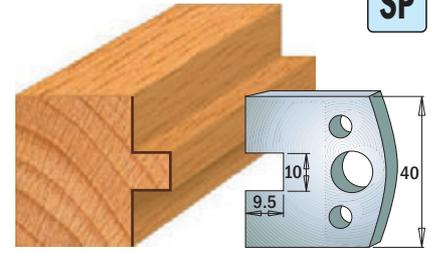


Pair of knives **690.092**
Pair of limiters **691.092**

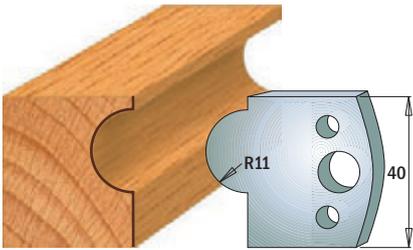


Pair of knives **690.093**
Pair of limiters **691.093**

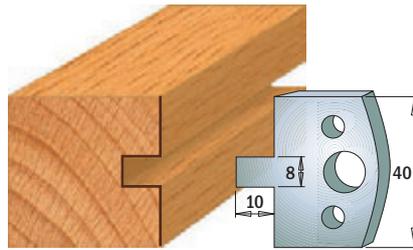


Pair of knives **690.094**
Pair of limiters **691.094**

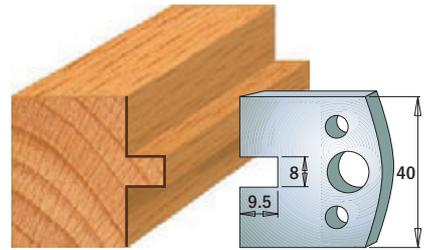


Pair of knives **690.095**
Pair of limiters **691.095**

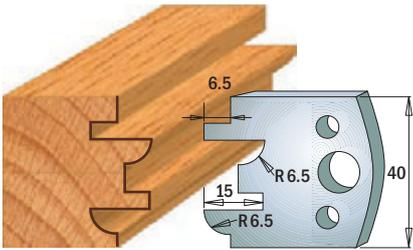


Pair of knives **690.096**
Pair of limiters **691.096**

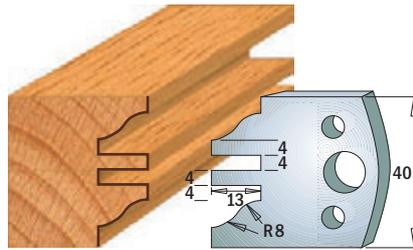


Pair of knives **690.097**
Pair of limiters **691.097**

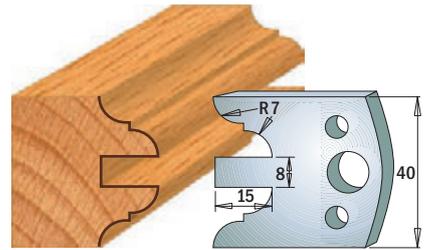


Pair of knives **690.098**
Pair of limiters **691.098**

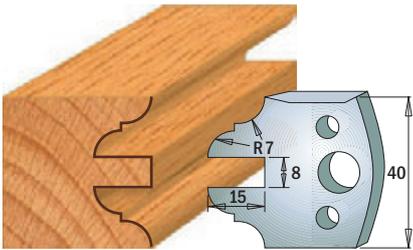


Pair of knives **690.099**
Pair of limiters **691.099**

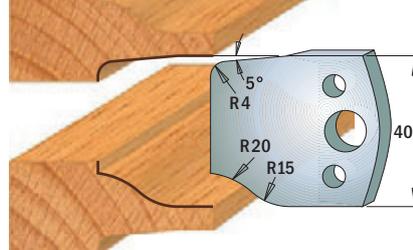


Pair of knives **690.100**
Pair of limiters **691.100**

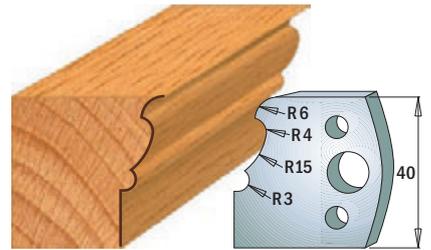


Pair of knives **690.101**
Pair of limiters **691.101**

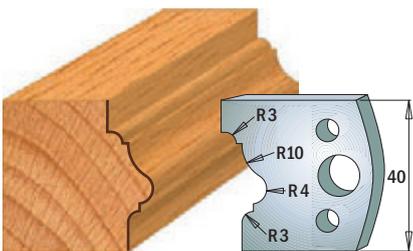

Pair of knives **690.102**
Pair of limiters **691.102**

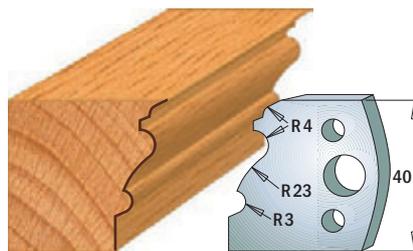

Pair of knives **690.103**
Pair of limiters **691.103**

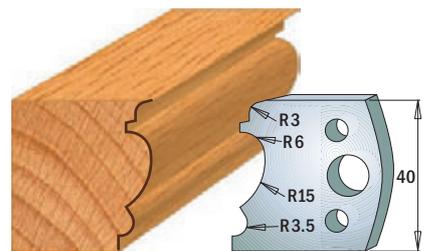

Pair of knives **690.104**
Pair of limiters **691.104**

Note: all knives and limiters only available in pairs

Drawings are 1:2 scale

Dimensions in mm.

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools


Power tools & accessories

Display cabinets & spare parts


Profile knives and limiters

Cutting length=40mm Thickness=4mm


SP

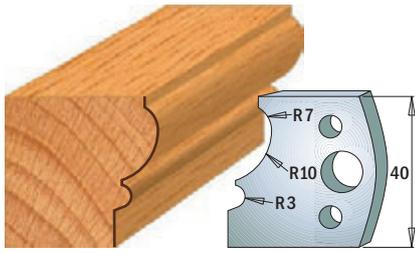


Pair of knives **690.105**
Pair of limiters **691.105**

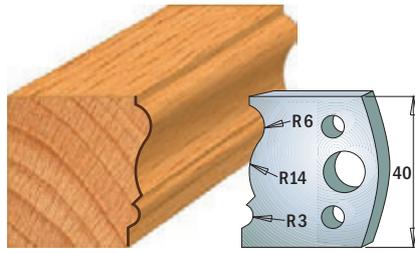


Pair of knives **690.106**
Pair of limiters **691.106**

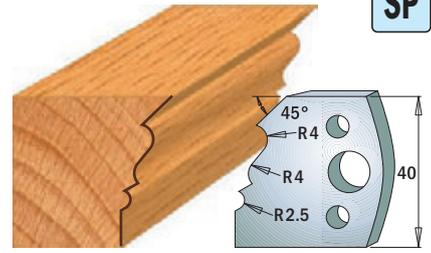


Pair of knives **690.107**
Pair of limiters **691.107**

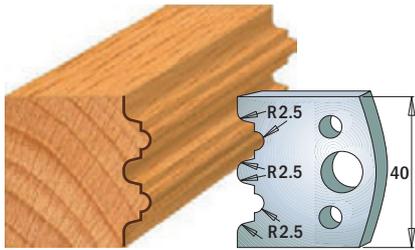


Pair of knives **690.108**
Pair of limiters **691.108**

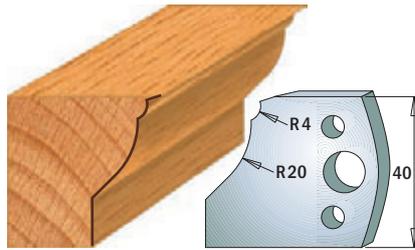


Pair of knives **690.109**
Pair of limiters **691.109**

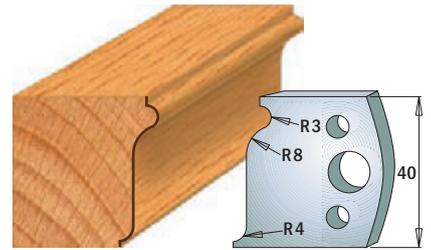


Pair of knives **690.110**
Pair of limiters **691.110**

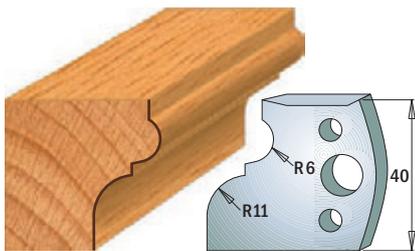


Pair of knives **690.111**
Pair of limiters **691.111**

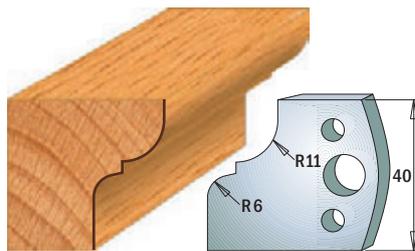


Pair of knives **690.112**
Pair of limiters **691.112**

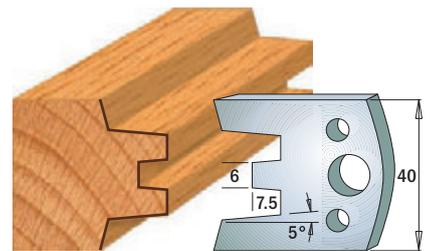


Pair of knives **690.113**
Pair of limiters **691.113**

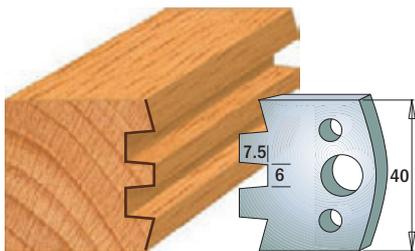


Pair of knives **690.114**
Pair of limiters **691.114**

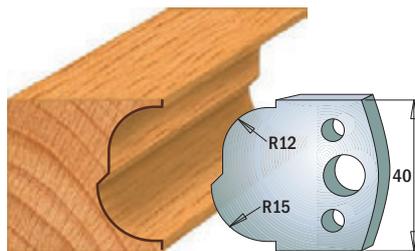


Pair of knives **690.115**
Pair of limiters **691.115**

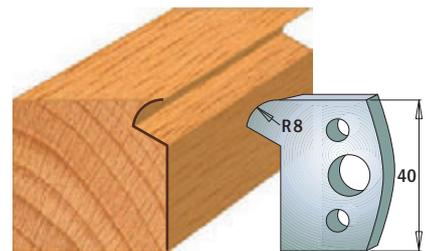


Pair of knives **690.116**
Pair of limiters **691.116**

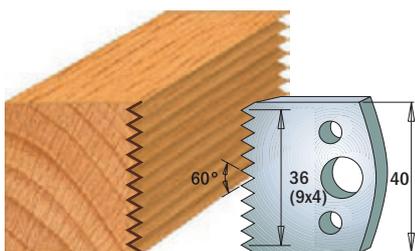

Pair of knives **690.117**
Pair of limiters **691.117**

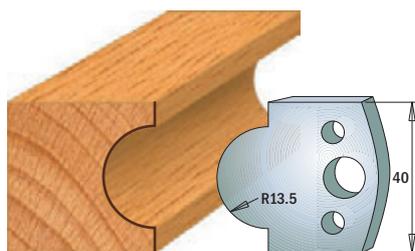

Pair of knives **690.118**
Pair of limiters **691.118**

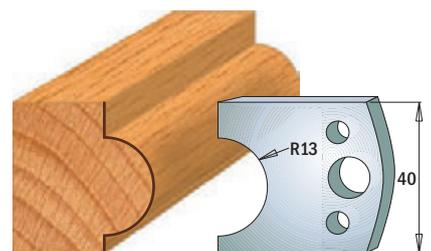

Pair of knives **690.119**
Pair of limiters **691.119**

Note: all knives and limiters only available in pairs

Drawings are 1:2 scale

Dimensions in mm.

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools


Power tools & accessories

Display cabinets & spare parts


Profile knives and limiters

Cutting length=40mm Thickness=4mm


SP

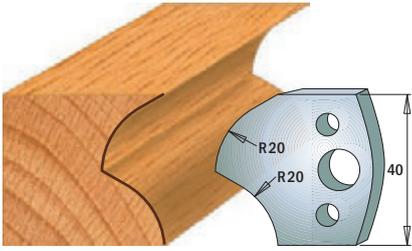


Pair of knives **690.120**
Pair of limiters **691.120**

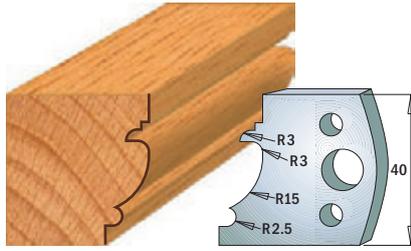


Pair of knives **690.121**
Pair of limiters **691.121**

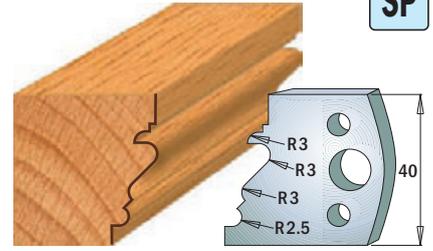


Pair of knives **690.122**
Pair of limiters **691.122**

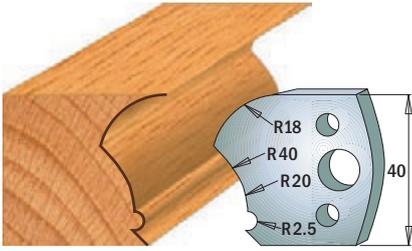


Pair of knives **690.123**
Pair of limiters **691.123**

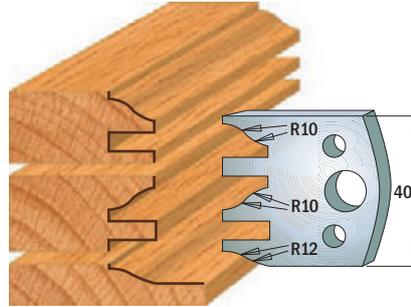


Pair of knives **690.124**
Pair of limiters **691.124**

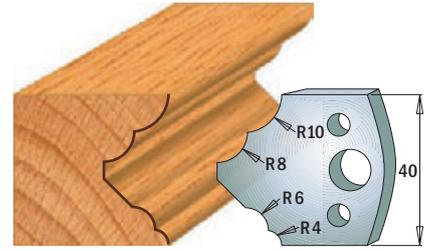


Pair of knives **690.125**
Pair of limiters **691.125**

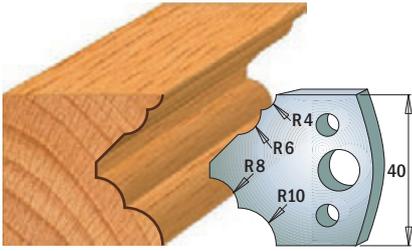


Pair of knives **690.126**
Pair of limiters **691.126**

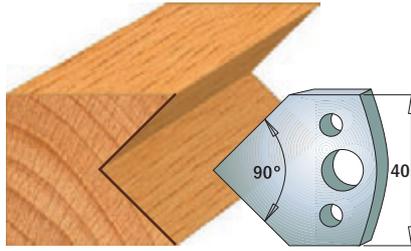


Pair of knives **690.127**
Pair of limiters **691.127**

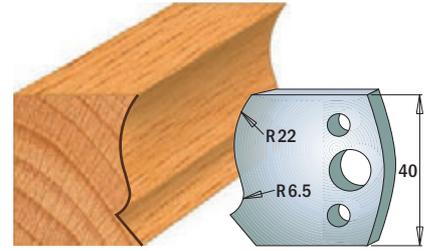


Pair of knives **690.128**
Pair of limiters **691.128**

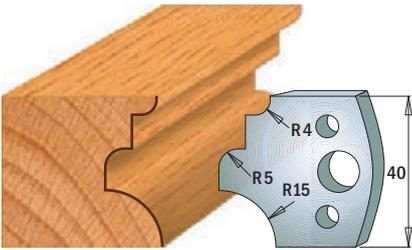


Pair of knives **690.129**
Pair of limiters **691.129**

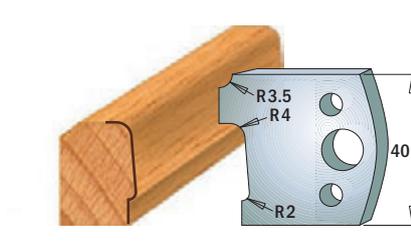


Pair of knives **690.130**
Pair of limiters **691.130**

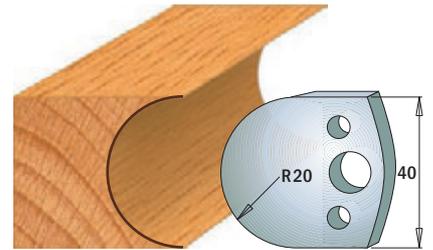


Pair of knives **690.131**
Pair of limiters **691.131**

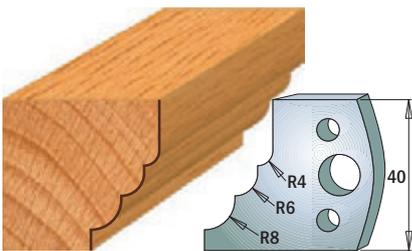

Pair of knives **690.132**
Pair of limiters **691.132**

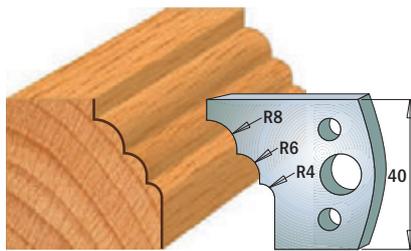

Pair of knives **690.133**
Pair of limiters **691.133**

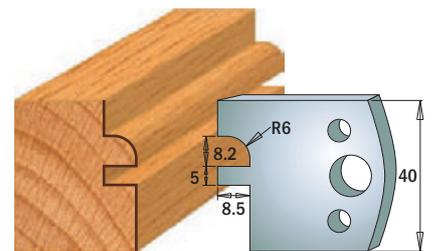

Pair of knives **690.134**
Pair of limiters **691.134**

Note: all knives and limiters only available in pairs

Drawings are 1:2 scale

Dimensions in mm.

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools


Power tools & accessories

Display cabinets & spare parts


Profile knives and limiters

Cutting length=40mm Thickness=4mm


SP

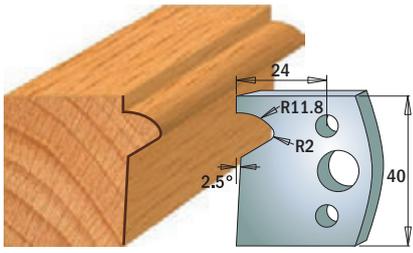


Pair of knives **690.135**
Pair of limiters **691.135**

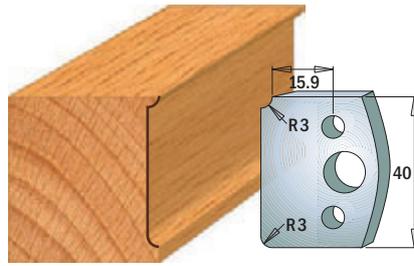


Pair of knives **690.170**
Pair of limiters **691.170**

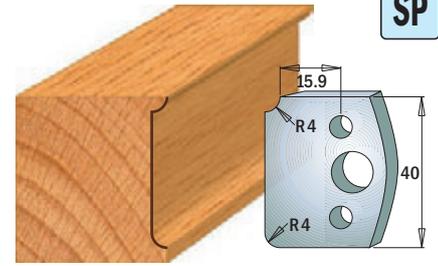


Pair of knives **690.171**
Pair of limiters **691.171**

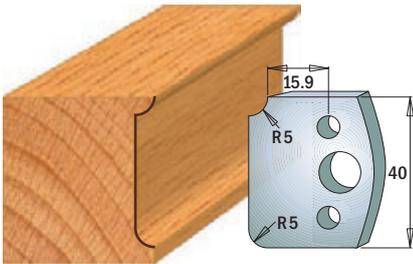


Pair of knives **690.172**
Pair of limiters **691.172**

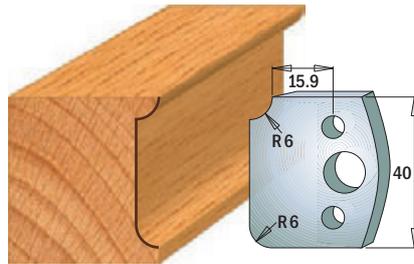


Pair of knives **690.173**
Pair of limiters **691.173**

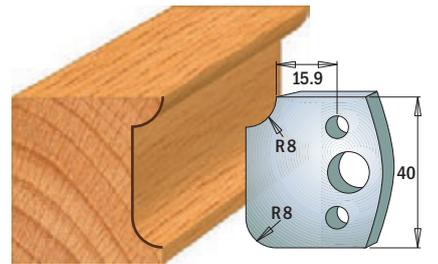


Pair of knives **690.174**
Pair of limiters **691.174**

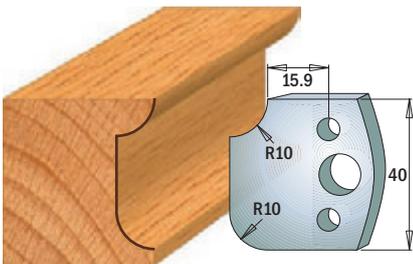


Pair of knives **690.175**
Pair of limiters **691.175**

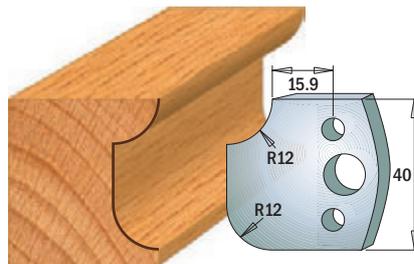

Pair of knives **690.176**
Pair of limiters **691.176**

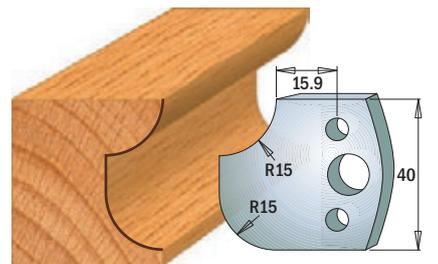


Pair of knives **690.177**
Pair of limiters **691.177**

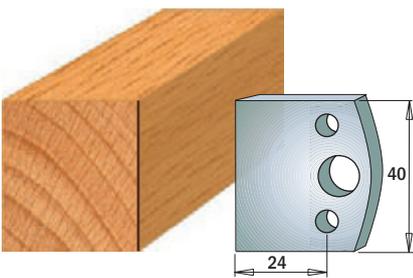


Pair of knives **690.192**
Pair of limiters **691.192**

Profile knives and limiters


Cutting length=50mm Thickness=4mm

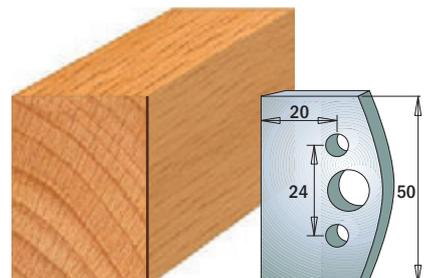


Pair of knives **690.500**
Pair of limiters **691.500**

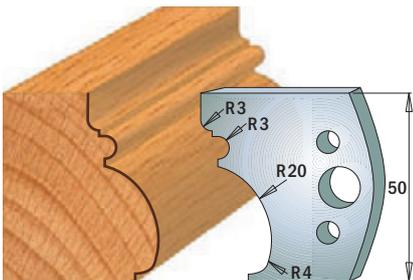

Pair of knives **690.501**
Pair of limiters **691.501**

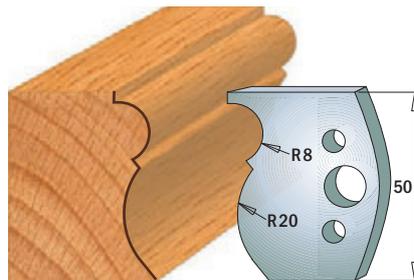

Pair of knives **690.502**
Pair of limiters **691.502**

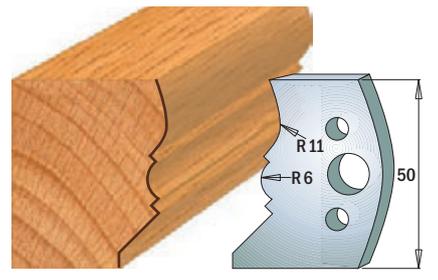

Pair of knives **690.503**
Pair of limiters **691.503**

Note: all knives and limiters only available in pairs

Drawings are 1:2 scale

Dimensions in mm.

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories


Display cabinets & spare parts

Profile knives and limiters


Cutting length=50mm Thickness=4mm




SP

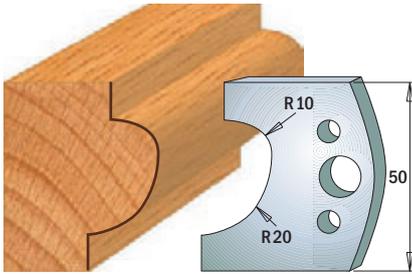


Pair of knives **690.504**
Pair of limiters **691.504**

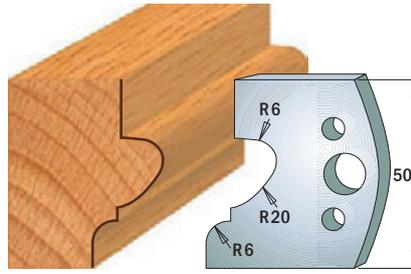


Pair of knives **690.505**
Pair of limiters **691.505**

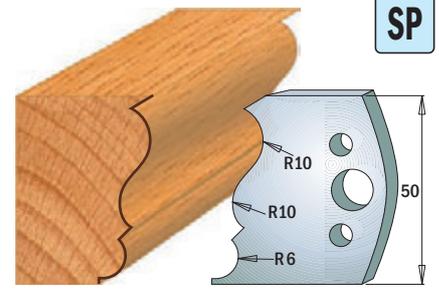


Pair of knives **690.506**
Pair of limiters **691.506**

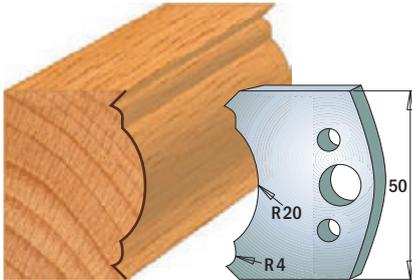


Pair of knives **690.507**
Pair of limiters **691.507**

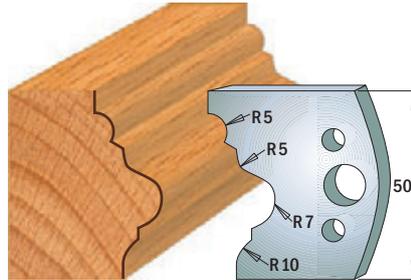


Pair of knives **690.508**
Pair of limiters **691.508**

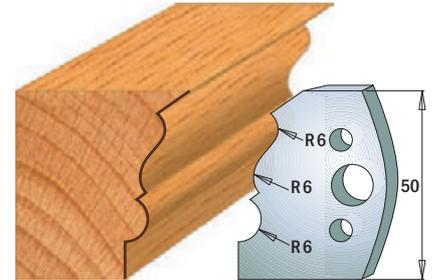


Pair of knives **690.509**
Pair of limiters **691.509**

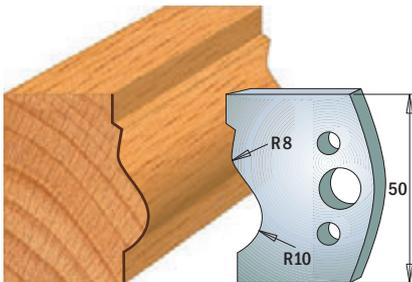


Pair of knives **690.510**
Pair of limiters **691.510**

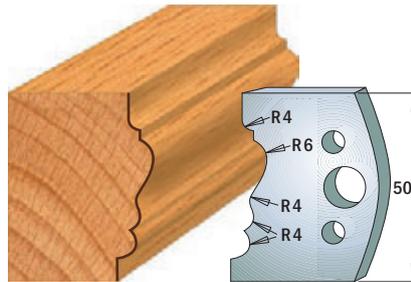


Pair of knives **690.511**
Pair of limiters **691.511**

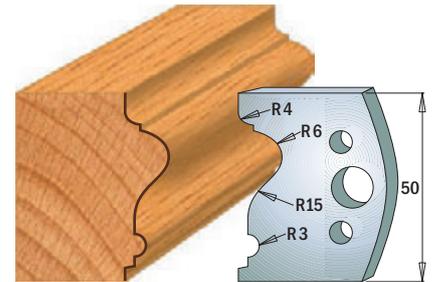


Pair of knives **690.512**
Pair of limiters **691.512**

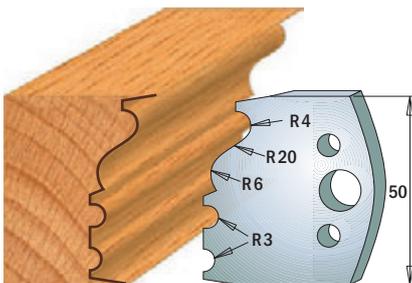


Pair of knives **690.513**
Pair of limiters **691.513**

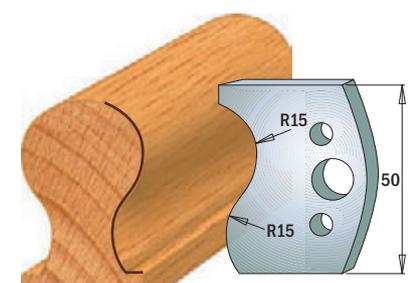


Pair of knives **690.514**
Pair of limiters **691.514**

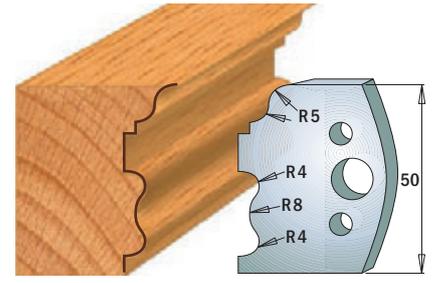


Pair of knives **690.515**
Pair of limiters **691.515**

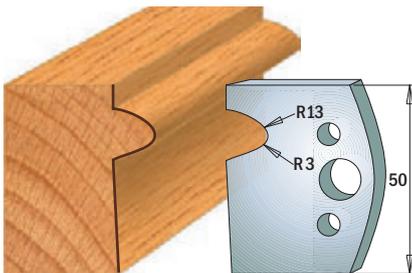

Pair of knives **690.516**
Pair of limiters **691.516**

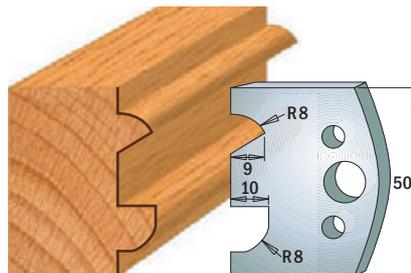

Pair of knives **690.517**
Pair of limiters **691.517**

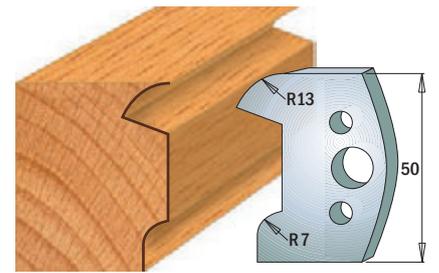

Pair of knives **690.518**
Pair of limiters **691.518**

Note: all knives and limiters only available in pairs

Drawings are 1:2 scale

Dimensions in mm.

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools


Power tools & accessories

Display cabinets & spare parts


Profile knives and limiters

Cutting length=50mm Thickness=4mm


SP

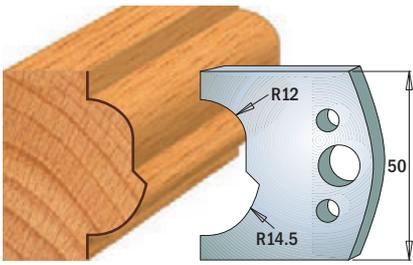


Pair of knives **690.519**
Pair of limiters **691.519**

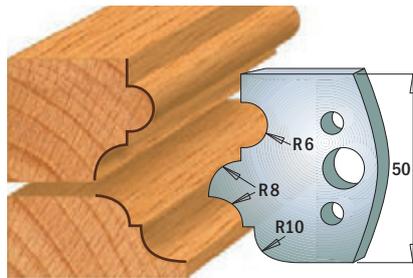


Pair of knives **690.520**
Pair of limiters **691.520**

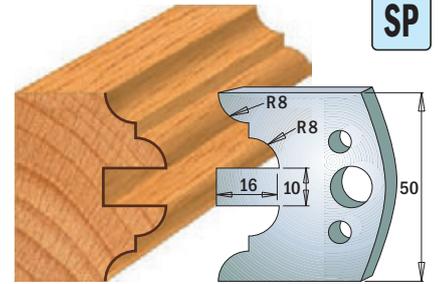


Pair of knives **690.522**
Pair of limiters **691.522**

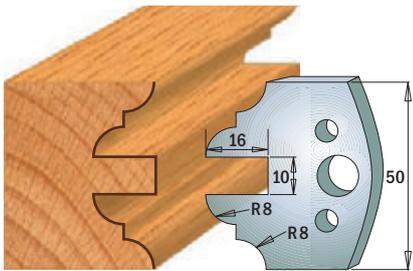


Pair of knives **690.523**
Pair of limiters **691.523**

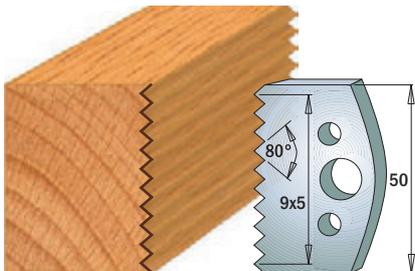


Pair of knives **690.524**
Pair of limiters **691.524**

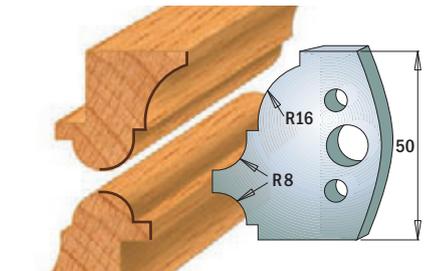


Pair of knives **690.541**
Pair of limiters **691.541**

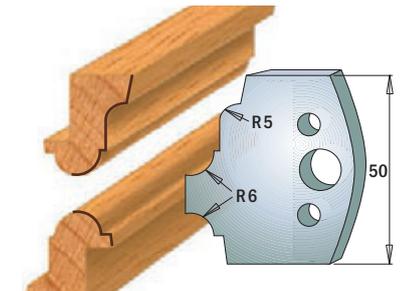


Pair of knives **690.542**
Pair of limiters **691.542**

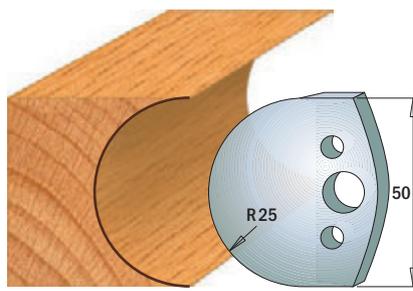


Pair of knives **690.543**
Pair of limiters **691.543**

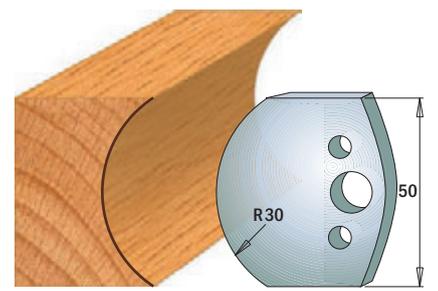


Pair of knives **690.544**
Pair of limiters **691.544**

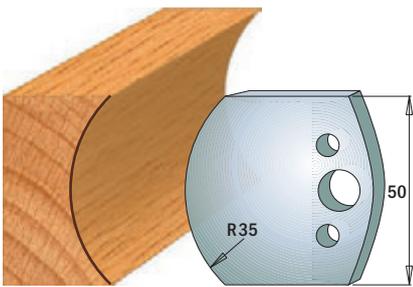


Pair of knives **690.545**
Pair of limiters **691.545**

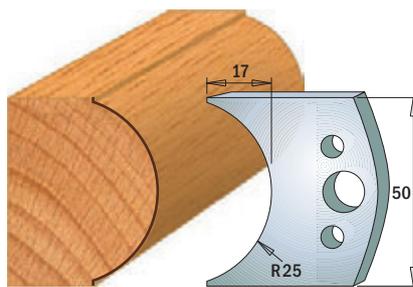


Pair of knives **690.546**
Pair of limiters **691.546**

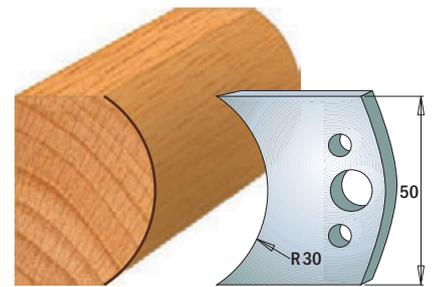


Pair of knives **690.547**
Pair of limiters **691.547**

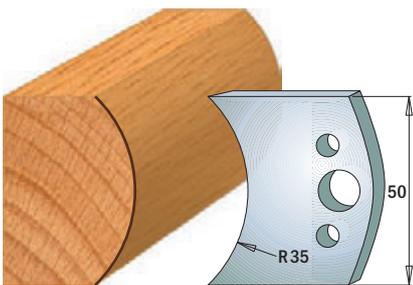

Pair of knives **690.548**
Pair of limiters **691.548**

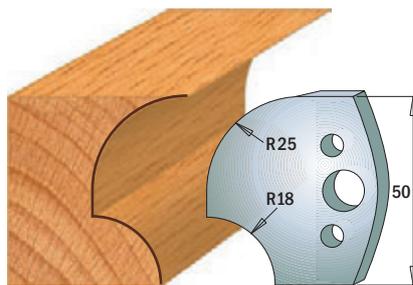

Pair of knives **690.549**
Pair of limiters **691.549**

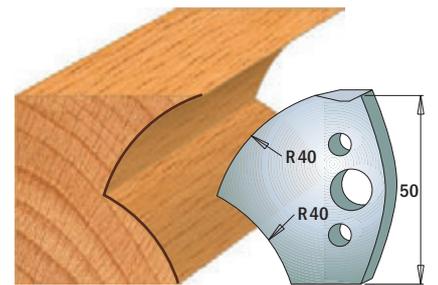

Pair of knives **690.550**
Pair of limiters **691.550**

Note: all knives and limiters only available in pairs

Drawings are 1:2 scale

Dimensions in mm.

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools


Power tools & accessories

Display cabinets & spare parts


Profile knives and limiters

Cutting length=50mm Thickness=4mm


SP

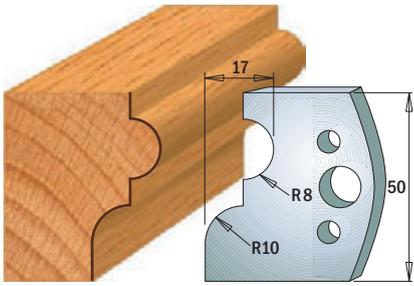


Pair of knives **690.551**
Pair of limiters **691.551**

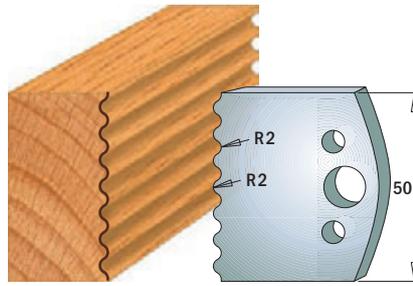


Pair of knives **690.552**
Pair of limiters **691.552**

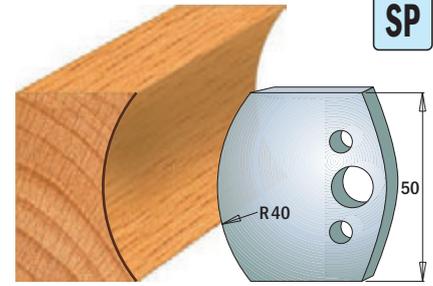


Pair of knives **690.553**
Pair of limiters **691.553**

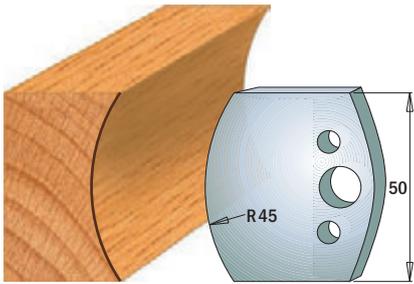


Pair of knives **690.554**
Pair of limiters **691.554**

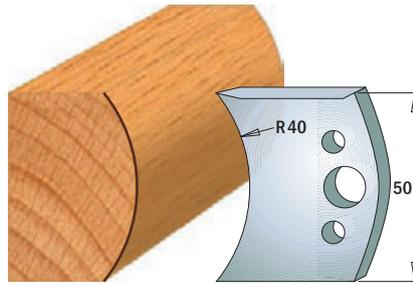


Pair of knives **690.555**
Pair of limiters **691.555**

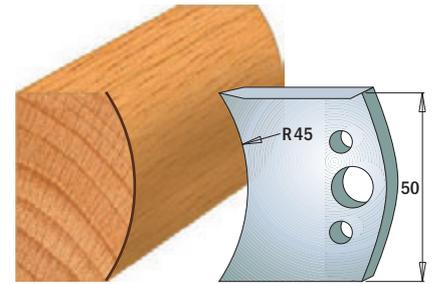


Pair of knives **690.556**
Pair of limiters **691.556**

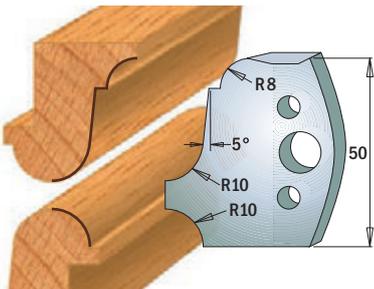


Pair of knives **690.557**
Pair of limiters **691.557**

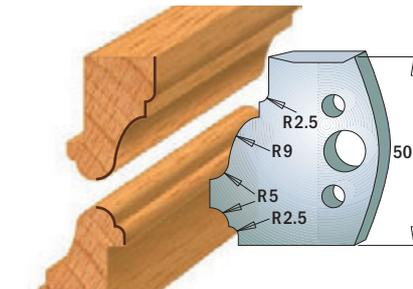


Pair of knives **690.558**
Pair of limiters **691.558**

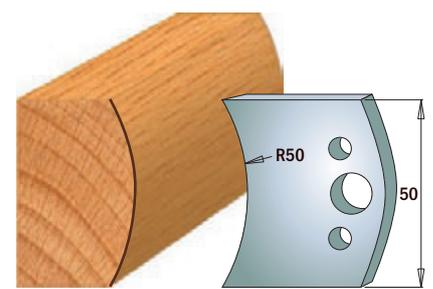


Pair of knives **690.559**
Pair of limiters **691.559**

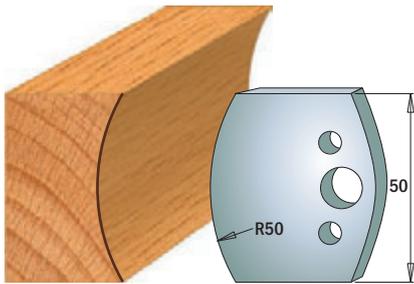


Pair of knives **690.560**
Pair of limiters **691.560**

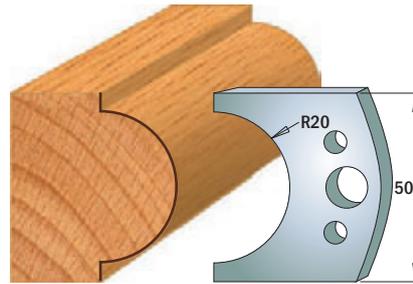


Pair of knives **690.561**
Pair of limiters **691.561**

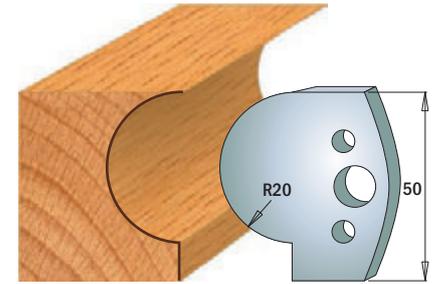


Pair of knives **690.562**
Pair of limiters **691.562**

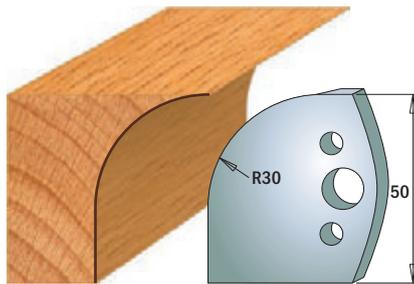

Pair of knives **690.563**
Pair of limiters **691.563**

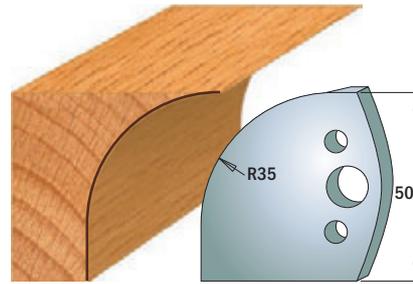

Pair of knives **690.564**
Pair of limiters **691.564**

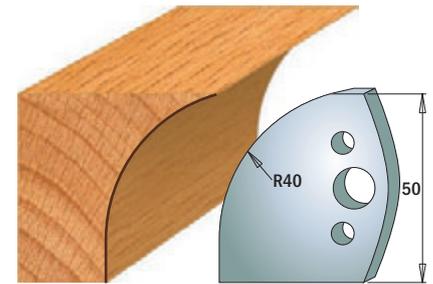

Pair of knives **690.565**
Pair of limiters **691.565**

Note: all knives and limiters only available in pairs

Drawings are 1:2 scale

Dimensions in mm.

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts

Profile knives and limiters

Cutting length=50mm Thickness=4mm

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets


CNC router cutter & chucks

Industrial dowel drills


Bits for hand power tools

Power tools & accessories


Display cabinets & spare parts

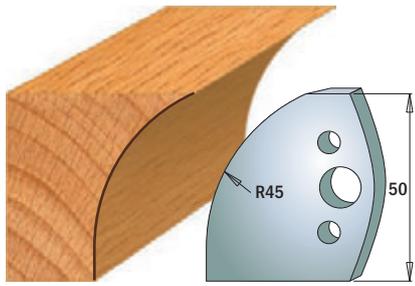


Pair of knives **690.566**
Pair of limiters **691.566**

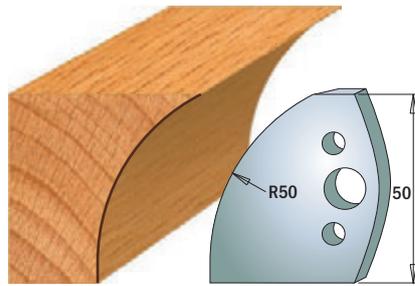


Pair of knives **690.567**
Pair of limiters **691.567**

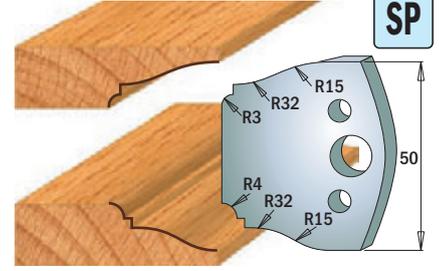


Pair of knives **690.568**
Pair of limiters **691.568**

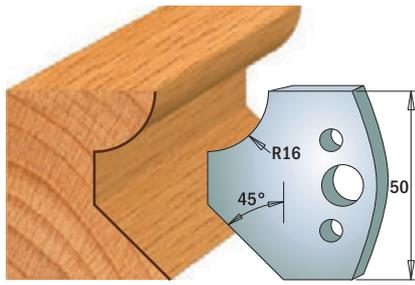


Pair of knives **690.569**
Pair of limiters **691.569**

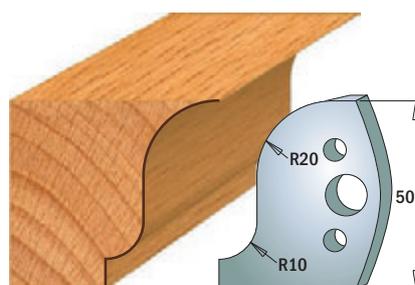


Pair of knives **690.570**
Pair of limiters **691.570**

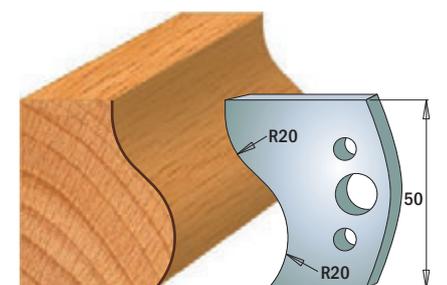


Pair of knives **690.571**
Pair of limiters **691.571**

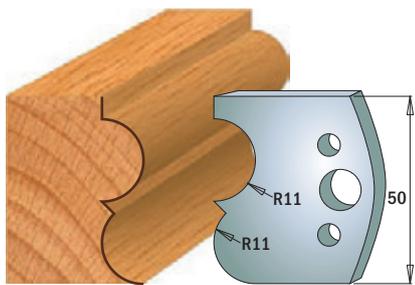


Pair of knives **690.572**
Pair of limiters **691.572**

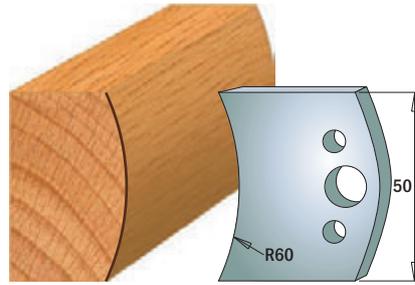


Pair of knives **690.573**
Pair of limiters **691.573**

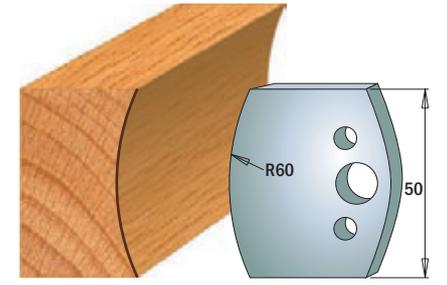


Pair of knives **690.574**
Pair of limiters **691.574**

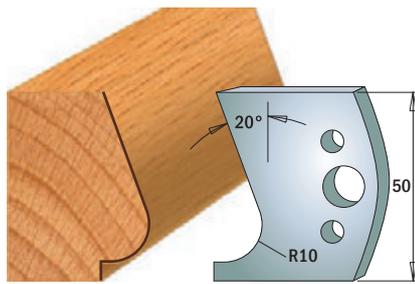


Pair of knives **690.575**
Pair of limiters **691.575**

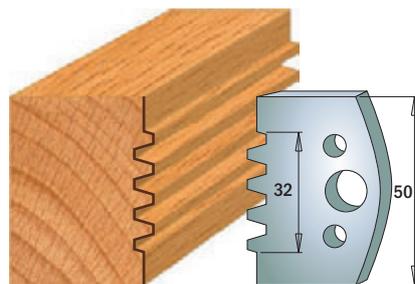


Pair of knives **690.576**
Pair of limiters **691.576**

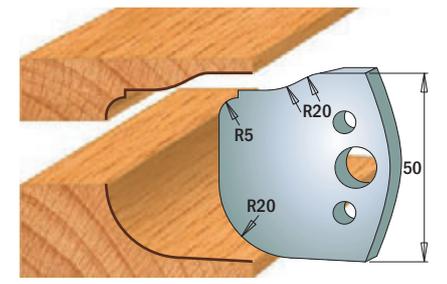


Pair of knives **690.577**
Pair of limiters **691.577**

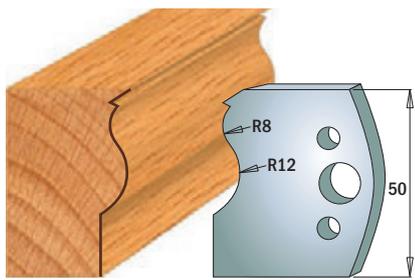

Pair of knives **690.578**
Pair of limiters **691.578**

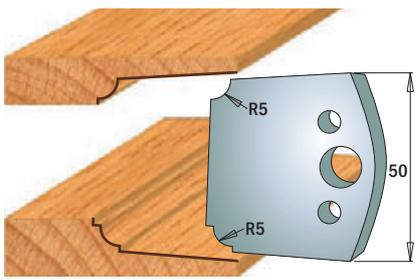

Pair of knives **690.579**
Pair of limiters **691.579**

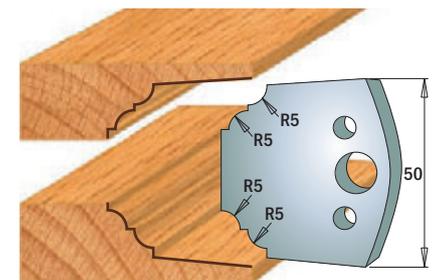


Pair of knives **690.580**
Pair of limiters **691.580**

Note: all knives and limiters only available in pairs

Drawings are 1:2 scale


Dimensions in mm.

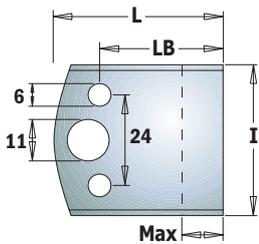

690-691

| DESCRIPTION | I mm | LB mm | L mm | Max mm | ORDER NO. |
|------------------------|------|-------|------|--------|----------------|
| Pair of knives | 40 | 32,5 | 44,5 | 18 | 690.193 |
| Pair of knives | 50 | 34 | 46 | 20 | 690.599 |
| Pair of blank limiters | 38 | 32,5 | 44,5 | 18 | 691.193 |
| Pair of blank limiters | 48 | 34 | 46 | 20 | 691.599 |

Pair of bore reducers

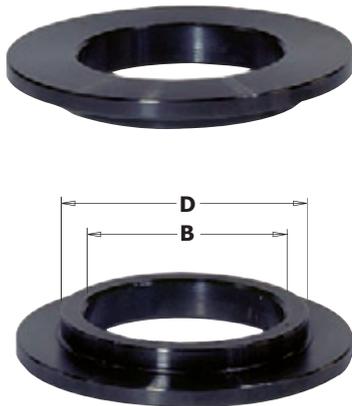


699

| D mm | B mm | ORDER NO. | D mm | B mm | ORDER NO. |
|-------|-------|-------------------|------|-------|-------------------|
| 19,05 | 12,7 | 699.019.13 | 35 | 31,75 | 699.035.31 |
| 25,4 | 19,05 | 699.026.19 | 40 | 30 | 699.040.30 |
| 30 | 19,05 | 699.030.19 | 40 | 32 | 699.040.32 |
| 30 | 25,4 | 699.030.26 | 40 | 35 | 699.040.35 |
| 31,75 | 19,05 | 699.031.19 | 50 | 30 | 699.050.30 |
| 31,75 | 25,4 | 699.031.26 | 50 | 32 | 699.050.32 |
| 31,75 | 30 | 699.031.30 | 50 | 35 | 699.050.35 |
| 35 | 30 | 699.035.30 | 50 | 40 | 699.050.40 |
| 35 | 32 | 699.035.32 | | | |

For use in pair only.

Chucks and "ER20" collets for spindle moulder machine

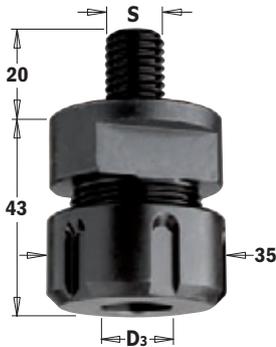

796

| S mm | D ₃ mm | L mm | ORDER NO. |
|----------|-------------------|------|-------------------|
| M12x1,75 | 3 ~ 12,7 | 43 | 796.122.00 |
| M14x2 | 3 ~ 12,7 | 43 | 796.142.00 |
| M16x2 | 3 ~ 12,7 | 43 | 796.162.00 |

Spare parts **992.483.03** M25x1,5mm clamping nut
991.483.00 "ER20" key

TECHNICAL DETAILS:
 Super strength steel.
 Precisely machined for accuracy.

Collet not included.

"ER20" precision collets for 796.122/142/162 items



184


| D ₃ mm | ORDER NO. | D ₃ mm | ORDER NO. |
|-------------------|-------------------|-------------------|-------------------|
| 3 | 184.030.20 | 8 | 184.080.20 |
| 5 | 184.050.20 | 10 | 184.100.20 |
| 6 | 184.060.20 | 12 | 184.120.20 |
| 6,35 | 184.064.20 | 12,7 | 184.127.20 |

new

HS corrugated back moulder knives

HS

793

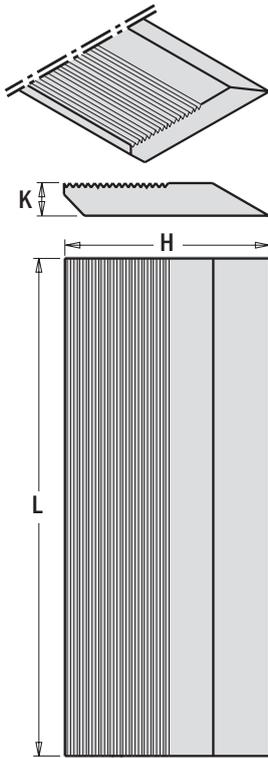


IN QUADROPACK PACKAGING

| L mm | H mm | K mm | Knives pieces for each set | ORDER NO. HS 6%W |
|--------------|---------|---------|-------------------------------|---------------------|
| 40 x 50 x 8 | | | 4 | 793.040.50 |
| 40 x 60 x 8 | | | 4 | 793.040.60 |
| 40 x 70 x 8 | | | 4 | 793.040.70 |
| 60 x 50 x 8 | | | 4 | 793.060.50 |
| 60 x 60 x 8 | | | 4 | 793.060.60 |
| 60 x 70 x 8 | | | 4 | 793.060.70 |
| 80 x 50 x 8 | | | 4 | 793.080.50 |
| 80 x 60 x 8 | | | 4 | 793.080.60 |
| 80 x 70 x 8 | | | 4 | 793.080.70 |
| 100 x 50 x 8 | | | 4 | 793.100.50 |
| 100 x 60 x 8 | | | 4 | 793.100.60 |
| 100 x 70 x 8 | | | 4 | 793.100.70 |
| 120 x 50 x 8 | | | 4 | 793.120.50 |
| 120 x 60 x 8 | | | 4 | 793.120.60 |
| 120 x 70 x 8 | | | 4 | 793.120.70 |
| 130 x 60 x 8 | | | 4 | 793.130.60 |
| 130 x 70 x 8 | | | 4 | 793.130.70 |
| 650 x 40 x 8 | | | 4 | 793.650.40 |
| 650 x 50 x 8 | | | 4 | 793.650.50 |
| 650 x 60 x 8 | | | 4 | 793.650.60 |
| 650 x 70 x 8 | | | 4 | 793.650.70 |

REMARK: special dimensions available on request.

TECHNICAL DETAILS:

Corrugated back moulder knives for profile cutter heads with precise positioning, angle 60°, pitch 1,6mm.

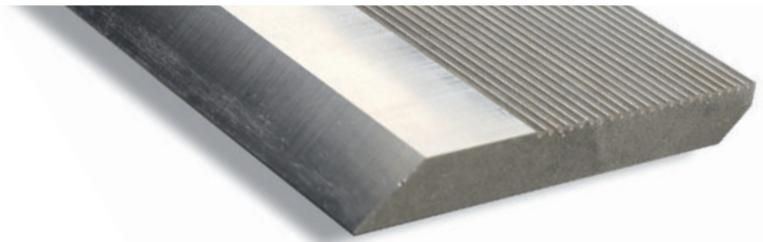

| MATERIAL | HS 6% W |
|--------------|---------|
| Dry softwood | ● |
| Wet softwood | ● |
| Dry hardwood | ● |
| Wet hardwood | ○ |

- Suitable
- Party suitable

Set of 2 magnetic knife setting jigs

CMT792


Insert your knives into your tool holders and align them perfectly with this set! Perfect micro adjustments on your knives will guarantee excellent cutting performance!

1. MAGNETIC STOP
2. JOINTS WITH MAGNETIC CONNECTORS
3. LOCK SCREW



Supplied in a solid wooden box




2 setup possibilities

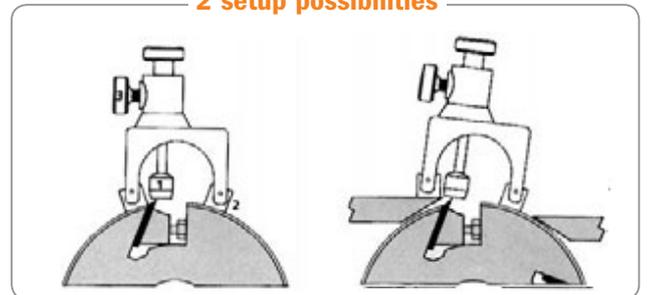

Positioning on the tool holder body with detection of the knife position.

Direct positioning on both the planer table and the tool holder body with detection of the knife position.

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

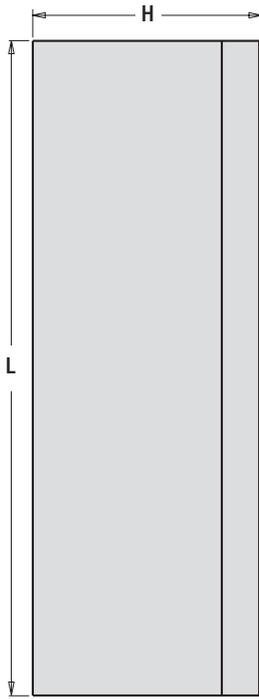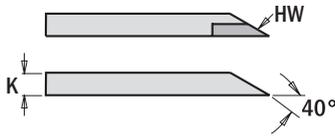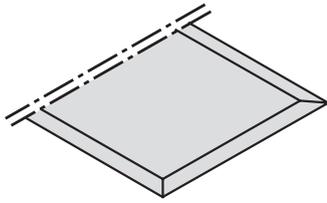

IN QUADROPACK PACKAGING

792




| L mm | H mm | K mm | KNIVES pieces for each set | ORDER NO. HS 6%W | ORDER NO. HS 18%W | ORDER NO. HW |
|---------|---------|---------|-------------------------------|---------------------|----------------------|-----------------|
| 120 | x 30 | x 3 | 2 | | 792.120.30 | |
| 130 | x 30 | x 3 | 2 | 792.131.30 | 792.130.30 | 792.132.30 |
| 150 | x 30 | x 3 | 2 | | 792.150.30 | |
| 180 | x 30 | x 3 | 2 | 792.181.30 | 792.180.30 | 792.182.30 |
| 200 | x 30 | x 3 | 2 | 792.201.30 | 792.200.30 | |
| 210 | x 30 | x 3 | 2 | 792.211.30 | 792.210.30 | |
| 230 | x 30 | x 3 | 2 | 792.231.30 | 792.230.30 | 792.232.30 |
| 250 | x 30 | x 3 | 2 | 792.251.30 | 792.250.30 | 792.252.30 |
| 260 | x 30 | x 3 | 2 | 792.261.30 | 792.260.30 | 792.262.30 |
| 300 | x 30 | x 3 | 2 | 792.301.30 | 792.300.30 | 792.302.30 |
| 310 | x 30 | x 3 | 2 | 792.311.30 | 792.310.30 | 792.312.30 |
| 350 | x 30 | x 3 | 2 | 792.351.30 | 792.350.30 | 792.352.30 |
| 400 | x 30 | x 3 | 2 | 792.401.30 | 792.400.30 | 792.402.30 |
| 410 | x 30 | x 3 | 2 | 792.411.30 | 792.410.30 | 792.412.30 |
| 430 | x 30 | x 3 | 2 | 792.431.30 | 792.430.30 | 792.432.30 |
| 450 | x 30 | x 3 | 2 | 792.451.30 | 792.450.30 | 792.452.30 |
| 500 | x 30 | x 3 | 2 | 792.501.30 | 792.500.30 | 792.502.30 |
| 510 | x 30 | x 3 | 2 | 792.511.30 | 792.510.30 | 792.512.30 |
| 520 | x 30 | x 3 | 2 | 792.521.30 | 792.520.30 | 792.522.30 |
| 530 | x 30 | x 3 | 2 | 792.531.30 | 792.530.30 | 792.532.30 |
| 600 | x 30 | x 3 | 2 | 792.601.30 | 792.600.30 | 792.602.30 |
| 610 | x 30 | x 3 | 2 | 792.611.30 | 792.610.30 | 792.612.30 |
| 630 | x 30 | x 3 | 2 | 792.631.30 | 792.630.30 | 792.632.30 |
| 640 | x 30 | x 3 | 2 | | 792.640.30 | |
| 710 | x 30 | x 3 | 2 | | 792.710.30 | |
| 810 | x 30 | x 3 | 2 | 792.811.30 | 792.810.30 | 792.812.30 |
| 1050 | x 30 | x 3 | 2 | 792.998.30 | 792.997.30 | 792.999.30 |
| | | | | | | |
| 300 | x 35 | x 3 | 2 | | 792.300.35 | |
| 310 | x 35 | x 3 | 2 | 792.311.35 | | |
| 350 | x 35 | x 3 | 2 | 792.351.35 | 792.350.35 | |
| 400 | x 35 | x 3 | 2 | 792.401.35 | 792.400.35 | |
| 410 | x 35 | x 3 | 2 | 792.411.35 | 792.410.35 | |
| 430 | x 35 | x 3 | 2 | | 792.430.35 | |
| 450 | x 35 | x 3 | 2 | 792.451.35 | 792.450.35 | |
| 500 | x 35 | x 3 | 2 | 792.501.35 | 792.500.35 | |
| 510 | x 35 | x 3 | 2 | 792.511.35 | 792.510.35 | |
| 520 | x 35 | x 3 | 2 | 792.521.35 | 792.520.35 | |
| 530 | x 35 | x 3 | 2 | 792.531.35 | 792.530.35 | |
| 550 | x 35 | x 3 | 2 | 792.551.35 | | |
| 600 | x 35 | x 3 | 2 | 792.601.35 | 792.600.35 | |
| 610 | x 35 | x 3 | 2 | 792.611.35 | 792.610.35 | |
| 630 | x 35 | x 3 | 2 | 792.631.35 | 792.630.35 | |
| 650 | x 35 | x 3 | 2 | 792.651.35 | | |
| 710 | x 35 | x 3 | 2 | | 792.710.35 | |
| 810 | x 35 | x 3 | 2 | 792.811.35 | 792.810.35 | |
| 820 | x 35 | x 3 | 2 | 792.821.35 | | |
| 1050 | x 35 | x 3 | 2 | 792.998.35 | 792.997.35 | |

| MATERIAL | HS 6%W | HS 18%W | HW |
|---------------|-----------|------------|----|
| Dry softwood | ● | ● | |
| Wet softwood | ● | ○ | |
| Dry hardwood | ○ | ● | ● |
| Wet hardwood | ○ | ● | ○ |
| Chipboard | | | ○ |
| MDF | | | ○ |
| Glulam | | ○ | ● |
| Solid surface | | | ○ |

- Suitable
- Party suitable


REMARK: special dimensions available on request.

The mirror finish on HW knives produces both razor sharp and extremely durable cutting edges.

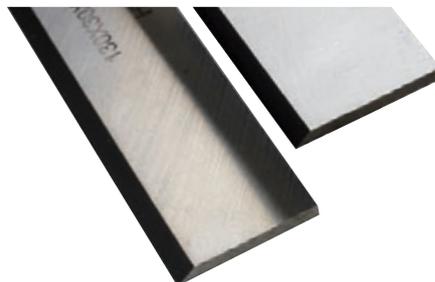


Planer and jointer knives


TERSA

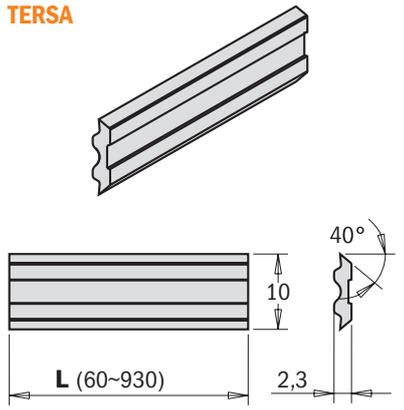

**CENTROSTAR
CENTROFIX
QUICKFIX**

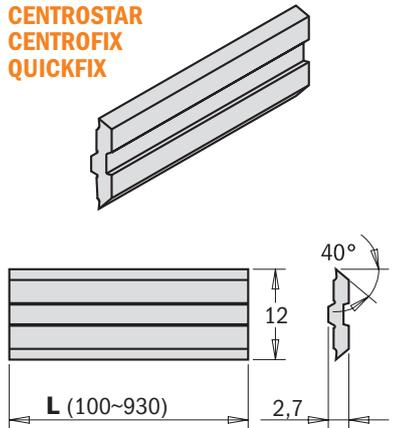

CENTROLOCK

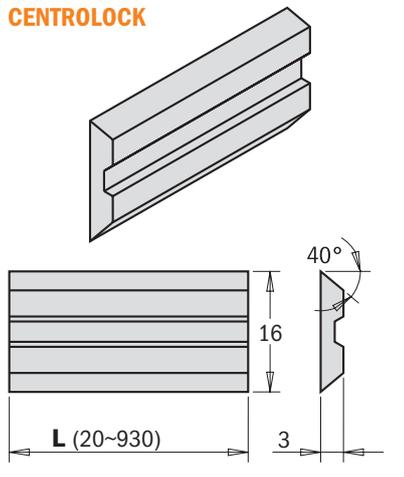

2 KNIVES FOR EACH SET

795

| TERSA | | | | CENTROSTAR, CENTROFIX, QUICKFIX | | | | CENTROLOCK | | | |
|----------------|----|----|-------------------|---------------------------------|----|----|-------------------|--------------|----|----|-------------------|
| L | H | K | ORDER NO. | L | H | K | ORDER NO. | L | H | K | ORDER NO. |
| mm | mm | mm | | mm | mm | mm | | mm | mm | mm | |
| 60 x 10 x 2,3 | | | 795.060.10 | | | | | 20 x 16 x 3 | | | 795.020.16 |
| 80 x 10 x 2,3 | | | 795.080.10 | | | | | 60 x 16 x 3 | | | 795.060.16 |
| 100 x 10 x 2,3 | | | 795.100.10 | 100 x 12 x 2,7 | | | 795.100.12 | 80 x 16 x 3 | | | 795.080.16 |
| 110 x 10 x 2,3 | | | 795.110.10 | 110 x 12 x 2,7 | | | 795.110.12 | 100 x 16 x 3 | | | 795.100.16 |
| 120 x 10 x 2,3 | | | 795.120.10 | 120 x 12 x 2,7 | | | 795.120.12 | | | | |
| 130 x 10 x 2,3 | | | 795.130.10 | 130 x 12 x 2,7 | | | 795.130.12 | 130 x 16 x 3 | | | 795.130.16 |
| | | | | 140 x 12 x 2,7 | | | 795.140.12 | | | | |
| 150 x 10 x 2,3 | | | 795.150.10 | 150 x 12 x 2,7 | | | 795.150.12 | 150 x 16 x 3 | | | 795.150.16 |
| | | | | 160 x 12 x 2,7 | | | 795.160.12 | | | | |
| 170 x 10 x 2,3 | | | 795.170.10 | 170 x 12 x 2,7 | | | 795.170.12 | 170 x 16 x 3 | | | 795.170.16 |
| 180 x 10 x 2,3 | | | 795.180.10 | 180 x 12 x 2,7 | | | 795.180.12 | 180 x 16 x 3 | | | 795.180.16 |
| | | | | 190 x 12 x 2,7 | | | 795.190.12 | 190 x 16 x 3 | | | 795.190.16 |
| | | | | 200 x 12 x 2,7 | | | 795.200.12 | | | | |
| 210 x 10 x 2,3 | | | 795.210.10 | 210 x 12 x 2,7 | | | 795.210.12 | 210 x 16 x 3 | | | 795.210.16 |
| | | | | 220 x 12 x 2,7 | | | 795.220.12 | | | | |
| 230 x 10 x 2,3 | | | 795.230.10 | 230 x 12 x 2,7 | | | 795.230.12 | 230 x 16 x 3 | | | 795.230.16 |
| | | | | | | | | 235 x 16 x 3 | | | 795.235.16 |
| | | | | 240 x 12 x 2,7 | | | 795.240.12 | 240 x 16 x 3 | | | 795.240.16 |
| 250 x 10 x 2,3 | | | 795.250.10 | 250 x 12 x 2,7 | | | 795.250.12 | | | | |
| 260 x 10 x 2,3 | | | 795.260.10 | 260 x 12 x 2,7 | | | 795.260.12 | 260 x 16 x 3 | | | 795.260.16 |
| | | | | 270 x 12 x 2,7 | | | 795.270.12 | 270 x 16 x 3 | | | 795.270.16 |
| 280 x 10 x 2,3 | | | 795.280.10 | 280 x 12 x 2,7 | | | 795.280.12 | | | | |
| 300 x 10 x 2,3 | | | 795.300.10 | 300 x 12 x 2,7 | | | 795.300.12 | | | | |
| 310 x 10 x 2,3 | | | 795.310.10 | 310 x 12 x 2,7 | | | 795.310.12 | 310 x 16 x 3 | | | 795.310.16 |
| 330 x 10 x 2,3 | | | 795.330.10 | | | | | | | | |
| 350 x 10 x 2,3 | | | 795.350.10 | 350 x 12 x 2,7 | | | 795.350.12 | | | | |
| 360 x 10 x 2,3 | | | 795.360.10 | 360 x 12 x 2,7 | | | 795.360.12 | | | | |
| 400 x 10 x 2,3 | | | 795.400.10 | 400 x 12 x 2,7 | | | 795.400.12 | | | | |
| 410 x 10 x 2,3 | | | 795.410.10 | 410 x 12 x 2,7 | | | 795.410.12 | | | | |
| 420 x 10 x 2,3 | | | 795.420.10 | 420 x 12 x 2,7 | | | 795.420.12 | | | | |
| 430 x 10 x 2,3 | | | 795.430.10 | 430 x 12 x 2,7 | | | 795.430.12 | | | | |
| 450 x 10 x 2,3 | | | 795.450.10 | 450 x 12 x 2,7 | | | 795.450.12 | | | | |
| | | | | | | | | 460 x 16 x 3 | | | 795.460.16 |
| | | | | 480 x 12 x 2,7 | | | 795.480.12 | | | | |
| 500 x 10 x 2,3 | | | 795.500.10 | | | | | | | | |
| 510 x 10 x 2,3 | | | 795.510.10 | 510 x 12 x 2,7 | | | 795.510.12 | | | | |
| 520 x 10 x 2,3 | | | 795.520.10 | 520 x 12 x 2,7 | | | 795.520.12 | | | | |
| 530 x 10 x 2,3 | | | 795.530.10 | 530 x 12 x 2,7 | | | 795.530.12 | | | | |
| 540 x 10 x 2,3 | | | 795.540.10 | | | | | | | | |
| 610 x 10 x 2,3 | | | 795.610.10 | 610 x 12 x 2,7 | | | 795.610.12 | | | | |
| | | | | 620 x 12 x 2,7 | | | 795.620.12 | | | | |
| 630 x 10 x 2,3 | | | 795.630.10 | 630 x 12 x 2,7 | | | 795.630.12 | | | | |
| 635 x 10 x 2,3 | | | 795.635.10 | | | | | | | | |
| 640 x 10 x 2,3 | | | 795.640.10 | 640 x 12 x 2,7 | | | 795.640.12 | | | | |
| 650 x 10 x 2,3 | | | 795.650.10 | 650 x 12 x 2,7 | | | 795.650.12 | 650 x 16 x 3 | | | 795.650.16 |
| 710 x 10 x 2,3 | | | 795.710.10 | 710 x 12 x 2,7 | | | 795.710.12 | | | | |
| | | | | 810 x 12 x 2,7 | | | 795.810.12 | | | | |
| 860 x 10 x 2,3 | | | 795.860.10 | | | | | | | | |
| 910 x 10 x 2,3 | | | 795.910.10 | | | | | | | | |
| 930 x 10 x 2,3 | | | 795.930.10 | 930 x 12 x 2,7 | | | 795.930.12 | 930 x 16 x 3 | | | 795.930.16 |

REMARK: special dimensions available on request.


TECHNICAL DETAILS:

HPS® is especially developed for the woodworking industry. Through the cooperation with the Thyssen-Krupp heat treatment division developed special heat treatment in modern high vacuum oven gets this steel its special attributes wich makes it to a real alternative to the HSS steels. The main advantages are:


- superb wear resistance
- maximum level of toughness
- resistance to softening
- easy to profile
- long lasting tested

A test result: Wood=Oak, Spinadle speed=6000 rpm, feed=24 meter/min
 = Result HPS® 17500 meters.
 = Result HSS 10000 meters.

| MATERIAL | GOOD | EXCELLENT |
|-----------------|------|-----------|
| Dry Softwood | | ● |
| Wet Softwood | | ● |
| Dry Hardwood | | ● |
| Wet Hardwood | | ● |
| Exotic Hardwood | ● | |

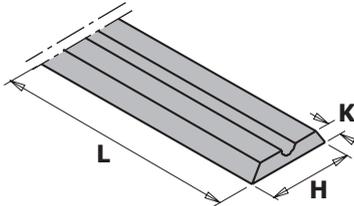

10-PCS. CASE

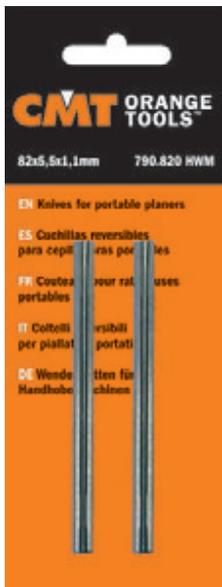

2-PCS. BLISTER CASE
(790.780/790.805/790.820)

790

| L mm | H mm | K mm | MACHINE | MODEL MACHINE | ORDER NO. 2 pcs. blister case | ORDER NO. 10 pcs. blister case |
|-------------------|---------|---------|----------------|--|----------------------------------|-----------------------------------|
| 56,0 x 5,5 x 1,1 | | | Adler | | | 790.560.00 |
| 60,0 x 5,5 x 1,1 | | | Wegoma | | | 790.600.01 |
| 75,5 x 5,5 x 1,1 | | | Aeg | HTH75 | 790.755 | 790.755.00 |
| | | | Black & Decker | DN75, 750SR, 600K | | |
| | | | Bosch | 0590, P400, 1590,1591 | | |
| | | | Festo | REP75 | | |
| | | | Haffner | FH222 | | |
| | | | Holz-Her | 2223, 2286, 2320 | | |
| | | | Kress | Jet-Star 6701, 6702 | | |
| | | | Mafell | HU75 | | |
| | | | Metabo | 6375 | | |
| | | | Scheer | MH75/3, MH80 | | |
| | | | Skil | 98H | | |
| 78,0 x 5,5 x 1,1 | | | Virutex | | 790.780 | 790.780.00 |
| 80,5 x 5,9 x 1,2 | | | Elu | MFF40, MFF80, MFF81, MFF81EK, PF161 | 790.806 | 790.805.00 |
| 80,5 x 5,5 x 1,1 | | | Elu | MFF80 | 790.805 | 790.805.01 |
| | | | Aeg | | | |
| | | | Bosch | | | |
| | | | Haffner | | | |
| 82,0 x 5,5 x 1,1 | | | Aeg | EH82, EH825, EH822, EH450, EH700, EH82-1, H500, H750, EH700R | 790.820 | 790.820.00 |
| | | | Black & Decker | DN76 | | |
| | | | Bosch | PHO 100/150, PHO 200/300 4387, PHO 2-82/3-82, Gustav, H00882 | | |
| | | | Casals | CE82 | | |
| | | | DeWalt | DW678, DW678EK, DW680 | | |
| | | | Elu | HH15, HH40, HH40K, HH40EK | | |
| | | | Fein | HS2151 | | |
| | | | Felisatti | TP282 | | |
| | | | Haffner | FH224 | | |
| | | | Hitachi | F20, F20A, FP20A, P20V, P20SA | | |
| | | | Holz-Her | 2321, 2322 | | |
| | | | Legna | R82, G82 | | |
| | | | Mafell | EHU82, MHU82 | | |
| | | | Makita | 1001, 1100, 1125B, 1900B, 1901, 1923B, 1923H, 1923HO | | |
| | | | Metabo | 4382, 8382, 0882, 0883, E0983 | | |
| | | | Perless | HHB82B | | |
| | | | Peugeot | RA400, 82RAC, RA82CS, BR82 BRA1-82, BRA3-82, RA1082CA | | |
| | | | Ryobi | L1323-A | | |
| | | | Skil | H92, H94, H95, H96, H97 1506, 1510 | | |
| | | | Stayer | 980B | | |
| 92,0 x 5,5 x 1,2 | | | Aeg | 450 | | 790.920.00 |
| | | | Hitachi | F30A, FU30 | | |
| | | | Ryobi | L120N, L150N, L1205N, L1323 | | |
| 102,0 x 5,5 x 1,1 | | | Aeg | HB750, EH102, HBE800 | | 790.992.00 |

TECHNICAL DETAILS:

- Order no. ISO: K40
- Hardness (HV10): 1.400
- Transverse rupture strength (N/mm²): 2.600

APPLICATION:

- Soft wood Good
- Hard wood Suitable
- Plywood Suitable



HWM reversible knives

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets








CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts

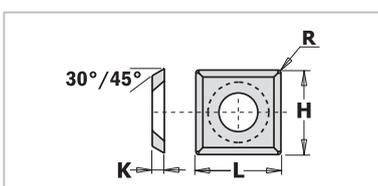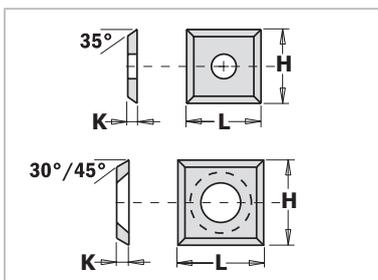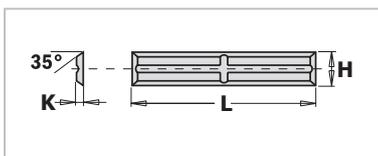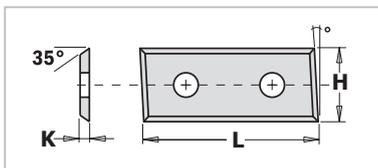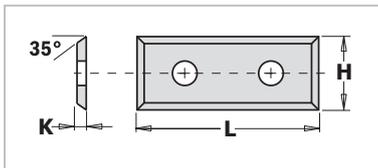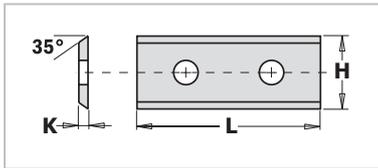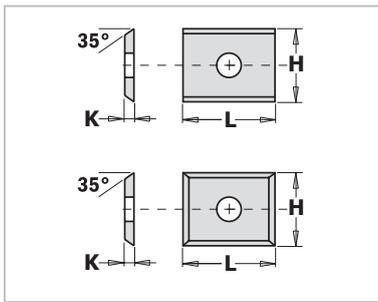

790 Standard reversible knives 2 cutting edges

| L mm | H mm | K mm | A | F1730 | S2020 | U2300 | N2550 |
|-----------------|---------|---------|-------|-------------------|-------------------|-------------------|-------|
| 7,5 | 12 | 1,5 | 35° | 790.075.00 | | | |
| 7,65 | 12 | 1,5 | 35° | 790.076.00 | | | |
| 9,6 | 12 | 1,5 | 35° | 790.096.00 | | | |
| 15 | 12 | 1,5 | 35° | 790.150.00 | | | |
| new 19,5 | 12 | 1,5 | 4/35° | 790.195.12 | | | |
| 20 | 12 | 1,5 | 35° | 790.200.00 | 790.200.02 | 790.200.03 | |

790 Standard reversible knives 2 cutting edges

| L mm | H mm | K mm | A | F1730 | S2020 | U2300 | N2550 |
|---------|---------|---------|-----|-------------------|-------------------|-------------------|-------------------|
| 24,7 | 12 | 1,5 | 35° | 790.250.00 | | | |
| 30 | 12 | 1,5 | 35° | 790.300.00 | 790.300.02 | 790.300.03 | 790.300.04 |
| 30 | 12 | 1,5 | 45° | | 790.300.20 | | |
| 40 | 12 | 1,5 | 35° | 790.400.00 | 790.400.02 | 790.400.03 | |
| 50 | 12 | 1,5 | 35° | 790.500.00 | 790.500.02 | 790.500.03 | 790.500.04 |
| 60 | 12 | 1,5 | 35° | 790.600.00 | | 790.600.03 | |

790 Standard reversible knives 4 cutting edges

| L mm | H mm | K mm | A | F1730 | S2020 | U2300 | N2550 |
|-----------------|---------|---------|-----|-------------------|-------|-------|-------|
| 29,5 | 9 | 1,5 | 35° | 790.295.09 | | | |
| 29,5 | 12 | 1,5 | 35° | 790.295.12 | | | |
| new 39,5 | 9 | 1,5 | 35° | 790.395.09 | | | |
| new 39,5 | 12 | 1,5 | 35° | 790.395.12 | | | |
| 49,5 | 9 | 1,5 | 35° | 790.495.09 | | | |
| 49,5 | 12 | 1,5 | 35° | 790.495.12 | | | |

790 Standard reversible knives 4 cutting edges

| L mm | H mm | K mm | A | F1730 | S2020 | U2300 | N2550 |
|---------|---------|---------|-----|-------------------|-------|-------|-------|
| 28,3 | 12 | 1,5 | 35° | 790.283.12 | | | |
| 48,3 | 12 | 1,5 | 35° | 790.483.12 | | | |

790 Standard reversible knives 4 cutting edges


| L mm | H mm | K mm | A | F1730 | S2020 | U2300 | N2550 |
|---------|---------|---------|-----|-------------------|-------|-------|-------|
| 20 | 4,1 | 1,1 | 35° | 790.200.01 | | | |
| 30 | 5,5 | 1,1 | 35° | 790.300.01 | | | |
| 50 | 5,5 | 1,1 | 35° | 790.500.01 | | | |

790 Standard reversible knives 4 cutting edges

| L mm | H mm | K mm | A | F1730 | S2020 | U2300 | N2550 |
|-----------------|---------|---------|-----|-------------------|-------------------|-------------------|-------|
| 12 | 12 | 1,5 | 35° | 790.120.00 | 790.120.02 | 790.120.03 | |
| new 13,6 | 13,6 | 2 | 30° | 790.136.00 | | | |
| 14 | 14 | 1,2 | 30° | 790.140.10 | | | |
| 14 | 14 | 2 | 30° | 790.140.00 | | 790.140.03 | |
| 14 | 14 | 2 | 45° | | 790.140.02 | | |

790 Standard reversible knives 4 cutting edges


| L mm | H mm | K mm | A | F1730 | S2020 | U2300 | N2550 |
|---------------|---------|---------|-------|-------------------|-------|-------|-------|
| new 14 | 14 | 2 | R/30° | 790.140.20 | | | |

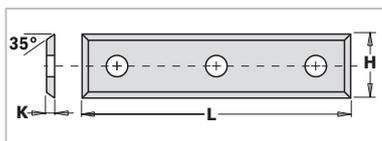

790 Standard reversible knives 4 cutting edges




| L mm | H mm | K mm | A | ORDER NO. | | | |
|---------|---------|---------|-----|-------------------|--------------|--------------|--------------|
| 50 | 9 | 1,5 | 35° | F1730 | S2020 | U2300 | N2550 |
| | | | | 790.500.09 | | | |

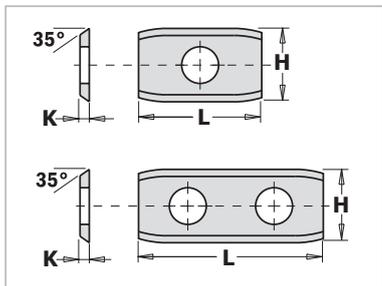


790 Standard reversible knives 2 cutting edges

| L mm | H mm | K mm | A | ORDER NO. | | | |
|---------|---------|---------|-----|-------------------|--------------|--------------|--------------|
| 20 | 12 | 1,5 | 35° | F1730 | S2020 | U2300 | N2550 |
| 30 | 12 | 1,5 | 35° | 790.201.00 | | | |
| 50 | 12 | 1,5 | 35° | 790.301.00 | | | |
| | | | | 790.501.00 | | | |

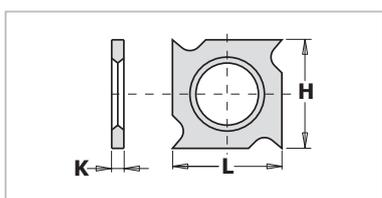


790 Standard reversible knives 4 cutting edges

| L mm | H mm | K mm | A | ORDER NO. | | | |
|---------|---------|---------|---|-------------------|--------------|--------------|--------------|
| 18 | 18 | 1,95 | | F1730 | S2020 | U2300 | N2550 |
| | | | | 790.181.00 | | | |
| 18 | 18 | 2,45 | | 790.182.00 | | | |

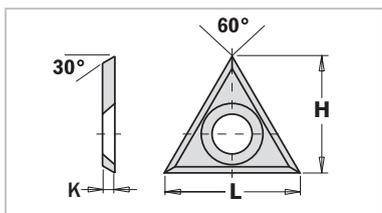


790 Standard reversible knives 30°

| L mm | H mm | K mm | A | ORDER NO. | | | |
|---------|---------|---------|-----|-------------------|--------------|--------------|--------------|
| 22 | 19 | 2 | 30° | F1730 | S2020 | U2300 | N2550 |
| | | | | 790.220.02 | | | |

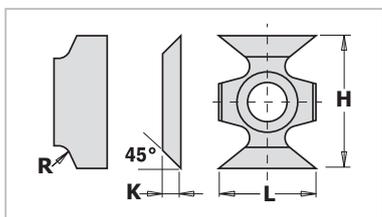

790 Edge rounding/chamfering reversible knives

| L mm | H mm | K mm | R mm | A | ORDER NO. | | | |
|---------|---------|---------|---------|-----|-------------------|--------------|--------------|--------------|
| 16 | 22 | 5 | 1,5 | | F1730 | S2020 | U2300 | N2550 |
| | | | | | 790.161.00 | | | |
| 16 | 22 | 5 | 2 | | 790.162.00 | | | |
| 16 | 22 | 5 | 3 | | 790.163.00 | | | |
| 16 | 22 | 5 | | 45° | 790.160.00 | | | |

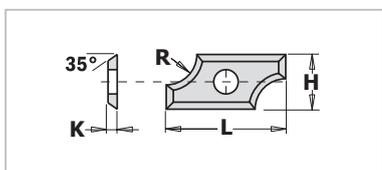

790 Profiled rounding reversible knives 4 cutting edges

| L mm | H mm | K mm | R mm | A | ORDER NO. | | | |
|---------|---------|---------|---------|-----|-------------------|--------------|--------------|--------------|
| 19,5 | 9 | 1,5 | 2 | 35° | F1730 | S2020 | U2300 | N2550 |
| | | | | | 790.020.00 | | | |
| 19,5 | 9 | 1,5 | 3 | 35° | 790.030.00 | | | |
| 19,5 | 9 | 1,5 | 5 | 35° | 790.050.00 | | | |
| 24 | 12 | 1,5 | 6,4 | 35° | 790.064.00 | | | |
| 24 | 12 | 1,5 | 8 | 35° | 790.080.00 | | | |

| MATERIAL | F1730 | S2020 | U2300 | N2550 |
|---------------|-------|-------|-------|-------|
| Dry softwood | ● | | | |
| Wet softwood | ● | | | |
| Dry hardwood | ● | ● | | |
| Wet hardwood | ● | ● | | |
| Chipboard | | ● | ● | ● |
| MDF | | ● | ● | ● |
| HDF | | | ● | ● |
| Solid surface | | | | ● |

● Suitable

TECHNICAL DETAILS:

- F1730** Hardness (HV10): 1.760 - Transverse rupture strength (N/mm²): 2.100
- S2020** Hardness (HV10): 1.680 - Transverse rupture strength (N/mm²): 3.700
- U2300** Hardness (HV10): 2.300 - Transverse rupture strength (N/mm²): 3.500
- N2550** Hardness (HV10): 2.550 - Transverse rupture strength (N/mm²): 3.200

All knives are supplied in 10 pcs. cases.



WHAT'S THE SECRET TO FLAWLESS EDGE PROFILES WITH NO REWORK?

WOOD 
Magazine

CMT The Perfect 10!
Rated the #1 Overall Router Bits



SUPERIOR HIGH-STRENGTH STEEL

We use high-quality, solid bar stock sourced from Switzerland, which provides exceptional resistance to fatigue and abrasion.



ANTI-KICKBACK DESIGN

Controls depth of cut and minimizes the chance of kickback, reducing your risk of injury.



SINTERHIP
HI-DENSITY INDUSTRIAL CHROME CARBIDE™

SINTERHIP HI-DENSITY INDUSTRIAL CHROME CARBIDE™

New process called SinterHIP (Hot Isostatic Pressing), helps prevent material failure and increases cutting life.



TRI-METAL BRAZING

Our Silver-Copper-Silver brazing protects the carbide tip when cutting harder wood or wood composites and reduces the chance of failed welds.



NON-STICK
ORANGE SHIELD COATING™

NON-STICK ORANGE SHIELD COATING™

Prevents bit from heating up, reduces pitch build-up, protects against corrosion and provides a longer bit life.



MULTI-AXIS GRINDING CREATES A 3X LONGER LASTING MIRROR FINISH

Each cutting edge is precisely sharpened to the micron, in order to produce a cutting angle, which is razor sharp, yet extremely durable.



Deluxe packaging



Router bits & sets

| PRODUCTS | PAGE |
|--------------------------------------|-----------|
| Straight & spiral bits | 98 ~ 109 |
| Trimmer & profiler bits | 110 ~ 119 |
| Rebater bits | 120 ~ 122 |
| Slotting & grooving bits | 123 ~ 127 |
| Jointing bits | 128 ~ 135 |
| Dovetail bits | 136 ~ 138 |
| Lettering, "V" Groove & chamfer bits | 139 ~ 144 |
| Drawer pull & radius bits | 145 ~ 147 |
| Ovolo & rounding over bits | 148 ~ 150 |
| Bead & ogee bits | 151 ~ 159 |
| Molding bits | 160 ~ 164 |
| Panel bits | 164 ~ 170 |
| Solid surface bits | 171 ~ 176 |
| Router bit sets | 177 ~ 188 |

BUILDING THE WORLD'S FINEST CUTTING TOOLS

We built our foundations - and our reputation for high quality - on the craftsman-like manufacture of boring bits and router bits. Times have changed and technology has completely altered the way things are done, and in this regard CMT is no exception. Our facilities have been newly renovated and our equipment today represents the most advanced technology available on the market, but we still make and will continue to make routers and boring bits with all the skill and care that we always have.




DESIGN

We engineer each tool with its purpose in mind. Years of developing high performance tools means that many of our top-selling tools are tried and true, the result of continuously perfecting each design, but we don't stop there. New materials, new profiles and new methods of working keep emerging. At CMT, we want to stay on the cutting edge of what's new in the industry so our technical department constantly evaluates current market developments and, by using state of the art software and years of experience, designs tools that are worthy of the CMT mark.

MATERIALS

Essentially, the main components of a router bit are just two: steel and carbide. If either of these is less than the best, the tool we make will show it. We've researched steel and carbide since the beginning, and found exactly what we were looking for:

Superior steel. All our steel comes from right above the border, in Switzerland, where they use an exclusive hot drawing process to forge the solid bar stock we use to manufacture our router bit shanks and bodies. The result is steel that is superior in strength and exceptionally resistant to fatigue and abrasion.

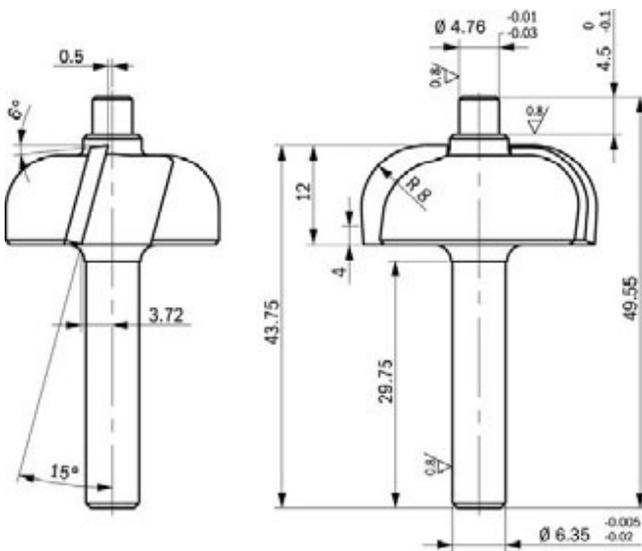

High-grade tungsten carbide. If steel is what gives our tools strength, carbide is what gives them intelligence. The capacity of the carbide tip to cut precisely and to last a long time is critical for the performance of any tool, so at CMT we use only premium micrograin carbide from Luxembourg to make the tips for our router bits.

MANUFACTURING

Turning, Milling and Cutting. Our biggest investment in recent years has been in upgrading production. Today, all machinery at CMT is fully automated. CNC machines run by specially trained operators make sure that the shanks and bodies of our router bits and boring bits are accurate and perfectly balanced.



Heat forged steel bodies for large diameter bits. No router bits are exactly the same, sometimes not even in the way they are made. Certain bits require a few more steps than others, like heat forging the steel of larger diameter bits before turning it down into precise bit bodies. This extra step produces a radial grain orientation which gives large diameter bits extra strength and durability.

Brazing. We have pioneered the art of brazing. Not only does our unique custom-designed computerized brazing equipment help eliminate the inconsistencies found in old fashioned hand brazing, but our silver-copper-silver brazing 'sandwich' provides a tight bond between the steel and the carbide, with a shock absorbing effect to protect the carbide tips when cutting harder woods.

Specially formulated carbide for specific applications. You have to cut every kind material, so we make sure that our carbide tips can handle each individual job. This means specially formulating the carbide of each tool so that the compositions vary from being super hard (for tough cutting jobs like laminates) to being less hard (to absorb the impact when cutting large profiles) and everything in between.

Grinding and Sharpening. The final step in the production process is no different from the rest: sharpening and grinding are done to extreme precision on multi-axis CNC machines. Each bevel and angle is ground or sharpened to the micron, to produce a cutting edge that is both razor sharp yet extremely durable.



680°C in seconds - and the brazing is complete.

QUALITY CONTROL

In even the most carefully done task, there's always room for error. However at CMT, we take measures to prevent even this. Just like we have always done, we manually check the quality of our tools at each step of the manufacturing process, and we still make test cuts with rail & stile bits to make sure the cut fits. However, now we also use a fully automatic measuring process that measures every dimension of the tool without actually coming into contact with it, to make sure that the tool measurements are accurate and that the profiles conform precisely to technical specifications. We also use this system to gauge the wear and tear on the CNC machines.




CMT's fully automatic measuring system.


Solid carbide spiral bits

Due to their spiral cutting edge which stays in continuous contact with the workpiece, these bits give a smooth, chatter-free cutting action, unlike conventional bits which have intermittent contact with the workpiece. Unsurpassed for cleaner cuts in ordinary or difficult materials, softwood, hardwood, plywood, composites etc. This new range of spiral bits with 6, 8, 12mm and 6,35 and 12,7mm shanks allow them to be used with C.N.C. router and hand-routers.

Test check yourself the extraordinary quality-price ratio of these bits!

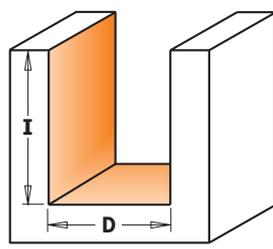


Drawing is 1:1 scale

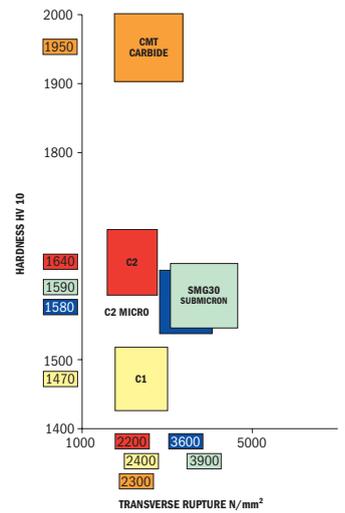


HWM Z2+2 Z3+3 RH

190 Upcut & downcut spiral

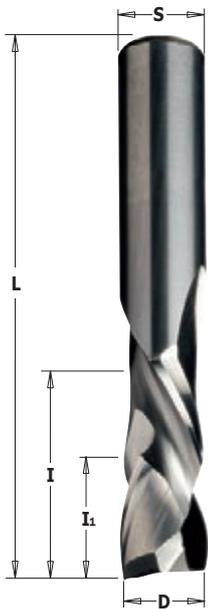


| D mm | I mm | l _i mm | L mm | Z | ORDER NO. S=Ø8mm | ORDER NO. S=Ø9,52mm | ORDER NO. S=Ø10mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|--|------|-------------------|-------|-----|-------------------|---------------------|-------------------|-------------------|---------------------|
| 8 | 32 | 7 | 80 | 2+2 | 190.080.11 | | | | |
| 9,52 | 28,6 | 7 | 76,2 | 2+2 | | 190.504.11 | | | |
| 10 | 32 | 7 | 80 | 2+2 | | | 190.100.11 | | |
| new 10 | 42 | 7 | 90 | 2+2 | | | 190.101.11 | | |
| 12 | 42 | 7 | 90 | 2+2 | | | | 190.120.11 | |
| new 12 | 52 | 7 | 100 | 2+2 | | | | 190.121.11 | |
| 12,7 | 25,4 | 16 | 76,2 | 2+2 | | | | | 190.505.11 |
| 12,7 | 28,6 | 16 | 76,2 | 2+2 | | | | | 190.506.11 |
| 12,7 | 34,9 | 16 | 88,9 | 2+2 | | | | | 190.507.11 |
| 12,7 | 41,3 | 16 | 101,6 | 2+2 | | | | | 190.508.11 |
| Up & downcut mortising bits | | | | | | | | | |
| 9,52 | 22,2 | 4,8 | 76,2 | 2+2 | | 190.513.11 | | | |
| 9,52 | 25,4 | 5,2 | 76,2 | 3+3 | | 190.813.11 | | | |
| 12 | 25,4 | 5,2 | 83 | 3+3 | | | | 190.320.11 | |
| 12,7 | 22,2 | 5,2 | 76,2 | 2+2 | | | | | 190.515.11 |
| 12,7 | 34,9 | 5,2 | 88,9 | 2+2 | | | | | 190.517.11 |

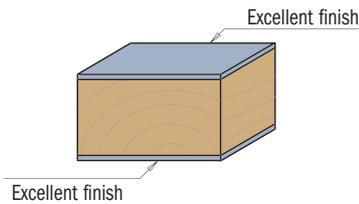


HWM Z1 RH


198 Upcut

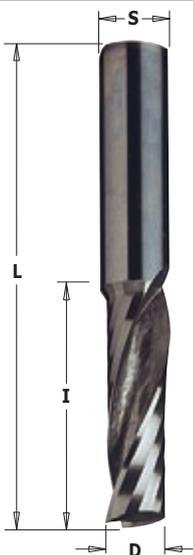

| D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|--------------|-------|------|-------------------|---------------------|-------------------|-------------------|---------------------|
| 3,18 | 12,7 | 50,8 | | 198.001.11 | | | |
| 4,76 | 15,87 | 50,8 | | 198.005.11 | | | |
| 6 | 22 | 60 | 198.060.11 | | | | |
| 6,35 | 19,05 | 50,8 | | 198.007.11 | | | |
| 6,35 | 25,4 | 63,5 | | 198.008.11 | | | |
| 8 | 22 | 70 | | | 198.080.11 | | |
| new 8 | 32 | 80 | | | 198.081.11 | | |
| 12 | 32 | 83 | | | | 198.120.11 | |

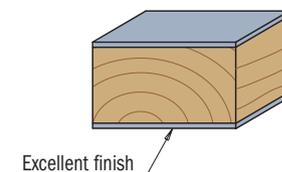


Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

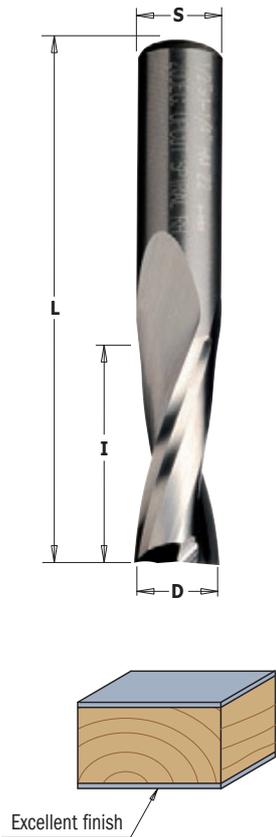

191 Upcut spiral

HWM Z2 RH

| D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|---------|---------------------|------------------------|---------------------|----------------------|------------------------|
| 3 | 12 | 60 | 191.630.11 | | 191.830.11 | | |
| 3,18 | 12,7 | 50,8 | | 191.001.11 | | | |
| 3,5 | 12 | 60 | 191.635.11 | | | | |
| 3,97 | 12,7 | 50,8 | | 191.003.11 | | | |
| 4 | 15 | 60 | 191.640.11 | | 191.840.11 | | |
| 4,76 | 19,05 | 50,8 | | 191.005.11 | | | |
| 5 | 17 | 60 | 191.650.11 | | 191.850.11 | | |
| 6 | 27 | 70 | 191.060.11 | | 191.860.11 | | |
| 6,35 | 19,05 | 50,8 | | 191.007.11 | | | |
| 6,35 | 25,4 | 63,5 | | 191.008.11 | | | |
| 7 | 32 | 80 | | | 191.870.11 | | |
| 7,94 | 25,4 | 76,2 | | | | | 191.501.11 |
| 8 | 22 | 70 | | | 191.080.11 | | |
| 8 | 32 | 80 | | | 191.081.11 | | |
| 8 | 42 | 90 | | | 191.082.11 | | |
| 9 | 32 | 83 | | | | 191.890.11 | |
| 9,53 | 31,75 | 76,2 | | | | | 191.503.11 |
| 10 | 32 | 80 | | | 191.800.11 | | |
| 10 | 32 | 83 | | | | 191.900.11 | |
| 10 | 42 | 90 | | | | 191.901.11 | |
| 12 | 35 | 83 | | | 191.820.11 | 191.120.11 | |
| 12 | 42 | 90 | | | | 191.121.11 | |
| 12 | 52 | 100 | | | | 191.122.11 | |
| 12,7 | 31,75 | 76,2 | | | | | 191.505.11 |
| 12,7 | 38,1 | 88,9 | | | | | 191.506.11 |
| 12,7 | 50,8 | 101,6 | | | | | 191.507.11 |

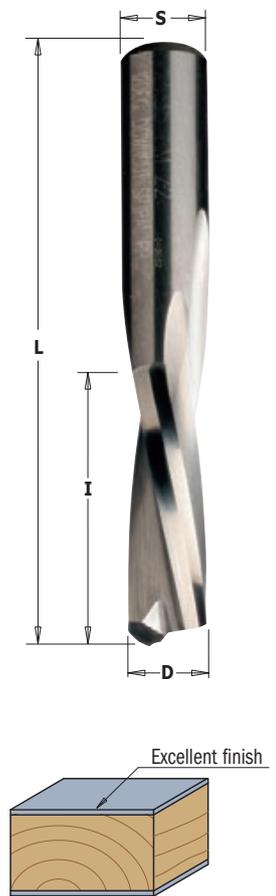

192 Downcut spiral

HWM Z2 RH

| D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|---------|---------------------|------------------------|---------------------|----------------------|------------------------|
| 3 | 12 | 60 | 192.630.11 | | 192.830.11 | | |
| 3,18 | 12,7 | 50,8 | | 192.001.11 | | | |
| 3,97 | 12,7 | 50,8 | | 192.003.11 | | | |
| 4 | 15 | 60 | 192.640.11 | | 192.840.11 | | |
| 4,76 | 19,05 | 50,8 | | 192.005.11 | | | |
| 5 | 17 | 60 | 192.650.11 | | 192.850.11 | | |
| 6 | 27 | 70 | 192.060.11 | | 192.860.11 | | |
| 6,35 | 19,05 | 50,8 | | 192.007.11 | | | |
| 6,35 | 25,4 | 63,5 | | 192.008.11 | | | |
| 7,94 | 25,4 | 76,2 | | | | | 192.501.11 |
| 8 | 22 | 70 | | | 192.080.11 | | |
| 8 | 32 | 80 | | | 192.081.11 | | |
| 8 | 42 | 90 | | | 192.082.11 | | |
| 9,53 | 31,75 | 76,2 | | | | | 192.503.11 |
| 10 | 32 | 80 | | | 192.800.11 | | |
| 10 | 32 | 83 | | | | 192.900.11 | |
| 12 | 35 | 83 | | | 192.820.11 | 192.120.11 | |
| 12,7 | 31,75 | 76,2 | | | | | 192.505.11 |
| 12,7 | 38,1 | 88,9 | | | | | 192.506.11 |
| 12,7 | 50,8 | 101,6 | | | | | 192.507.11 |

Saw blades

Jig saw blades

Tools with bore & knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools


Power tools & accessories

Display cabinets & spare parts

Straight bits


HW HWM Z1 Z2 RH

7/8/911

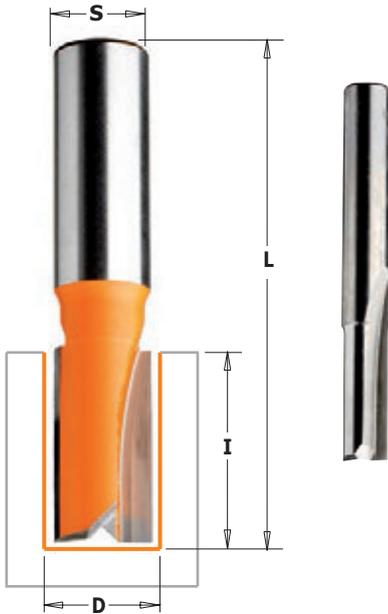


If you are looking to get the most out of your time and money through more efficient production, but want nothing less than a beautiful clean edge on your finished piece, then you definitely must include CMT straight bits in your collection. These razor-sharp, double-faced cutters perfectly synthesize the characteristics and advantages that define quality CMT products. Made of special Fatigue Proof™ steel and micro-grain carbide, our straight bits can withstand even the heaviest work load and still give you a smooth, precise cut every time. You also get exceptional chip ejection to allow cleaner and more constant cutting. The surface of all CMT bits is protected with our trademark orange non-stick PTFE to help keep the bit from collecting resin, pitch and other residue. Every bit is submitted to strict quality tests to guarantee perfect cutting tolerance, balance and concentricity. CMT bits allow production on an industrial scale using a variety of plywood, composites and natural woods. CMT produces 91 types of straight bits in a wide range of diameters so you can find exactly what you want.


The cutting edge top sharpening on 9mm diameter bits and larger allows for short plunging operations.

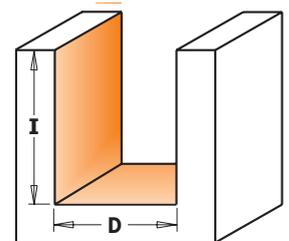


Drawing is 1:1 scale

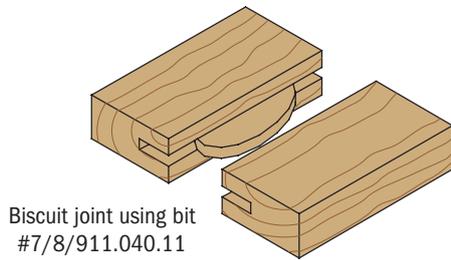


Biscuit joint using bit #7/8/911.040.11

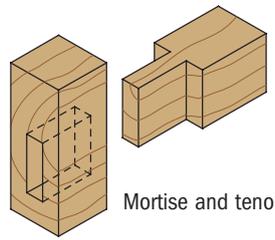


Mortise and tenon

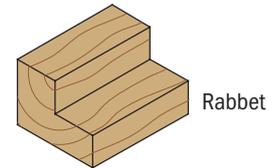

Rabbet

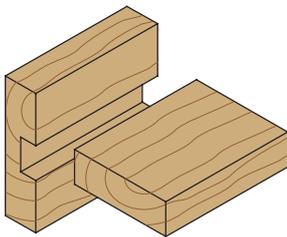


Right-angle joint



Union



Tongue and groove joint

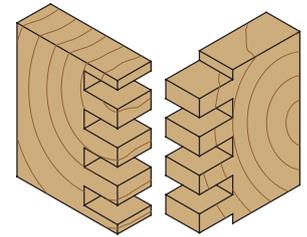

Box joint

Plywood groove set

811



HW HWM Z2 RH



Our plywood groove bits are designed specifically for routing grooves and dadoes for joints in plywood. That means they match the true thickness of plywood, producing tight, accurate joints. Use our 18,2mm bit for 19mm plywood, 12,3mm bit for 12,7mm plywood and our 6mm for 6,35mm ply. No gaps or sloppy joints, guaranteed. These money-saving 3-bit sets are available with 12,7mm or 6,35 shanks.

Example shown in 12,7mm thick plywood

This joint is made with the CMT 12,3mm straight bit in 12,7mm plywood. Notice the precise fit - no gaps.



This joint is made with a regular 12,7mm straight bit in 12,7mm plywood. Notice the extra space and ill fitting joint.

| DESCRIPTION | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø12,7mm |
|---|------------------------|------------------------|
| Plywood groove set (Ø6 - Ø12,3 - Ø18,2mm) | 811.001.11 | 811.501.11 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts


| D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------------------------------|---------|---------|---------------------|------------------------|---------------------|----------------------|------------------------|
| • 2* | 4 | 50 | 711.020.11 | 811.020.11 | | | |
| • 3 | 8 | 45 | 711.030.11 | 811.030.11 | | | |
| • 3 | 8 | 50 | | | 911.030.11 | | |
| • 3 | 8 | 58,3 | | | | 911.530.11 | |
| • 3,2 | 9,5 | 45 | | 811.032.11 | | | |
| • 4 | 10 | 58,3 | | | | 911.540.11 | |
| • 4 | 10 | 45 | 711.040.11 | 811.040.11 | | | |
| • 4 | 10 | 50 | | | 911.040.11 | | |
| • 4,75 | 12,7 | 50,8 | | 811.047.11 | | | |
| • 5 | 12 | 50 | 711.050.11 | 811.050.11 | 911.050.11 | | |
| • 5 | 12 | 58,3 | | | | 911.550.11 | |
| • 6 | 16 | 50 | 711.060.11 | 811.060.11 | 911.060.11 | | |
| • 6 | 19 | 63,5 | | | | 911.560.11 | 811.560.11 |
| • 6,35 | 19 | 50,8 | | 811.064.11 | | | |
| • 6,35 | 19 | 57,2 | | 811.065.11 | | | |
| • 6,35 | 19 | 63,5 | | | | | 811.564.11 |
| • 7 | 18 | 50 | 711.070.11 | 811.070.11 | 911.070.11 | | |
| • 7 | 18 | 63,5 | | | | 911.570.11 | |
| • 7,6 | 20 | 50 | | | 911.076.11 | | |
| • 8 | 20 | 50 | 711.080.11 | 811.080.11 | 911.080.11 | | |
| • 8 | 25,4 | 70 | | 811.081.11 | | | |
| • 8 | 25,4 | 70 | | | | | 811.581.11 |
| 9 | 20 | 48 | 711.090.11 | | 911.090.11 | | |
| 9,5 | 19 | 50,8 | | 811.095.11 | | | |
| 9,5 | 25,4 | 63,5 | | 811.096.11 | | | |
| 9,5 | 25,4 | 66,7 | | | | | 811.595.11 |
| 10 | 20 | 48 | 711.100.11 | 811.100.11 | 911.100.11 | | |
| 10 | 25,4 | 63,5 | | | | | 811.600.11 |
| 11 | 20 | 48 | 711.110.11 | | 911.110.11 | | |
| 12 | 20 | 50 | 711.120.11 | 811.120.11 | 911.120.11 | | |
| 12 | 25,4 | 63,5 | | | | 911.620.11 | 811.620.11 |
| 12,3 | 25,4 | 57,2 | | 811.123.11 | | | |
| 12,3 | 25,4 | 63,5 | | | | | 811.623.11 |
| 12,7 | 19 | 57,2 | | 811.127.11 | | | |
| 12,7 | 25,4 | 66,7 | | | | | 811.627.11 |
| 12,7 | 31,7 | 82,5 | | | | | 811.628.11 |
| 13 | 20 | 57 | 711.130.11 | | 911.130.11 | | |
| 14 | 20 | 50 | 711.140.11 | 811.140.11 | 911.140.11 | | |
| 14,2 | 14,2 | 57,2 | | 811.142.11 | | | |
| 15 | 20 | 57,2 | 711.150.11 | 811.150.11 | 911.150.11 | | |
| 15,8 | 19 | 66,7 | | 811.158.11 | | | |
| 15,8 | 25,4 | 63,5 | | | | | 811.660.11 |
| 16 | 20 | 57,2 | 711.160.11 | 811.160.11 | 911.160.11 | | |
| 16 | 25,4 | 63,5 | | | | | 811.661.11 |
| 17 | 20 | 50 | 711.170.11 | | | | |
| 18 | 20 | 50 | 711.180.11 | 811.180.11 | 911.180.11 | | |
| 18,2 | 25,4 | 57,2 | | 811.182.11 | | | |
| 18,2 | 25,4 | 63,5 | | | | | 811.682.11 |
| 19 | 20 | 57,2 | 711.190.11 | 811.191.11 | 911.190.11 | | |
| 19 | 25,4 | 63,5 | | | | | 811.690.11 |
| 20 | 20 | 50 | 711.200.11 | 811.200.11 | 911.200.11 | | |
| 22 | 20 | 57,2 | 711.220.11 | 811.220.11 | 911.220.11 | | |
| 24 | 20 | 50 | 711.240.11 | | 911.240.11 | | |
| 25 | 20 | 50 | 711.250.11 | | 911.250.11 | | |
| 25,4 | 19 | 50,8 | | 811.254.11 | | | |
| 25,4 | 31,7 | 76,2 | | | | | 811.754.11 |
| 28,5 | 31,7 | 76,2 | | | | | 811.785.11 |
| 10 pcs. in masterpack | | | | | | | |
| 9,5 | 25,4 | 63,5 | | | | | 811.096.11-X10 |

• HWM
* Z1



Masterpack


Straight bits, long series

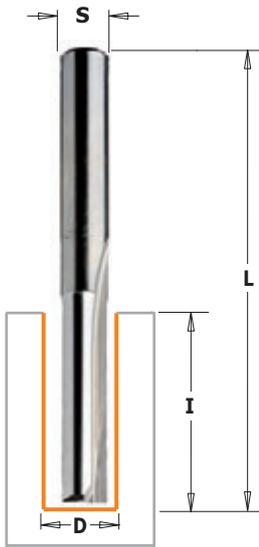HW HWM Z2 RH


7/8/912

SAFETY PRECAUTIONS: never use damaged or worn bits. Always work at the proper feed rate without forcing the bit. Pay particular attention when making the initial cut with a small diameter bit. For best results when working with small diameter bits, make the cut in more than one pass.

The cutting edge top sharpening on 9mm diameter bits and larger allows for short plunging operations.

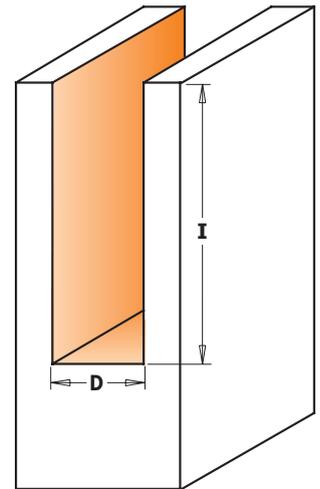


Drawing is 1:1 scale



Masterpack

| D mm | I mm | L mm | ORDER NO. S=∅6mm | ORDER NO. S=∅6,35mm | ORDER NO. S=∅8mm | ORDER NO. S=∅12mm | ORDER NO. S=∅12,7mm |
|------------------------------|---------|---------|---------------------|------------------------|---------------------|----------------------|------------------------|
| • 3 | 11 | 60 | 712.030.11 | | | | |
| • 3,2 | 12,7 | 50,8 | | 812.032.11 | | | |
| • 4 | 12 | 60 | 712.040.11 | | | | |
| • 5 | 18 | 60 | 712.050.11 | | | | |
| • 6 | 25,4 | 60 | 712.060.11 | 812.060.11 | 912.060.11 | | |
| • 6,35 | 25,4 | 60 | | 812.064.11 | | | |
| • 8 | 31,7 | 60 | 712.080.11 | 812.080.11 | 912.080.11 | | |
| • 8 | 31,7 | 75 | | | | 912.580.11 | |
| 9 | 31,7 | 75 | | | | 912.590.11 | |
| 9,5 | 31,7 | 63,5 | | 812.095.11 | | | |
| 9,5 | 31,7 | 73 | | | | | 812.595.11 |
| 10 | 31,7 | 60 | 712.100.11 | 812.100.11 | 912.100.11 | | |
| 10 | 31,7 | 70 | | | | | 812.600.11 |
| 10 | 31,7 | 74 | | | | 912.600.11 | |
| 11,1 | 31,7 | 82,5 | | | | | 812.611.11 |
| 12 | 31,7 | 60 | 712.120.11 | 812.120.11 | 912.120.11 | | |
| 12 | 31,7 | 70 | | | | | 812.620.11 |
| 12 | 38,1 | 95 | | | | 912.621.11 | 812.621.11 |
| 12 | 50,8 | 108 | | | | 912.622.11 | |
| 12,7 | 31,7 | 70 | | 812.127.11 | 912.127.11 | | |
| 12,7 | 38,1 | 95 | | | | | 812.627.11 |
| 12,7 | 50,8 | 108 | | | | | 812.628.11 |
| 12,7 | 63,5 | 111 | | | | | 812.629.11 |
| 14 | 31,7 | 60 | 712.140.11 | 812.140.11 | 912.140.11 | | |
| 14 | 31,7 | 70 | | | | 912.640.11 | |
| 15 | 31,7 | 66 | 712.150.11 | 812.150.11 | 912.150.11 | | |
| 15 | 31,7 | 70 | | | | 912.650.11 | |
| 15,8 | 31,7 | 70 | | 812.158.11 | | | |
| 16 | 31,7 | 66 | 712.160.11 | 812.160.11 | 912.160.11 | | |
| 16 | 31,7 | 70 | | | | 912.660.11 | 812.660.11 |
| 18 | 38,1 | 80 | | | | 912.681.11 | |
| 19 | 38,1 | 82,5 | | | | 912.690.11 | 812.690.11 |
| 19 | 50,8 | 92 | | | | 912.691.11 | 812.691.11 |
| 20 | 38,1 | 80 | | | | 912.701.11 | |
| 22 | 38,1 | 80 | | | | 912.721.11 | |
| 10 pcs. in masterpack | | | | | | | |
| 12,7 | 50,8 | 108 | | | | | 812.628.11-X10 |

• HWM

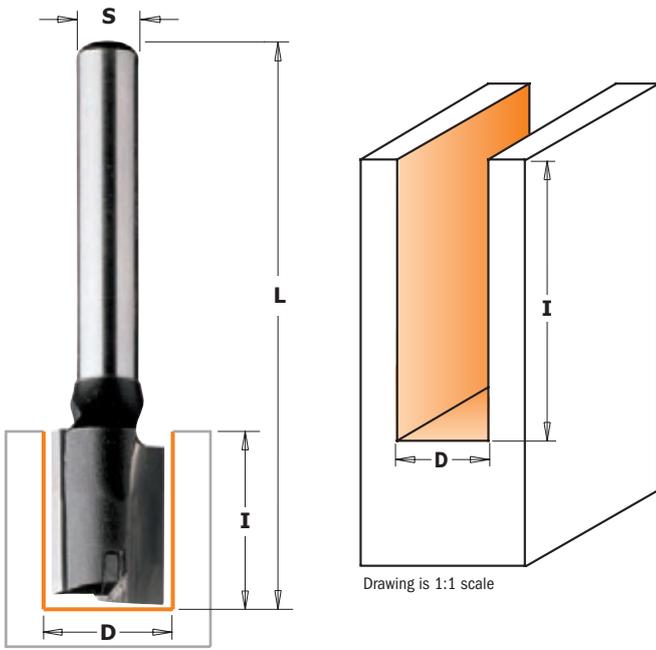

174-177




These industrial straight bits are made a kind of stainless steel specifically created to support hard work on route machines and CNC routers. The cutting plunging edge will allow you to execute any kind of drilling and trimming jobs on soft and hardwood, wood composites and also plastic and laminated materials.

APPLICATION: used for drilling, grooving or jointing solid wood and wood composites. Can be used on machining centres, CNC routers and hand-held routers equipped with chucks or adaptors.

Plunge centre tip

This particular kind of cutting plunging edge allows long-lasting performance on drilling operation.



• HWM


| D mm | I mm | L mm | ORDER NO. S=Ø12mm |
|---------|---------|---------|----------------------|
| 10 | 35 | 90 | 177.100.11 |
| 12 | 35 | 90 | 177.120.11 |
| 12 | 50 | 100 | 177.121.11 |
| 14 | 35 | 90 | 177.140.11 |
| 16 | 35 | 90 | 177.160.11 |
| 16 | 60 | 110 | 177.161.11 |
| 18 | 35 | 90 | 177.180.11 |
| 18 | 60 | 110 | 177.181.11 |
| 20 | 35 | 90 | 177.200.11 |
| 22 | 35 | 90 | 177.220.11 |
| 24 | 35 | 90 | 177.240.11 |
| 25 | 35 | 90 | 177.250.11 |
| 26 | 35 | 90 | 177.260.11 |
| 28 | 35 | 90 | 177.280.11 |
| 30 | 35 | 90 | 177.300.11 |
| 35 | 35 | 90 | 177.350.11 |

| D mm | I mm | L mm | ORDER NO. S=Ø8mm |
|---------|---------|---------|---------------------|
| • 3 | 10 | 55 | 174.030.11 |
| • 4 | 10 | 55 | 174.040.11 |
| • 5 | 12 | 55 | 174.050.11 |
| • 6 | 14 | 55 | 174.060.11 |
| • 7 | 20 | 55 | 174.070.11 |
| 8 | 20 | 55 | 174.080.11 |
| 8 | 30 | 70 | 174.081.11 |
| 8 | 40 | 90 | 174.082.11 |
| 9 | 20 | 55 | 174.090.11 |
| 10 | 20 | 60 | 174.100.11 |
| 10 | 30 | 70 | 174.102.11 |
| 10 | 40 | 90 | 174.101.11 |
| 11 | 20 | 60 | 174.110.11 |
| 12 | 20 | 60 | 174.120.11 |
| 12 | 30 | 70 | 174.122.11 |
| 12 | 40 | 90 | 174.121.11 |
| 13 | 20 | 60 | 174.130.11 |
| 14 | 20 | 60 | 174.140.11 |
| 14 | 30 | 70 | 174.142.11 |
| 14 | 40 | 90 | 174.141.11 |
| 15 | 20 | 60 | 174.150.11 |
| 16 | 20 | 70 | 174.160.11 |
| 16 | 30 | 70 | 174.162.11 |
| 16 | 40 | 90 | 174.161.11 |
| 18 | 20 | 70 | 174.180.11 |
| 18 | 30 | 70 | 174.181.11 |
| 18 | 40 | 80 | 174.182.11 |
| 19 | 20 | 70 | 174.190.11 |
| 20 | 20 | 70 | 174.200.11 |
| 20 | 30 | 70 | 174.201.11 |
| 20 | 40 | 90 | 174.202.11 |
| 22 | 20 | 70 | 174.220.11 |
| 22 | 30 | 70 | 174.221.11 |
| 22 | 40 | 90 | 174.222.11 |
| 24 | 20 | 70 | 174.240.11 |
| 24 | 30 | 70 | 174.241.11 |
| 24 | 40 | 90 | 174.242.11 |
| 25 | 20 | 70 | 174.250.11 |
| 26 | 20 | 70 | 174.260.11 |
| 26 | 30 | 70 | 174.261.11 |
| 28 | 20 | 70 | 174.280.11 |
| 28 | 30 | 70 | 174.281.11 |
| 29 | 20 | 70 | 174.290.11 |
| 30 | 20 | 70 | 174.300.11 |

Straight cutters with threaded shank



HW plunge centre tip



TECHNICAL DETAILS:

- Super strength steel
- 2 HW alternating precision ground cutting edges [Z2+1]

APPLICATION: ideal for cutting openings for electrical boxes and similar operations in solid wood, wood composites, plastics and laminates. Can be used on machining centres, CNC routers and hand-held routers equipped with chucks or adaptors.

170-171-180-181

| D mm | I mm | L mm | ORDER NO. S=M12x1 |
|---------|---------|---------|----------------------|
| 6 | 18 | 60 | 170.060.11 |
| 8 | 23 | 60 | 170.080.11 |
| 10 | 23 | 60 | 170.100.11 |
| 11 | 23 | 60 | 170.110.11 |
| 12 | 23 | 60 | 170.120.11 |
| 14 | 23 | 60 | 170.140.11 |
| 15 | 25 | 60 | 170.150.11 |
| 16 | 25 | 60 | 170.160.11 |
| 18 | 25 | 60 | 170.180.11 |
| 20 | 25 | 60 | 170.200.11 |
| 22 | 25 | 60 | 170.220.11 |
| 24 | 25 | 60 | 170.240.11 |
| 25 | 25 | 60 | 170.250.11 |
| 26 | 25 | 60 | 170.260.11 |
| 28 | 25 | 60 | 170.280.11 |
| 30 | 25 | 60 | 170.300.11 |
| 35 | 25 | 60 | 170.350.11 |
| 8 | 35 | 67 | 171.080.11 |
| 10 | 35 | 67 | 171.100.11 |
| 12 | 35 | 67 | 171.120.11 |
| 14 | 35 | 67 | 171.140.11 |
| 16 | 35 | 67 | 171.160.11 |
| 18 | 35 | 67 | 171.180.11 |
| 20 | 35 | 67 | 171.200.11 |
| 22 | 35 | 67 | 171.220.11 |
| 12 | 45 | 77 | 180.120.11 |
| 16 | 45 | 77 | 180.160.11 |
| 18 | 45 | 77 | 180.180.11 |
| 20 | 45 | 77 | 180.200.11 |
| 16 | 60 | 92 | 181.160.11 |
| 20 | 60 | 92 | 181.200.11 |



HW plunge centre tip




173-182



| D mm | I mm | L mm | ORDER NO. S=M10 |
|---------|---------|---------|--------------------|
| 6 | 14 | 50 | 173.060.11 |
| 8 | 20 | 52 | 173.080.11 |
| 10 | 22 | 52 | 173.100.11 |
| 12 | 22 | 52 | 173.120.11 |
| 14 | 25 | 52 | 173.140.11 |
| 15 | 25 | 52 | 173.150.11 |
| 16 | 25 | 52 | 173.160.11 |
| 18 | 25 | 52 | 173.180.11 |
| 20 | 25 | 52 | 173.200.11 |
| 22 | 25 | 52 | 173.220.11 |
| 25 | 25 | 52 | 173.250.11 |
| 30 | 25 | 52 | 173.300.11 |
| 8 | 35 | 67 | 182.080.11 |
| 10 | 35 | 67 | 182.100.11 |
| 12 | 35 | 67 | 182.120.11 |
| 14 | 35 | 67 | 182.140.11 |
| 16 | 45 | 77 | 182.160.11 |
| 18 | 45 | 77 | 182.180.11 |
| 20 | 45 | 77 | 182.200.11 |

5%co HS spiral bits for aluminium positive single flute

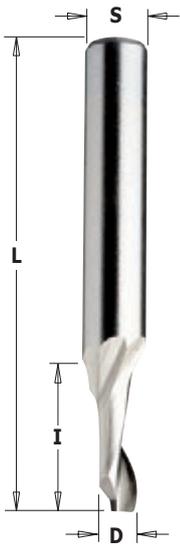

Suggested
MAX RPM 12.000

188

HS Z1 RH


| D mm | I mm | L mm | ORDER NO. S=∅8mm |
|---------|---------|---------|---------------------|
| 3 | 12 | 60 | 188.030.51 |
| 4 | 12 | 60 | 188.040.51 |
| 4 | 40 | 100 | 188.041.51 |
| 5 | 14 | 60 | 188.050.51 |
| 5 | 40 | 100 | 188.051.51 |
| 6 | 14 | 60 | 188.060.51 |
| 6 | 40 | 100 | 188.061.51 |
| 7 | 14 | 60 | 188.070.51 |
| 8 | 14 | 80 | 188.080.51 |
| 8 | 40 | 100 | 188.081.51 |
| 9 | 14 | 80 | 188.090.51 |
| 10 | 14 | 80 | 188.100.51 |
| 12 | 14 | 80 | 188.120.51 |

TECHNICAL DETAILS:

- 5%co premium solid HS
- 1 upcut spiral cutting edge
- Upward chip ejection

APPLICATION: these tools feature single flute design allowing both efficient and effective carving on all types of aluminium. The final result? Higher flexibility than traditional bits, enhanced productivity and high quality finishing.

5%co HS spiral bits for aluminium positive single flute for high cutting depth

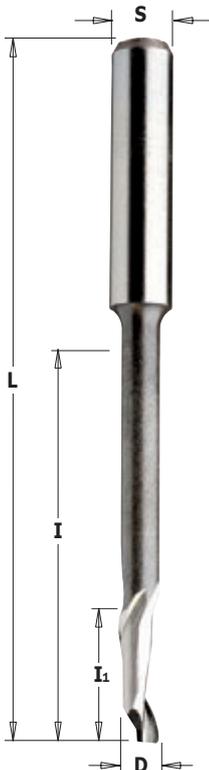

Suggested
MAX RPM 12.000

189

HS Z1 RH

| D mm | I mm | I ₁ mm | L mm | S mm | ORDER NO. |
|---------|---------|----------------------|---------|---------|------------|
| 4 | 46 | 16 | 90 | 8 | 189.040.51 |
| 5 | 35 | 18 | 80 | 8 | 189.050.51 |
| 5 | 35 | 14 | 120 | 8 | 189.051.51 |
| 5 | 55 | 16 | 90 | 8 | 189.052.51 |
| 6 | 45 | 16 | 90 | 8 | 189.060.51 |
| 8 | 68 | 14 | 100 | 8 | 189.080.51 |
| 8 | 55 | 14 | 80 | 8 | 189.081.51 |
| 10 | 95 | 14 | 120 | 10 | 189.100.51 |
| 10 | 70 | 30 | 100 | 10 | 189.101.51 |


TECHNICAL DETAILS:

- 5%co premium solid HS
- 1 upcut spiral cutting edge
- Upward chip ejection

APPLICATION: these tools feature single flute design allowing both efficient and effective carving on all types of aluminium. The final result? Higher flexibility than traditional bits, enhanced productivity and high quality finishing.


Straight router bits with insert knives

INSERT CARBIDE Z1 RH

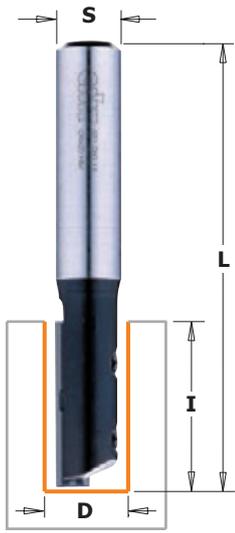

651-652

Straight router bit with one replaceable mini knife and fixing wedge. Radial and axial groove for better and safe knife insertion. For finishing, routing and grooving in board materials (DTD laminated, MDF and hardwood). For use on portable routers or CNC machining centres.

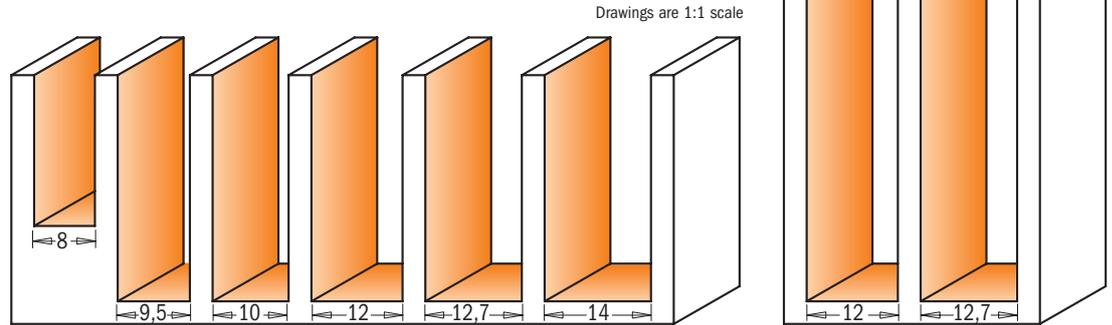

Drawings are 1:1 scale

| D mm | I mm | L mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | |
|------|------|------|------------------------|---------------------|----------------------|------------------------|-------------|--|--|--|---|
| 8 | 20 | 60 | 651.079.11 | | | | | | | | 790.200.01 651.999.01 990.070.00 991.063.00 |
| 8 | 20 | 60 | | 651.080.11 | | | | | | | 790.200.01 651.999.01 990.070.00 991.063.00 |
| 8 | 20 | 67 | | | 651.081.11 | 651.681.11 | | | | | 790.200.01 651.999.01 990.070.00 991.063.00 |
| 9,5 | 30 | 70 | 651.095.11 | | | | | | | | 790.300.01 651.999.02 990.071.00 991.063.00 |
| 9,5 | 30 | 80 | | | | 651.695.11 | | | | | 790.300.01 651.999.02 990.071.00 991.063.00 |
| 10 | 30 | 70 | | 651.100.11 | | | | | | | 790.300.01 651.999.02 990.071.00 991.063.00 |
| 10 | 30 | 80 | | | 651.101.11 | 651.701.11 | | | | | 790.300.01 651.999.02 990.071.00 991.063.00 |
| 12 | 30 | 70 | | 651.120.11 | | | | | | | 790.300.01 651.999.02 990.071.00 991.063.00 |
| 12 | 30 | 80 | | | 651.121.11 | 651.721.11 | | | | | 790.300.01 651.999.02 990.071.00 991.063.00 |
| 12 | 50 | 103 | | | 652.121.11 | 652.621.11 | | | | | 790.500.01 651.999.03 990.016.00 991.060.00 |
| 12,7 | 30 | 70 | 651.127.11 | | | | | | | | 790.300.01 651.999.02 990.071.00 991.063.00 |
| 12,7 | 30 | 80 | | | | 651.727.11 | | | | | 790.300.01 651.999.02 990.071.00 991.063.00 |
| 12,7 | 50 | 103 | | | | 652.628.11 | | | | | 790.500.01 651.999.03 990.016.00 991.060.00 |
| 14 | 30 | 73 | | 651.140.11 | | | | | | | 790.300.01 651.999.02 990.071.00 991.063.00 |


Straight router bits with insert knives for laminates

INSERT CARBIDE Z1 RH



652

Straight trimmer bits with one replaceable knife fixed by Tox screw. For economical specialist application requiring low down-time. The 29,5x9x1,5mm knives provide a 40mm cutting length when operating in multiple passes. For routing, trimming and grooving on board materials (laminated chipboards, worktop panels and MDF). For use on portable routers.

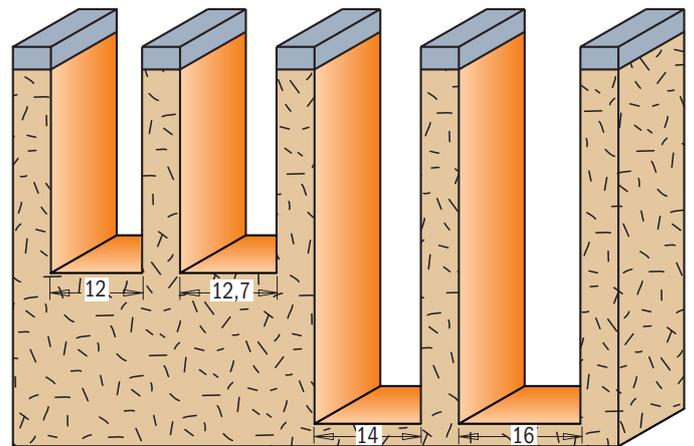

Drawings are 1:1 scale

| D mm | I mm | L mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | |
|------|------|------|---------------------|----------------------|------------------------|-------------|--|--|--|----------------------------------|
| 12 | 29,5 | 79 | 652.120.11 | | | | | | | 790.295.09 990.072.00 991.061.00 |
| 12 | 39,5 | 90 | 652.122.11 | | | | | | | 790.395.09 990.072.00 991.061.00 |
| 12,7 | 29,5 | 89 | | | 652.627.11 | | | | | 790.295.09 990.072.00 991.061.00 |
| 14 | 50 | 96 | | 652.141.11 | | | | | | 790.500.09 990.072.00 991.061.00 |
| 16 | 50 | 96 | | 652.161.11 | | | | | | 790.500.09 990.072.00 991.061.00 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts


Straight router bits with insert knives



653

Straight router bits with on replaceable plunging knife and side knife fixed by a special Torx screw. The tool bodies are precisely balanced. For finishing, routing, plunging and grooving on board materials (laminated chipboards and MDF) and hardwood. For use on portable routers or CNC machining centres.

INSERT CARBIDE Z1+1 RH

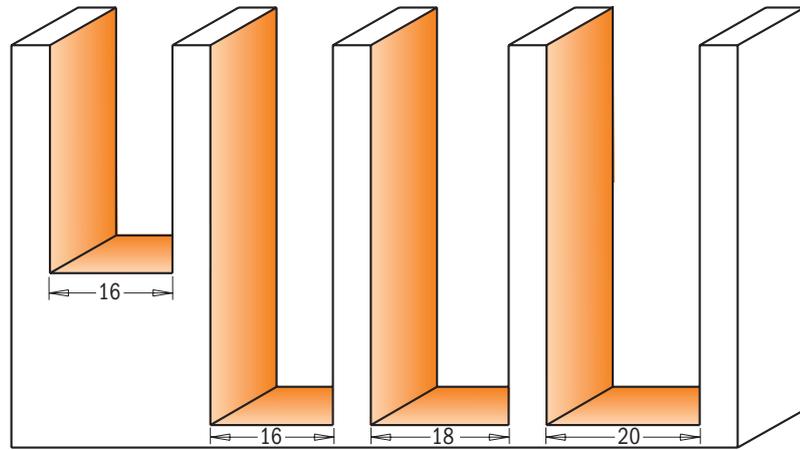

Drawings are 1:1 scale

| D mm | I mm | L mm | ORDER NO. | | | | Spare parts | | | | | |
|---------|---------|---------|-------------------|-------------------|-----------|-------------------|-------------|------------|------------|------------|------------|------------|
| | | | S=Ø8mm | S=Ø12mm | S=Ø12,7mm | S=Ø20mm | | | | | | |
| 15,8 | 28,3 | 91 | | | | 653.158.11 | 790.283.12 | 990.074.00 | 990.075.00 | 790.075.00 | 990.072.00 | 991.061.00 |
| 15,8 | 48,3 | 111 | | | | 653.159.11 | 790.483.12 | 990.074.00 | 990.075.00 | 790.075.00 | 990.072.00 | 991.061.00 |
| 16 | 28,3 | 81 | 653.160.11 | | | | 790.283.12 | 990.074.00 | 990.075.00 | 790.075.00 | 990.072.00 | 991.061.00 |
| 16 | 28,3 | 91 | | 653.161.11 | | 653.661.11 | 790.283.12 | 990.074.00 | 990.075.00 | 790.075.00 | 990.072.00 | 991.061.00 |
| 16 | 48,3 | 111 | | 653.162.11 | | 653.662.11 | 790.483.12 | 990.074.00 | 990.075.00 | 790.075.00 | 990.072.00 | 991.061.00 |
| 18 | 48,3 | 111 | | | | 653.681.11 | 790.483.12 | 990.074.00 | 990.075.00 | 790.075.00 | 990.072.00 | 991.061.00 |
| 20 | 48,3 | 111 | | | | 653.701.11 | 790.483.12 | 990.074.00 | 990.075.00 | 790.096.00 | 990.072.00 | 991.061.00 |

Straight router bits with insert knives




655

654

Straight router bit with two replaceable knives fixed by special Torx screws. Their blades are sharpened on the top with 3° angle for better plunging operations.

INSERT CARBIDE Z2 RH

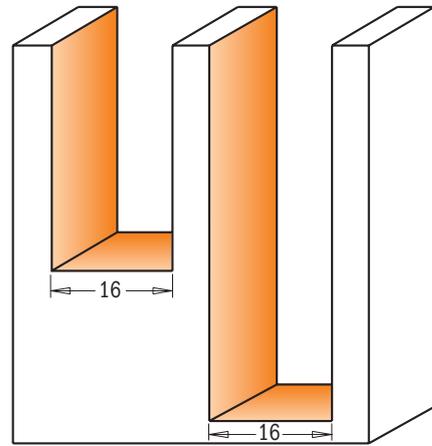

Drawings are 1:1 scale



| D mm | I mm | L mm | ORDER NO. | | | | Spare parts | | |
|---------|---------|---------|-------------------|-------------------|-------------------|-------------------|-------------|------------|------------|
| | | | S=Ø8mm | S=Ø12mm | S=Ø12,7mm | S=Ø20mm | | | |
| 16 | 28,3 | 76 | 654.160.11 | | | | 790.283.12 | 990.073.00 | 991.061.00 |
| 16 | 28,3 | 86 | | 654.161.11 | 654.661.11 | | 790.283.12 | 990.073.00 | 991.061.00 |
| 16 | 48,3 | 105 | | 654.162.11 | | 654.662.11 | 790.483.12 | 990.073.00 | 991.061.00 |
| 19 | 12 | 45 | 655.190.11 | | | | 790.120.00 | 990.075.00 | 991.061.00 |

Mortising bits




7/8/901B

Equipped with thick carbide tips and negative shear angle design, CMT mortising bits guarantee you flawless performance. Mortise perfect hinges with no splintered edges or rough bottoms. They also make an easy job on both natural wood and wood composites. Fit most popular mortising jigs. The CMT mortising bit with top bearing guide is the perfect bit for sign making or any kind of template work.

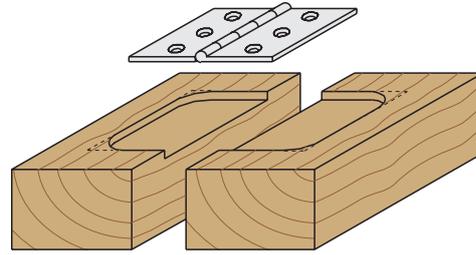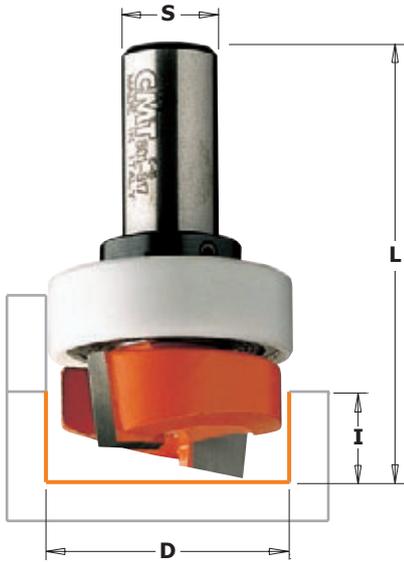


Example of usage of a CMT mortising bit to fit a hinge.

7/8/901

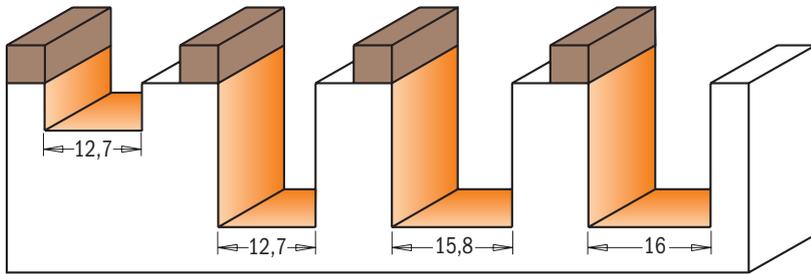

Drawings are 1:1 scale

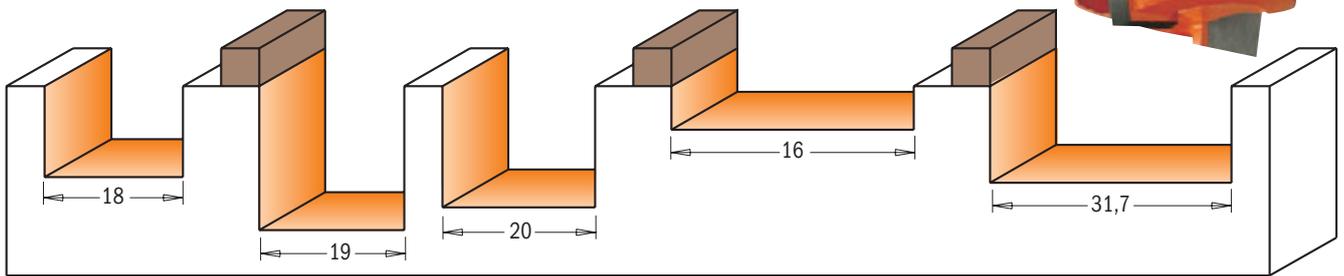

| D | I | L | ORDER NO. | ORDER NO. | ORDER NO. | ORDER NO. | ORDER NO. |
|-------------------------|------|----|--------------------|--------------------|--------------------|-------------------|--------------------|
| mm | mm | mm | S=Ø6mm | S=Ø6,35mm | S=Ø8mm | S=Ø12mm | S=Ø12,7mm |
| 12,7 | 6,35 | 41 | | 801.128.11 | | | |
| 12,7 | 19 | 54 | 701.127.11 | 801.127.11 | 901.127.11 | | |
| 12,7 | 19 | 60 | | | | 901.627.11 | 801.627.11 |
| 15,8 | 19 | 57 | | 801.158.11 | | | |
| 16 | 19 | 54 | 701.160.11 | | 901.160.11 | | |
| 18 | 16 | 48 | 701.180.11 | | 901.180.11 | | |
| 19 | 19 | 54 | 701.190.11 | 801.190.11 | 901.190.11 | | |
| 19 | 19 | 57 | | | | | 801.690.11 |
| 20 | 16 | 48 | 701.200.11 | | 901.200.11 | | |
| 31,7 | 5,7 | 63 | | | | | 801.818.11 |
| 31,7 | 12,7 | 48 | | 801.317.11 | | | |
| 31,7 | 12,7 | 54 | | | | 901.817.11 | 801.817.11 |
| with top bearing | | | | | | | |
| 12,7 | 6,35 | 41 | | 801.128.11B | | | |
| 12,7 | 19 | 54 | | 801.127.11B | | | |
| 15,8 | 19 | 57 | | 801.158.11B | | | |
| 16 | 19 | 54 | | | 901.160.11B | | |
| 19 | 19 | 54 | 701.190.11B | | | | |
| 19 | 19 | 54 | | 801.190.11B | | | |
| 31,7 | 5,7 | 63 | | | | | 801.818.11B |
| 31,7 | 12,7 | 54 | | | | | 801.817.11B |

Spare parts



| | | |
|------------|------------|------------|
| 791.010.00 | 541.001.00 | 991.056.00 |
| 791.010.00 | 541.001.00 | 991.056.00 |
| 791.009.00 | 541.001.00 | 991.056.00 |
| 791.025.00 | 541.004.00 | 991.056.00 |
| 791.007.00 | 541.003.00 | 991.056.00 |
| 791.004.00 | 541.001.00 | 991.056.00 |
| 791.015.00 | 541.002.00 | 991.056.00 |
| 791.015.00 | 541.002.00 | 991.056.00 |


Hinge recesser bits




7/902

CMT hinge recesser bits are ideal for shallow lateral routing cuts such as recessing hinges.

SHOP TIPS: corners will require final square with a hand or a corner chisel.

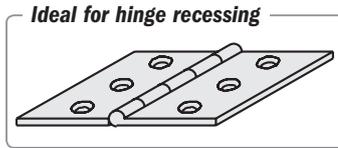


The special construction allows good chip clearance and plunging.

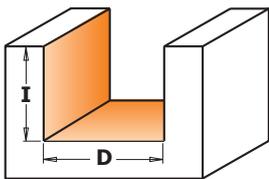

Drawing is 1:1 scale



| D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø8mm |
|---------|---------|---------|---------------------|---------------------|
| 12 | 12 | 38 | 702.120.11 | 902.120.11 |
| 13 | 12 | 38 | 702.130.11 | 902.130.11 |
| 14 | 12 | 38 | 702.140.11 | 902.140.11 |
| 15 | 12 | 38 | 702.150.11 | 902.150.11 |
| 16 | 12 | 38 | 702.160.11 | 902.160.11 |
| 18 | 12 | 38 | 702.180.11 | 902.180.11 |
| 20 | 11 | 38 | 702.200.11 | 902.200.11 |
| 22 | 11 | 38 | 702.220.11 | 902.220.11 |
| 23 | 11 | 38 | 702.230.11 | 902.230.11 |
| 24 | 11 | 38 | 702.240.11 | 902.240.11 |
| 25 | 11 | 38 | 702.250.11 | 902.250.11 |

Dado & Planer bits

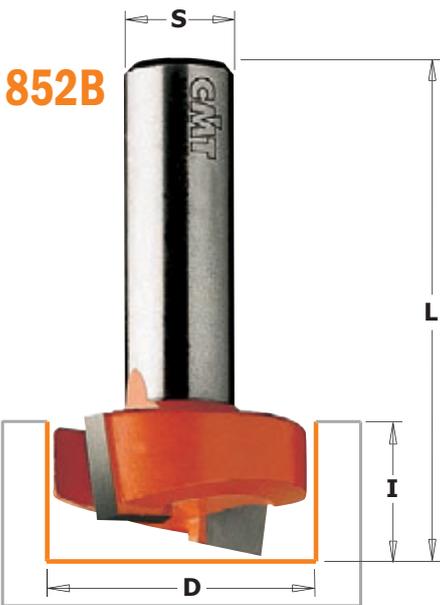

852

Constructed with thick carbide tips and downward shear angle design, CMT mortising bits give you flawless performance. The negative shear angle of the cutting edges pushes the wood fibers down as they cut, allowing you to rout perfect hinge mortises with no splintered edges or rough bottoms. They also make an easy job on both natural wood and wood composites. We offer bits to fit the most popular mortising jigs.

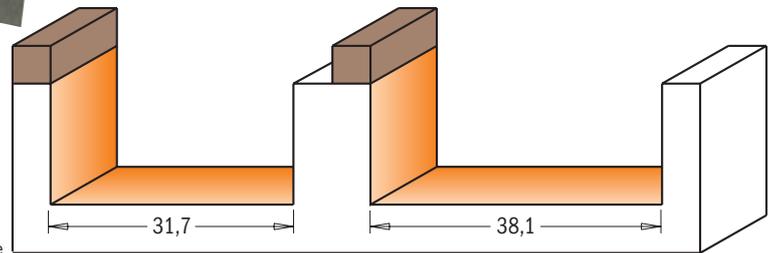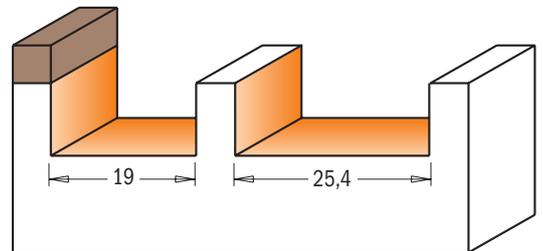

Drawings are 1:1 scale

| D mm | I mm | L mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø12,7mm |
|-------------------------|---------|---------|------------------------|------------------------|
| 19 | 9,5 | 57 | 852.001.11 | |
| 19 | 9,5 | 63,5 | | 852.501.11 |
| 25,4 | 9,5 | 57 | | 852.502.11 |
| 31,7 | 15,8 | 70 | | 852.503.11 |
| 38,1 | 15,8 | 70 | | 852.504.11 |
| with top bearing | | | | |
| 19 | 9,5 | 57 | 852.001.11B | |
| 19 | 9,5 | 63,5 | | 852.501.11B |
| 31,7 | 15,8 | 70 | | 852.503.11B |
| 38,1 | 15,8 | 70 | | 852.504.11B |

Spare parts




| | | |
|------------|------------|------------|
| 791.004.00 | 541.001.00 | 991.056.00 |
| 791.011.00 | 541.002.00 | 991.056.00 |
| 791.015.00 | 541.002.00 | 991.056.00 |
| 791.020.00 | 541.002.00 | 991.056.00 |

Pattern bits


7/8/912B

7/8/911B

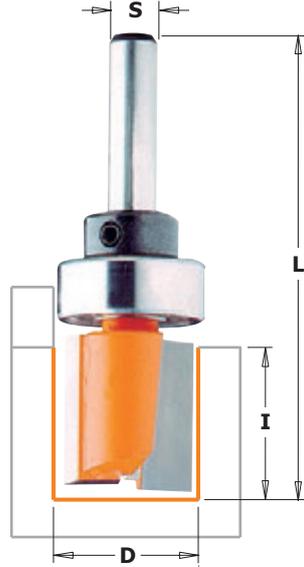


Whether you are a full time professional or a part time woodworking enthusiast, discover the unlimited possibilities of template routing with a CMT pattern bit. Pair up these double fluted bits with your choice of template to produce cabinet and furniture pieces, signs, toys and any other creative projects. Carbide tipped to last longer, CMT pattern bits are equipped with top bearing for working with the bearing above the wood piece. This gives you a clear view of what you are routing so you can work confidently and accurately.

SAFETY TIPS: Make sure your router is in top condition. The template must be securely fastened to the workpiece. When choosing a bit, carefully consider the thickness of the template and all the implications of the cut. Opt for the shortest bit possible for the project you are working on.



811.081.11B

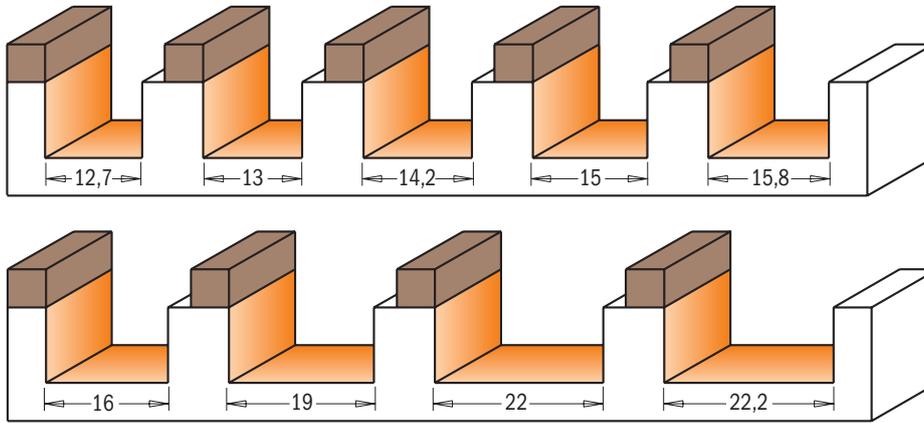

Drawings are 1:1 scale

| D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | |
|--------------------|---------|---------|---------------------|------------------------|---------------------|----------------------|------------------------|-------------|------------|------------|
| 8 | 25,4 | 70 | | 811.081.11B | | | | | | |
| 12,7 | 19 | 57 | | 811.127.11B | | | | 791.010.00 | 541.001.00 | 991.056.00 |
| 13 | 20 | 57 | 711.130.11B | | | | | 791.023.00 | 541.003.00 | 991.056.00 |
| 14,2 | 14,2 | 57 | | 811.142.11B | | | | 791.009.00 | 541.001.00 | 991.056.00 |
| 15 | 20 | 57 | 711.150.11B | | | | | 791.024.00 | 541.003.00 | 991.056.00 |
| 15,8 | 12,7 | 58 | | 811.159.11B | | | | 791.009.00 | 541.001.00 | 991.056.00 |
| 15,8 | 19 | 66,5 | | 811.158.11B | | | | 791.009.00 | 541.001.00 | 991.056.00 |
| 16 | 20 | 57 | | | 911.160.11B | | | 791.025.00 | 541.004.00 | 991.056.00 |
| 19 | 20 | 57 | 711.190.11B | | | | | 791.007.00 | 541.003.00 | 991.056.00 |
| 19 | 20 | 57 | | 811.191.11B | | | | 791.004.00 | 541.001.00 | 991.056.00 |
| 19 | 25,4 | 63,5 | | | | | 811.690.11B | 791.011.00 | 541.002.00 | 991.056.00 |
| 22 | 20 | 57 | | | 911.220.11B | | | 791.005.00 | 541.004.00 | 991.056.00 |
| 22,2 | 25,4 | 66,5 | | | | | 811.222.11B* | 791.021.00 | 541.006.00 | 991.056.00 |
| long series | | | | | | | | | | |
| 12,7 | 31,7 | 70 | | 812.127.11B | | | | 791.010.00 | 541.001.00 | 991.056.00 |
| 15 | 31,7 | 66,5 | 712.150.11B | | | | | 791.024.00 | 541.003.00 | 991.056.00 |
| 15,8 | 31,7 | 70 | | 812.158.11B | | | | 791.009.00 | 541.001.00 | 991.056.00 |
| 16 | 31,7 | 66,5 | | | 912.160.11B | | | 791.025.00 | 541.004.00 | 991.056.00 |
| 19 | 38,1 | 82,5 | | | | 912.690.11B | | 791.011.00 | 541.005.00 | 991.056.00 |
| 19 | 38,1 | 82,5 | | | | | 812.690.11B | 791.011.00 | 541.002.00 | 991.056.00 |
| 19 | 50,8 | 92 | | | | 912.691.11B | | 791.011.00 | 541.005.00 | 991.056.00 |
| 19 | 50,8 | 92 | | | | | 812.691.11B | 791.011.00 | 541.002.00 | 991.056.00 |


This item requires a slightly larger bearing than its cutting diameter
 *Ø9,5mm shanks with Ø9,5/12,7mm bushings (799.001.00)

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts



652B

Straight router bits with on replaceable knife fixed by a Torx screw. For economical specialist applications requiring low downtime. They are equipped with top bearing for template use. For routing, trimming and grooving in board materials (laminated chipboards, worktop panels, MDF). For use on portable routers.

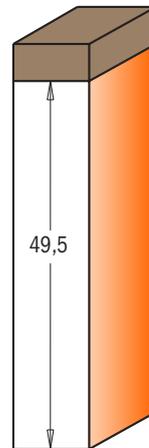

Drawing is 1:1 scale


| D mm | I mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | | |
|---------|---------|---------|----------------------|------------------------|-------------|------------|------------|------------|------------|------------|
| 19 | 49,5 | 100 | 652.690.11B | 652.691.11B | | | | | | |
| | | | | | 790.495.09 | 990.072.00 | 991.061.00 | 791.011.00 | 541.002.00 | 991.056.00 |

Pattern router bits with insert knives for laminates



656

This bit type is equipped with top bearing for template use. For finishing, routing and grooving in board materials (laminated chipboards, MDF) and hardwood. Fors use on portable routers or CNC machining centres.

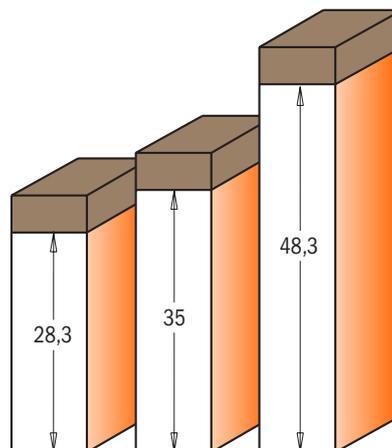

Drawings are 1:1 scale

| D mm | I mm | L mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | | |
|---------|---------|---------|---------------------|----------------------|------------------------|-------------|------------|------------|------------|------------|------------|
| 16 | 35 | 80 | 656.160.11 | | | | | | | | |
| 19 | 28,3 | 69 | 656.190.11 | | | 790.283.12 | 990.075.00 | 991.061.00 | 791.025.00 | 541.004.00 | 991.056.00 |
| 19 | 28,3 | 79 | | | 656.691.11 | 790.283.12 | 990.075.00 | 991.061.00 | 791.011.00 | 541.002.00 | 991.056.00 |
| 19 | 48,3 | 100 | | 656.692.11 | 656.693.11 | 790.483.12 | 990.075.00 | 991.061.00 | 791.011.00 | 541.002.00 | 991.056.00 |

Weatherseal bits

HWM Z2 RH



7/813.001



191.635

711.031


712.030
712.040
812.032

Make your house more energy efficient by insulating old doors and windows. A CMT Weatherseal bit is the perfect bit to re-groove door and window frames to accommodate wind blocking inserts. Made of solid carbide for strength and endurance.

Special economical double-sided design lets you save money by offering two tips in one bit; with the same features as the one-sided weatherseal bit. Only available with a 3mm (1/8") cutting diameter.

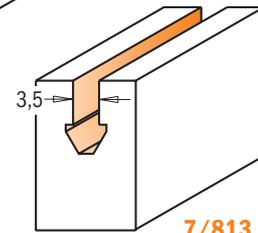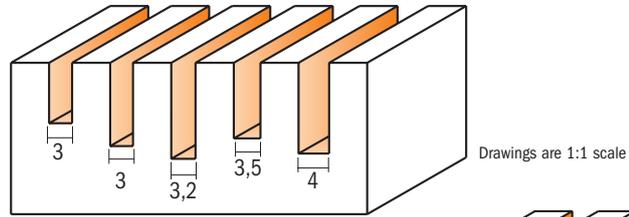


7/813.001.11

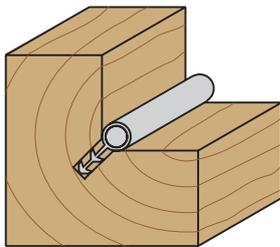

| D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm |
|---------|---------|---------|---------------------|------------------------|
| 3 | 8 | 70 | 711.031.11 | |
| 3 | 11 | 60 | 712.030.11 | |
| 3,2 | 12,7 | 50,8 | | 812.032.11 |
| 3,5 | 10 | 60 | 191.635.11 | |
| 4 | 12 | 60 | 712.040.11 | |
| 3,5 | 8 | 70 | 713.001.11 | |
| 3,5 | 8 | 63,5 | | 813.001.11 |

Combination trimmer bits


HW Z2 RH

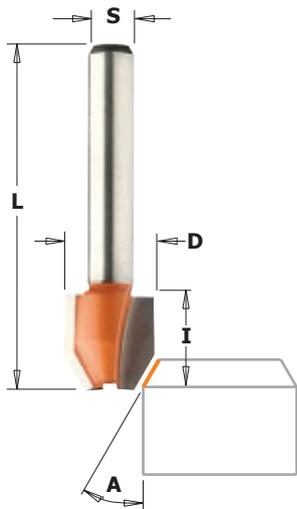

7/8/921

Work to your highest standards with the CMT combination trimmer bits. Now you can cut, trim and bevel all laminated without changing the bits. Achieve great results in straight or angled cuts on both soft and hardwood. Three popular sizes, each with carbide-tipped cutting edges for efficient bevel and straight trimming.

NOTICE: these bits must be used with an edge, separate guide or fence.

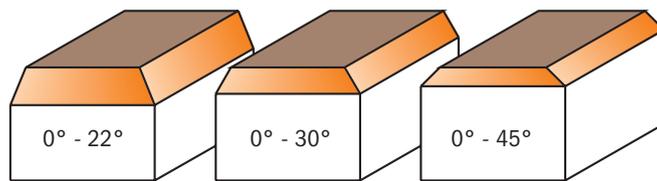


Drawings are 1:1 scale

| A | D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm |
|----------|---------|---------|---------|---------------------|------------------------|---------------------|
| 0° - 22° | 12 | 12,7 | 44,5 | 721.022.11 | 821.022.11 | |
| 0° - 30° | 12 | 12,7 | 44,5 | 721.030.11 | 821.030.11 | 921.030.11 |
| 0° - 45° | 12 | 12,7 | 44,5 | 721.045.11 | 821.045.11 | |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Combination trimmer bits

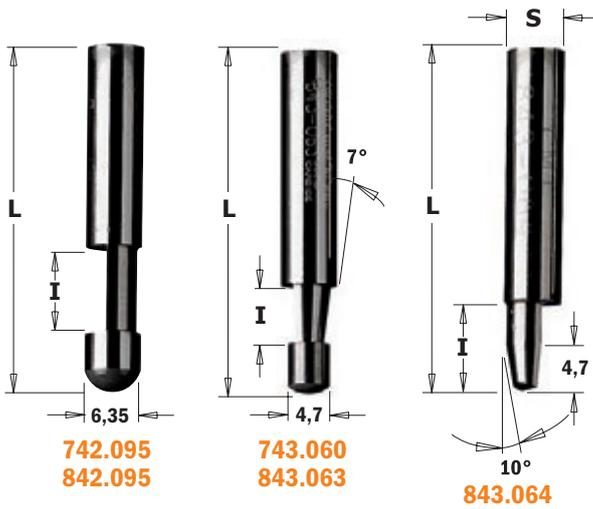

7/842 - 7/843




Work to your highest standards with the CMT combination trimmer bits. Now you can cut, trim and bevel all laminated without changing the bits. Achieve great results in straight or angled cuts on both soft and hardwood. Three popular sizes, each with carbide-tipped cutting edges for efficient bevel and straight trimming.

NOTICE: these bits must be used with an edge, separate guide or fence.




Masterpack

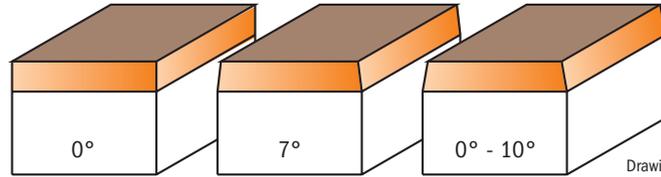

Drawings are 1:1 scale

| A | D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm |
|------------------------------|------|------|------|-------------------|-----------------------|
| 0° | 6 | 9,5 | 38,1 | 742.095.11 | |
| 0° | 6,35 | 9,5 | 38,1 | | 842.095.11 |
| 7° | 6 | 6 | 38,1 | 743.060.11 | |
| 7° | 6,35 | 6,35 | 38,1 | | 843.063.11 |
| 0° - 10° | 6,35 | 9,5 | 38,1 | | 843.064.11 |
| 50 pcs. in masterpack | | | | | |
| 0° | 6,35 | 9,5 | 38,1 | | 842.095.11-X50 |
| 7° | 6,35 | 6,35 | 38,1 | | 843.063.11-X50 |

Combination trimmer bits



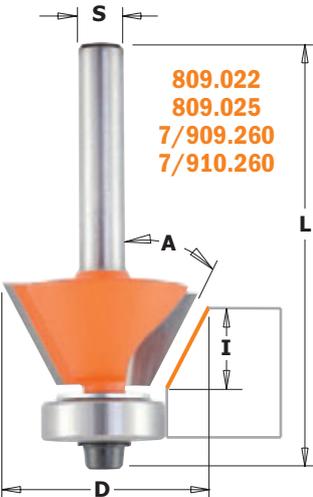


7/907 - 7/8/909 - 7/910

Using the CMT's combination flush and bevel trim bits is the easiest and most precise way to put execute finishing on laminates. No bit changing is necessary to achieve a large variety of angles; simply lower the bit cutting depth for perfect right angle cuts, or raise it for creating rounded off edges on both soft and hardwood.

These bits include ball bearing guide for easy template work and for guaranteeing the protection of your workpiece. Also they feature two flutes for smoother cutting and are perfect for rounding off table legs and other soft areas on furniture pieces that may be easily damaged.

Drawings are 1:1 scale

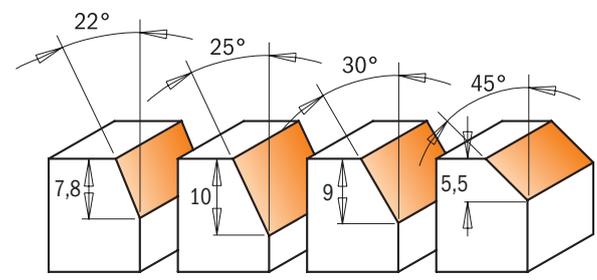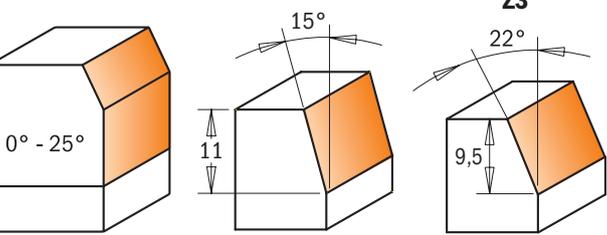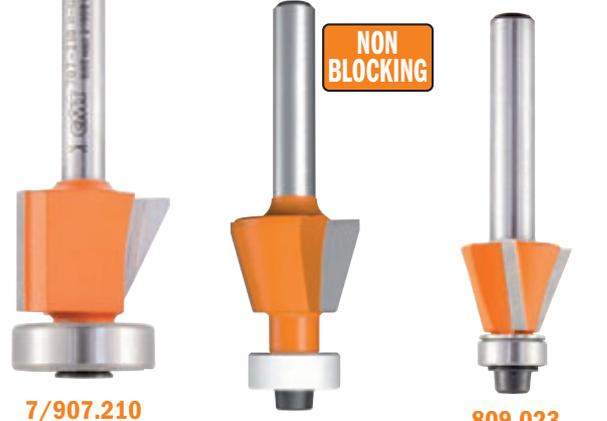

| A | D mm | I mm | L mm | Z | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm |
|----------------|-----------|-----------|------|---|-------------------|---------------------|-------------------|
| 0° - 25° | 19 - 24,5 | 16 (10+6) | 56,5 | 2 | 707.210.11 | | 907.210.11 |
| new 15° | 18,6 | 11 | 57 | 2 | 709.016.11 | 809.016.11 | |
| 22° | 12,7 | 7,8 | 47,6 | 2 | | 809.022.11 | |
| 22° | 17,5 | 9,5 | 51 | 3 | | 809.023.11 | |
| 25° | 19,05 | 10 | 52,4 | 2 | | 809.025.11 | |
| 30° | 27 | 9 | 55 | 2 | 709.260.11 | | 909.260.11 |
| 45° | 27 | 5,5 | 51,5 | 2 | 710.260.11 | | 910.260.11 |

Spare parts



| | | | |
|------------|------------|------------|------------|
| | 791.007.00 | 990.004.00 | 991.062.00 |
| new | 990.422.00 | 791.044.00 | 990.058.00 |
| | | 990.035.00 | 990.062.00 |
| new | 990.422.00 | 791.002.00 | 990.058.00 |
| | 990.422.00 | 791.002.00 | 990.058.00 |
| | 990.422.00 | 791.002.00 | 990.058.00 |
| | 990.423.00 | 791.018.00 | 990.058.00 |
| | 990.423.00 | 791.018.00 | 990.058.00 |

Flush trim bits





7/8/906

We have designed a series of truly indispensable bits available in a wide range of sizes for your woodworking needs and your most difficult projects. For precision work on laminates or quick template work with excellent finishing.

SHOP TIPS: these bits are excellent for making through mortises. Use a straight bit (#711.130.11) to groove the through mortise area, then use the drill bit (#517.130.31) to bore a through hole at the end of the groove. Turn the workpiece over to end the mortise. Use the flush trim bit with a cutting length slightly longer than the fillet, following the groove made on the opposite side of the workpiece with the ball bearing guide.

new

8/906.227.11
Z3

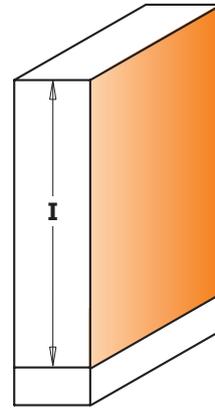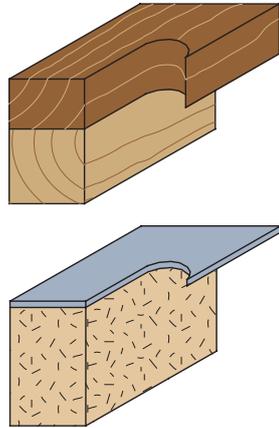

Masterpack

Drawing is 1:1 scale

• HWM

| I mm | D mm | L mm | Z | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------------------------------|---------|---------|---|---------------------|------------------------|---------------------|----------------------|------------------------|
| •25,4 | 6,35 | 63,5 | 2 | 706.064.11 | 806.064.11 | | | |
| 12,7 | 9,5 | 55,5 | 2 | 706.096.11 | 806.096.11 | 906.096.11 | | |
| 12,7 | 12,7 | 57,8 | 2 | 706.128.11 | 806.128.11 | 906.128.11 | | |
| 12,7 | 12,7 | 70,6 | 2 | | | | 906.628.11 | 806.628.11 |
| 16 | 19 | 57,1 | 2 | 706.190.11 | | 906.190.11 | | |
| 25,4 | 9,5 | 68,2 | 2 | 706.095.11 | 806.095.11 | 906.095.11 | | |
| 25,4 | 12,7 | 70,7 | 2 | 706.127.11 | 806.127.11 | 906.127.11 | | |
| new 25,4 | 12,7 | 71 | 3 | | 806.227.11 | 906.227.11 | | |
| 25,4 | 12,7 | 86,6 | 2 | | | | 906.627.11 | 806.627.11 |
| 38,1 | 12,7 | 94 | 2 | | | | 906.629.11 | 806.629.11 |
| 50,8 | 12,7 | 103,7 | 2 | | | | 906.630.11 | 806.630.11 |
| 10 pcs. in masterpack | | | | | | | | |
| 25,4 | 9,5 | 68,2 | 2 | | 806.095.11-X10 | | | |
| 25,4 | 12,7 | 70,7 | 2 | | 806.127.11-X10 | | | 806.627.11-X10 |
| 38,1 | 12,7 | 94 | 2 | | | | | 806.629.11-X10 |

Spare parts



| | | |
|------------|------------|------------|
| 791.035.00 | 541.350.00 | |
| 791.002.00 | 990.422.00 | 990.058.00 |
| 791.003.00 | 990.423.00 | 990.058.00 |
| 791.003.00 | 990.423.00 | 990.058.00 |
| 791.007.00 | | 990.004.00 |
| 791.002.00 | 990.422.00 | 990.058.00 |
| 791.003.00 | 990.423.00 | 990.058.00 |
| 791.003.00 | 990.423.00 | 990.058.00 |
| 791.003.00 | 990.423.00 | 990.058.00 |
| 791.003.00 | 990.423.00 | 990.058.00 |
| 791.003.00 | 990.423.00 | 990.058.00 |

Spare parts
991.057.00 3/32" hex key for screw (990.058.00)
991.062.00 2,5mm hex key for screw (990.004.00)




Flush trim bit set

806

Indispensable in any shop, the new 3 piece flush trim bit set gives you the option to trim laminates or do template work conveniently.

Set contains:
806.095.11 - 806.096.11 - 806.191.11.

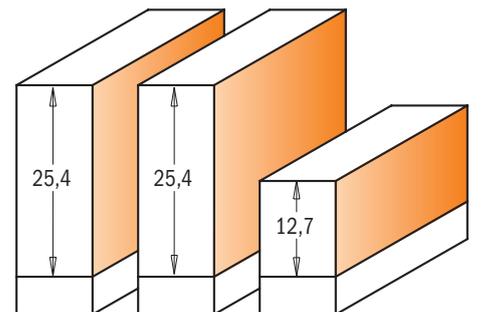

Drawings are 1:1 scale

| DESCRIPTION | BITS SIZES mm | ORDER NO. S=Ø6,35mm |
|--------------------|-----------------------------|------------------------|
| Flush trim bit set | 9,5x12,7 - 9,5x25,4 - 19x25 | 806.001.11 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Super-duty flush trim bits





7/8/906



These new super duty bits represent the finest of the extensive line of CMT flush trim bits with ball bearing guides. A negative shear angle cutting edge and 19mm cutting diameter set CMT flush trim bits apart from standard bits. Work quickly and safely to get a superior finishing with absolute minimal chipping.

SAFETY TIPS: dust and chips from laminate materials are hazardous to your health and safety. Always wear a dust mask and eye protection when routing.

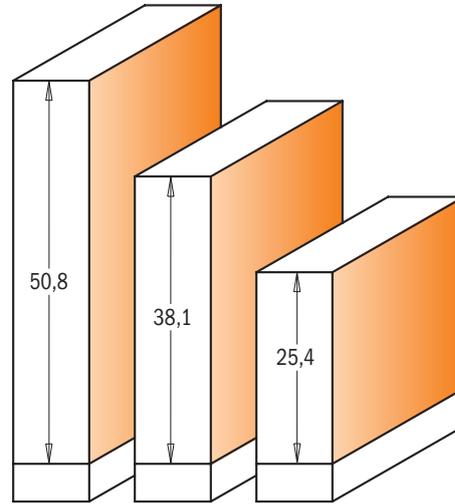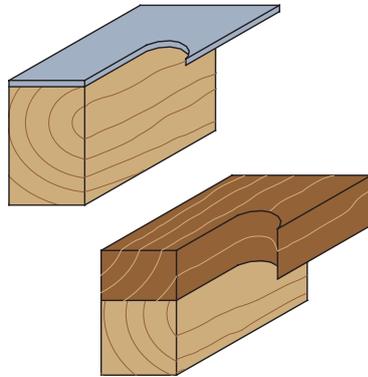


Drawings are 1:1 scale



| I mm | D mm | L mm | ORDER NO. | ORDER NO. | ORDER NO. | ORDER NO. | ORDER NO. | Spare parts | | | |
|---------|---------|---------|-------------------|-------------------|-------------------|-----------|-------------------|-------------------|------------|------------|------------|
| | | | S=Ø6mm | S=Ø6,35mm | S=Ø8mm | S=Ø12mm | S=Ø12,7mm | | | | |
| 25,4 | 19 | 73,9 | 706.191.11 | 806.191.11 | 906.191.11 | | | 791.004.00 | 541.550.00 | 990.058.00 | |
| 25,4 | 19 | 86,5 | | | | | 906.691.11 | 806.691.11 | 791.004.00 | 541.550.00 | 990.058.00 |
| 38,1 | 19 | 92,9 | | | | | 906.692.11 | 806.692.11 | 791.004.00 | 541.550.00 | 990.058.00 |
| 50,8 | 19 | 109,5 | | | | | 906.690.11 | 806.690.11 | 791.004.00 | 541.550.00 | 990.058.00 |

Spare parts 991.057.00 3/32" hex key for screw (990.058.00)



DP Flush trim bits for laminates

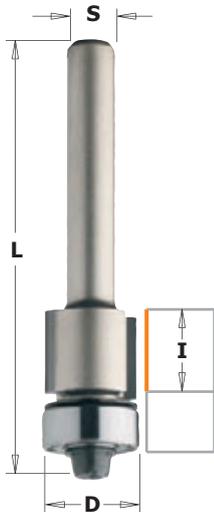

7/8/906 XTREME



These new super duty DP (polycrystalline diamond) bits represent the ultimate in the extensive line of CMT flush trim bits. Investing in CMT DP flush trim bits to save time and money, as they last at least 40 times longer than conventional carbide tipped flush trim bits.

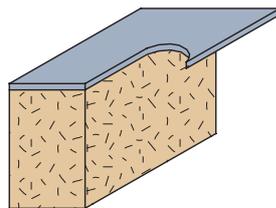


Drawing is 1:1 scale

40X
LONGER LIFE
THAN CARBIDE

| I mm | D mm | L mm | ORDER NO. | ORDER NO. | ORDER NO. | Spare parts | | | |
|---------|---------|---------|-------------------|-------------------|-------------------|-------------|------------|------------|------------|
| | | | S=Ø6mm | S=Ø6,35mm | S=Ø8mm | | | | |
| 11 | 12,7 | 58,1 | 706.128.61 | 806.128.61 | 906.128.61 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |



Double-bearing spiral flush trim bits

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

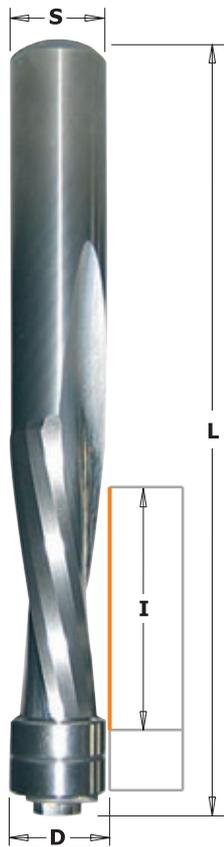

190B-191B-192B


The new CMT solid carbide spiral flush trim bits are manufactured with a special super-micrograin formulation that has increased hardness with a higher transverse rupture point. Combined with the spiral cutting angle, the new CMT solid carbide spiral flush trim bits with double bearing allow the cabinet maker to shear wood and wood products cleanly, providing more efficient chip ejection than standard flush trim bits. In production settings these new bits will run cooler and the edges will stay sharper, last longer and increase your shop productivity.

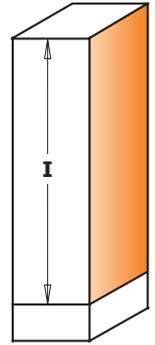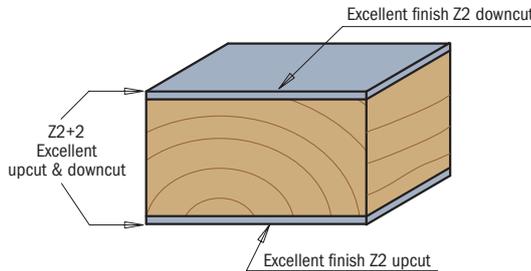

Drawing is 1:1 scale

| I mm | D mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | |
|--|------|------|--------------------|---------------------|--------------------|---------------------|-------------|------------|
| Z2+2 upcut & downcut spiral bit | | | | | | | | |
| 42 | 12,7 | 114 | | | 190.127.11B | 190.508.11B | 791.010.00 | 541.301.00 |
| Z2 upcut spiral bit | | | | | | | | |
| 25,4 | 6,35 | 76,2 | 191.064.11B | 191.008.11B | | | 791.035.00 | 541.350.00 |
| 31,7 | 12,7 | 89 | | | | 191.505.11B | 791.010.00 | 541.301.00 |
| 50,8 | 12,7 | 114 | | | 191.127.11B | 191.507.11B | 791.010.00 | 541.301.00 |
| Z2 downcut spiral bit | | | | | | | | |
| 31,7 | 12,7 | 89 | | | | 192.505.11B | 791.010.00 | 541.301.00 |
| 50,8 | 12,7 | 114 | | | 192.127.11B | 192.507.11B | 791.010.00 | 541.301.00 |

3 in 1 flush trim bits for MDF/laminate

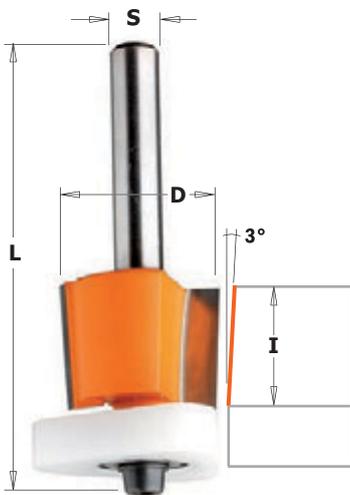

7/8/907





3 in 1 new flush trim bits with Delrin® Triangular bearings are your best partner for laminate trimming. In fact it solves 3 of the most common problems that occur in flush trimming in cabinet shops:

- 1) The anti-stick properties of the Delrin® bearing greatly reduces the likelihood of freezing of the bearing from glue.
- 2) The extended guide surface of the new Delrin® bearing will perfectly match the work surface without scratching like the steel bearing would. The Delrin® bearing also guarantees maximum stability.
- 3) The shear angle cutting edge reduces the need for filing. 3 in 1 bits are ideal on plastic laminates as well as aluminium laminates!

3 in 1 bits are ideal on plastic laminates as well as aluminium laminates!

Patent pending


- Extended guide surface
- Non-freezing
- Non-scratch surface

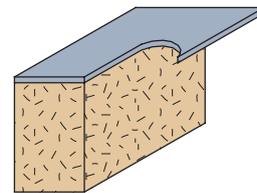

Drawing is 1:1 scale

Perfect trimming with the conical edges!

Thanks to the innovative conical edges of this bit you will always get perfect cuts even after re-sharpening. In fact, the most popular problem you have with the standard flush trim bits is the undersize diameter after re-sharpening which leaves the mark on the material; now with the new CMT construction you could re-sharpen up to six times without any problem. Just remember to adjust your bit up or down as per the illustration.

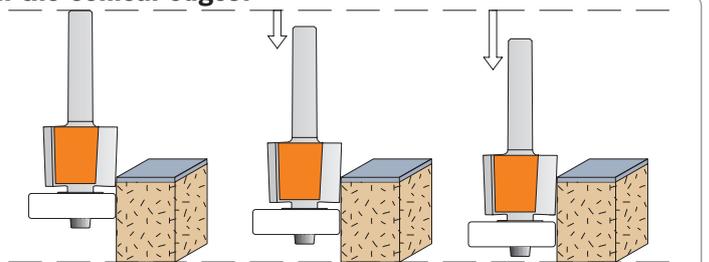


| I mm | D mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm | Spare parts | | | |
|-------|------|------|-------------------|---------------------|-------------------|---------------------|-------------|------------|------------|------------|
| 12,7 | 12,7 | 54,2 | 707.128.11 | 807.128.11 | 907.128.11 | | | | | |
| 15,87 | 19 | 59,3 | 707.190.11 | 807.190.11 | 907.190.11 | | 990.422.00 | 791.042.00 | 990.058.00 | 991.057.00 |
| 15,87 | 19 | 65,7 | | | | 807.690.11 | 990.423.00 | 791.043.00 | 990.058.00 | 991.057.00 |
| | | | | | | | 990.423.00 | 791.043.00 | 990.058.00 | 991.057.00 |

Flush trim bits with insert knives




657.1

Flush trim bits with two replaceable knives fixed by special Torx screws. The blades are 2 sided sharpened and can give extra new edges. Guided flush trim bits type 657 are equipped with the ball bearing guides.

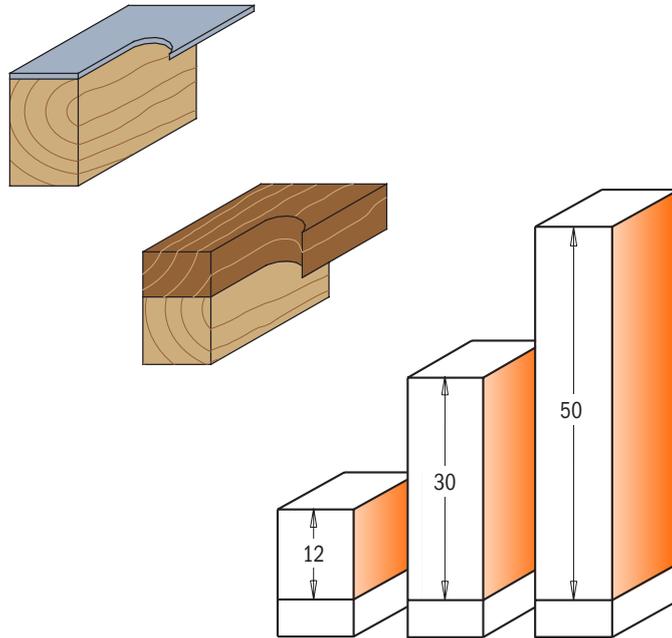

Drawings are 1:1 scale

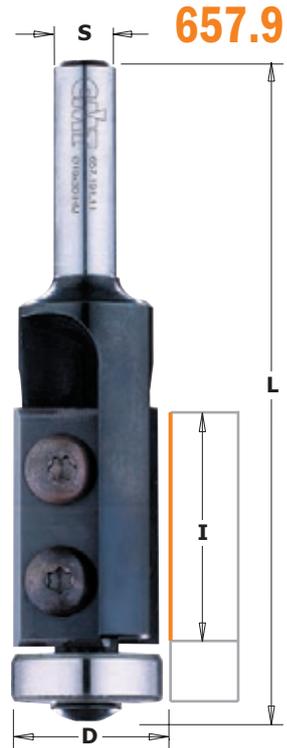

657.9

| I mm | D mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12 mm | ORDER NO. S=Ø12,7mm |
|------|------|------|-------------------|---------------------|-------------------|--------------------|---------------------|
| 12 | 19 | 56 | 657.194.11 | 657.192.11 | 657.190.11 | | |
| 30 | 19 | 74 | 657.195.11 | | 657.191.11 | | |
| 30 | 19 | 87 | | | | 657.692.11 | |
| 50 | 19 | 112 | | | | 657.991.11 | 657.992.11 |


Spare parts

| | | | |
|------------|------------|------------|------------|
| | | | |
| 790.120.00 | 990.075.00 | 991.061.00 | 791.007.00 |
| 790.300.00 | 990.075.00 | 991.061.00 | 791.007.00 |
| 790.300.00 | 990.075.00 | 991.061.00 | 791.007.00 |
| 790.500.00 | 990.075.00 | 991.061.00 | 791.007.00 |

Spare parts


- 990.410.00 Ø4,2/Ø9mm shield for M4 screws
- 990.052.00 M4x6mm TCEI screws
- 991.067.00 3mm hex key
- 541.514.00 Ø6,4mm shield

FILE-FREE Flush trim bits for laminate

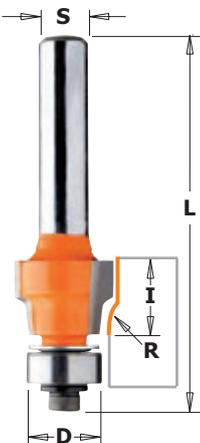

8/907

This new CMT's bit is perfect for ensuring smooth flawless results on your laminate surfaces after flush trimming. Sharp edges are easily trimmed away, leaving your surfaces nice and smooth to the touch. No further filing is needed!

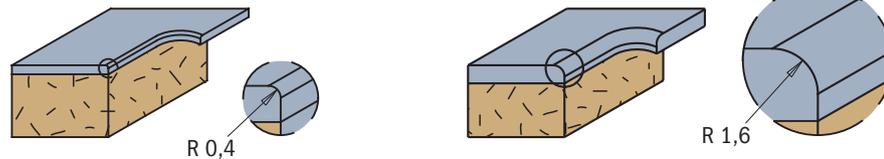

Drawings are 1:1 scale

| D mm | I mm | R mm | L mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm |
|------|------|------|------|---------------------|-------------------|
| 12,7 | 9,5 | 0,4 | 52 | 807.004.11 | 907.004.11 |
| 12,7 | 9,5 | 1,6 | 52 | 807.015.11 | 907.015.11 |

Spare parts

| | | | |
|------------|------------|------------|------------|
| | | | |
| 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |


Pattern/Flush trim bits with insert knives

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts



657B

Flush trim bit combined with pattern bit fixed by special Torx screws. The blades are 2 sided sharpened and can give extra new edges. Guided flush trim bits type 657 are equipped with the top and bottom ball bearing guides. For flush and finishing operations.

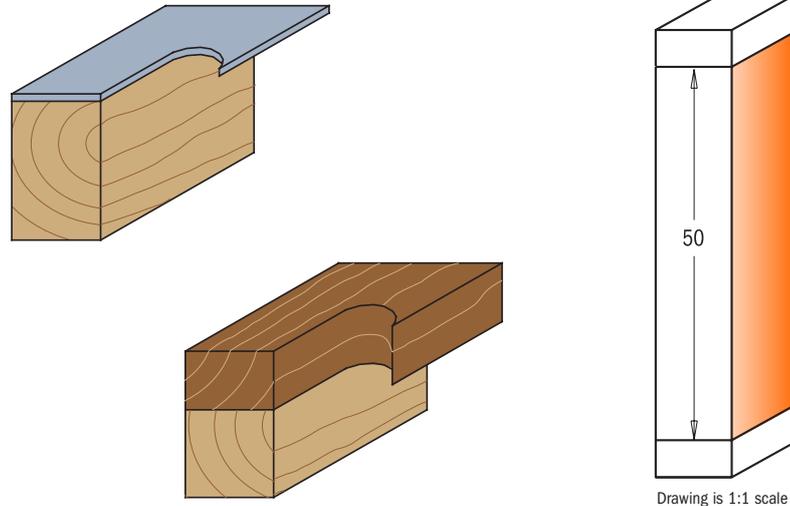

Drawing is 1:1 scale

| I mm | D mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------|------|------|----------------------|------------------------|
| 50 | 19 | 110 | 657.993.11B | |
| 50 | 19 | 110 | | 657.994.11B |

Spare parts

| | | | | | |
|------------|------------|------------|------------|------------|------------|
| | | | | | |
| 790.500.00 | 990.075.00 | 791.007.00 | 990.052.00 | 791.011.00 | 541.002.00 |
| 790.500.00 | 990.075.00 | 791.007.00 | 990.052.00 | 791.011.00 | 541.002.00 |

Spare parts
990.410.00 Ø4,2/Ø9mm shield for M4 screws
991.067.00 3mm hex key


991.061.00 T15 Torx key
991.056.00 1,5mm hex key

Flush trim router bits with double bearing



806/906B

These new innovative two-flute router bits are equipped with a double bearing and feature a down shear design, which allows for clean smooth cuts on many materials. Therefore it is no longer necessary to flip or move your tool if you need to ride it from either direction to the other side of your workpiece. You will benefit from this tool especially when routing curved elements along or against the grain.

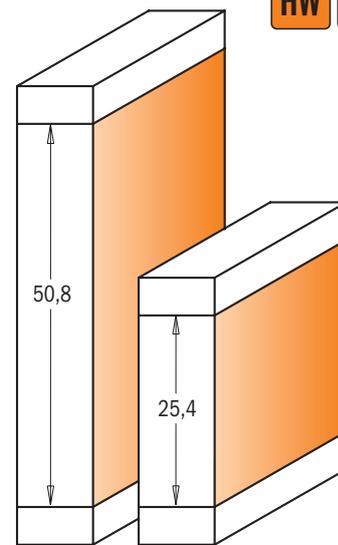

Drawings are 1:1 scale

| I mm | D mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------|------|-------|----------------------|------------------------|
| 25,4 | 19 | 86,5 | 906.691.11B | |
| 25,4 | 19 | 86,5 | | 806.691.11B |
| 50,8 | 19 | 109,5 | 906.690.11B | |
| 50,8 | 19 | 109,5 | | 806.690.11B |

Spare parts

| | | | | |
|------------|------------|------------|------------|------------|
| | | | | |
| 791.004.00 | 541.550.00 | 990.058.00 | 791.011.00 | 541.005.00 |
| 791.004.00 | 541.550.00 | 990.058.00 | 791.011.00 | 541.002.00 |
| 791.004.00 | 541.550.00 | 990.058.00 | 791.011.00 | 541.005.00 |
| 791.004.00 | 541.550.00 | 990.058.00 | 791.011.00 | 541.002.00 |

Panel pilot bits with guide





7/8/916



How much time do you end up spending making openings in paneling, drywall, siding, doors or windows? With the CMT panel pilot bit, the job just got quicker. The point plunges smoothly and easily and the carbide edges cut clean and fast. All of this adds up to accurate cuts in less time and with less effort - great for trimming formica, veneer and other laminates.

SAFETY TIPS: Always use extra caution when working near electrical outlets and boxes - always disconnect the current. Make sure the bit does not go so deep as to cut the wires.

716.061

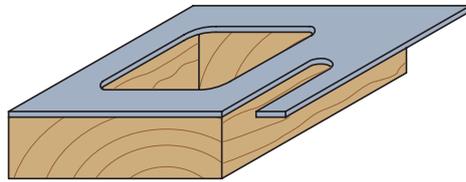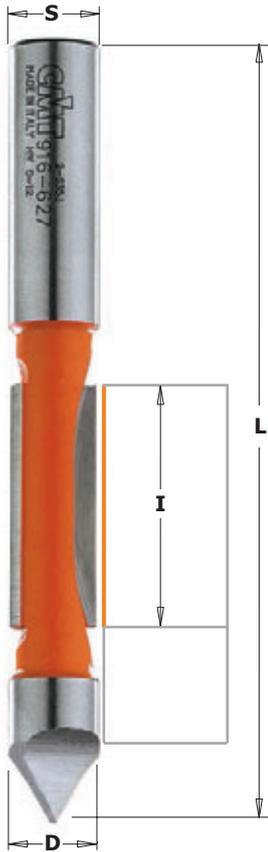

A unique and time saving bit, the CMT Double Panel Pilot Bit is perfect for making openings and slots in veneers and laminates. The lower portion of the cutting edge is located under the bearing and allows you to cut on both sides of the material. Durable carbide tipped cutters are spaced 12mm apart and each cutter can work in stock up to 18mm thick.

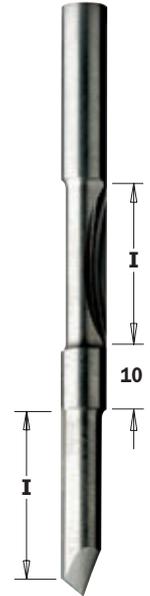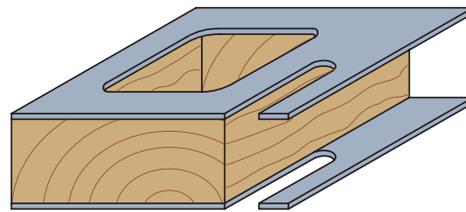

• HWM

| D mm | I mm | L mm | Z | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------------------------------|-------|------|-----|---------------------|------------------------|---------------------|----------------------|------------------------|
| 6 | 19 | 64 | 1 | 716.060.11 | | | | |
| •6 | 19 | 60 | 1 | 716.060.21 | | | | |
| •6 | 18+18 | 70 | 1+1 | 716.061.11 | | | | |
| 6,35 | 19 | 64 | 1 | | 816.064.11 | | | |
| 8 | 19 | 64 | 1 | | | 916.080.11 | | |
| 9,53 | 25,4 | 78 | 2 | | 816.095.11 | | | |
| 12 | 31,7 | 102 | 2 | | | | 916.627.11 | |
| 12,7 | 31,7 | 102 | 2 | | | | | 816.627.11 |
| 10 pcs. in masterpack | | | | | | | | |
| 12,7 | 31,7 | 102 | 2 | | | | | 816.627.11-X10 |



Panel pilot bits with guide

7/8/953



An absolutely indispensable bit for making cabinets. CMT Flush and V-Groove bits allow you to make cabinet front frames in 25mm stock that fit perfectly with the sides. The added V-cutter feature makes a decorative groove along the hinge joint to hide the seam.

SHOP TIP: For best results, leave less than 3mm overhang on cabinet front frames for easier routing.

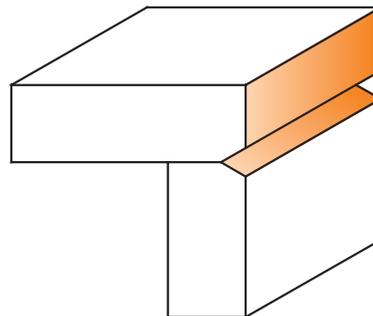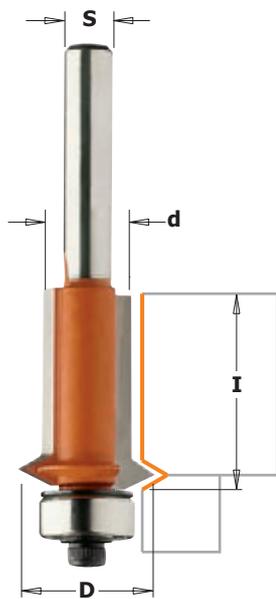

Drawing is 1:1 scale

| d mm | D mm | I mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | | | | |
|------|------|------|---------------------|------------------------|---------------------|----------------------|------------------------|---|---|---|---|------------|------------|------------|------------|
| 12,7 | 19 | 25,4 | 753.001.11 | 853.001.11 | 953.001.11 | 953.501.11 | 853.501.11 |  |  |  |  | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |

The CMT grand rabet set





8/935.503

Your choice of "The Grand Rabet" by CMT is an investment that shows your commitment to quality. This CMT product will deliver years of reliable service under normal use. For safe and trouble-free results please observe the following instructions and safety precautions.

The complete kit (item code 835-935.503.11), will enable you to produce 17 different rabet sizes including rabbets for under-size plywood applications.

For rabet sizes over 12,7mm (1/2"), make the cuts in several shallow passes until the desired depth is achieved.

Available in 12 and 12,7mm shanks.

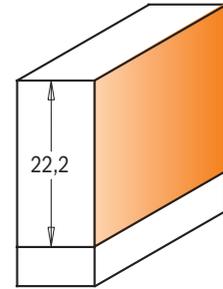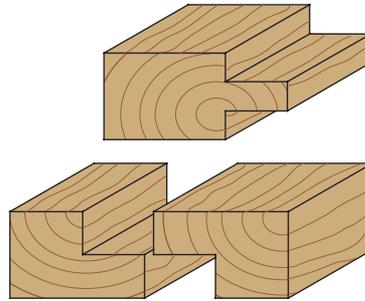


Collar order no.
799.517.00

8/935.990





Drawings are 1:1 scale



Order no. **791.705.00**

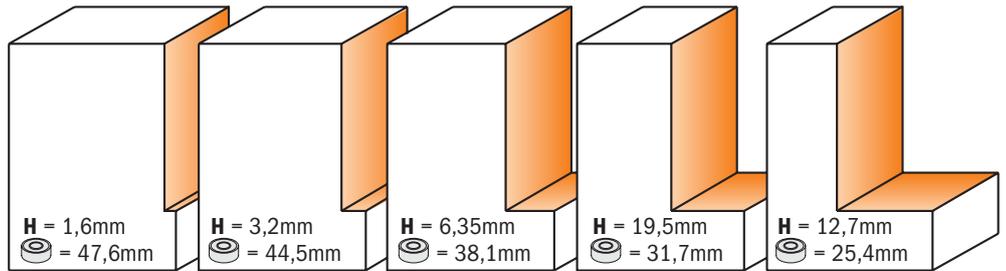

Order no. **791.706.00**

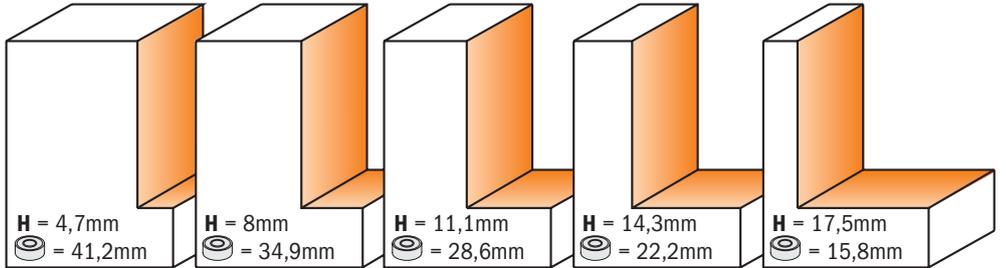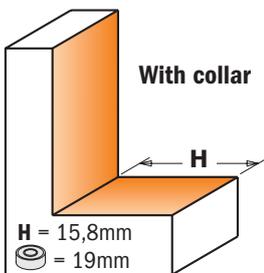


Order no. **791.707.00**

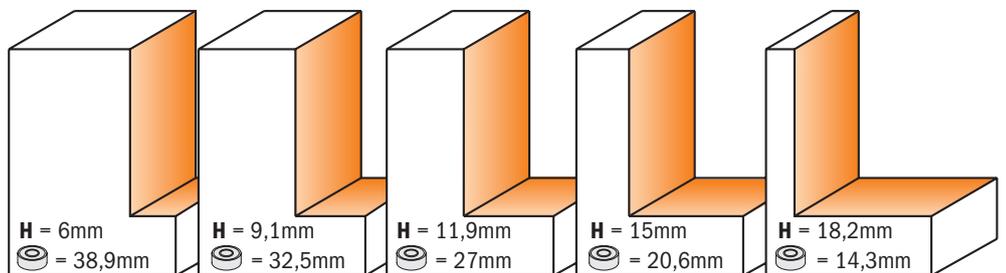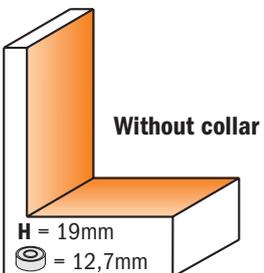

| | DESCRIPTION | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|----------------------|---|----------------------|------------------------|
| | The CMT grand rabet set (Ø50,8x22,2mm) | 935.503.11 | 835.503.11 |
| SET CONTAINS: | The grand rabet (bit only) with collar Ø19mm | 935.990.11 | 835.990.11 |
| | 5 pcs. collar set (1,6 - 3,2 - 6,35 - 9,5 - 12,7mm rabbets) | | 791.705.00 |
| | 5 pcs. collar set (4,7 - 8 - 11,1 - 14,3 - 17,5mm rabbets) | | 791.706.00 |
| | 5 pcs. collar set (6 - 9,1 - 11,9 - 15 - 18,2mm rabbets) | | 791.707.00 |
| | Collar Ø50,8mm | | 799.517.00 |
| | Kit with screw, shields and keys | | 990.452.00 |


Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Rabbeting bits

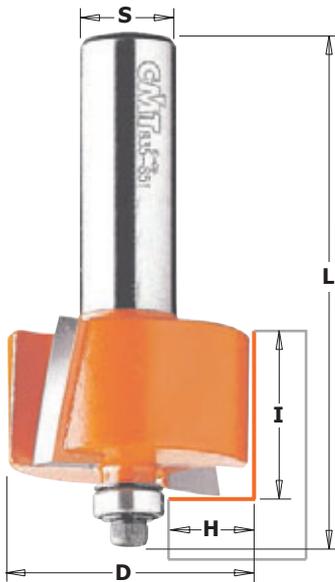

7/8/935

CMT carbide-faced rabbeting bits are fast and accurate - you can quickly produce inset doors and drawer fronts, make strong rabbet joints, mill perfect tongue and groove joints or any number of other jobs that before were time consuming and difficult. You can even re-groove old window frames to fit insulated glass panes with the extra long CMT 19mm (3/4") rabbeting bit. Other possibilities are illustrated below and on the following pages. Look at our slot cutters and round over bits for ideas on how to put extra finishing touches on all your grooving and rabbeting projects.

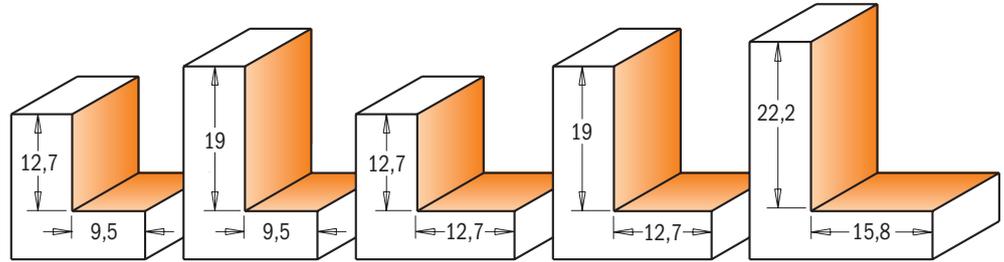

Drawings are 1:1 scale

| H mm | D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | |
|------|------|------|------|---------------------|------------------------|---------------------|----------------------|------------------------|-------------|------------|------------|
| 9,5 | 31,7 | 12,7 | 58,4 | 735.317.11 | 835.317.11 | 935.317.11 | | | | | |
| 9,5 | 31,7 | 12,7 | 61,2 | | | | 935.817.11 | 835.817.11 | 990.423.00 | 791.003.00 | 990.058.00 |
| 9,5 | 31,7 | 19 | 64,8 | 735.318.11 | | 935.318.11 | | | 990.423.00 | 791.003.00 | 990.058.00 |
| 12,7 | 34,9 | 12,7 | 59,4 | 735.350.11 | 835.350.11 | 935.350.11 | 935.850.11 | 835.850.11 | 990.422.00 | 791.002.00 | 990.058.00 |
| 12,7 | 34,9 | 19 | 65,8 | | | | 935.851.11 | 835.851.11 | 990.422.00 | 791.002.00 | 990.058.00 |
| 16 | 50,8 | 22 | 77,8 | | | | 935.990.11 | 835.990.11 | 990.408.00 | 791.010.00 | 990.058.00 |

Spare parts 991.057.00 3/32" hex key
799.503.00 19,05mm bushings

541.514.00 2mm spacer (8/935.990.11)

Rabbeting sets




7/8/935.001

CMT rabbeting sets allow you to make a limitless number of cuts by adjusting the cutting height on your router and changing the bearing on the bit.




BE SURE to keep the black bearing washer right side up to correspond with the bearing rotation when re-assembling the bearing. Improper re-assembly can cause the screw to come loose. Each set comes complete with one rabbeting bit and six interchangeable ball bearing guides.

Drawings are 1:1 scale

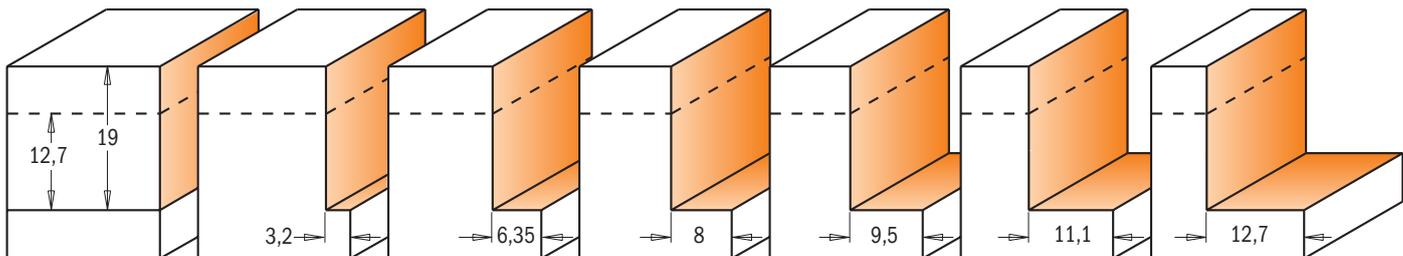

| H mm | D mm | I mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|--------|------|------|---------------------|------------------------|---------------------|----------------------|------------------------|
| 0-12,7 | 34,9 | 12,7 | 735.001.11 | 835.001.11 | 935.001.11 | 935.501.11 | 835.501.11 |
| 0-12,7 | 34,9 | 19 | | | | 935.502.11 | 835.502.11 |

Rabbeting bits with insert knives

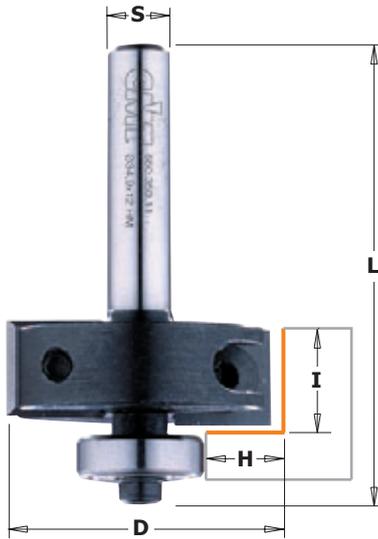


660

Rabbeting bits with two replaceable knives fixed by special Torx screws. The blades are 4 sided sharpened and gives high economy of your work with board materials.



Rabbeting bits are equipped with the ball bearing guides for rabbeting width H= 9,5mm. Optionals you can choose bearings for rabbeting width 12,7 - 11,1 - 8 - 6,35 - 3,2 - 0mm.

For chipboards, hard wood or MDF. For use on portable Routers.

Drawings are 1:1 scale

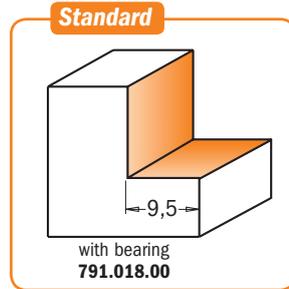

Optional

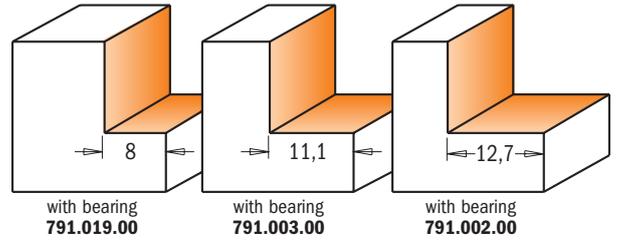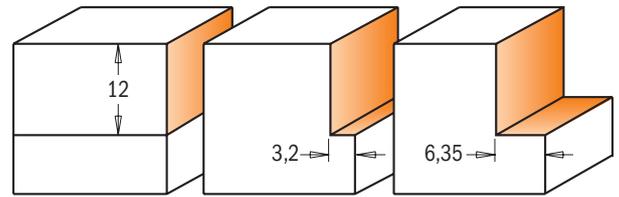


Spare parts 990.463.00 Kit with screw, shield and key

| H mm | D mm | I mm | L mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | |
|------|------|------|------|------------------------|---------------------|------------------------|-------------|------------|------------|------------|--|
| 9,5 | 34,9 | 12 | 55 | 660.351.11 | 660.350.11 | | | | | | |
| 9,5 | 34,9 | 12 | 65 | | | 660.851.11 | 790.120.00 | 990.075.00 | 991.061.00 | 791.018.00 | |

Spare parts 990.400.00 Ø3.2/Ø7mm shield for M3 screw
541.552.00 Ø3.25/Ø15.8mm shield for M3 screw
990.051.00 M3x6mm TCEI screws




990.053.00 M3x10mm TCEI screws
990.054.00 M3x16mm TCEI screws
991.062.00 Hex key 2,5mm

Grand rabbeting bits with insert knives

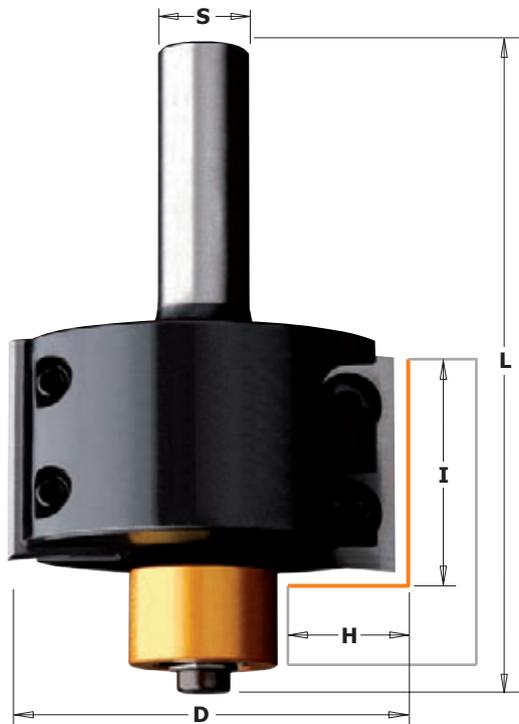


660.9

Your choice of "The Grand Rabbet" by CMT is an investment that shows your commitment to quality. This CMT product will deliver years of reliable service under normal use. The collar sets (791.705.00-791.706.00-791.707.00) will enable you to produce 17 different rabbet sizes including rabbets for under-size plywood applications. For rabbet sizes over 12,7mm (1/2"), make the cuts in several shallow passes until the desired depth is achieved. Available in 12 and 12,7mm shanks.

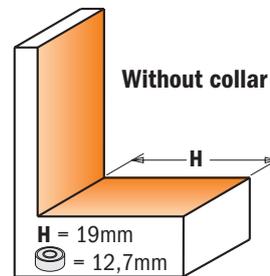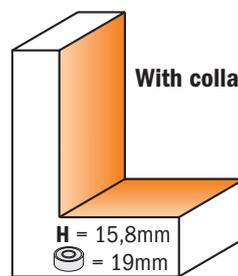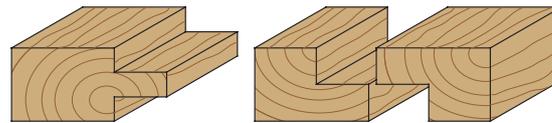

Collar order no.
799.517.00

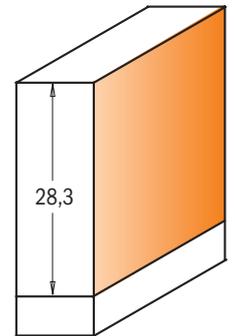


Drawing is 1:1 scale

| H mm | D mm | I mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | |
|------|------|------|------|----------------------|------------------------|-------------|------------|------------|------------|--|
| 16 | 50,8 | 28,3 | 87,3 | 660.990.11 | 660.991.11 | | | | | |
| | | | | | | 790.283.12 | 990.075.00 | 991.061.00 | 791.010.00 | |

Spare parts 541.514.00 Ø6,4mm stop collar
799.503.00 Ø19,05mm bushings
990.410.00 Ø4.2/Ø9mm shield for M4 screw
990.052.00 M4x6mm TCEI screw
991.067.00 3mm hex key
990.469.00 Kit screw, shield and key

Optional: 799.517.00 Collar for flush trim Ø50,8mm
791.705.00 5 pcs. collar set (1,6-3,2-6,35-9,5-12,7mm rabbets)
791.706.00 5 pcs. collar set (4,7-8-11,1-14,3-17,5mm rabbets)
791.707.00 5 pcs. collar set (6-9,1-11,9-15-18,2mm rabbets)

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

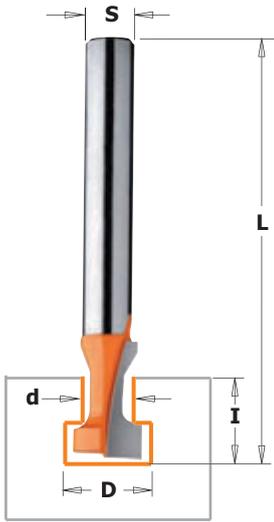




7/8/950.001



With the CMT keyhole bit you can make holes that keep your frames, plaques or any wall hanging perfectly straight and attached to the wall. The bit bores an entry hole in the wood, then proceeds to cut a 4,8mm hole and finishes by boring a larger opening under the surface. The perfect way to securely mount wall hangings on screws and nails.

SAFETY TIPS: Be sure the workpiece is securely fastened to the router table or work bench.


SHOP TIPS: Recommended for use with a plunge router.

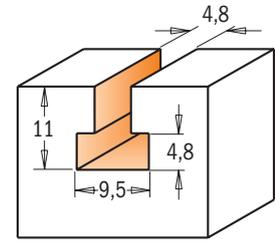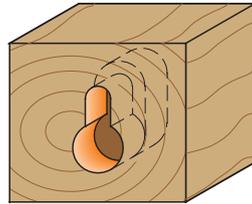


Drawing is 1:1 scale

| D mm | d mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|---------|---------|---------------------|------------------------|---------------------|----------------------|------------------------|
| 9,5 | 4,8 | 11 | 54 | 750.001.11 | 850.001.11 | 950.001.11 | 950.501.11 | 850.501.11 |


T-Slot bits

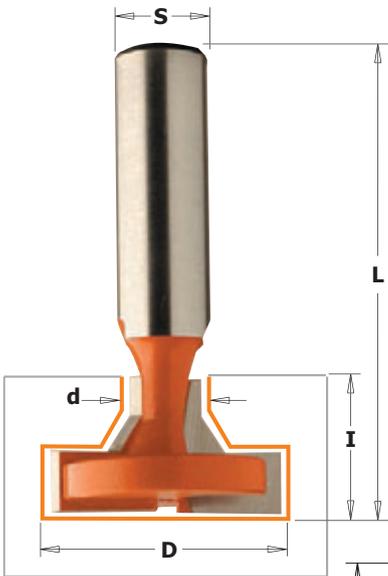

8/950.6

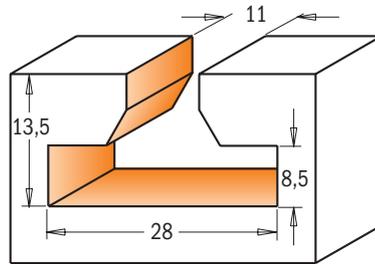


8/950.603

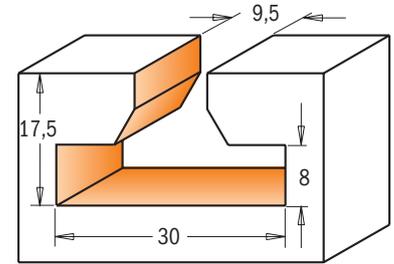


8/950.601

Drawings are 1:1 scale

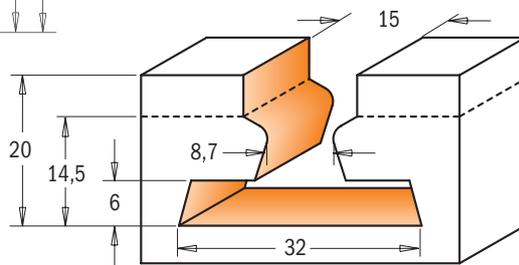

950.604

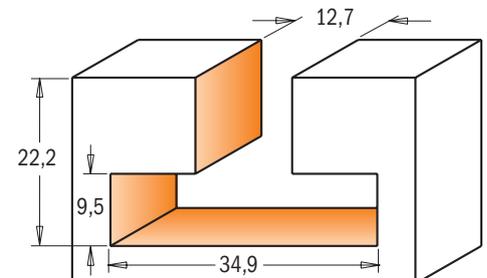

8/950.602


| D mm | d mm | I mm | L mm | Z | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|---------|---------|-----|----------------------|------------------------|
| 28 | 11 | 13,5 | 56,3 | 2 | 950.603.11 | 850.603.11 |
| 30 | 9,5 | 17,5 | 60,3 | 2 | 950.601.11 | 850.601.11 |
| 32 | 8,7-15 | 20 | 66 | 1+1 | 950.604.11 | |
| 34,9 | 12,7 | 22,2 | 63,5 | 2 | 950.602.11 | 850.602.11 |

Screw slot bits




8/913


Any large panel or table top should be secured in a way that allows it to expand or contract without splitting. These screw-slot bits let you create screw slots so that panels can be held in place but are able to slide back and forth without splitting the wood or breaking the screw securing them.

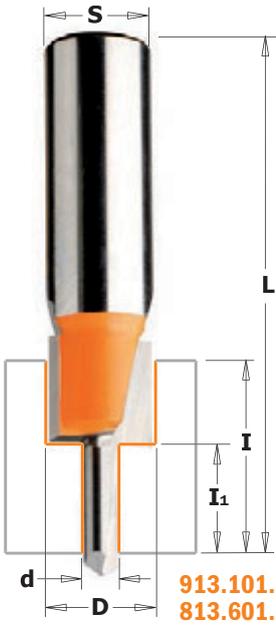


913.101.11
813.601.11

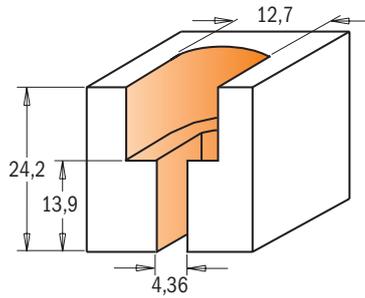

Drawing is 1:1 scale

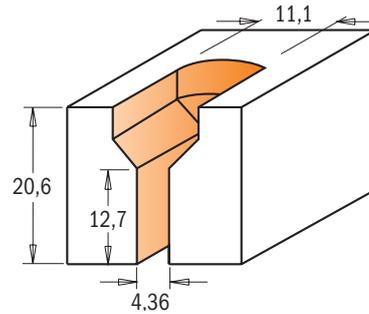

913.201.11
813.701.11

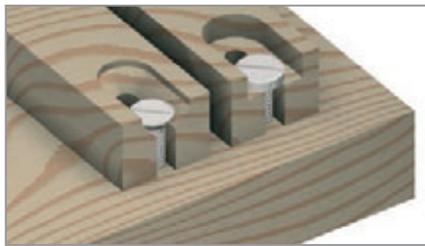



| D mm | d mm | I ₁ mm | I mm | L mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm |
|---------|---------|----------------------|---------|---------|---------------------|------------------------|
| 11,1 | 4,36 | 12,7 | 20,6 | 63,5 | 913.201.11 | 813.701.11 |
| 12,7 | 4,36 | 13,9 | 24,2 | 63,5 | 913.101.11 | 813.601.11 |

Flooring router bits




822.023B - 822.024B


CMT now offers these industrial quality carbide-tipped router bits for flooring and inlay applications. They can easily and smoothly run through solid and timber wood while cutting edges keep sharp still after several passes. 822.024.11B item number also features rounded edges to produce 3,2mm (1/8") radius inlays. These bits are equipped with a stop collar and a bearing.

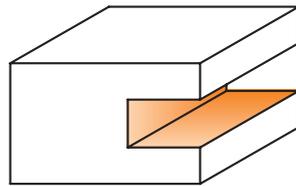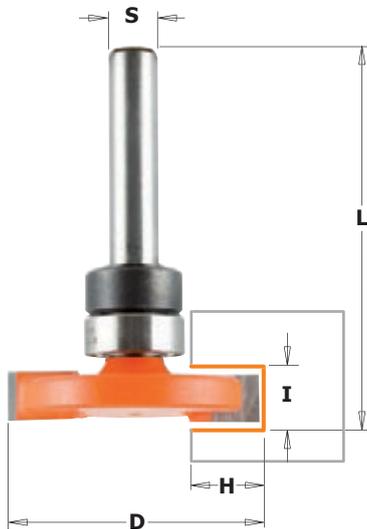


Drawings are 1:1 scale

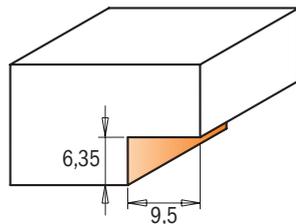

822.023.11B

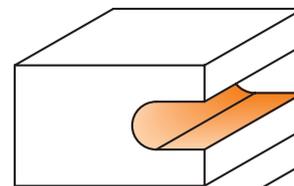


822.024.11B

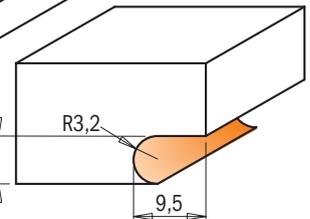

| D mm | I mm | H mm | R mm | L mm | ORDER NO. S=Ø6,35mm | Spare parts | | | | | | | |
|---------|---------|---------|---------|---------|------------------------|-------------|--|--|--|------------|------------|------------|------------|
| 31,75 | 6,35 | 9,5 | | 47,6 | 822.023.11B | | | | | 791.010.00 | 541.001.00 | 990.005.00 | 991.056.00 |
| 31,75 | 6,35 | 9,5 | 3,2 | 47,6 | 822.024.11B | | | | | 791.010.00 | 541.001.00 | 990.005.00 | 991.056.00 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Three wing slot cutter set

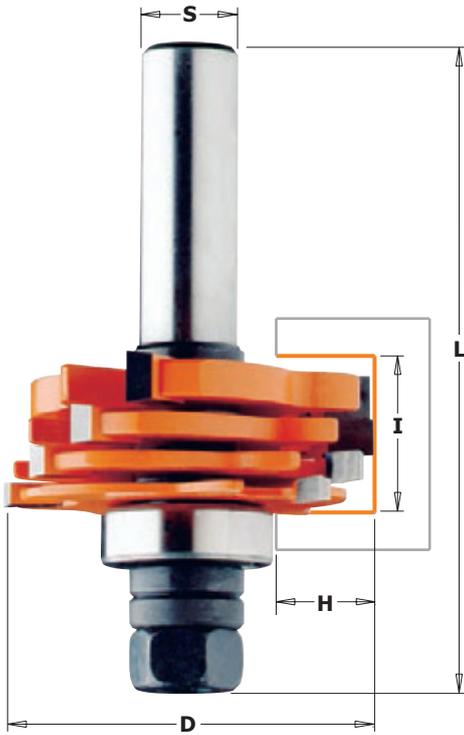

8/900.506

Create slots, grooves and rabbets in materials from 3,2mm to 18mm in depth by using the adjustable CMT Three Wing slot cutter set. See chart below for details on spacing and correct cutter combinations. Ideal for biscuit joints and milling perfect tongue and groove joints.

This set includes:


- 4 carbide tipped cutters 3,2mm, 4mm, 4,8mm, 6,4mm
- 1 arbor 12mm or 12,7mm
- 1 ball bearing (22mm) for 12,7mm cut
- 17 shims: (8x0,1mm - 4x0,5mm - 3x1mm and 2x4mm)

Safety tips: Never use the slot cutter set without shims between the cutters.

The distance between the cutters can vary from 1mm to 1,7mm. A shim must also be positioned between the ball bearing and the cutters.

Shop tips: The bearings kit 791.711.00 allows to make 6,35 and 9,5mm cutting depth.

NOTE: The carbide edges of the cutters should never touch; arrange the shims as illustrated below. Use only the thicknesses provided in the set. Be sure all cutters are assembled in the proper right rotational direction below. Looking down the arbor the cutters will turn clockwise.




| Cutter combinations | Cutter height mm | mm |
|---------------------|------------------|--------|
| A | 3,2 | |
| B | 4 | |
| C | 4,8 | |
| D | 6,4 | |
| A + B | 6,4 | a 7,1 |
| A + C | 7,2 | a 7,9 |
| A + D | 8,8 | a 9,5 |
| B + C | 8 | a 8,7 |
| B + D | 9,6 | a 10,3 |
| C + D | 10,4 | a 11,1 |
| A + B + C | 10,4 | a 11,8 |
| A + B + D | 11,9 | a 13,3 |
| A + C + D | 12,7 | a 14,1 |
| B + C + D | 13,5 | a 14,9 |
| A + B + C + D | 15,9 | a 18 |

Use shims to adjust cut width: MIN.1mm - MAX 1,7mm


| I mm | D mm | H mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts |
|--------|------|------|------|-------------------|---------------------|----------------------------------|
| 3,2-18 | 47,6 | 12,8 | 81 | 900.506.11 | | 924.128.00 791.005.00 990.020.00 |
| 3,2-18 | 47,6 | 12,8 | 81 | | 800.506.11 | 824.128.00 791.005.00 990.020.00 |

Spare parts
 541.515.00 0,1mm spacer
 541.517.00 0,5mm spacer
 541.518.00 1mm spacer
 541.501.00 4mm spacer

Optional:
 791.711.00 Kit of two bearing 28,5mm and 34,9mm for slot cutter

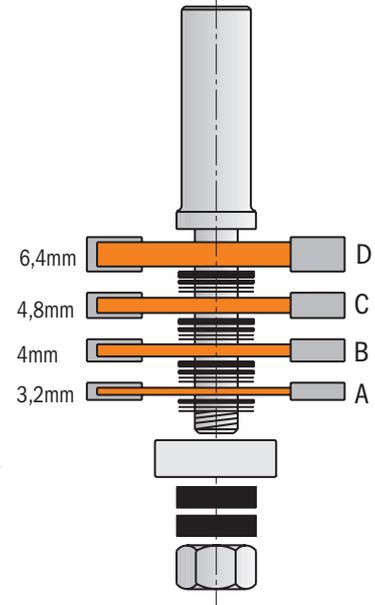

Tongue and groove set

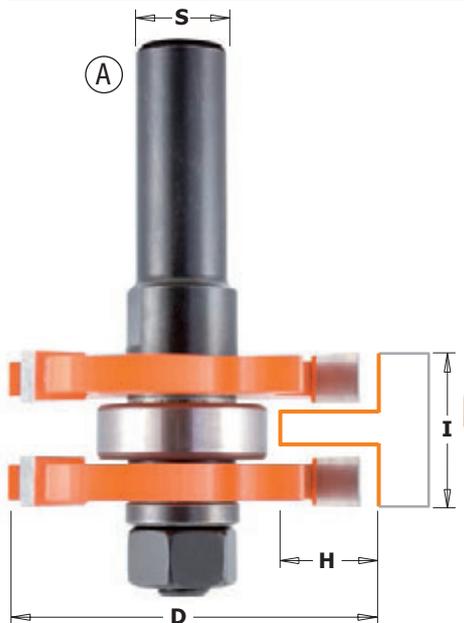


8/900.626

Make tongue and groove joints without the complicated process of taking apart and reassembling bits. The new CMT tongue and groove set gives you one bit to groove the slot and a separate bit to mill the tongue. Or use your imagination and put them to work individually on other projects. Makes tongue and groove cuts in wood up to 19mm thick.



Drawings are 1:1 scale

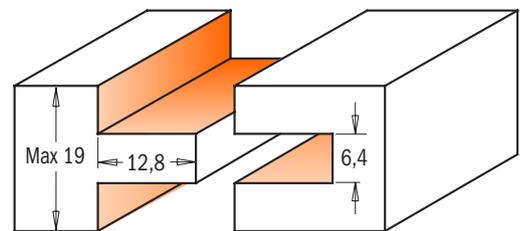

| Profile | I mm | D mm | H mm | L mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts |
|---------|------|------|------|------|-------------------|-------------------|---------------------|---|
| A+B | 19 | 47,6 | 12,8 | 71 | 900.126.11 | | | 924.083.00 791.005.00 822.364.11 990.020.00 |
| A+B | 19 | 47,6 | 12,8 | 71 | | 900.626.11 | | 924.131.00 791.005.00 822.364.11 990.020.00 |
| A+B | 19 | 47,6 | 12,8 | 71 | | | 800.626.11 | 824.131.00 791.005.00 822.364.11 990.020.00 |
| A | 19 | 47,6 | 12,8 | 71 | | | 800.626.11M | 824.131.00 791.005.00 822.364.11 990.020.00 |

Spare parts
 541.515.00 0,1mm spacer
 541.516.00 0,3mm spacer
 541.517.00 0,5mm spacer

541.518.00 1mm spacer
 541.500.00 3mm spacer




Slot cutters



7/8/922A/B


Uses for the CMT three wing slot cutter are almost infinite. Cut slots and grooves for splines, biscuits, T-molding or tongue and groove joints. Every cutter features anti-kickback design, micrograin carbide tips and orange CMT trademark non-stick PTFE coating. CMT slot cutters are available as a blade only or with your choice of a 6, 8, 12, 6,35 or 12,7mm diameter arbor which includes a 22mm diameter bearing for a cutting depth of up to 12,7mm.

NOTE: For biscuit joints, use l=4mm slot cutter.

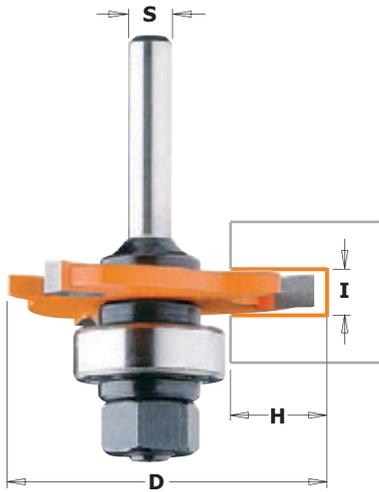

| I mm | P mm | D mm | H mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------|------|------|------|---------------------|------------------------|---------------------|----------------------|------------------------|
| 1,5 | 1,07 | 47,6 | 12,8 | 722.315.11A | | 922.315.11A | 922.315.11B | |
| 1,6 | 1,07 | 47,6 | 12,8 | | 822.316.11A | | | 822.316.11B |
| 2 | 1,27 | 47,6 | 12,8 | 722.320.11A | 822.320.11A | 922.320.11A | 922.320.11B | 822.320.11B |
| 2,4 | 1,27 | 47,6 | 12,8 | | 822.324.11A | | | 822.324.11B |
| 2,5 | 1,27 | 47,6 | 12,8 | 722.325.11A | | 922.325.11A | 922.325.11B | |
| 3 | 1,27 | 47,6 | 12,8 | 722.330.11A | | 922.330.11A | 922.330.11B | |
| 3,2 | 1,27 | 47,6 | 12,8 | | 822.332.11A | | | 822.332.11B |
| 3,5 | 2,07 | 47,6 | 12,8 | 722.335.11A | | 922.335.11A | 922.335.11B | |
| 4 | 2,07 | 47,6 | 12,8 | 722.340.11A | 822.340.11A | 922.340.11A | 922.340.11B | 822.340.11B |
| 4,8 | 2,86 | 47,6 | 12,8 | | 822.348.11A | | | 822.348.11B |
| 5 | 2,86 | 47,6 | 12,8 | 722.350.11A | | 922.350.11A | 922.350.11B | |
| 6 | 4,45 | 47,6 | 12,8 | 722.360.11A | 822.360.11A | 922.360.11A | 922.360.11B | 822.360.11B |
| 6,4 | 4,45 | 47,6 | 12,8 | | 822.364.11A | | | 822.364.11B |

These three wing carbide tipped Slot Cutters feature anti-kickback three wing blade design and CMT's trademark orange P.T.F.E. Industrial Coating. All cutters feature an 8mm bore that fits CMT's arbors (items 7/8/924).

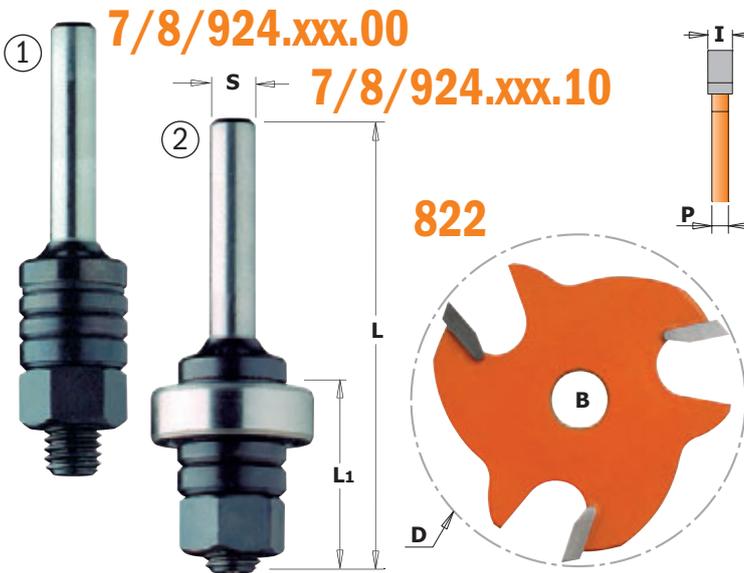

| I mm | P mm | D mm | B mm | ORDER NO. |
|------|------|------|------|-------------------|
| 1,5 | 1,07 | 47,6 | 8 | 822.315.11 |
| 1,6 | 1,07 | 47,6 | 8 | 822.316.11 |
| 1,8 | 1,27 | 47,6 | 8 | 822.318.11 |
| 2 | 1,27 | 47,6 | 8 | 822.320.11 |
| 2,2 | 1,27 | 47,6 | 8 | 822.322.11 |
| 2,4 | 1,27 | 47,6 | 8 | 822.324.11 |
| 2,5 | 1,27 | 47,6 | 8 | 822.325.11 |
| 2,8 | 1,27 | 47,6 | 8 | 822.328.11 |
| 3 | 1,27 | 47,6 | 8 | 822.330.11 |
| 3,2 | 1,27 | 47,6 | 8 | 822.332.11 |
| 3,5 | 2,07 | 47,6 | 8 | 822.335.11 |
| 4 | 2,07 | 47,6 | 8 | 822.340.11 |
| 4,8 | 2,86 | 47,6 | 8 | 822.348.11 |
| 5 | 2,86 | 47,6 | 8 | 822.350.11 |
| 6 | 4,45 | 47,6 | 8 | 822.360.11 |
| 6,4 | 4,45 | 47,6 | 8 | 822.364.11 |

| DESCRIPTION | L1 mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|--|-------|------|---------------------|------------------------|---------------------|----------------------|------------------------|
| ① Slot cutter arbor without bearing | 26 | 61 | 724.060.00 | 824.064.00 | 924.080.00 | | |
| ① Slot cutter arbor without bearing | 26 | 67,5 | | | | 924.120.00 | 824.127.00 |
| ② Slot cutter arbor with bearing | 26 | 61 | 724.060.10 | 824.064.10 | 924.080.10 | | |
| ② Slot cutter arbor with bearing | 26 | 67,5 | | | | 924.120.10 | 824.127.10 |
| Slot cutter arbor without bearing, long series | 40 | 86 | | | 924.083.00 | | |
| Slot cutter arbor with bearing, long series | 40 | 86 | | | 924.083.10 | | |

Spare parts



| | | | |
|------------|-----------------|------------|------------|
| 791.005.00 | Ø8-22mm bearing | 541.518.00 | 1mm spacer |
| 541.501.00 | 4mm spacer | 990.020.00 | M8 nut |
| 541.500.00 | 3mm spacer | | |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts




923A - 823B

The possible uses of this bit are almost: you can rout grooves and rabbets, T or dovetail joints on wood panels. Each bit has three carbide tipped cutters and has an orange coloured PTFE coating, it features anti-kickback design too. The 22mm bearing is included for a cutting depth of 12,8mm. The bit and the slot cutter are available also separately.

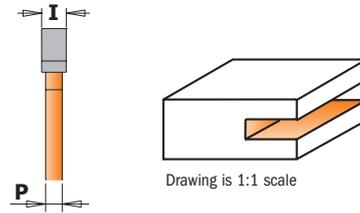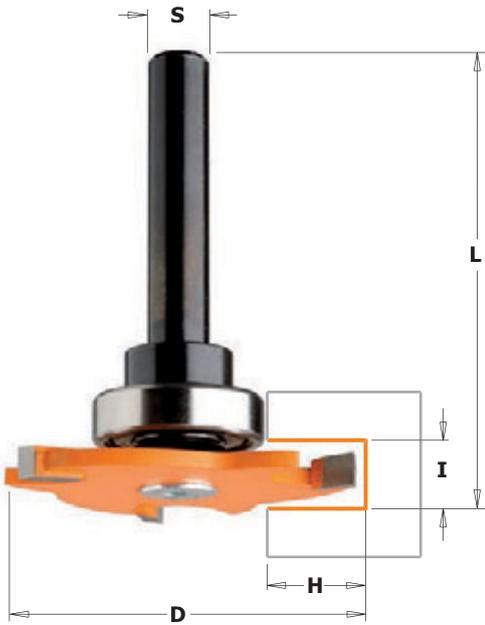


| I mm | P mm | D mm | H mm | L mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm |
|---------|---------|---------|---------|---------|---------------------|------------------------|
| 3 | 1,27 | 47,6 | 12,8 | 58 | 923.330.11A | |
| 3,2 | 1,27 | 47,6 | 12,8 | 58,2 | | 823.332.11B |
| 4 | 2,07 | 47,6 | 12,8 | 58,4 | 923.340.11A | 823.340.11B |
| 5 | 2,86 | 47,6 | 12,8 | 63 | 923.350.11A | |
| 6,4 | 4,45 | 47,6 | 12,8 | 64,4 | | 823.364.11B |

823

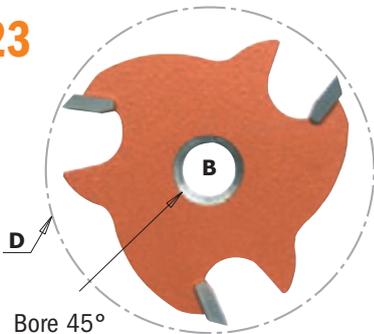


These three wing carbide tipped slot cutters feature anti-kickback three wing blade design and CMT's trademark orange PTFE Industrial Coating. All cutters feature an 8mm bore that fits CMT's arbors (items 7/8/924).

| I mm | P mm | D mm | B mm | ORDER NO. |
|---------|---------|---------|---------|-------------------|
| 3 | 1,27 | 47,6 | 8 | 823.330.11 |
| 3,2 | 1,27 | 47,6 | 8 | 823.332.11 |
| 4 | 2,07 | 47,6 | 8 | 823.340.11 |
| 5 | 2,86 | 47,6 | 8 | 823.350.11 |
| 6,4 | 4,45 | 47,6 | 8 | 823.364.11 |



7/8/924

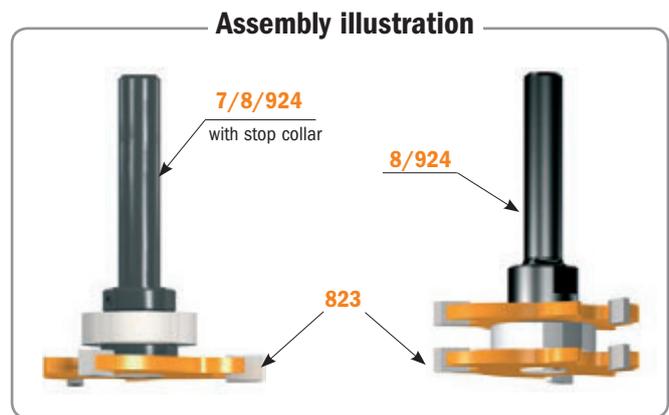

| DESCRIPTION | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm |
|---|---------------------|------------------------|---------------------|------------------------|
| ① Slot cutter arbor without bearing without stop collar | 724.061.00 | 824.061.00 | 924.081.00 | 824.121.00 |
| ① Slot cutter arbor with bearing and stop collar | 724.061.10 | 824.061.10 | 924.081.10 | 824.121.10 |
| ② Slot cutter arbor without bearing | | | 924.082.00 | 824.122.00 |
| ② Slot cutter arbor with bearing | | | 924.082.10 | 824.122.10 |

Spare parts

| | | | |
|------------|--------------------------------|------------|---------------------|
| 791.012.00 | Ø8-22mm bearing | 541.515.00 | 0,1mm spacer |
| 541.001.00 | Stop collar for Ø6,35mm shanks | 541.516.00 | 0,3mm spacer |
| 541.002.00 | Stop collar for Ø12,7mm shanks | 541.517.00 | 0,5mm spacer |
| 791.013.00 | Ø12,7-22mm bearing | 541.518.00 | 1mm spacer |
| 541.003.00 | Stop collar for Ø6mm shanks | 990.055.00 | M5x12mm TSPEI screw |
| 541.004.00 | Stop collar for Ø8mm shanks | 991.067.00 | 3mm hex key |

Flute & bead set

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories



Display cabinets & spare parts



8/955.701

This perfectly mated CMT set is ideal for making canoe slats and hot tubs. Featuring tungsten carbide, the bits' cutting edges stay sharp after cutting large amounts of stock, and the anti-kickback design lets you work safely.

Use both the flute and the bead bits for 6,35mm (1/4") slats as shown below.

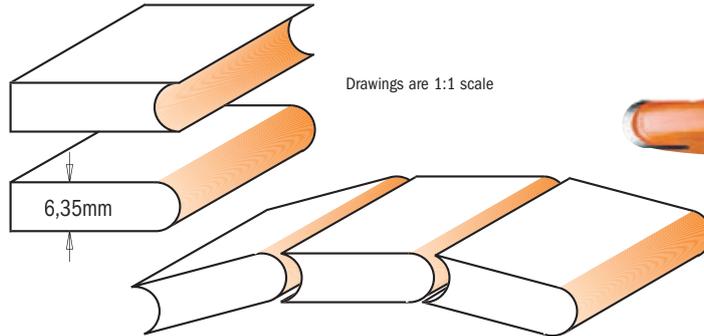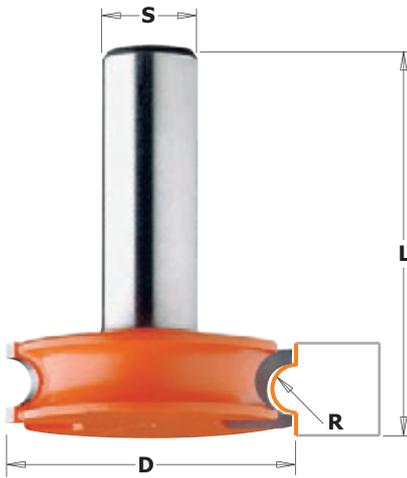

| R mm | D mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|---------|----------------------|------------------------|
| 3,2 | 38 | 48,1 | 955.701.11 | 855.701.11 |




Lock miter set




8/955

Now you don't have to fight with those awkward clamps on your 22,5° projects. Use this pair of bits to produce octagonal shaped boxes and popular corner cabinetry like corner cabinets for kitchens, entertainment centres, kitchen islands and corner hutches. This 22,5° Lock Miter set provides a strong tight joint when you want to join wood at 45° angles.

Biscuits and splines are time-consuming to make and difficult to clamp. CMT's matched pair of cutters makes set-up easy. Height adjustment is not critical with this matched pair; simply adjust your fence so the top edge of the work piece intersects the angle of the bit where it meets the fence. After your joints are machined they can be glued and assembled and simply clamped by using strapping tape.

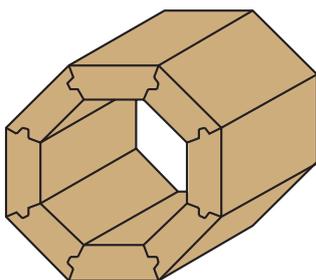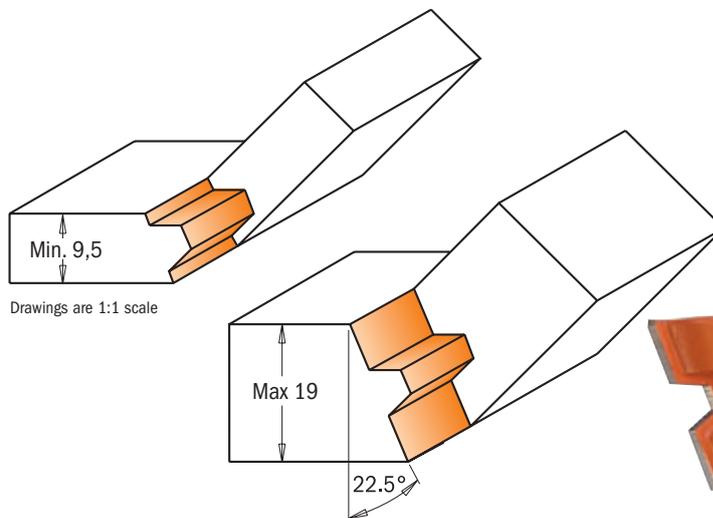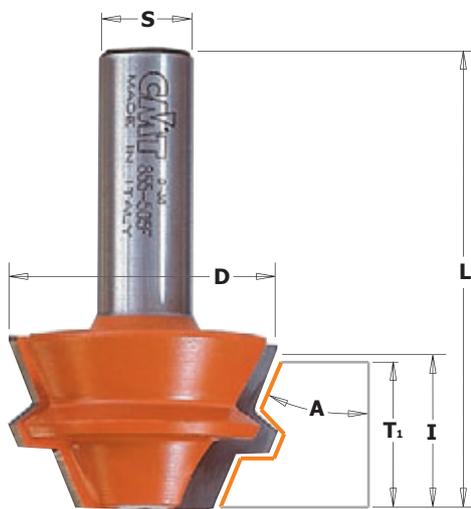

| D mm | I mm | A | T1 mm | L mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm |
|---------|---------|-------|----------|---------|---------------------|------------------------|
| 37,3 | 22,2 | 22.5° | 9,5 ÷ 19 | 60,3 | 955.005.11 | 855.505.11 |


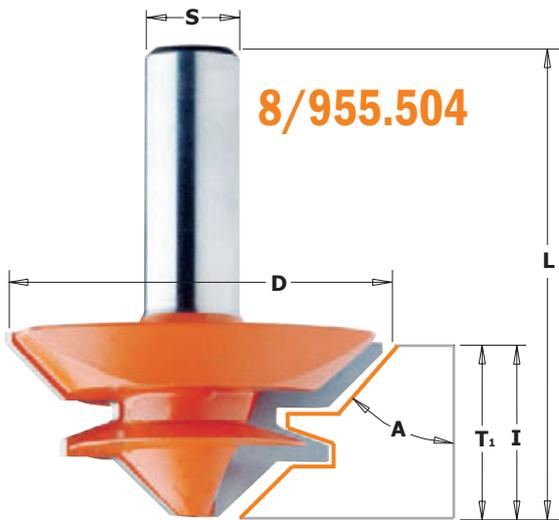


8/955.504



CMT lock miter bits are ideal for milling miter joints in 28,5mm stock. The quick and easy way to accurately create boxes, stretcher bars, frames and any assortment of right angle or parallel joint projects.

To produce perfectly fitting miter joints, lay one piece with the inside face-down on the work table and the wood centred to the bit. Mill as shown in step 1 of the illustration below. Mill the second piece with the inside face placed vertical to the bit and fence, as shown in step 2.

To mill sturdy parallel glue joints follow step 1 shown in the illustration with the inside face of the workpiece laid flat on the table and centred to the bit. To make the second part, lay the workpiece flat on the table and centred to the bit. Mill with the inside face-up.

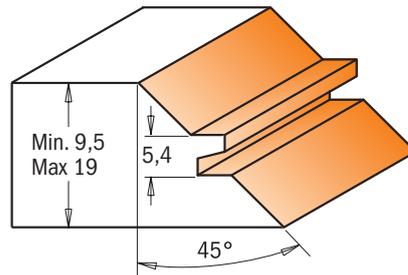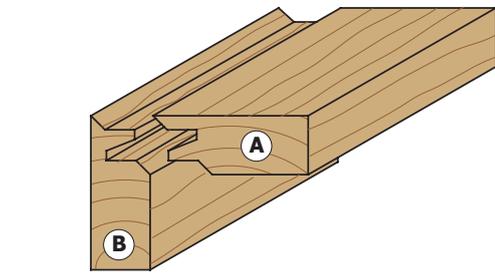


8/955.503

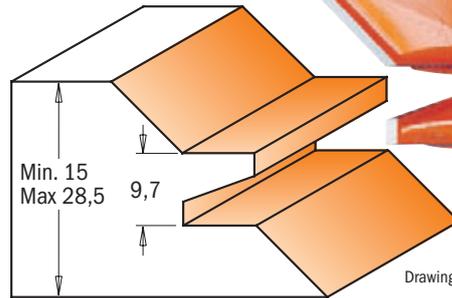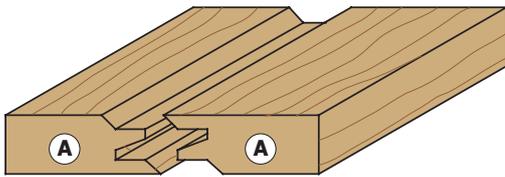


Drawings are 1:1 scale

For miter and parallel glue joints using 19mm board

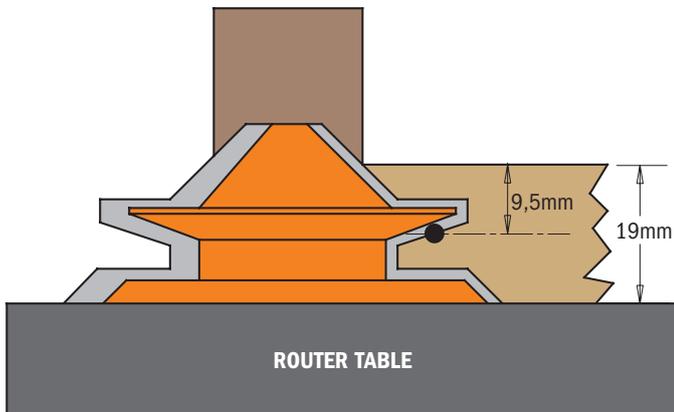

Nr. 1: Rout one piece with the inside face flat on the router table. Be sure the cut is centred to the stock.

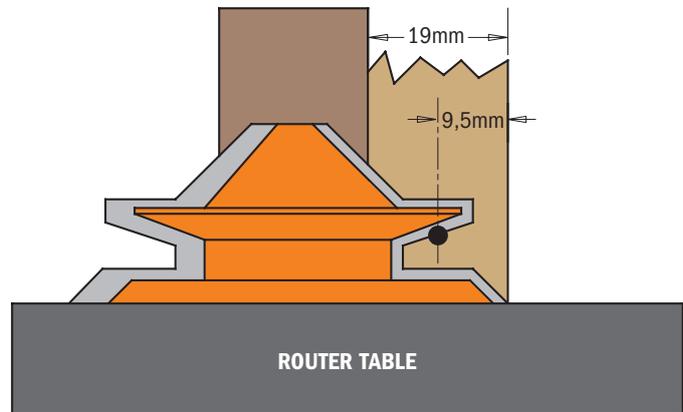

Nr. 2: Rout the second piece with the inside face vertical to the fence.

| D mm | I mm | A | T ₁ mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|-----|----------------------|---------|----------------------|------------------------|
| 70 | 31,7 | 45° | 15 ÷ 28,5 | 69,9 | 955.503.11 | 855.503.11 |
| 50,8 | 22,2 | 45° | 9,5 ÷ 19 | 60,3 | 955.504.11 | 855.504.11 |

Reverse glue joint bits




Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

8/955.501




The most unique and important characteristic of this CMT bit is its capacity to produce an almost indestructible glue joint quickly and without error. Ideal for routing wide dimension panels, doors and furniture pieces. By accurately centering the bit to the wood, the upper and lower vertical cutting edges of the bit will cut equal proportions. Simply run one edge of the panel, turn the panel over, and then run the opposite edge - you will produce perfectly harmonized reverse cuts that match up to make flawless joints.

SHOP TIPS: When glueing, apply enough pressure to securely seal the joint. Insufficient pressure results in a weak joint and excessive pressure will distort the wood.

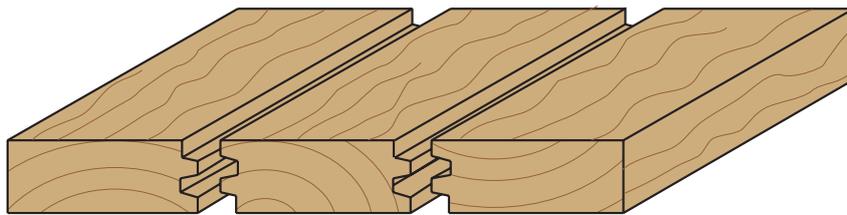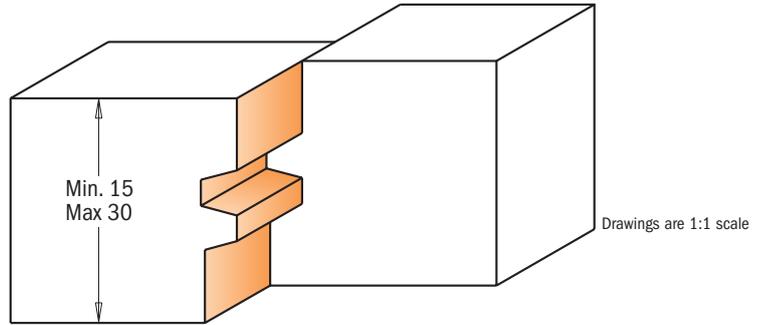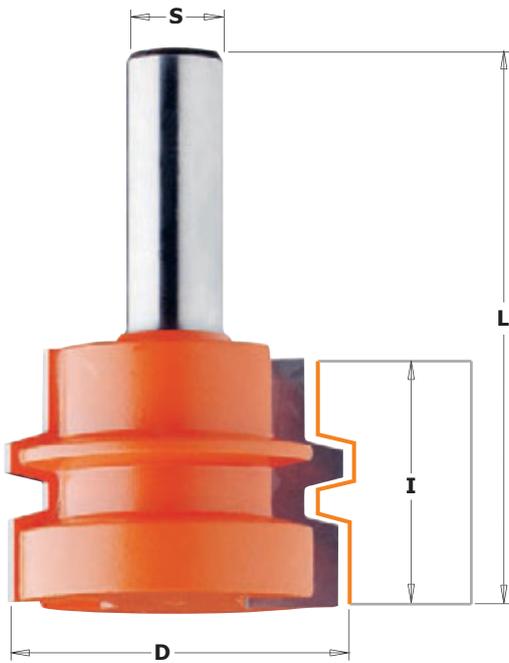

In this example we have used a 19mm board

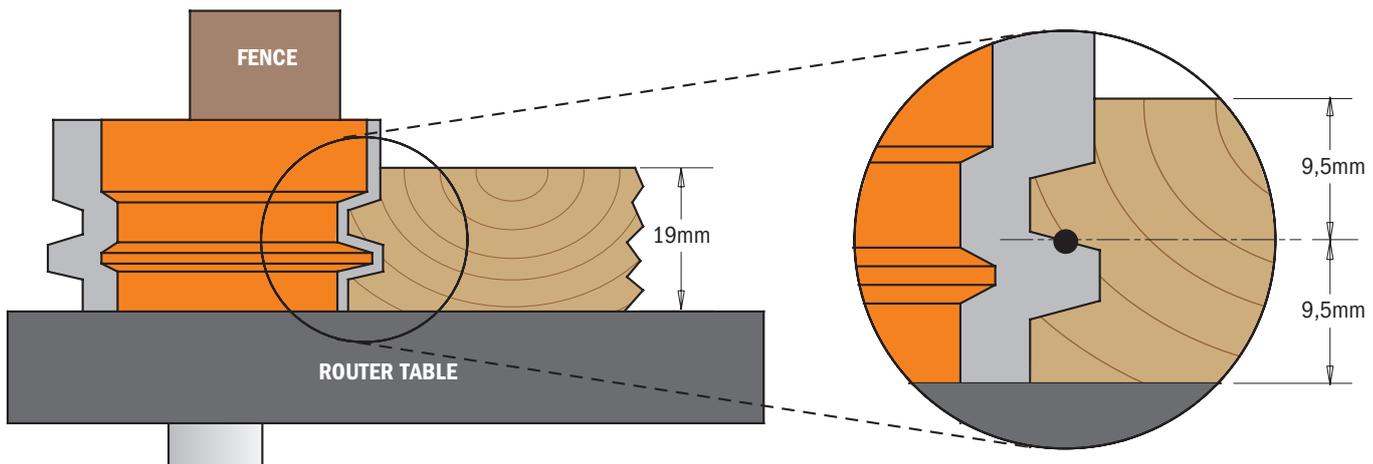

To accurately centre the wood to the bit: Adjust the bit according to the thickness of the wood you are cutting. Line up the cut edge of the wood to the centre point of the bit as illustrated in the enlarged drawing. The upper and lower vertical cutting edges of the bit are in proportion and at an equal distance from the centre point of the bit. Run one cut edge of the wood, turn the piece over and run the other edge for exact reverse cuts that match up perfectly. Assemble the reverse cut pairs together for beautiful, strong joints.

| D mm | I mm | T ₁ mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|----------------------|---------|----------------------|------------------------|
| 44,4 | 32 | 15 - 30 | 70,1 | 955.501.11 | 855.501.11 |








855.508 - 955.008
7/8/955.002 - 8/955.502




The key to success when constructing quality drawers is in the quality of the drawer lock bit you use. With CMT drawer lock bits you can make strong, perfectly fitting joints quickly and easily. As illustrated below, mill the drawer front with the inside face-down on the work table.

Mill the sides of the drawer with the inside face placed vertical to the bit and fence, and perpendicular to the table.

These bits are to be used on router tables only and are not to be used on hand-held routers.

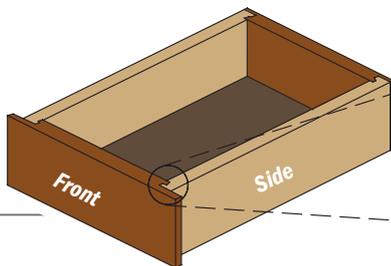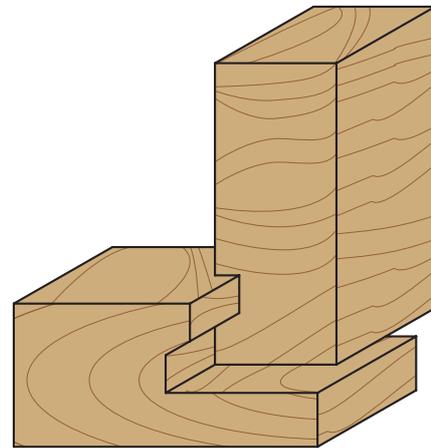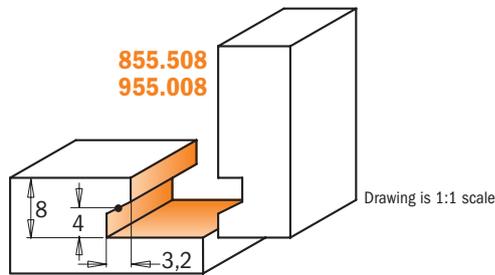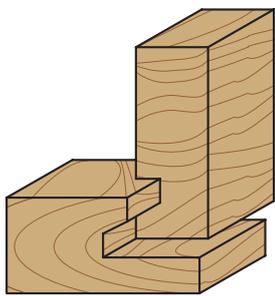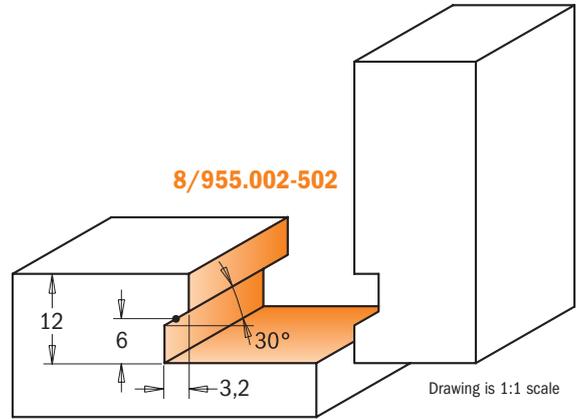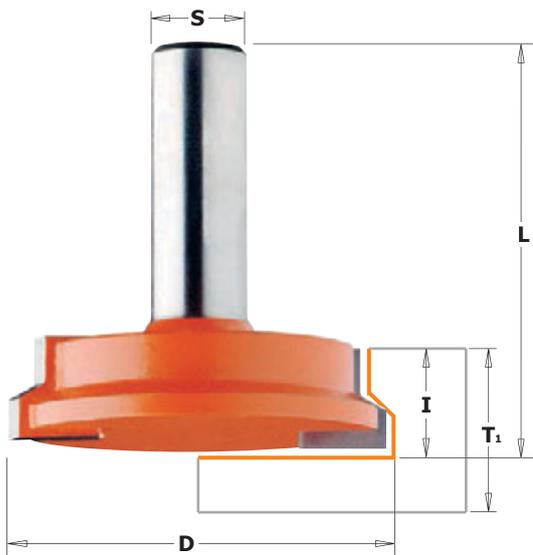

Overhang for drawer stop

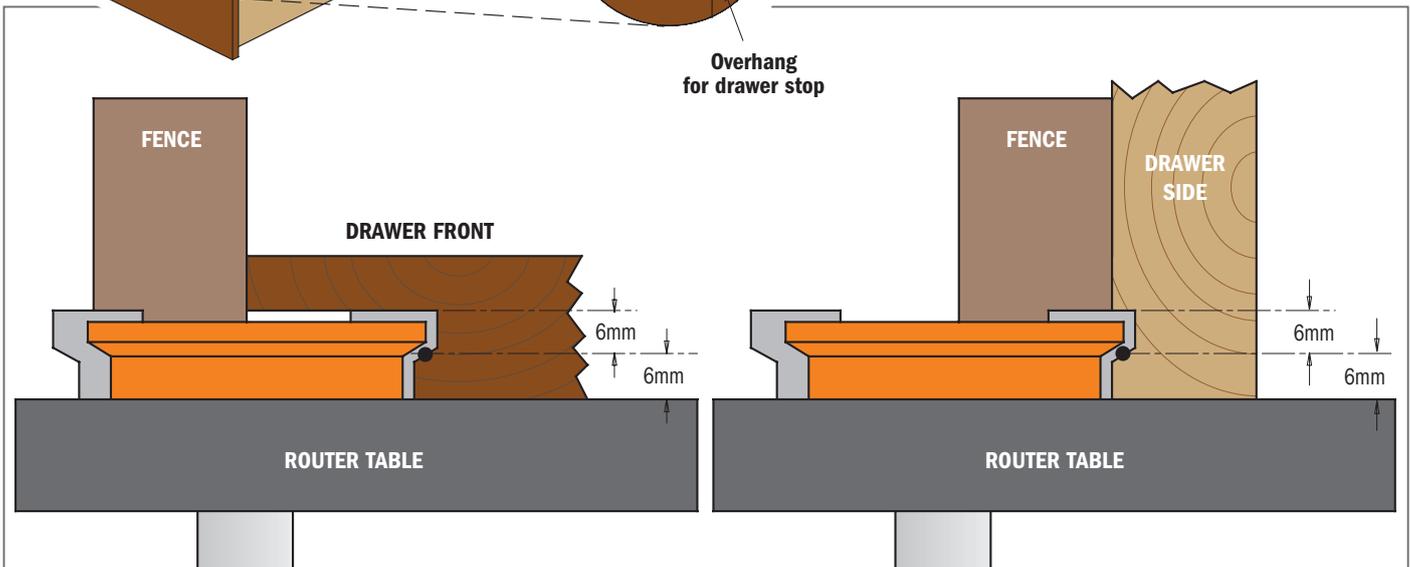


| D | T ₁ | I | L | ORDER NO. |
|------|----------------|---------|------|-------------------|-------------------|-------------------|-------------------|-------------------|
| mm | min. mm | max. mm | mm | S=Ø6mm | S=Ø6,35mm | S=Ø8mm | S=Ø12mm | S=Ø12,7mm |
| 25,4 | 9,5 | 15,87 | 12,7 | | | 955.008.11 | | |
| 25,4 | 9,5 | 15,87 | 12,7 | | | | | 855.508.11 |
| 31,7 | 15,87 | 25,4 | 12,7 | 755.002.11 | 855.002.11 | 955.002.11 | | |
| 50,8 | 15,87 | 25,4 | 12,7 | | | | 955.502.11 | 855.502.11 |

Window sash set



8/955.801

CMT designed this set so you can create window sashes that are as beautiful as they are functional. As an additional feature, the CMT window sash set will also mill perfectly joining 35mm rail and stile parts for custom made doors. Like all CMT quality bits, this set includes our anti-kickback design feature and our trademark non-stick orange coating. Made of Fatigue Proof® steel with carbide-faced cutting edges for longer life. Each set contains one 38mm bit and one 35mm bit designed for cutting 35mm stock.

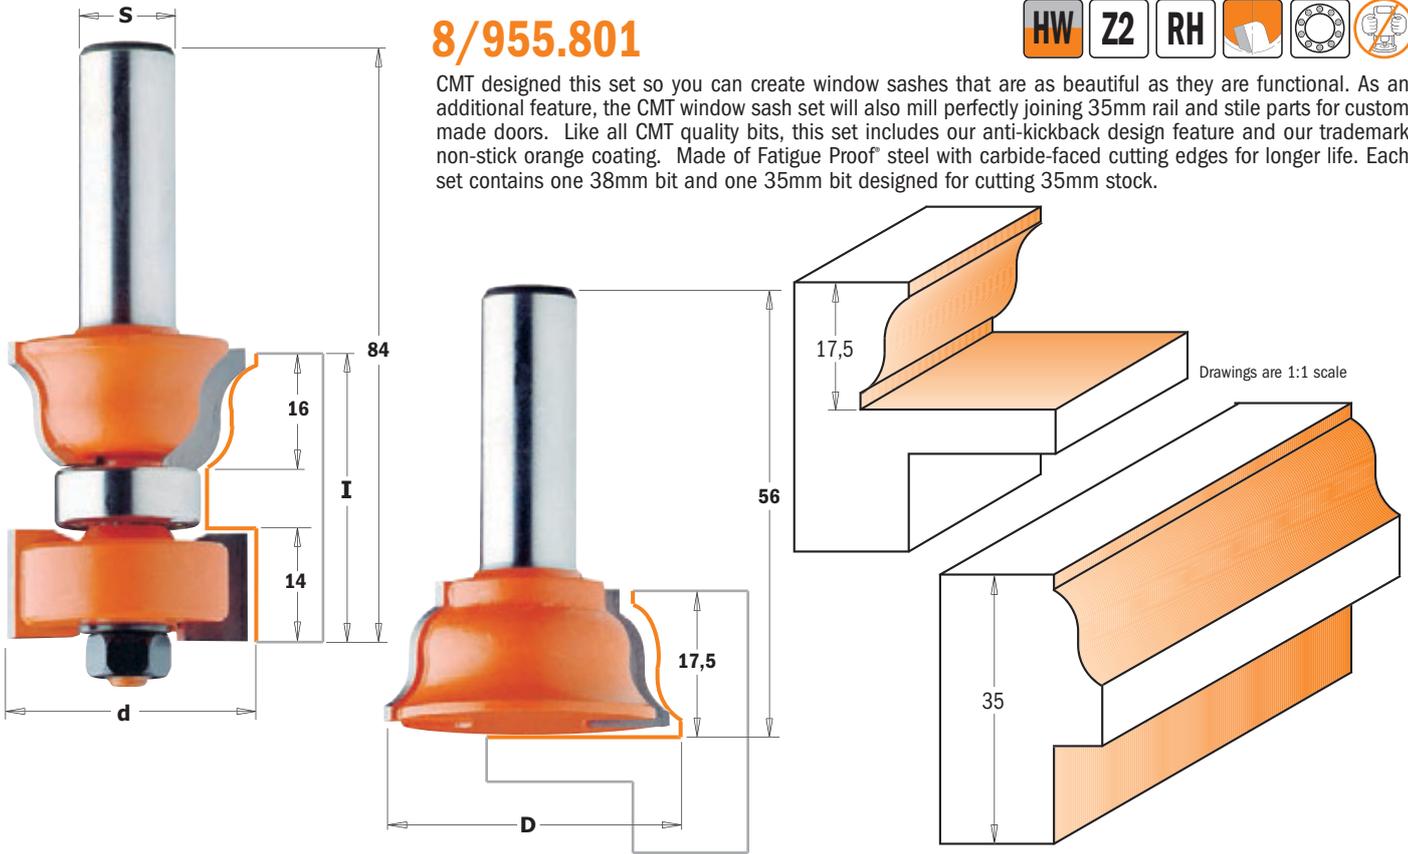

| d | I | L | D | I | L | ORDER NO. | ORDER NO. | Spare parts | | | |
|----|----|----|----|------|----|-------------------|-------------------|-------------|------------|------------|------------|
| mm | mm | mm | mm | mm | mm | S=∅12mm | S=∅12,7mm | | | | |
| 35 | 35 | 84 | 38 | 17,5 | 56 | 955.801.11 | 855.801.11 | 791.012.00 | 822.004.11 | 541.518.00 | 990.020.00 |

Step-by-step window sash construction

Your CMT set makes it easy!

In our step-by-step example for window sash construction, we used the following:

- CMT Window Sash Set (item #855.801.11)
- stiles cut 35mm thick
- rails cut 35mm thick
- scrap stock

The CMT Window Sash Set was designed ideally for the construction of windows in 35mm stock, however variations as narrow as 28mm can be used. Stock thicker than 35mm exceeds the milling range of the cutter. Remember to adjust your measurements and cutting depths according to the wood thickness you use. We suggest making a trial joint in scrap stock according to the following steps before milling all of the cope and stick profiles.

STEP 1 - Measurements and making the tenons





The ideal thickness of the stiles when using the CMT sash set is 35mm. The desired width of the stiles will determine the length you need to make your tenons, while the length of the stile will represent the desired full height of the sash. When cutting the rails to length, make sure to add the length of the two tenons to the overall length of the rail. The length of the tenons should be at least half the width of the stile. Mill 16mm measuring from the front face of the stock using a table saw, radial saw or router as shown in illustration 1. This measurement remains invariable since it is calculated to the height of the CMT sash routers. The width of the tenon is 6mm. Rotate the stock and mill the other side. For our example, the second milling will be 13mm but this measurement will vary if you are using thinner stock.

STEP 2 - Making the cope profile on rails, sash bar and muntins

To make the cope profile, place the rail face front down on the router table with the tenon flush to the bit as shown in illustration 2. Adjust the fence so the bit mills 6,35mm deeper than the tenon. To mill the sash bar and the muntins (cross bars), position front face down on the router table and mill without changing the height of the bit.


STEP 3 - Making the stick profile on rails, stile, sash bar and muntins

To mill the stick profile along the inside edges of all sash parts, place the already milled cope profile front face down on the router table and adjust the sash bit so that the lower edge of the top cutter will exactly touch the upper edge of the tenon as shown in illustration 3. With the rail still face down on the table, turn it so the inside edge of the rail is touching the bit and mill the stick profile. Mill the inside edges of the stiles and mill both edges of the front face of the sash bar and muntins. To cut the slots for the tenons, measure 16mm from the front face of the stiles and rout with a table saw.

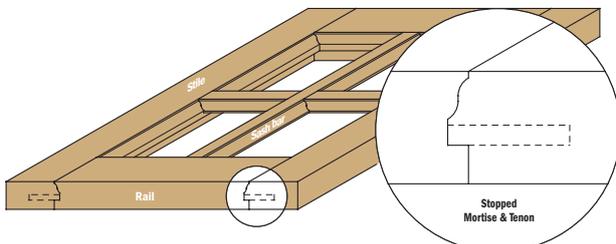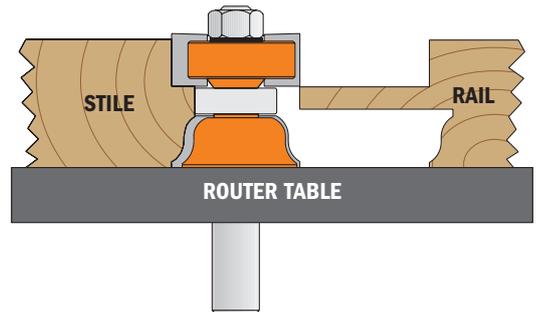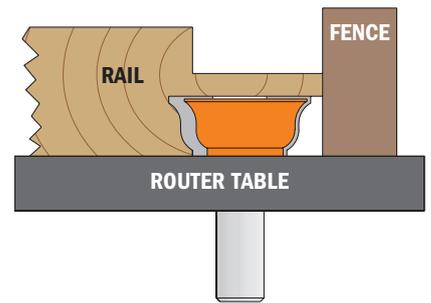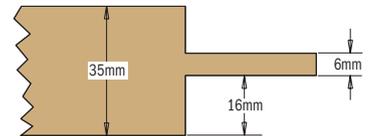


Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Ovolo sash bits


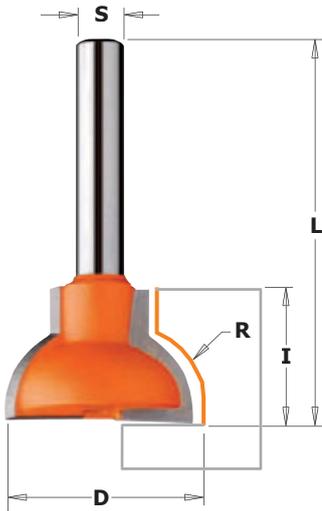


8/955.3

These bits allow you to make true divided light doors for fine furniture and cabinets as well as sash bar windows, and stile and rail constructions.
The glazing bar ovolo bits are bearing-guided to enable curved frames to be moulded.
Cove bits can be used to produce easy-to-pull drawer handles.

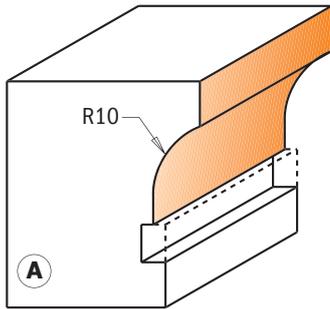

Drawings are 1:1 scale

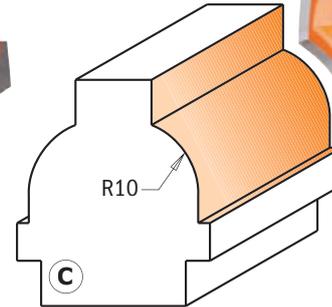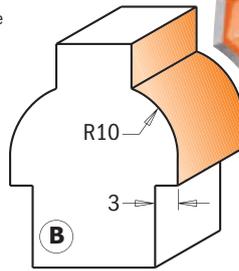

| D mm | I mm | R mm | L mm | Profile | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm |
|------|------|------|------|---------|------------------------|---------------------|
| 22 | 19 | 10 | 50,8 | A | 855.307.11M | 955.307.11M |
| 22 | 19 | 10 | 50,8 | B | 855.307.11F | 955.307.11F |
| 28 | 19 | 10 | 61,2 | C | 855.308.11F | 955.308.11F |

Spare parts




990.423.00 791.003.00 990.058.00 991.057.00

Ovolo sash set



955.302 - 855.802

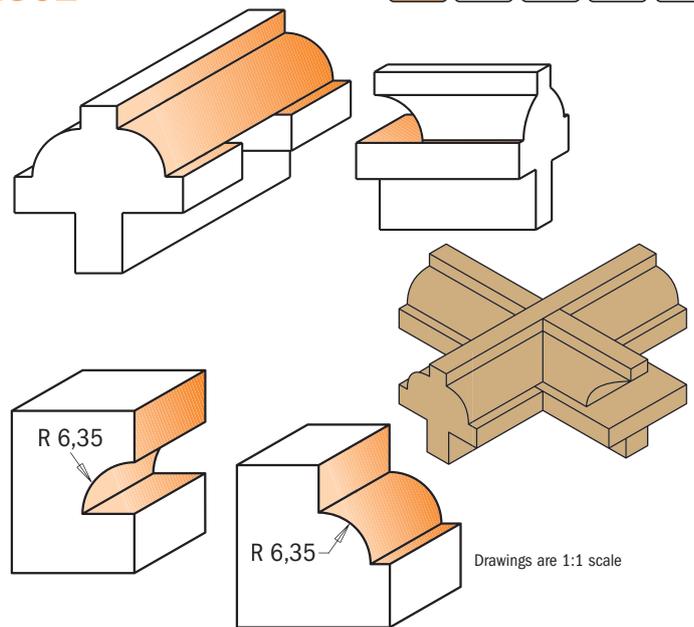

Drawings are 1:1 scale

| d mm | D mm | I mm | R mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm |
|------|------|------|------|---------------------|------------------------|
| 30 | 31,7 | 12 | 6,35 | 955.302.11 | 855.802.11 |

Spare parts



990.423.00 791.003.00 990.058.00 991.057.00 791.011.00 541.002.00

Spare parts 991.056.00 1,5mm hex key

Finger joint bit

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets


CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools


Power tools & accessories

Display cabinets & spare parts

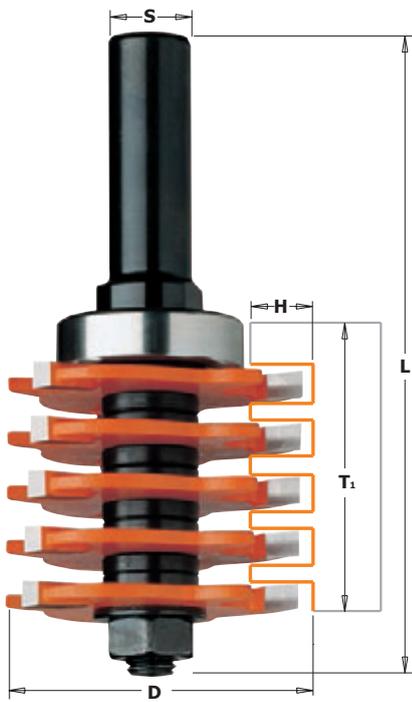

8/900.616

This router allows you to carry out accurate and functional finger joints in a much easier way. Without any adjustment you will be able to work woods with different thicknesses as indicated in the drawing. The bearing allows you to reach a 9,5mm cutting depth. For further cutting depths you need to use a fence.

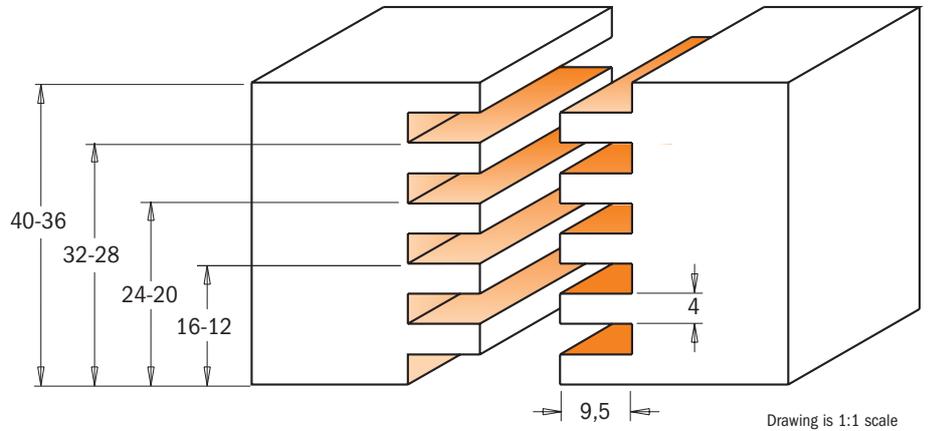

| T ₁ mm | D mm | H mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | |
|----------------------|---------|---------|---------|----------------------|------------------------|-------------|------------|------------|------------|--|
| 12 - 40 | 47,6 | 9,5 | 97 | 900.616.11 | | | | | | |
| 12 - 40 | 47,6 | 9,5 | 97 | | 800.616.11 | 924.130.00 | 791.027.00 | 822.340.11 | 990.020.00 | |
| | | | | | | 824.130.00 | 791.027.00 | 822.340.11 | 990.020.00 | |


Spare parts

| | |
|------------|------------------|
| 541.515.00 | 0,1mm spacer |
| 541.519.00 | 0,1mm spacer |
| 990.403.00 | 1,6mm washer |
| 990.459.00 | Kit with spacers |

Optional


| | |
|------------|------------------------------------|
| 791.020.00 | Ø38,1mm bearing (for depth 4,75mm) |
| 791.029.00 | Ø34,9mm bearing (for depth 6,35mm) |
| 791.015.00 | Ø31,7mm bearing (for depth 8mm) |
| 791.011.00 | Ø19mm bearing (for depth 14,3mm) |

Professional finger joint bit

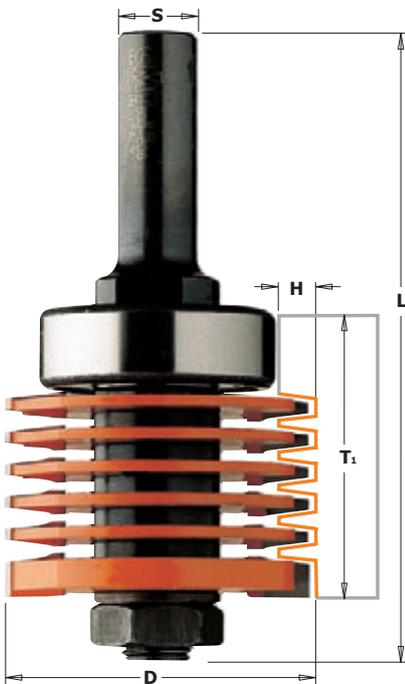

8/900.606

This versatile CMT finger joint bit lets you make one of the most incredibly strong side-to-side or end-to-end joints in all wood and wood composites. The tightness of the accurately cut joint and the maximum glue surface create a joint that is actually stronger than an unworked piece of wood. CMT's professional finger joint features two flute design, carbide teeth and six removable cutters so you can make joints in a wide range of stock thicknesses, from 12,7mm to 36mm. Ideal for molding manufacturers and furniture makers.

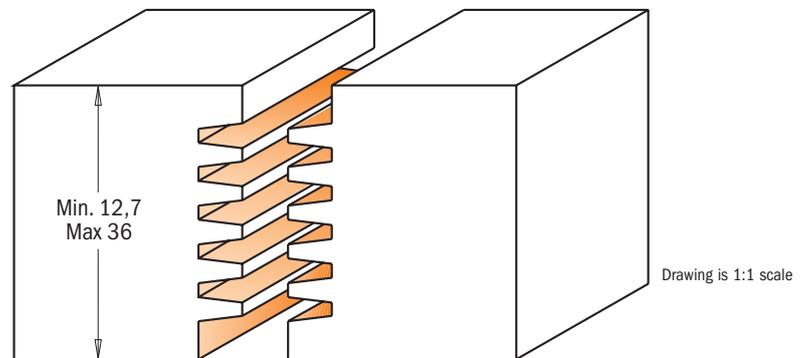

| T ₁ mm | D mm | H mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | |
|----------------------|---------|---------|---------|----------------------|------------------------|-------------|------------|------------|------------|------------|
| 12,7 - 36 | 47,6 | 5,5 | 97 | 900.606.11 | | | | | | |
| 12,7 - 36 | 47,6 | 5,5 | 97 | | 800.606.11 | 924.129.00 | 791.028.00 | 822.005.11 | 822.006.11 | 990.022.00 |
| | | | | | | 824.129.00 | 791.028.00 | 822.005.11 | 822.006.11 | 990.022.00 |

Spare parts

| | | | |
|------------|------------|------------|-----------------|
| 541.511.00 | 3mm spacer | 541.513.00 | 0,1mm spacer |
| 541.512.00 | 2mm spacer | 990.458.00 | Kit with spacer |



V-Tongue and groove set

8/955.506



If the standard selection of molding and mill work you find in today's lumber shops isn't satisfactory to your woodworking tastes, then look to CMT's molding system instead. With these bits, you can make dozens of elaborate profiles by combining two or more passes. Avoid the average and create your own moldings. Some initial suggestions are illustrated below.

SAFETY TIPS: Use these bits with a fence. The profiles shown below are milled from heavy stock then refined to the desired shape.

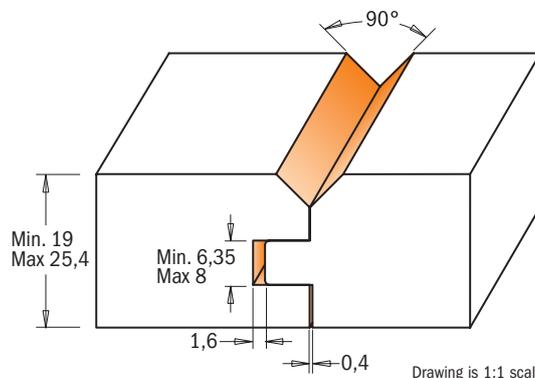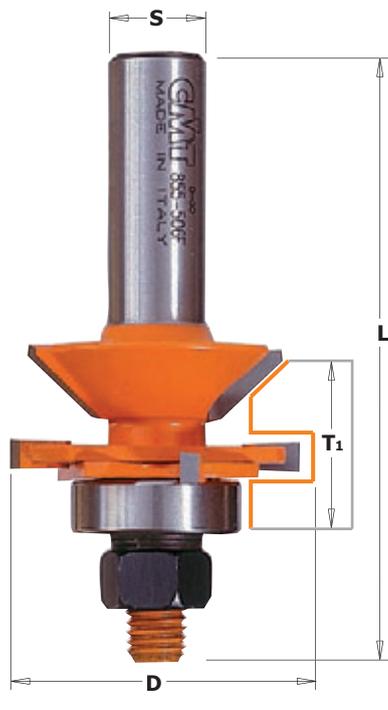

| D mm | T ₁ mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | |
|---------|----------------------|---------|----------------------|------------------------|--|--|--|--|--|
| 44,4 | 19÷25,4 | 75,5 | 955.506.11 | 855.506.11 |  8mm |  4mm |  19mm |  22mm |  990.020.00 |
| | | | <i>Spare parts</i> | | | | | | |
| | | | | |  0,1mm spacer |  0,5mm spacer | | | |
| | | | | |  0,3mm spacer |  990.407.00 Shield | | | |

Spare parts

541.515.00 0,1mm spacer
541.516.00 0,3mm spacer




541.517.00 0,5mm spacer
990.407.00 Shield

Edge banding bits set

8/955.510



This is a great set to create economical but attractive and durable edge to your cabinet doors. Use 1/2" or 1" thick panels in plywood or MDF and create your own edge banding from the wood of your choice. Easy to use: just center each cutter on the stock and make the cut; glue together the two pieces and flush trim it after assembly if necessary. The set features a 60° tongue & groove for a large surface area for glue.

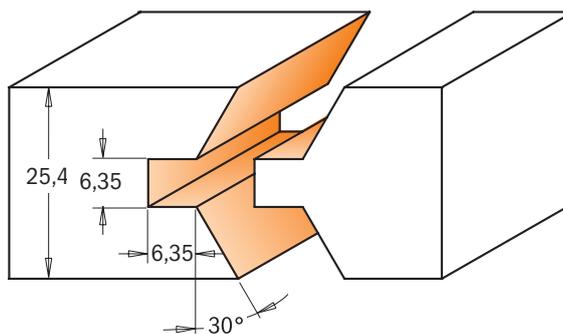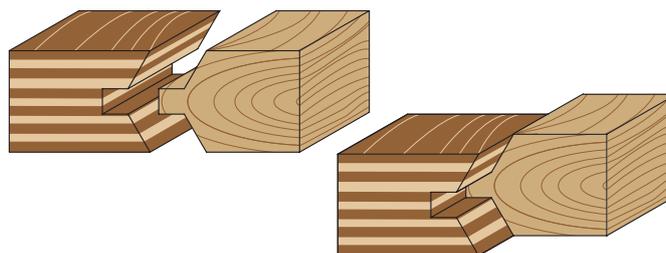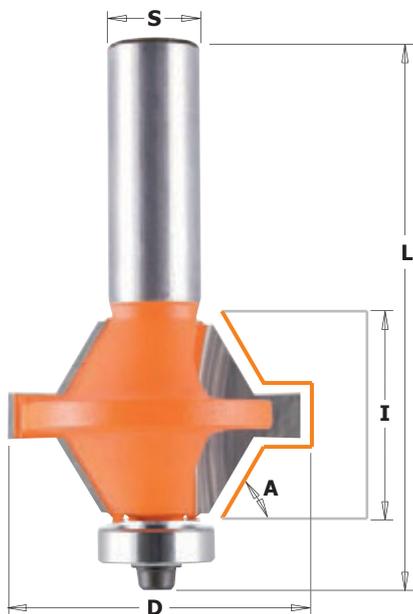


| D mm | I mm | A | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | |
|---------|---------|-----|---------|----------------------|------------------------|---|--|--|--|
| 40 | 25,4 | 30° | 74,5 | 955.510.11 | 855.510.11 |  990.423.00 |  791.018.00 |  990.058.00 |  991.057.00 |

Spare parts

990.423.00 791.018.00 990.058.00 991.057.00

Dovetail bits



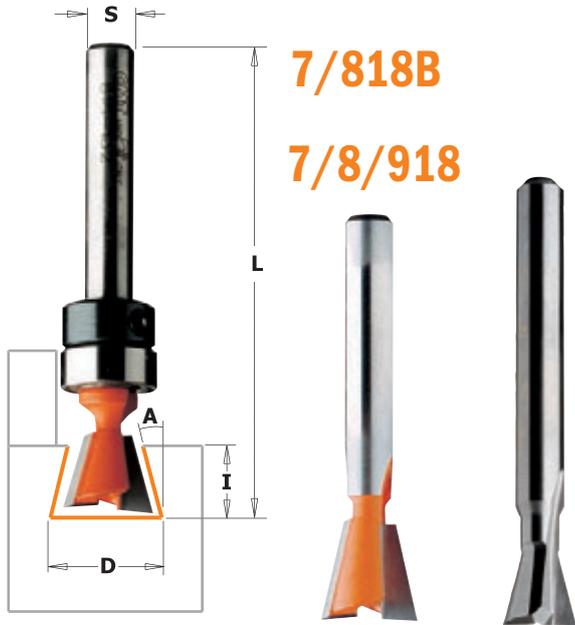


The beautifully crafted dovetail joint is a classic that appeals to both professionals and novices alike. Admired for its attractiveness in box and exposed joint projects, the dovetail is remarkably strong and functional. CMT dovetail bits are available in 25 different sizes so you can stretch your creativity to the limit. See the illustrations on the next page for dovetail joinery possibilities.



CMT dovetail bits are designed to fit all popular jigs including Leigh, Keller, JointTECH and Omnijig systems. You are sure to find the bit you are looking for in our vast selection of cutting sizes and angles. Check the overall length of the bit before placing an order to be sure you get the size you need - CMT makes bits specifically to fit on jigs and routers that require a longer shank length.

SHOP TIPS: Two passes are recommended when routing dovetails with a template. Check that the dovetails have been cut through completely and smoothly before removing the workpiece. For even easier routing and less stress on your dovetail bit, run the first pass with a straight bit. Use a dovetail on your router table equipped with a fence to achieve difficult chamfer angles.

SAFETY TIPS: If a dovetail bit jams while working, adjust the position of the bit in the collet and make sure the cutting depth is correct. Do not lift the router out of the template.

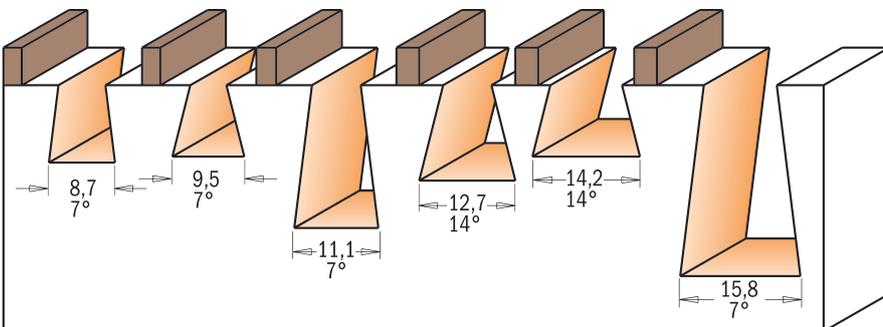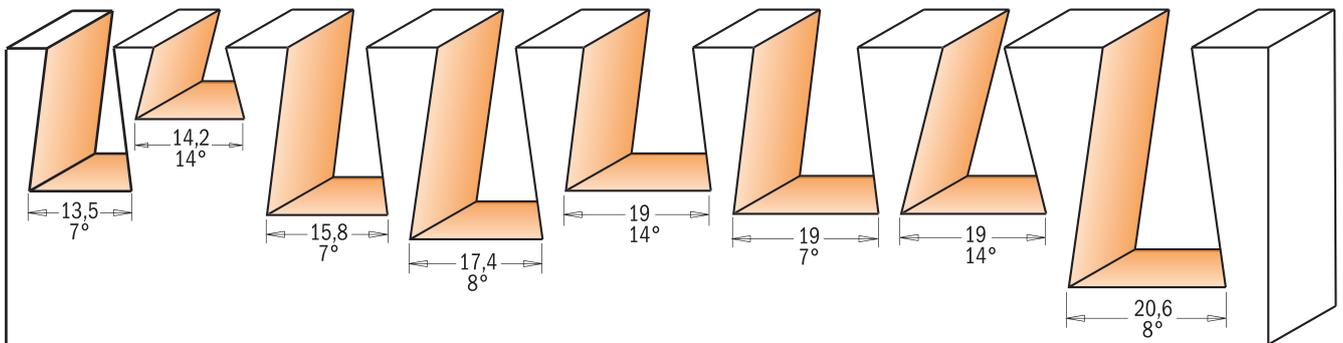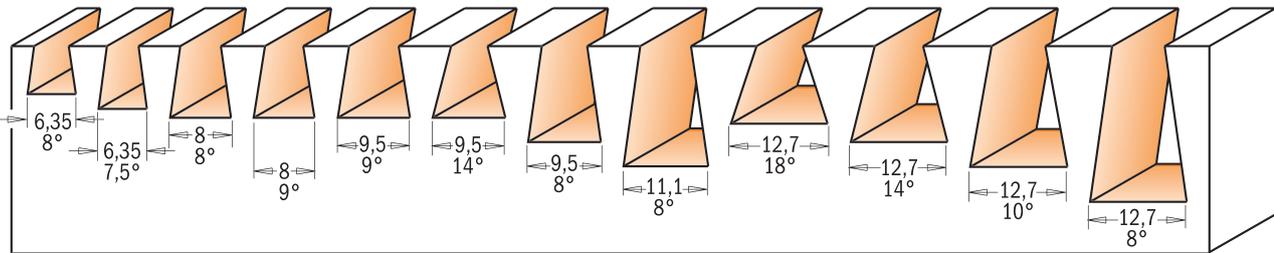

| Manufacturer/Model | | ORDER NO. |
|--------------------|-------------|-------------|
| CMT-Enlock10 | 718.098.11B | 818.098.11B |
| CMT-Enlock15 | 718.127.11B | 818.128.11B |
| CMT300 | 718.127.11 | 818.128.11 |
| | 918.127.11 | 818.628.11 |

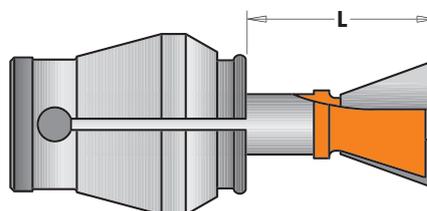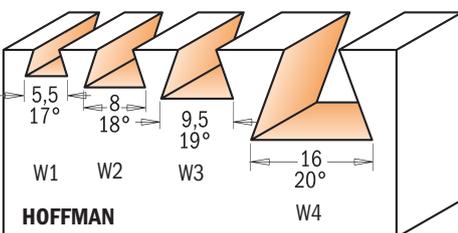

| Manufacturer/Model | | ORDER NO. |
|--------------------|------------|------------|
| HOFFMAN | | |
| W1 L=16mm | 718.053.11 | 818.053.11 |
| W2L=17,5mm | 718.079.11 | 818.079.11 |
| W3 L=19mm | 718.093.11 | 818.093.11 |
| W4 L=25mm | | 918.167.11 |

Drawings are 1:1 scale

7/8/918 - 7/818B



Here are a few of the beautiful dovetail joints you can produce using CMT bits


Through dovetail




Half-blind dovetail






Variably-spaced dovetail



Sliding dovetail



A few seconds and your joints are ready!




| D mm | I mm | L mm | A | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | |
|--|---------|---------|------|---------------------|------------------------|---------------------|----------------------|------------------------|-------------|------------|--|
| • 6 | 8,3 | 60 | 7,5° | 718.060.11 | | | | | | | |
| • 6,35 | 6,35 | 50,8 | 8° | | 818.065.11 | | | | | | |
| • 6,35 | 8,3 | 63,5 | 7,5° | | 818.064.11 | | | 818.564.11 | | | |
| • 8 | 9,5 | 54 | 8° | | 818.081.11 | | | | | | |
| • 8 | 9,5 | 52,5 | 9° | | 818.080.11 | | | | | | |
| • 8 | 9,5 | 63,5 | 9° | | | | | 818.580.11 | | | |
| 9,5 | 9,5 | 52,5 | 9° | 718.095.11 | 818.096.11 | 918.095.11 | | | | | |
| 9,5 | 9,5 | 63,5 | 9° | | | | | 818.596.11 | | | |
| • 9,5 | 9,5 | 60,3 | 14° | | 818.098.11 | | | | | | |
| • 9,5 | 12,7 | 60,3 | 8° | | 818.097.11 | | | | | | |
| 11,1 | 15,9 | 60,3 | 8° | | 818.111.11 | | | | | | |
| 12,7 | 10,3 | 60,3 | 18° | | 818.132.11 | | | | | | |
| 12,7 | 12,7 | 52,4 | 14° | 718.127.11 | 818.128.11 | 918.127.11 | | | | | |
| 12,7 | 12,7 | 63,5 | 14° | | | | | 818.628.11 | | | |
| 12,7 | 12,7 | 62 | 14° | | 818.130.11 | | | | | | |
| 12,7 | 16 | 60,3 | 10° | | 818.133.11 | | | | | | |
| 12,7 | 20,6 | 69,8 | 8° | | 818.129.11 | 918.129.11 | | | | | |
| 13,5 | 19,05 | 61,5 | 7° | | | | | 818.635.11 | | | |
| 14,2 | 9,5 | 50,8 | 14° | | 818.142.11 | | | | | | |
| 15,8 | 22 | 60,3 | 7° | 718.158.11 | 818.158.11 | 918.158.11 | | | | | |
| 15,8 | 22 | 66,7 | 7° | | | | 918.658.11 | 818.658.11 | | | |
| 17,4 | 25,4 | 77,6 | 8° | | | | | 818.674.11 | | | |
| 19 | 19 | 77,6 | 14° | | | | | 818.691.11 | | | |
| 19 | 22 | 60,3 | 7° | 718.190.11 | 818.190.11 | 918.190.11 | | | | | |
| 19 | 22 | 66,7 | 7° | | | | 918.690.11 | 818.690.11 | | | |
| 19 | 22 | 60,3 | 14° | | 818.191.11 | | | | | | |
| 20,6 | 31,7 | 84,1 | 8° | | | | | 818.706.11 | | | |
| with top bearing | | | | | | | | | | | |
| 8,73 | 10,3 | 58 | 7° | | 818.087.11B | | | | 791.009.00 | 541.001.00 | |
| • 9,5 | 9,5 | 60,3 | 14° | 718.098.11B | 818.098.11B | | | | 791.010.00 | 541.001.00 | |
| 11,1 | 19 | 66,7 | 7° | | 818.113.11B | | | | 791.009.00 | 541.001.00 | |
| 12,7 | 12,7 | 52,4 | 14° | 718.127.11B | 818.128.11B | | | | 791.010.00 | 541.001.00 | |
| 14,2 | 9,5 | 50,8 | 14° | | 818.142.11B | | | | 791.010.00 | 541.001.00 | |
| with top bearing (shank Ø9,5mm) | | | | | | | | | | | |
| 15,8 | 25,4 | 68,3 | 7° | | | | 818.159.11B | | 791.021.00 | 541.006.00 | |
| for Hoffman | | | | | | | | | | | |
| • 5,5 | 4 | 43 | 17° | 718.053.11 | 818.053.11 | | | | | | |
| • 8 | 6 | 43 | 18° | 718.079.11 | 818.079.11 | | | | | | |
| • 9,5 | 7,3 | 43 | 19° | 718.093.11 | 818.093.11 | | | | | | |
| 16,7 | 12,5 | 49 | 20° | | | | 918.167.11 | | | | |

Spare parts 990.005.00 M3x3mm TSEI screw
991.056.00 1,5mm hex key

• HWM

9° Dovetail cutters

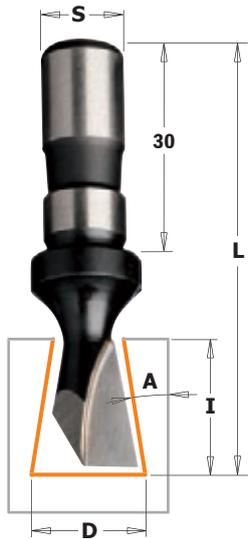


522


HW **Z1** **RH**

| D mm | I mm | L mm | A | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|----|---------|----------------------------------|
| 14 | 18 | 60 | 9° | 12 | 522.140.11 |

TECHNICAL DETAILS:
 - Super strength steel
 - 1 HW precision ground cutting edge (Z1)

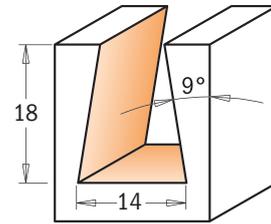

Drawing is 1:1 scale

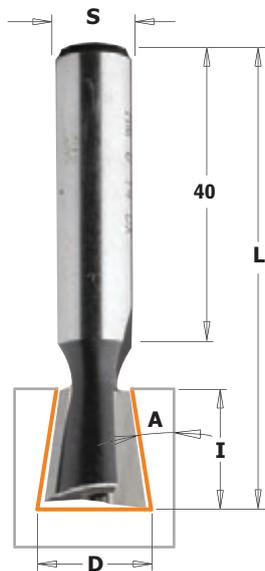


523

HW **Z2** **RH**


| D mm | I mm | L mm | A | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|----|---------|----------------------------------|
| 14 | 16 | 60 | 9° | 10 | 523.140.11 |

TECHNICAL DETAILS:
 - Super strength steel
 - 2 HW precision ground cutting edges (Z2)

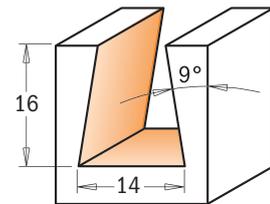

Drawing is 1:1 scale

15° dovetail cutter with insert knives for roof-frames

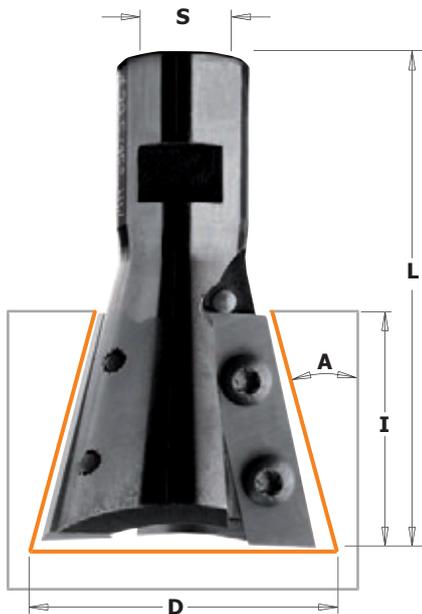

664

INSERT CARBIDE **Z2** **RH**


| D mm | I mm | L mm | A | S | ORDER NO. Right-hand rotation |
|---------|---------|---------|-----|-------|----------------------------------|
| 39,5 | 31,5 | 65,5 | 15° | M12x1 | 664.395.11 |

Spare parts

| | | |
|------------|------------|------------|
| | | |
| 790.315.00 | 990.078.00 | 991.061.00 |

TECHNICAL DETAILS:
 - Super strength steel
 - 2 HWM precision insert knives (Z2)

APPLICATION:
 This cutter allows you to assembly roof-frames by dovetailing.

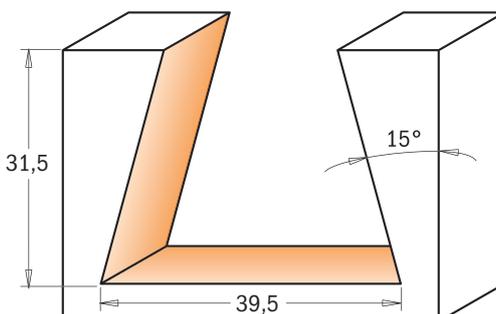


Drawing is 1:1 scale

Saw blades
 Jig saw blades
 Tools with bore & Knives
 Router bits & sets
 CNC router cutter & chucks
 Industrial dowel drills
 Bits for hand power tools
 Power tools & accessories
 Display cabinets & spare parts

60° Lettering bit



7/8/949

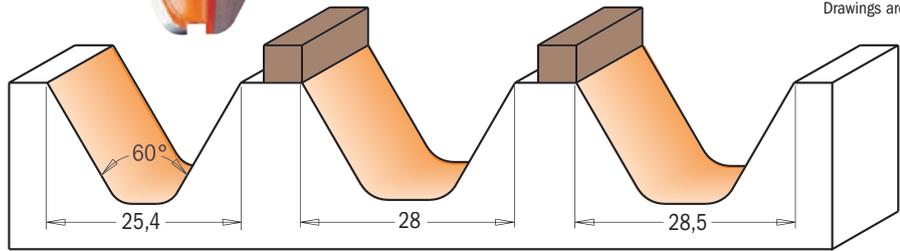

The ideal bit for routing signs. CMT has designed a bit with a 60° curved profile, a 3,2mm (1/8") radius and a flattened bottom to make relief letter-making easy and accurate. This exclusive design allows you to efficiently level off the area around the base of the letter and bevel the letter edges to eliminate aggravating splintering. Try our 60° lettering bit with top bearing guide to get even more precise decorative effects.

| D mm | I mm | A | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | |
|-------------------------|------|-----|------|---------------------|------------------------|----------------------|------------------------|-------------|------------|------------|
| 25,4 | 19 | 60° | 50,8 | 749.001.11 | 849.001.11 | | | | | |
| 28 | 19 | 60° | 63,5 | | | 949.502.11 | | | | |
| 28,5 | 19 | 60° | 63,5 | | | | 849.501.11 | | | |
| with top bearing | | | | | | | | | | |
| 28 | 19 | 60° | 63,5 | | | 949.502.11B | | 791.026.00 | 541.005.00 | 991.056.00 |
| 28,5 | 19 | 60° | 63,5 | | | | 849.501.11B | 791.027.00 | 541.002.00 | 991.056.00 |

Spare parts 990.005.00 M3x3mm STEI screw


Bowl and tray bits



7/851B



7/8/951

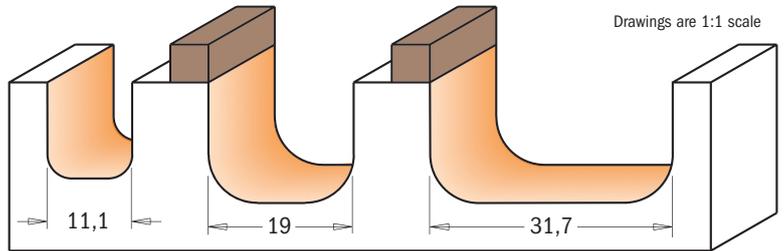

This CMT bit is ideal for making bowls, trays, boxes, cutting boards or any other specialty or craft item. The round corner of the bit shapes the inner radius while the sides and bottom create the smooth flat surfaces. Makes pattern work quick and easy. For best results on jobs where accuracy is a priority we recommend using our top bearing bowl and tray bits shown at bottom of page. Bowl and Tray bits with top bearings are great for pattern work. Use them to create raised sign lettering, trays and many other items.

| D mm | I mm | R mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | |
|-------------------------|------|------|------|---------------------|------------------------|---------------------|----------------------|------------------------|-------------|------------|------------|
| 11,1 | 12,7 | 3,2 | 45,5 | | 851.001.11 | | | | | | |
| 19 | 16 | 6,4 | 54 | 751.002.11 | 851.002.11 | 951.002.11 | | | | | |
| 19 | 16 | 6,4 | 60,4 | | | | 951.501.11 | 851.501.11 | | | |
| 31,7 | 16 | 6,4 | 60,4 | | | | 951.502.11 | 851.502.11 | | | |
| with top bearing | | | | | | | | | | | |
| 19 | 16 | 6,4 | 54 | 751.002.11B | | | | | 791.007.00 | 541.003.00 | 991.056.00 |
| 19 | 16 | 6,4 | 54 | | 851.002.11B | | | | 791.004.00 | 541.001.00 | 991.056.00 |
| 19 | 16 | 6,4 | 60,4 | | | | | 851.501.11B | 791.011.00 | 541.002.00 | 991.056.00 |
| 31,7 | 16 | 6,4 | 60,4 | | | | 951.502.11B | 851.502.11B | 791.015.00 | 541.002.00 | 991.056.00 |


Spare parts 990.005.00 M3x3mm STEI screw

V-Grooving bits (90°)


HW Z2 RH

7/8/915

These double cutting edge CMT bits offer an almost endless range of woodworking possibilities. Make clean, perfect cuts in panels, drawer fronts or even plasterboard panels; chamfer edges or engrave beautiful lettering.

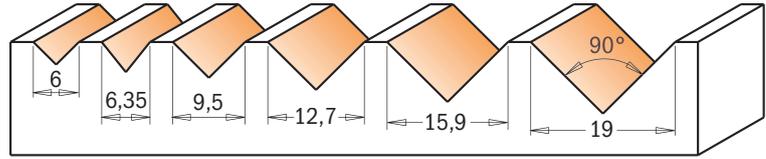

Drawings are 1:1 scale

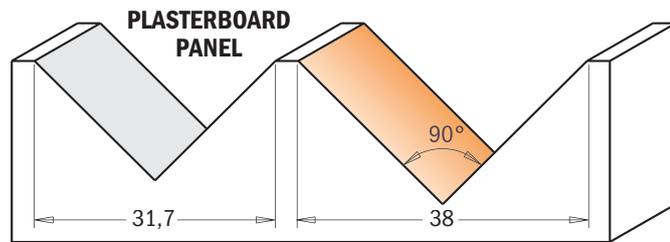

• HWM


| D mm | I mm | A | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|-----|---------|---------------------|------------------------|---------------------|----------------------|------------------------|
| •6 | 8 | 90° | 38,1 | 715.060.11 | | 915.060.11 | | |
| •6,35 | 8 | 90° | 38,1 | | 815.064.11 | | | |
| 9,5 | 12,7 | 90° | 44,5 | 715.095.11 | 815.095.11 | 915.095.11 | | |
| 12,7 | 12,7 | 90° | 44,5 | 715.127.11 | 815.127.11 | 915.127.11 | | |
| 16 | 12,7 | 90° | 52,8 | | | 915.160.11 | | |
| 16 | 12,7 | 90° | 63,5 | | | | 915.660.11 | 815.660.11 |
| 19 | 16 | 90° | 55,5 | 715.190.11 | | | | |
| 19 | 16 | 90° | 63,5 | | | | 915.690.11 | 815.690.11 |
| 31,7 | 16 | 90° | 63,5 | | | 915.317.11 | 915.817.11 | 815.817.11 |
| 38 | 19 | 90° | 63,5 | | | 915.380.11 | | |
| 38 | 19 | 90° | 70 | | | | | 815.880.11 |

7/8/915B

HW Z2 RH

In addition, CMT has versatile top bearing bits that allow for several template options of your choice (see series 715B-815B-915B). Like all CMT bits, they are made of super strength Fatigue Proof® steel with carbide-tipped cutting edges and are coated with our trademark orange PTFE non-stick coating. These bits are ideal for routing signs, or almost any project that is suitable for accurate template routing.

TIPS: V-grooving bits can perfectly chamfer 45°. Two tools in one!

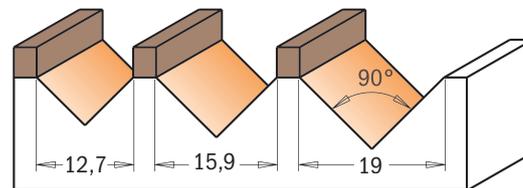

Drawings are 1:1 scale

| D mm | I mm | L mm | A | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm | Spare parts | | |
|---------|---------|---------|-----|---------------------|------------------------|---------------------|------------------------|-------------|------------|------------|
| 12,7 | 12,7 | 44,5 | 90° | | 815.127.11B | | | 791.010.00 | 541.001.00 | 991.056.00 |
| 16 | 12,7 | 52,8 | 90° | | | 915.160.11B | | 791.025.00 | 541.004.00 | 991.056.00 |
| 19 | 16 | 55,5 | 90° | 715.190.11B | | | | 791.007.00 | 541.003.00 | 991.056.00 |
| 19 | 16 | 63,5 | 90° | | | | 815.690.11B | 791.011.00 | 541.002.00 | 991.056.00 |

Spare parts



| | | |
|------------|------------|------------|
| 791.010.00 | 541.001.00 | 991.056.00 |
| 791.025.00 | 541.004.00 | 991.056.00 |
| 791.007.00 | 541.003.00 | 991.056.00 |
| 791.011.00 | 541.002.00 | 991.056.00 |

Spare parts 990.005.00 M3x3mm STEI screw




915

ALUCOBOND® plus composite panels can be shaped using a very simple processing method. The technique, called the routing and folding method, enables a fabricator to produce shapes of various kinds and sizes.

A V-shaped groove is routed on the reverse side of the ALUCOBOND® plus composite panel using a “V” groove router bit. A thin layer of the core material should be left at the base of the groove, i.e. on the inside of the outer cover sheet. The untouched outer cover sheet can now be bent manually, giving an exact and clean folding line which follows the routed groove. The outer radius of the folded edge depends on the shape of the groove and its depth.

We recommend that the routing be done using a CNC machining centre, a portable sheet milling machine or a hand router. The routing and folding method can be used for ALUCOBOND® plus composite panels with all available standard surface finishes. The advantages of this unique technique are:

- Low investment cost
- Simple fabrication technique
- Folding can be done on site, saving transportation cost
- Low-cost fabrication of shaped components, wall cladding, roof edgings, column cladding, flashings, etc.
- Flexibility in creating shapes
- Very economical
- Shapes are not limited by machine capacity.

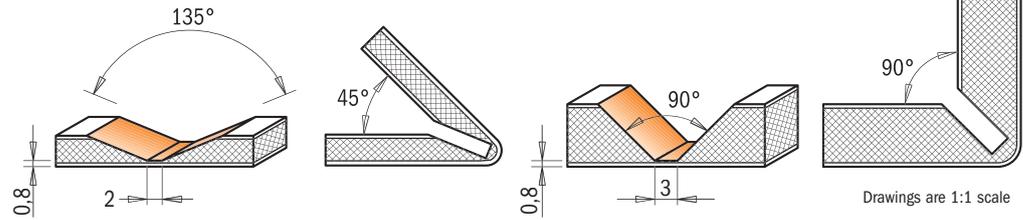

Drawings are 1:1 scale

| D mm | I mm | A | L mm | ORDER NO. S=Ø8mm |
|---------|---------|------|---------|---------------------|
| 18 | 7,45 | 90° | 60 | 915.001.11 |
| 18 | 3,3 | 135° | 60 | 915.002.11 |

Laser point bit (60°) Z=3




7/8/958




This new bit lets you make delicate grooves and incisions with laser precision. Make one of a kind effects with single run 30° bevel edges. Three super sharp cutting edges and this perfectly balanced bit allow you to work with superior accuracy with no risk of burning. Raise the bit and produce a delicate fine point incision, or work the whole 12,7mm diameter to render bold highlighted lettering. Super strong steel shank and micrograin carbide cutting edges guarantee long lasting performance.

7/858.002

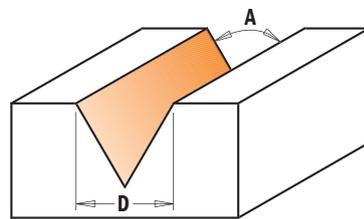

Drawing is 1:1 scale

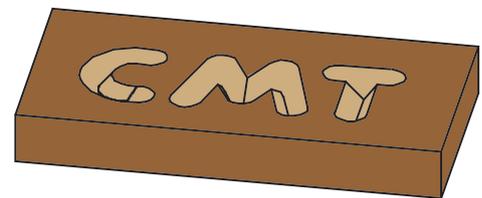

| D mm | I mm | A | Z | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm |
|---------|---------|-----|---|---------|---------------------|------------------------|---------------------|------------------------|
| • 6 | 9 | 35° | 1 | 50 | 758.002.11 | | | |
| • 6,35 | 9,5 | 35° | 1 | 50,8 | | 858.002.11 | | |
| 12,7 | 11 | 60° | 3 | 57,2 | 758.001.11 | 858.001.11 | 958.001.11 | |
| 12,7 | 11 | 60° | 3 | 60,3 | | | | 858.501.11 |


• HWM

V-grooving & signmaking router bits with indexable knives (90°)

new

CMT ORANGE TOOLS™

INSERT CARBIDE Z1 RH


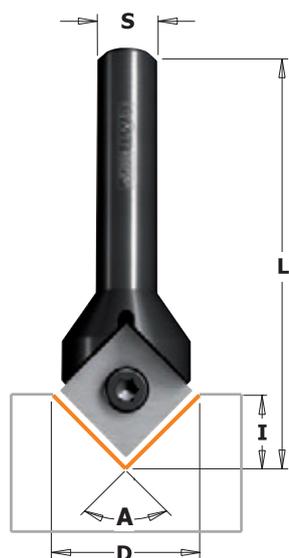


665

These bits have been designed for signmaking and lettering. When insert shows signs of wear, you can simply rotate it to exploit the other cutting edges. Locking screw secures insert tightly for safety and high cutting accuracy.

TECHNICAL DETAILS:

- Super strength steel.
- 1 HW precision insert knife [Z1].

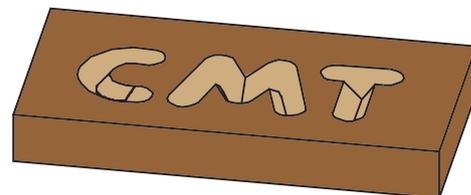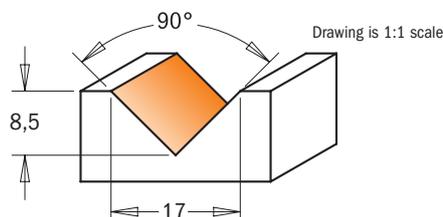


| A | D mm | I mm | L mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | Spare parts | | |
|-----|------|------|------|------------------------|---------------------|-------------|------------|------------|
| 90° | 17 | 8,5 | 53 | 665.171.11 | 665.170.11 | | | |
| | | | | | | 790.120.00 | 990.076.00 | 991.061.00 |

Stepped rebate router bit


new

HW Z2 RH

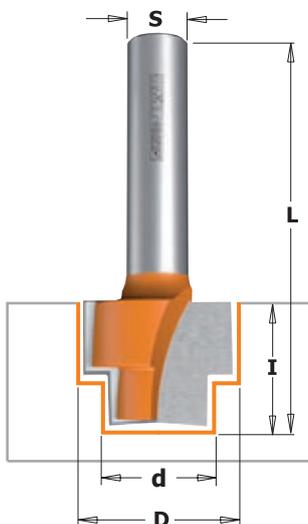

965

Router bit featuring 2 carbide-tipped cutting edges for producing double rebates on wood and wood composites. Designed for accepting library/bookcase shelving strips or for accommodating hardware into your window slots.

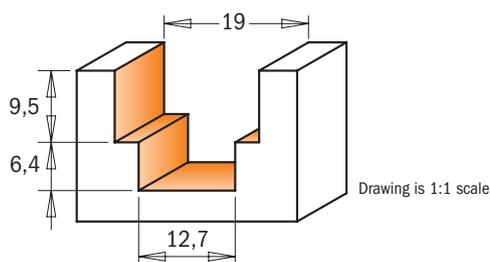

| d mm | D mm | I mm | L mm | ORDER NO. S=Ø8mm |
|------|------|------|------|---------------------|
| 12,7 | 19 | 15,9 | 50,8 | 965.121.11 |

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets


CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories


Display cabinets & spare parts

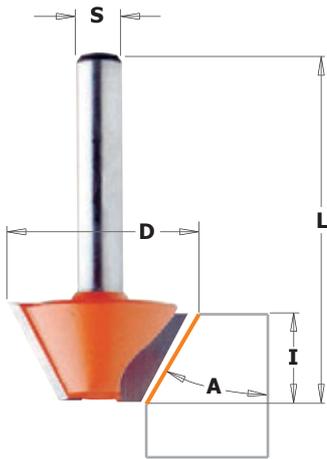

703/4/5 - 903/4/5




From a gently beveled edge to decorative chamfers in a variety of materials, CMT offers smooth results.

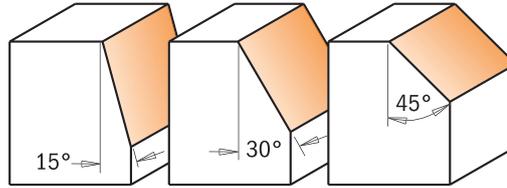

Drawings are 1:1 scale

| A | D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø8mm |
|-----|------|------|------|---------------------|---------------------|
| 15° | 24 | 14 | 46 | 703.240.11 | 903.240.11 |
| 30° | 26 | 12,7 | 44,5 | 704.240.11 | 904.240.11 |
| 45° | 25 | 8 | 41 | 705.240.11 | 905.240.11 |


Chamfer bits with insert knives

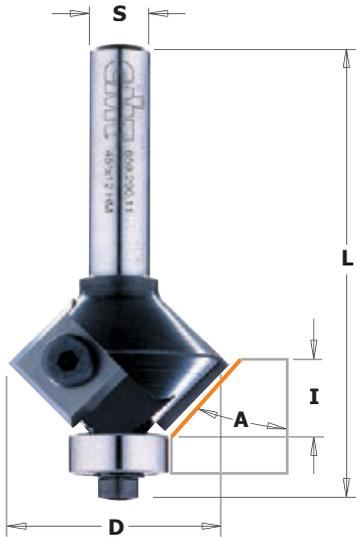

659



Bevel and Chamfer trim bits with two replaceable knives fixed by special Torx screws. The knives are 4 sided sharpened and gives three extra new edges. Guided bevel and chamfer trim bits type 659 are equipped with the ball bearing guides. Type 658 is unguided. For specialist applications requiring economy of replaceable tips. For precision work on laminates, MDF or for quick rounded edges in hard wood. For use on portable Routers or CNC machining centers.

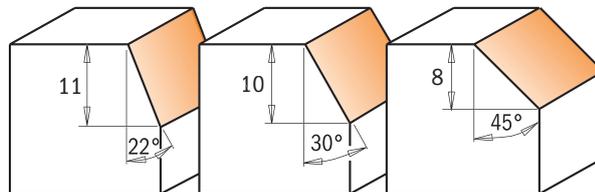

Drawings are 1:1 scale

658



| A | D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm | Spare parts | | |
|-----|------|------|------|---------------------|------------------------|---------------------|------------------------|-------------|------------|------------|
| 45° | 29 | 8 | 52 | 658.047.11 | | 658.045.11 | | | | |
| 22° | 25 | 11 | 65 | 659.024.11 | 659.023.11 | 659.022.11 | | 790.120.00 | 990.075.00 | 791.006.00 |
| 30° | 28 | 10 | 66 | 659.032.11 | 659.031.11 | 659.030.11 | | 790.120.00 | 990.075.00 | 791.006.00 |
| 45° | 29 | 8 | 60 | 659.047.11 | 659.046.11 | 659.045.11 | | 790.120.00 | 990.075.00 | 791.022.00 |
| 45° | 29 | 8 | 68 | | | | 659.646.11 | 790.120.00 | 990.075.00 | 791.022.00 |

- Spare parts**
- 990.400.00 Ø3.2/Ø7mm shield for M3 screw
 - 990.051.00 M3x6mm TCEI screw
 - 991.062.00 2,5mm hex key
 - 991.061.00 T15 Torx key

Chamfer bits

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets


CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts


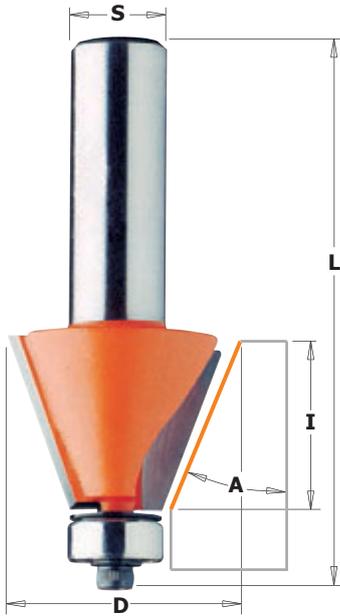


7/8/936 - 8/957



CMT chamfer bits can cut clean, accurate bevels and chamfers and are great for edge work or for making perfectly aligned multi-sided containers, boxes and other decorative projects. See illustration below for examples. Can be used for working larger scale projects such as beams and columns with excellent results.

Drawings are 1:1 scale

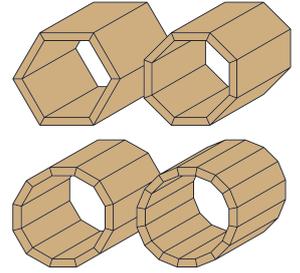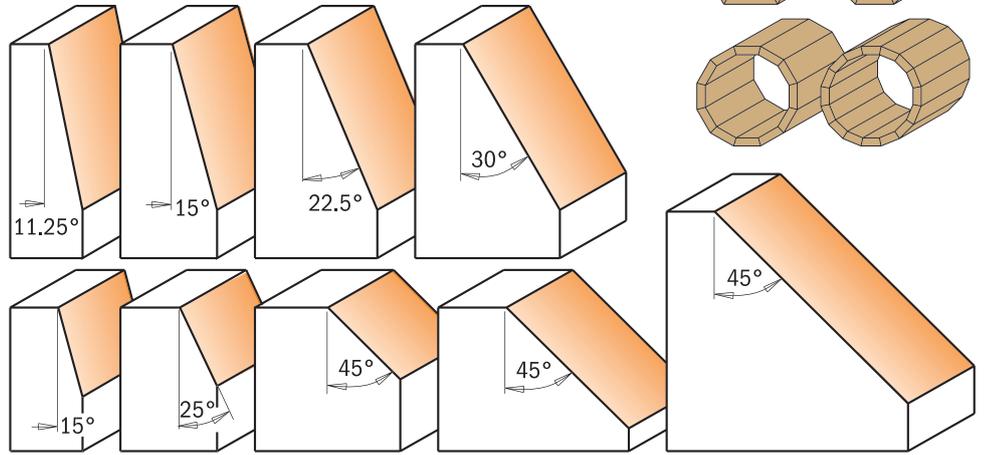

| A | D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|--------|---------|---------|---------|---------------------|------------------------|---------------------|----------------------|------------------------|
| 15° | 19 | 11,5 | 54,9 | 736.130.11 | 836.130.11 | 936.130.11 | | |
| 25° | 22,2 | 10 | 54,9 | 736.190.11 | 836.190.11 | 936.190.11 | | |
| 45° | 31,7 | 9,5 | 53 | 736.280.11 | 836.280.11 | 936.280.11 | | |
| 45° | 45 | 18 | 60,2 | 736.420.11 | 836.420.11 | 936.420.11 | | |
| 45° | 45 | 18 | 66,5 | | | | 936.920.11 | 836.920.11 |
| 45° | 65 | 26 | 76,7 | | | | 936.950.11 | 836.950.11 |
| 11,25° | 21,5 | 22 | 71,1 | | | | 957.504.11 | 857.504.11 |
| 15° | 24,5 | 22 | 71,1 | | | | 957.503.11 | 857.503.11 |
| 22,5° | 31 | 22 | 71,1 | | | | 957.502.11 | 857.502.11 |
| 30° | 38,5 | 22 | 71,1 | | | | 957.501.11 | 857.501.11 |

Spare parts



| | | | |
|------------|------------|------------|------------|
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |


Chamfer set



836




Build beautiful planters, boxes and other multi-sided pieces with this handy set. Why cut imperfect angles on your table saw when it's so much easier and accurate to use the CMT Chamfer set? Our solution to accurate polygon construction includes 5 anti-kickback, carbide tipped bits in the most popular angles - 11-1/4°, 15°, 22-1/2°, 30° and 45°. No polygon project is too difficult. Available with 12,7mm shank.

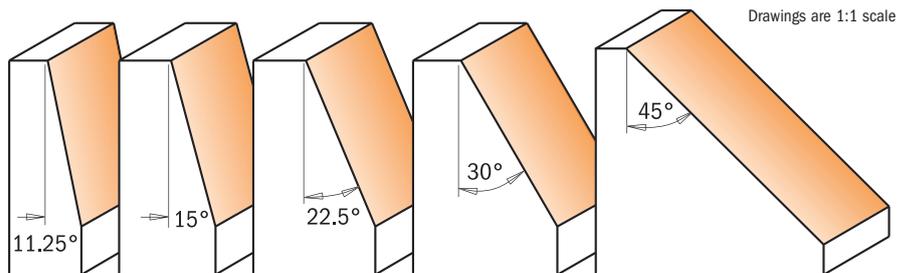

Drawings are 1:1 scale

| DESCRIPTION | ORDER NO. S=Ø12,7mm |
|-------------|------------------------|
| Chamfer set | 836.501.11 |

Round nose bits

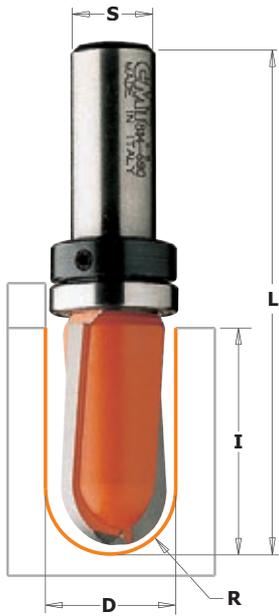

7/8/914B



7/8/914




new



Personalize your doors, drawer fronts, panels or any surface you choose with your own signature motif. CMT round nose bits in solid carbide or with carbide tipped flutes let you create engraving in any wood or wood product. We offer a complete selection of diameters and cutting depths so you can achieve the effects you want. Mounted on your router table, you can work materials up to 31,7mm in depth.

For even more elaborate decorations, we also offer top bearing bits - use your own template with one of these bits to produce truly unique doors and drawer fronts. A favourite item for professional sign makers, craft makers and hobbyists.

SHOP TIPS: more than one pass is recommended when making cove edges. To prevent splintering, begin with a shallow initial pass and deepen gradually.

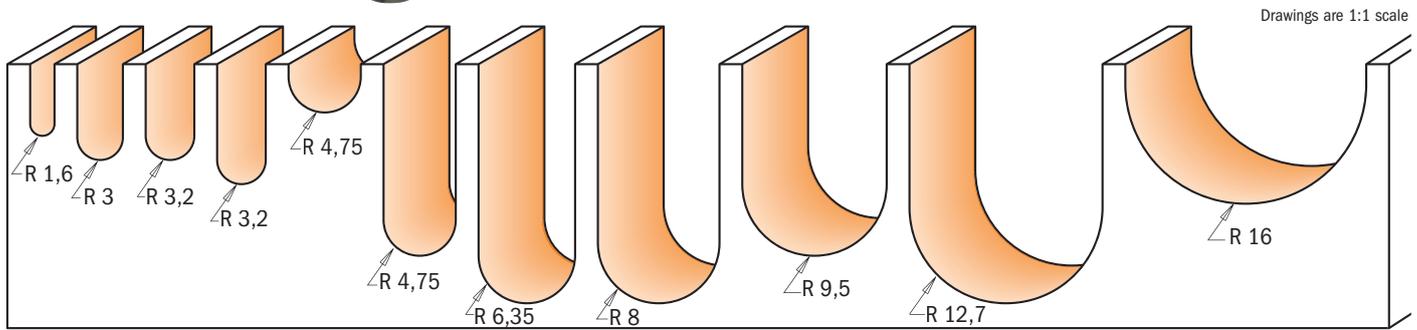

Drawings are 1:1 scale

| R | D | I | L | ORDER NO. |
|-------------------|------|------|------|-------------------|-------------------|-------------------|-------------------|-------------------|
| mm | mm | mm | mm | S=Ø6mm | S=Ø6,35mm | S=Ø8mm | S=Ø12mm | S=Ø12,7mm |
| • 1,6 | 3,2 | 9,5 | 50,8 | 714.032.11 | 814.032.11 | 914.032.11 | | |
| new • 1,6 | 3,2 | 12,7 | 50,8 | | 199.001.11 | | | |
| • 3 | 6 | 12,7 | 50,8 | 714.060.11 | | 914.060.11 | | |
| new • 3 | 6 | 27 | 70 | 199.060.11 | | | | |
| • 3,2 | 6,4 | 12,7 | 50,8 | | 814.064.11 | | | |
| new • 3,2 | 6,4 | 25,4 | 63,5 | | 199.008.11 | | | |
| • 3,2 | 6,4 | 15,9 | 63,5 | | | | | 814.564.11 |
| new • 4 | 8 | 32 | 80 | | | 199.081.11 | | |
| | 4,75 | 9,5 | 6,4 | 714.095.11 | 814.095.11 | 914.095.11 | | |
| | 4,75 | 9,5 | 25,4 | | | | | 814.595.11 |
| new • 6 | 12 | 35 | 80 | | | | 199.120.11 | |
| | 6,35 | 12,7 | 9,5 | 714.127.11 | 814.127.11 | 914.127.11 | | |
| | 6,35 | 12,7 | 31,7 | | | | 914.627.11 | 814.627.11 |
| new • 6,35 | 12,7 | 31,7 | 76,2 | | | | | 199.505.11 |
| | 8 | 15,8 | 9,5 | 714.160.11 | 814.160.11 | 914.160.11 | | |
| | 8 | 15,8 | 31,7 | | | | | 814.660.11 |
| | 9,5 | 19 | 11,5 | 714.190.11 | 814.190.11 | 914.190.11 | | |
| new • 9,5 | 19 | 25 | 63,5 | | | 914.191.11 | | |
| | 9,5 | 19 | 31,7 | | | | 914.690.11 | 814.690.11 |
| new • 12,7 | 25,4 | 16 | 73 | | | 914.254.11 | | |
| | 12,7 | 25,4 | 31,7 | | | | 914.754.11 | 814.754.11 |
| | 16 | 31,7 | 18,5 | | | | 914.817.11 | 814.817.11 |

Spare parts



with top bearing

| | | | | | | | | | | |
|------|------|------|------|--------------------|--------------------|--------------------|--------------------|------------|------------|------------|
| 6,35 | 12,7 | 9,5 | 50,8 | | 814.127.11B | | | 791.010.00 | 541.001.00 | 991.056.00 |
| 8 | 15,8 | 9,5 | 50,8 | | 814.160.11B | | | 791.009.00 | 541.001.00 | 991.056.00 |
| 8 | 15,8 | 9,5 | 50,8 | | | 914.160.11B | | 791.025.00 | 541.004.00 | 991.056.00 |
| 9,5 | 19 | 11,5 | 50,8 | 714.190.11B | | | | 791.007.00 | 541.003.00 | 991.056.00 |
| 9,5 | 19 | 11,5 | 50,8 | | 814.190.11B | | | 791.004.00 | 541.001.00 | 991.056.00 |
| 9,5 | 19 | 31,7 | 73 | | | | 814.690.11B | 791.011.00 | 541.002.00 | 991.056.00 |

Spare parts 990.005.00 M3x3mm TSEI screw

• HWM


Ball milling

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts



8/968

Cut channels for pipes or cables in one single pass using CMT's ball end bits. Reduce the stress on the bits by cutting a first groove with a straight bit.

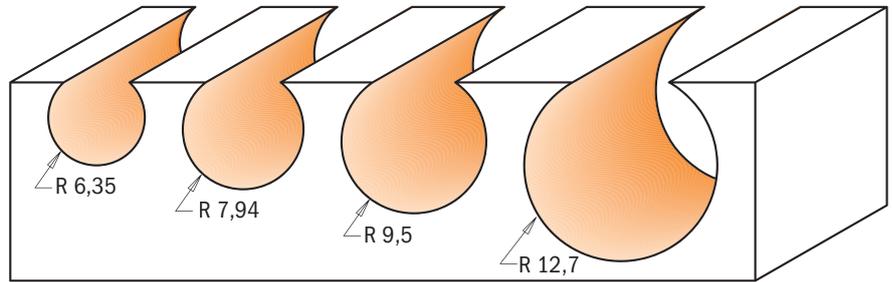

Drawings are 1:1 scale

| R mm | D mm | I mm | L mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|---------|---------|---------------------|----------------------|------------------------|
| 6,35 | 12,7 | 11 | 57,15 | 968.127.11 | | 868.627.11 |
| 7,94 | 15,88 | 14,2 | 60,3 | 968.158.11 | | 868.658.11 |
| 9,52 | 19,05 | 17,4 | 63,5 | 968.190.11 | | 868.690.11 |
| 12,7 | 25,4 | 23,5 | 70 | | 968.754.11 | 868.754.11 |

Round nose set




814


Each of these sets include 3 of the most widely used CMT Round Nose bits. These solid carbide or carbide tipped bits are perfect for sign making, engraving, or adding flutes and veins to doors or drawer fronts. Available in 6,35mm and 12,7mm shanks.



Drawings are 1:1 scale

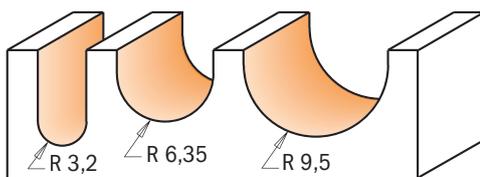


814.001.11

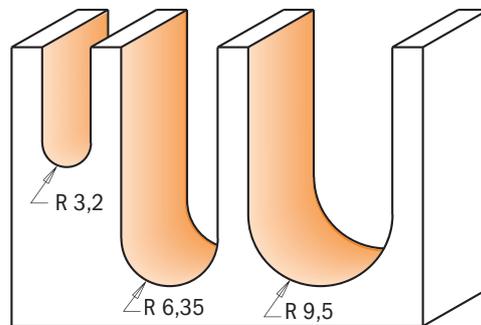

814.501.11


| DESCRIPTION | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø12,7mm |
|----------------|------------------------|------------------------|
| Round nose set | 814.001.11 | 814.501.11 |

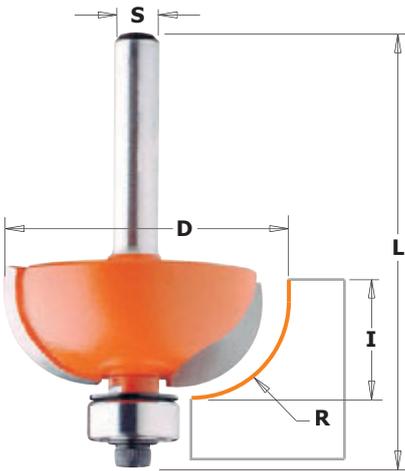


7/8/937




Make simple or elegant furniture, doors and drawer fronts by adding a final touch with CMT cove bits. Join them together with a CMT roundover bit and make perfectly fitting rule joints, ideal for drop leaf counter and table tops. These bits feature anti-kickback design, carbide-tipped cutting edges, Fatigue Proof® steel body and PTFE non-stick coating.

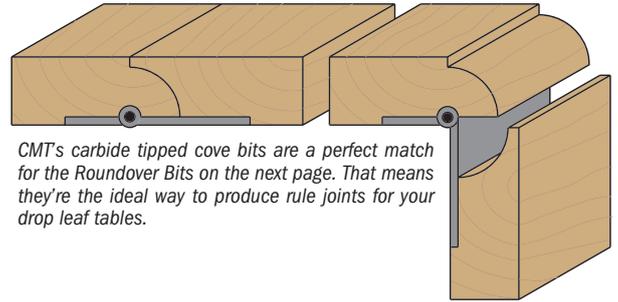

CMT's carbide tipped cove bits are a perfect match for the Roundover Bits on the next page. That means they're the ideal way to produce rule joints for your drop leaf tables.

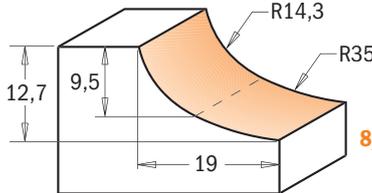


8/937.955.11

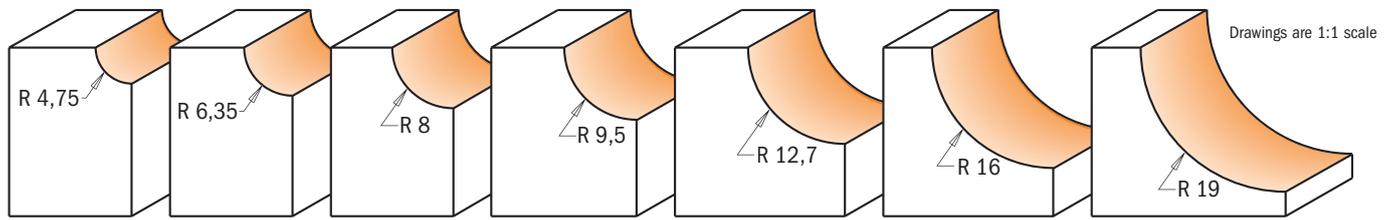

| R | D | I | L | ORDER NO. |
|---------|------|------|------|-------------------|-------------------|-------------------|-------------------|-------------------|
| mm | mm | mm | mm | S=Ø6mm | S=Ø6,35mm | S=Ø8mm | S=Ø12mm | S=Ø12,7mm |
| 4,75 | 22,2 | 12,7 | 54,9 | 737.190.11 | 837.190.11 | 937.190.11 | | |
| 4,75 | 22,2 | 12,7 | 61,2 | | | | 937.690.11 | 837.690.11 |
| 6,35 | 25,4 | 12,7 | 54,9 | 737.222.11 | 837.222.11 | 937.222.11 | | |
| 6,35 | 25,4 | 12,7 | 61,2 | | | | 937.722.11 | 837.722.11 |
| 8 | 28,7 | 12,7 | 54,2 | 737.254.11 | 837.254.11 | 937.254.11 | | |
| 8 | 28,7 | 12,7 | 60,5 | | | | 937.754.11 | 837.754.11 |
| 9,5 | 31,7 | 12,7 | 54,2 | 737.286.11 | 837.286.11 | 937.286.11 | | |
| 9,5 | 31,7 | 12,7 | 60,5 | | | | 937.786.11 | 837.786.11 |
| 12,7 | 38,1 | 15,5 | 57,7 | 737.350.11 | 837.350.11 | 937.350.11 | | |
| 12,7 | 38,1 | 15,5 | 64 | | | | 937.850.11 | 837.850.11 |
| 16 | 44,5 | 18,5 | 67 | | | | 937.950.11 | 837.950.11 |
| 19 | 50,8 | 22,2 | 70,7 | | | | 937.951.11 | 837.951.11 |
| 14,3-35 | 50,8 | 12,7 | 61,2 | | | | 937.955.11 | 837.955.11 |

Spare parts



| | | | |
|------------|------------|------------|------------|
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |


Cove bit set



837



See simple furniture, doors and drawer fronts transform into elegant pieces by giving them a final touch with a CMT Cove Bit. Pair them up with CMT Roundover Bits and make beautiful rule joints to create drop leaf counter and table tops. Anti-kickback design and thick carbide tips for long lasting performance. Available with a 12,7mm or 6,35mm shank. Cove radii are 6,35mm, 9,5mm and 12,7mm.

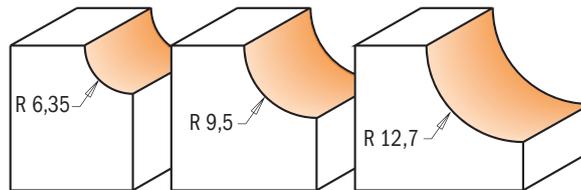

Drawings are 1:1 scale

| DESCRIPTION | ORDER NO. | ORDER NO. |
|--------------|-------------------|-------------------|
| | S=Ø6,35mm | S=Ø12,7mm |
| Cove bit set | 837.001.11 | 837.501.11 |

Cavetto edge mold bits

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories




Display cabinets & spare parts



7/8/963 - 7/8/964

The cavetto bit cuts beautiful, traditional profiles, but you may also use just a portion of the bit to cut a more simple and cleaner cove edge. This bit add a special touch to furniture pieces by making traditional cove profiles with top and bottom fillet grooves in any kind of wood and wood composites.

Important: always assemble the black bearing heat shield with the raised side up when changing the bearing. Improper assembly will cause the screw to come loose and the bearing to fall off when routing.

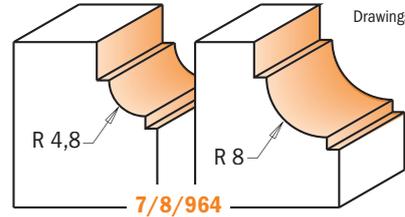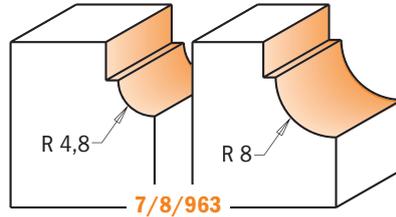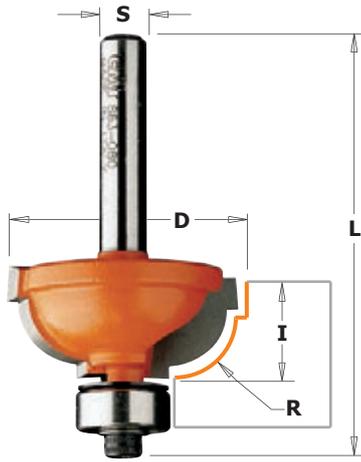

Drawings are 1:1 scale

| R | D | I | L | ORDER NO. |
|-----|------|------|------|-------------------|-------------------|-------------------|-------------------|-------------------|
| mm | mm | mm | mm | S=Ø6mm | S=Ø6,35mm | S=Ø8mm | S=Ø12mm | S=Ø12,7mm |
| 4,8 | 25,4 | 11,5 | 54,6 | 763.048.11 | 863.048.11 | 963.048.11 | | |
| 4,8 | 25,4 | 11,5 | 60,9 | | | | 963.548.11 | 863.548.11 |
| 8 | 31,7 | 14,3 | 56,9 | 763.080.11 | 863.080.11 | 963.080.11 | | |
| 8 | 31,7 | 14,3 | 66,8 | | | | 963.580.11 | 863.580.11 |
| 4,8 | 25,4 | 11,5 | 52,8 | 764.048.11 | 864.048.11 | 964.048.11 | | |
| 4,8 | 25,4 | 11,5 | 59,1 | | | | 964.548.11 | 864.548.11 |
| 8 | 31,7 | 14,3 | 55,1 | 764.080.11 | 864.080.11 | 964.080.11 | | |
| 8 | 31,7 | 14,3 | 65 | | | | 964.580.11 | 864.580.11 |

Spare parts



| | | | |
|------------|------------|------------|------------|
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |




Ovolo bits



7/8/927

CMT put the work capacity of several different bits all into one. The perfect bit for furniture makers, the CMT ovolo allows you to make beautiful beadwork, edgework and veins. Use these bits on automated router systems or with a fence to produce a wide variety of single and double bead profiles and roundovers like those illustrated below by simply adjusting the height or depth of the cut.


SAFETY TIPS: Pay particular attention to never rush the job when using a large profile bit. Mill pieces with a fence mounted on the work table to insure maximum protection.

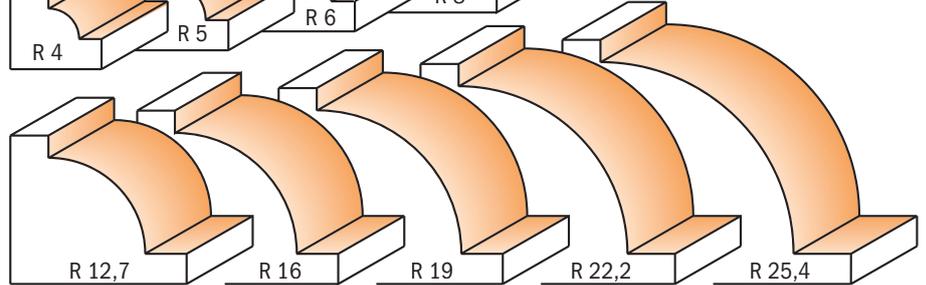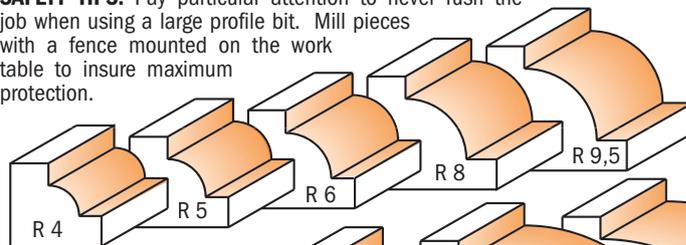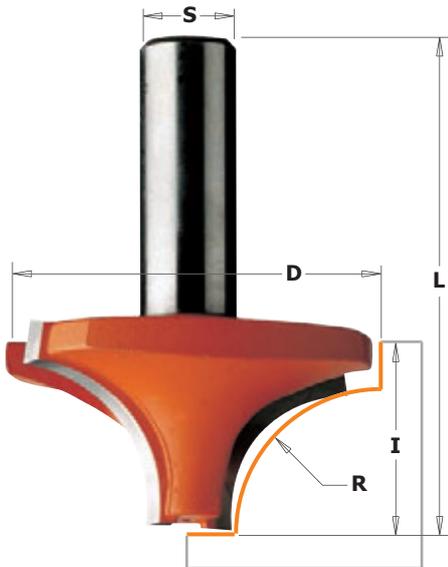

Drawings are 1:1 scale

| R | D | I | L | ORDER NO. |
|------|------|------|------|-------------------|-------------------|-------------------|-------------------|-------------------|
| mm | mm | mm | mm | S=Ø6mm | S=Ø6,35mm | S=Ø8mm | S=Ø12mm | S=Ø12,7mm |
| 4 | 19 | 12 | 43,8 | 727.040.11 | | 927.040.11 | | |
| 5 | 21 | 12 | 43,8 | 727.050.11 | 827.050.11 | 927.050.11 | | |
| 6 | 23 | 12 | 43,8 | 727.060.11 | 827.060.11 | 927.060.11 | | |
| 6 | 23 | 12 | 50,1 | | | | | 827.560.11 |
| 8 | 28,6 | 12,7 | 44,5 | 727.080.11 | | 927.080.11 | | |
| 9,5 | 31,7 | 14 | 45,8 | 727.095.11 | 827.095.11 | 927.095.11 | | |
| 9,5 | 31,7 | 14 | 51,9 | | | | 927.595.11 | 827.595.11 |
| 12,7 | 38,1 | 19 | 50,8 | | 827.127.11 | | | |
| 12,7 | 38,1 | 19 | 57,1 | | | | 927.627.11 | 827.627.11 |
| 16 | 44,5 | 22,2 | 60,3 | | | | 927.660.11 | 827.660.11 |
| 19 | 50,8 | 25,4 | 63,5 | | | | 927.690.11 | 827.690.11 |
| 22,2 | 57,1 | 28,5 | 66,6 | | | | 927.722.11 | 827.722.11 |
| 25,4 | 63,5 | 33,3 | 71,4 | | | | 927.754.11 | 827.754.11 |


Beading bits

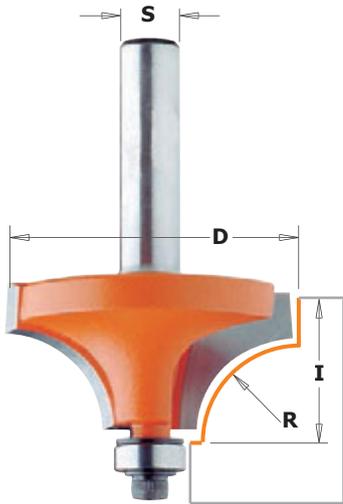

7/8/939




Beading bits are similar to the roundover profile, but a smaller bearing produces a delicate inset at the base of the cut, giving you an extra decorative option.
For a beading profile (code 7/8/939) simply change the bearing (**791.002.00**) on your roundover bits (code 7/8/938).

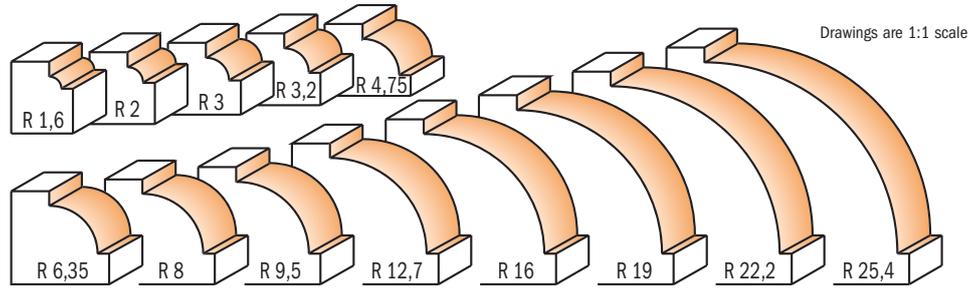

*Use only on router table

| R mm | D mm | I mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | | | | |
|------|------|------|-------------------|---------------------|-------------------|--------------------|---------------------|-------------|--|--|--|------------|------------|------------|------------|
| 1,6 | 15,9 | 12,7 | 739.160.11 | 839.160.11 | 939.160.11 | | | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 2 | 16,7 | 12,7 | | | 939.167.11 | | | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 3 | 18,7 | 12,7 | | | 939.187.11 | | | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 3,2 | 19,1 | 12,7 | 739.190.11 | 839.190.11 | 939.190.11 | | | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 4,75 | 22,2 | 12,7 | 739.222.11 | 839.222.11 | 939.222.11 | | | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 6,35 | 25,4 | 12,7 | 739.254.11 | 839.254.11 | 939.254.11 | 939.754.11 | 839.754.11 | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 8 | 28,6 | 12,7 | 739.285.11 | 839.285.11 | 939.285.11 | | | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 9,5 | 31,7 | 16 | 739.317.11 | 839.317.11 | 939.317.11 | 939.817.11 | 839.817.11 | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 12,7 | 38,1 | 19 | 739.380.11 | 839.380.11 | 939.380.11 | 939.880.11 | 839.880.11 | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 16 | 44,5 | 22 | | 839.445.11 | 939.445.11 | 939.945.11 | 839.945.11 | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 19 | 50,8 | 25,4 | | | | 939.990.11 | 839.990.11 | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 22,2 | 57,1 | 28,5 | | | | 939.991.11 | 839.991.11 | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 25,4 | 63,5 | 33,3 | | | | 939.992.11* | 839.992.11* | | | | | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |

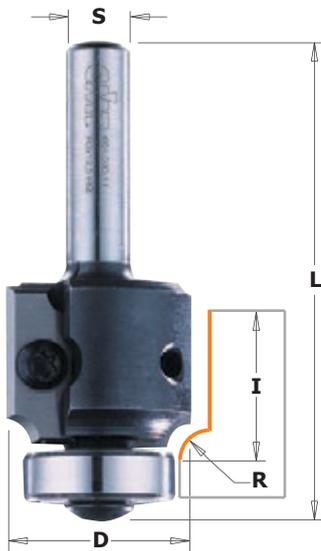


Roundover bits with insert knives

661



Roundover bits with two replaceable knives fixed by special Tox screws. The blades are 2 sided profiled and give high economy of your work with laminates. Roundover bits type are equipped with the ball bearing guides. For precision work on laminates. Radius R2 or R3 is for rounded 2mm or 3mm ABS edges. Radius R5 is for quick rounded edges in hard wood or MDF. For use on portable Routers.

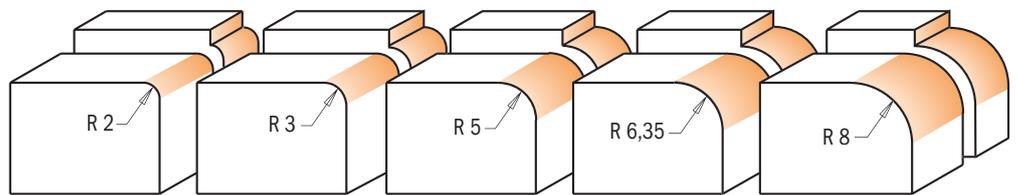

Drawings are 1:1 scale

| R mm | D mm | I mm | L mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | | | | |
|------|------|------|------|---------------------|-------------------|---------------------|-------------|--|--|--|------------|------------|------------|------------|
| 2 | 22,8 | 19,5 | 64 | 661.021.11 | 661.020.11 | | | | | | 790.020.00 | 990.076.00 | 991.061.00 | 791.007.00 |
| 3 | 24,8 | 19,5 | 64 | 661.031.11 | 661.030.11 | | | | | | 790.030.00 | 990.076.00 | 991.061.00 | 791.007.00 |
| 5 | 28,8 | 19,5 | 64 | 661.051.11 | 661.050.11 | | | | | | 790.050.00 | 990.076.00 | 991.061.00 | 791.007.00 |
| 6,35 | 28,5 | 24 | 67 | 661.064.11 | 661.063.11 | | | | | | 790.064.00 | 990.075.00 | 991.061.00 | 791.006.00 |
| 8 | 31,8 | 24 | 67 | | 661.080.11 | | | | | | 790.080.00 | 990.075.00 | 991.061.00 | 791.006.00 |
| 8 | 31,8 | 24 | 77 | | | 661.581.11 | | | | | 790.080.00 | 990.075.00 | 991.061.00 | 791.006.00 |

Spare parts

| | | | |
|------------|-------------------|------------|-------------------|
| 990.400.00 | M3 shield | 990.410.00 | M4 shield |
| 990.051.00 | M3x6mm TCEI screw | 990.052.00 | M4x6mm TCEI screw |
| 991.062.00 | 2,5mm hex key | 991.067.00 | 3mm hex key |

Roundover bits



7/8/938



The smaller bearing on the CMT Beading bits makes a delicate inset at the base of the cut, giving you the advantage of an extra decorative option.

BE SURE to keep the black bearing washer right side up to correspond with the bearing rotation when reassembling the bearing. Improper reassembly can cause the bit to unscrew. All CMT roundover bits have a 12,7mm bearing diameter with the exception of the radius 28,6mm and 31,7mm bits which have a 19mm bearing diameter. You have 13 different radii to choose from, the majority having 5 shank diameter options. All bits are made of Fatigue Proof® steel and have carbide-tipped cutting edges.

SHOP TIPS: The CMT 1.6mm radius roundover bit is excellent for finishing laminates. Virtually eliminates the filing required when using conventional trim bits.

SAFETY TIPS: Use caution when working with large diameter bits and make more than one pass to gradually remove stock. Pay particular attention when routing small pieces; and always rout on a router table equipped with a fence.

***Use only on router table**

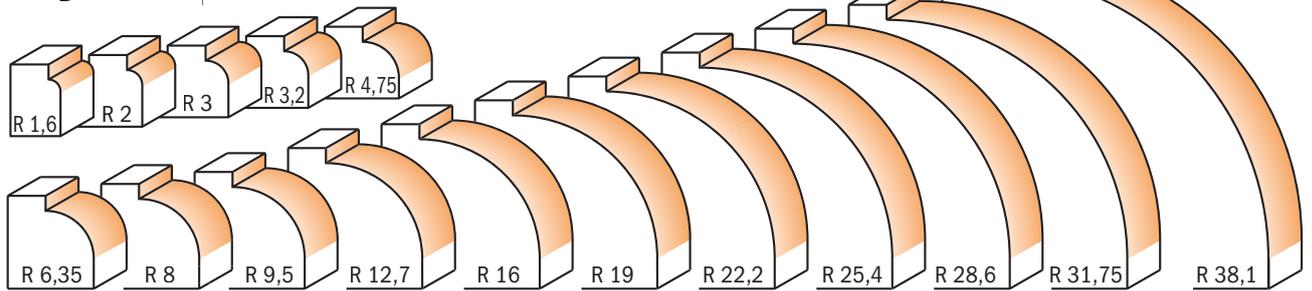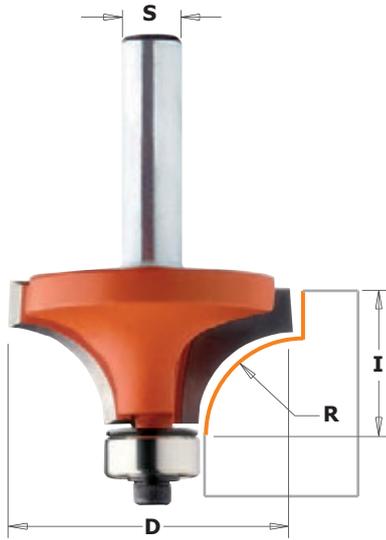

Drawings are 1:1 scale

Spare parts



| R mm | D mm | I mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | | | | |
|-------|------|------|--------------------|---------------------|--------------------|--------------------|---------------------|------------|------------|------------|------------|
| 1,6 | 15,9 | 12,7 | 738.160.11 | 838.160.11 | 938.160.11 | | | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 2 | 16,7 | 12,7 | 738.167.11° | | 938.167.11° | | | 990.422.00 | 791.044.00 | 990.058.00 | 991.057.00 |
| 3 | 18,7 | 12,7 | 738.187.11° | | 938.187.11° | | | 990.422.00 | 791.044.00 | 990.058.00 | 991.057.00 |
| 3,2 | 19,1 | 12,7 | 738.190.11 | 838.190.11 | 938.190.11 | | | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 4,75 | 22,2 | 12,7 | 738.222.11 | 838.222.11 | 938.222.11 | | | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 6,35 | 25,4 | 12,7 | 738.254.11 | 838.254.11 | 938.254.11 | 938.754.11 | 838.754.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 8 | 28,6 | 12,7 | 738.285.11 | 838.285.11 | 938.285.11 | | | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 9,5 | 31,7 | 16 | 738.317.11 | 838.317.11 | 938.317.11 | 938.817.11 | 838.817.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 12,7 | 38,1 | 19 | 738.380.11 | 838.380.11 | 938.380.11 | 938.880.11 | 838.880.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 16 | 44,5 | 22 | | 838.445.11 | 938.445.11 | 938.945.11 | 838.945.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 19 | 50,8 | 25,4 | | | | 938.990.11 | 838.990.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 22,2 | 57,1 | 28,5 | | | | 938.991.11 | 838.991.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 25,4 | 63,5 | 33,3 | | | | 938.992.11* | 838.992.11* | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 28,6 | 76,2 | 38,1 | | | | 938.993.11* | 838.993.11* | 541.550.00 | 791.004.00 | 990.058.00 | 991.057.00 |
| 31,75 | 82,5 | 44,4 | | | | 938.994.11* | 838.994.11* | 541.550.00 | 791.004.00 | 990.058.00 | 991.057.00 |
| 38,1 | 88,9 | 44,4 | | | | 938.996.11* | 838.996.11* | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |


*791.044.00 Delrin® Bearing

Roundover set



838

CMT's roundover sets give you the maximum flexibility for all of your projects by putting the most requested diameters in one package. Available in 12,7mm and 6,35mm shanks. Roundover radii are 6,35mm, 9,5mm and 12,7mm. These versatile bits are always in demand - the simple clean lines of a smooth roundover edge can be used in a wide variety of applications from picture frames to table and counter tops.

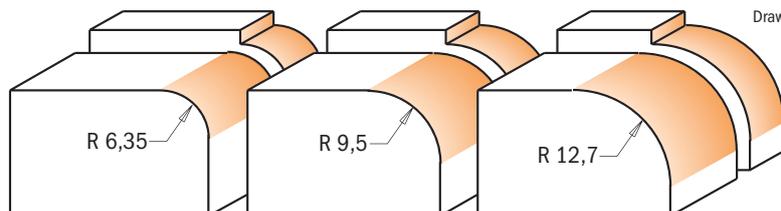


Drawings are 1:1 scale

| DESCRIPTION | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø12,7mm |
|---------------|---------------------|---------------------|
| Roundover set | 838.001.11 | 838.501.11 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Decorative ogee bits

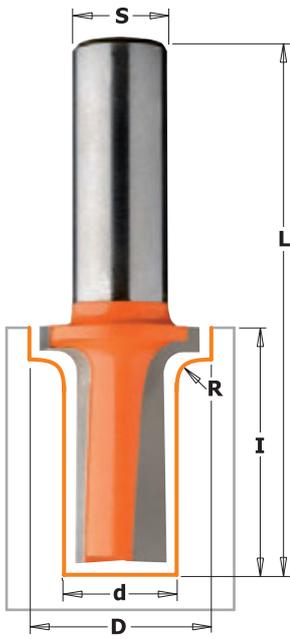




8/965.905



8/965.903
8/965.904

8/965

Enhance your doors and drawer fronts and leave your visitors amazed! These ogee bits cutting edges are carbide-tipped for effective, smooth and eye-catching work.

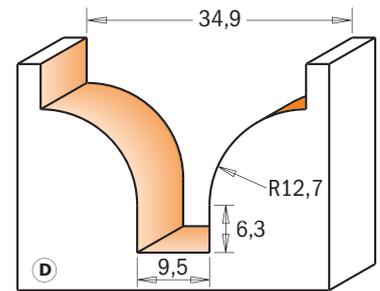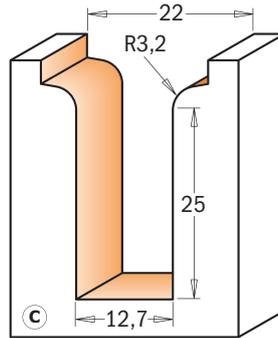


Drawings are 1:1 scale

| D mm | d mm | R mm | I mm | L mm | Profile | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|---------|---------|---------|---------|----------------------|------------------------|
| 19 | 6,4 | 6,4 | 13 | 51 | B | 965.903.11 | 865.903.11 |
| 22 | 12,7 | 3,2 | 31,7 | 69,8 | C | 965.905.11 | 865.905.11 |
| 34,9 | 9,5 | 12,7 | 25 | 65,5 | D | 965.904.11 | 865.904.11 |


new

Decorative ogee bits

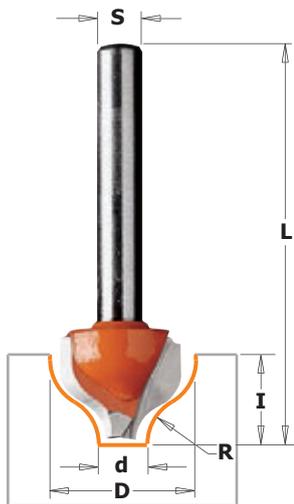

7/8/965

This new CMT bit produces a classic single or double edged bead. Ideal for creating a marked decorative effect on panel, door and drawer work.

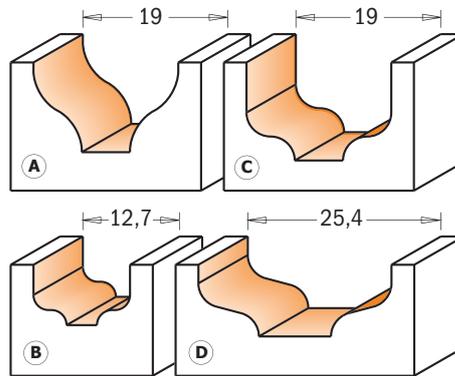

Drawings are 1:1 scale

| D mm | d mm | R mm | I mm | L mm | Profile | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|---------|---------|---------|---------|---------------------|------------------------|---------------------|----------------------|------------------------|
| 19 | 6,35 | 6,4 | 11 | 50,8 | A | 765.001.11 | 865.001.11 | 965.001.11 | 965.501.11 | 865.501.11 |
| 12,7 | 4 | 2 | 8 | 51 | B | | 865.002.11 | 965.002.11 | | |
| 19 | 6,35 | 3,2 | 13 | 68 | C | | | | 965.503.11 | 865.503.11 |
| 25,4 | 9,5 | 3,2 | 9,5 | 49 | D | | | | 965.504.11 | 865.504.11 |

Decorative ogee bits

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets


CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools


Power tools & accessories

Display cabinets & spare parts

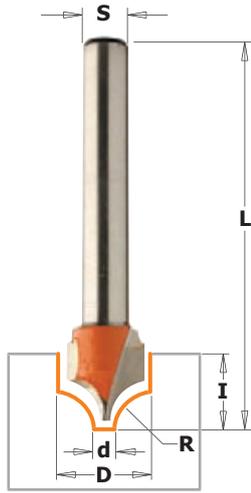

7/8/965


Make subtle decorative edges with this bit! Perfect for enhancing doors and drawer fronts, it will deliver smooth and flawless results. Carbide-tipped to ensure a clean, sharp and precise cut.



Drawing is 1:1 scale


| D mm | d mm | R mm | I mm | L mm | Profile | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm |
|---------|---------|---------|---------|---------|---------|---------------------|------------------------|---------------------|
| 10 | 1,3 | 5 | 10 | 50 | A | 765.402.11 | 865.402.11 | 965.402.11 |

Classical bead bits

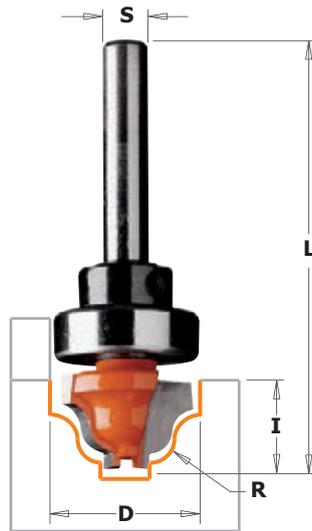


7/8/965B

This bit gives you even more decorative possibilities for panel and edge work. The bit design gives a wide flat bottom cut and a longer shank allows for a greater depth in the detail of the profile.

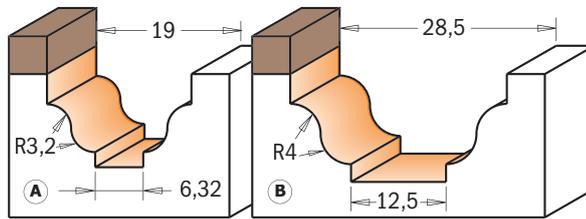


Drawings are 1:1 scale

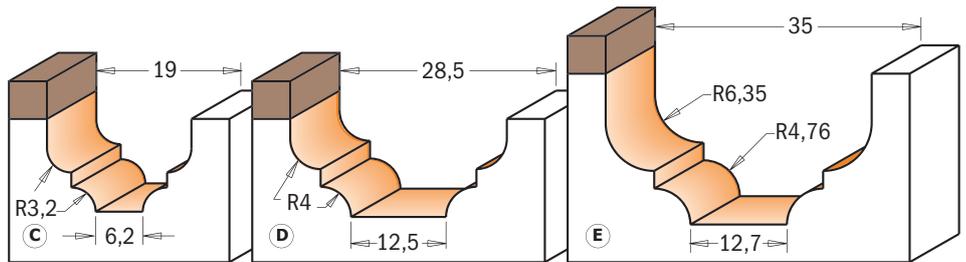

| D mm | R mm | I mm | L mm | Profile | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | |
|---------|-------------|---------|---------|---------|---------------------|------------------------|---------------------|----------------------|------------------------|-------------|------------|------------|
| 19 | 3,2 | 12,3 | 54 | A | 765.201.11B | | | | | | | |
| 19 | 3,2 | 12,3 | 54 | A | | 865.201.11B | | | | 791.007.00 | 541.003.00 | 991.056.00 |
| 28,6 | 4 | 14,3 | 58,8 | B | | | 965.202.11B | | | 791.004.00 | 541.001.00 | 991.056.00 |
| 28,6 | 4 | 14,3 | 58,8 | B | | | | 965.702.11B | | 791.027.00 | 541.002.00 | 991.056.00 |
| 28,6 | 4 | 14,3 | 58,8 | B | | | | | 865.702.11B | 791.027.00 | 541.005.00 | 991.056.00 |
| 19 | 3,2 | 12,3 | 54 | C | 765.301.11B | | | | | 791.027.00 | 541.002.00 | 991.056.00 |
| 19 | 3,2 | 12,3 | 54 | C | | 865.301.11B | | | | 791.007.00 | 541.003.00 | 991.056.00 |
| 28,6 | 4 | 13,3 | 58 | D | | | 965.302.11B | | 865.802.11B | 791.004.00 | 541.001.00 | 991.056.00 |
| 28,6 | 4 | 13,3 | 58 | D | | | | 965.802.11B | | 791.027.00 | 541.002.00 | 991.056.00 |
| 34,9 | 4,76 - 6,35 | 18,5 | 66,1 | E | | | 965.303.11B | | | 791.027.00 | 541.005.00 | 991.056.00 |
| 34,9 | 4,76 - 6,35 | 18,5 | 66,1 | E | | | | | 865.803.11B | 791.031.00 | 541.004.00 | 991.056.00 |
| | | | | | | | | | | 791.029.00 | 541.002.00 | 991.056.00 |

Spare parts 990.005.00 M3x3mm TSEI screw

Plunge ogee bits

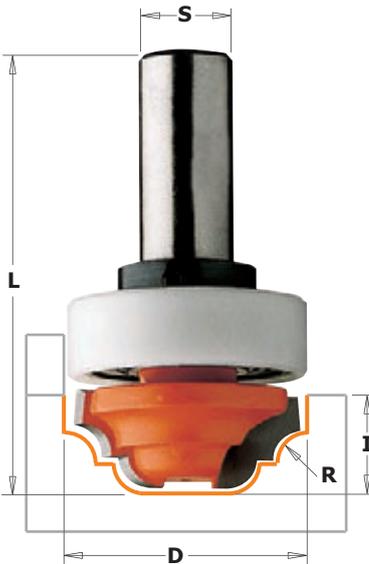


7/8/948 - 7/8/948B



You will never run out of ideas with this creative bit. Add a classic touch to any edge or highlight door fronts and panels with decorative layered effects. For even more options, try the CMT plunge ogee with bearing guide for pattern following.

For more CMT ogee profile options, choose among plunge ogee bits equipped with top bearing. Excellent for achieving accurate decorative work and guaranteed for long lasting performance.

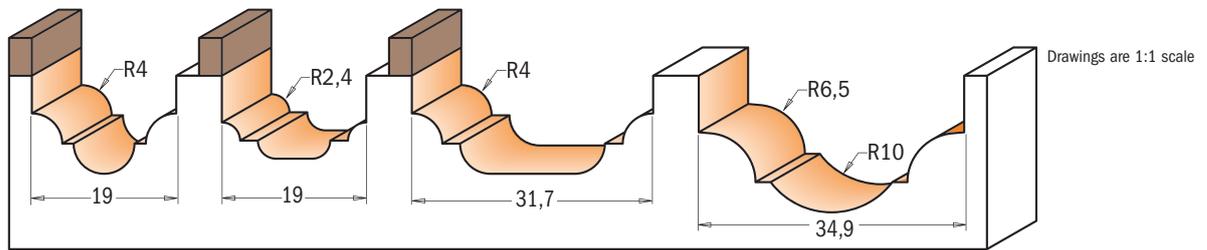

| D mm | R mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | |
|-------------------------|--------|------|------|------------------|---------------------|------------------|-------------------|---------------------|-------------|------------|------------|
| 19 | 4 | 13 | 51,1 | 748.190.11 | 848.190.11 | 948.190.11 | | | | | |
| 19 | 2,4 | 12 | 53 | 748.191.11 | 848.191.11 | 948.191.11 | | | | | |
| 31,7 | 4 | 13 | 58 | | | 948.317.11 | 948.817.11 | 848.817.11 | | | |
| 34,9 | 6,5-10 | 18 | 68 | | | | 948.850.11 | 848.850.11 | | | |
| with top bearing | | | | | | | | | | | |
| 19 | 4 | 13 | 51,1 | 748.190.11B | | | | | 791.007.00 | 541.003.00 | 991.056.00 |
| 19 | 4 | 13 | 51,1 | | 848.190.11B | | | | 791.004.00 | 541.001.00 | 991.056.00 |
| 19 | 2,4 | 12 | 53 | 748.191.11B | | | | | 791.007.00 | 541.003.00 | 991.056.00 |
| 19 | 2,4 | 12 | 53 | | 848.191.11B | | | | 791.004.00 | 541.001.00 | 991.056.00 |
| 31,7 | 4 | 13 | 58 | | | 948.317.11B | | | 791.015.00 | 541.002.00 | 991.056.00 |
| 31,7 | 4 | 13 | 58 | | | | 948.817.11B | | 791.015.00 | 541.005.00 | 991.056.00 |
| 31,7 | 4 | 13 | 58 | | | | | 848.817.11B | 791.015.00 | 541.002.00 | 991.056.00 |

Spare parts 990.005.00 M3x3mm TSEI screw




Decorative ogee bits

7/8/965




This new CMT bit produces a classic single or double edged bead. Ideal for creating a marked decorative effect on panel, door and drawer work.

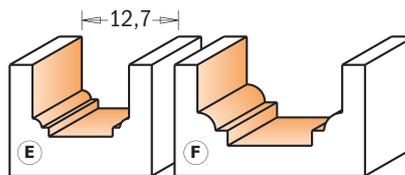


Drawings are 1:1 scale

| D mm | d mm | R mm | I mm | L mm | Profile | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm |
|------|------|------|------|------|---------|------------------|---------------------|------------------|
| 12,7 | 8,4 | 1,2 | 12,7 | 50,8 | E | 765.101.11 | 865.101.11 | 965.101.11 |
| 19 | 11,1 | 2,4 | 11 | 50,8 | F | 765.102.11 | 865.102.11 | 965.102.11 |

Roman ogee bits

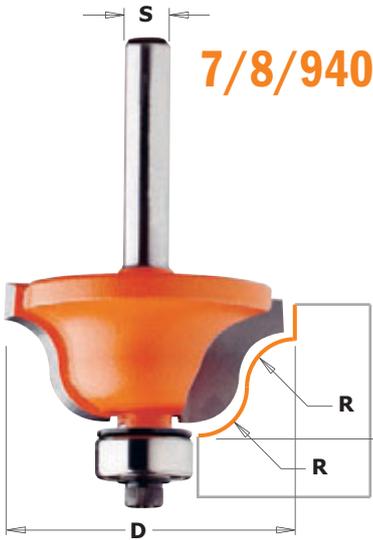


The roman ogee may be the most popular edge treatment in woodworking, and it is certainly one of the most beautiful. This bit includes all CMT bit features and produces a perfect rendition of classic design.
SHOP TIPS: for best results, multiple passes are recommended.

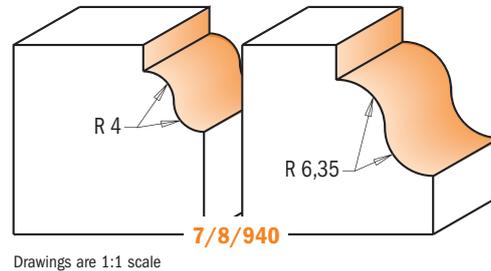

Drawings are 1:1 scale

7/8/941

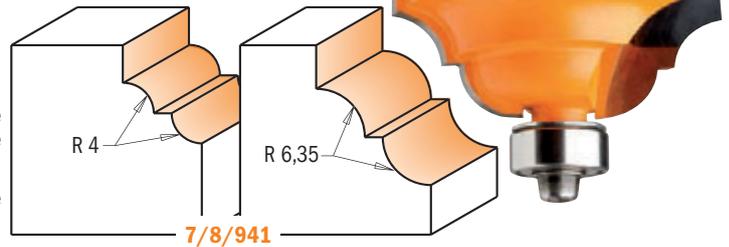



This bit takes the Roman ogee a step further. The horizontal bead adds style and elegance to the traditional shape.

SHOP TIPS: for best results, multiple passes are recommended.

Spare parts


| R mm | D mm | I mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | | | | |
|------|------|------|------------------|---------------------|------------------|-------------------|---------------------|------------|------------|------------|------------|
| 4 | 28,7 | 11,5 | 740.270.11 | 840.270.11 | 940.270.11 | 940.770.11 | 840.770.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 6,4 | 38,1 | 17,3 | 740.350.11 | 840.350.11 | 940.350.11 | 940.850.11 | 840.850.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 4 | 33,4 | 13 | 741.285.11 | 841.285.11 | 941.285.11 | 941.785.11 | 841.785.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 6,4 | 42,8 | 18,5 | 741.380.11 | 841.380.11 | 941.380.11 | 941.880.11 | 841.880.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |

Classical ogee bits

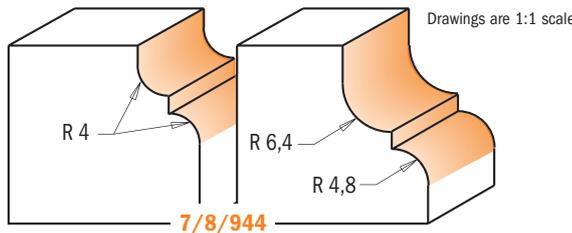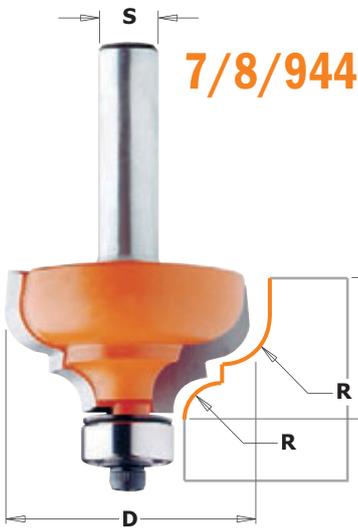

Drawings are 1:1 scale

7/8/945

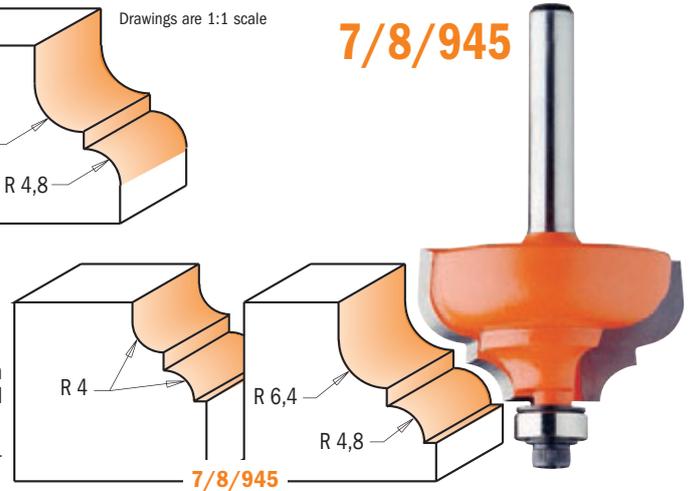

This profile includes a horizontal bead along the bottom of the profile adding a decorative detail to the traditional ogee design.


SHOP TIPS: for best results, multiple passes are recommended.

Spare parts

| R mm | D mm | I mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | | | | |
|---------|------|------|------------------|---------------------|------------------|-------------------|---------------------|------------|------------|------------|------------|
| 4 | 28,7 | 13 | 744.287.11 | 844.287.11 | 944.287.11 | 944.787.11 | 844.787.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 6,4-4,8 | 35 | 18,5 | 744.350.11 | 844.350.11 | 944.350.11 | 944.850.11 | 844.850.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 4 | 28,7 | 13 | 745.287.11 | 845.287.11 | 945.287.11 | 945.787.11 | 845.787.11 | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 6,4-4,8 | 35 | 18,5 | 745.350.11 | 845.350.11 | 945.350.11 | 945.850.11 | 845.850.11 | 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Ogee with fillet bits

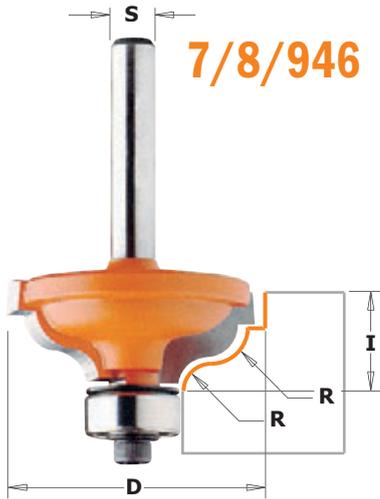


7/8/946

Take a complete assortment of CMT ogee bits into your shop. These bits feature micrograin carbide edges, high strength steel and the trademarked orange non-stick PTFE coating.

SHOP TIPS: for best results, multiple passes are recommended.


For a more-detailed profile, this bit adds an inset bead along the lower edge of the cut.

SHOP TIPS: for best results, multiple passes are recommended.

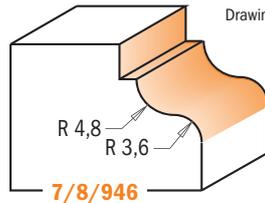

7/8/946

Drawings are 1:1 scale

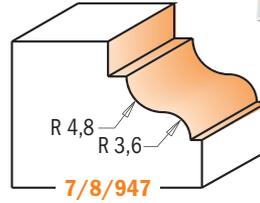

7/8/947



7/8/947

| R mm | D mm | I mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|------|------|-------------------|---------------------|-------------------|-------------------|---------------------|
| 4,8-3,6 | 34,2 | 13 | 746.325.11 | 846.325.11 | 946.325.11 | 946.825.11 | 846.825.11 |
| 4,8-3,6 | 34,2 | 13 | 747.325.11 | 847.325.11 | 947.325.11 | 947.825.11 | 847.825.11 |

Spare parts

| | | | |
|------------|------------|------------|------------|
| | | | |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |

Ogee bits




7/8/959

These profiles are the mirror image of the traditional roman ogee. They add a sharp defining details to the edges of cabinets and furniture, before rolling into a smooth convex shape.

SHOP TIPS: for best results, multiple passes are recommended.


These bits are identical to the 7/8/959 series with the addition of an inset bead along the lower edge.

SHOP TIPS: for best results, multiple passes are recommended.

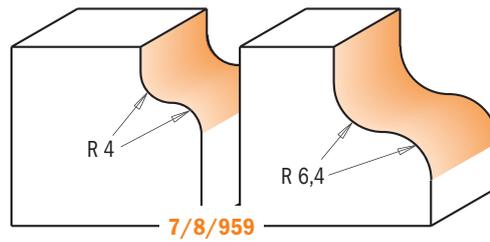

7/8/959

Drawings are 1:1 scale

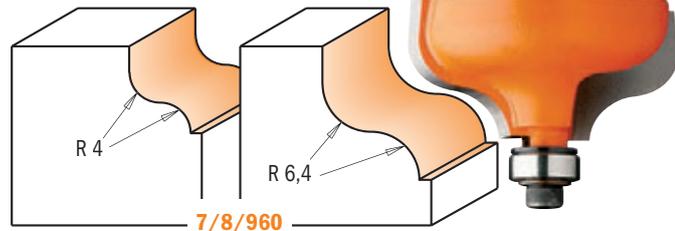

7/8/960

| R mm | D mm | I mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------|------|------|-------------------|---------------------|-------------------|-------------------|---------------------|
| 4 | 28,7 | 13 | 759.040.11 | 859.040.11 | 959.040.11 | 959.540.11 | 859.540.11 |
| 6,4 | 38,1 | 18 | 759.064.11 | 859.064.11 | 959.064.11 | 959.564.11 | 859.564.11 |
| 4 | 28,7 | 13 | 760.040.11 | 860.040.11 | 960.040.11 | 960.540.11 | 860.540.11 |
| 6,4 | 38,1 | 18 | 760.064.11 | 860.064.11 | 960.064.11 | 960.564.11 | 860.564.11 |

Spare parts

| | | | |
|------------|------------|------------|------------|
| | | | |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |
| 990.422.00 | 791.002.00 | 990.058.00 | 991.057.00 |

new



CMT ORANGE TOOLS™



Adjustable roundover and bevel router bits

8/900.623

These new CMT bits are ideal for making new awesome creations! Create a double 4,76mm (3/16") roundover profile, a double 45° bevel or even a mixed profile on your wood panels easily and in a cost-effective way! Interchangeable shims are included to allow for different stock thicknesses according to the board. To be used on table-mounted routers. Avoid using these bits in hand-held power tools.

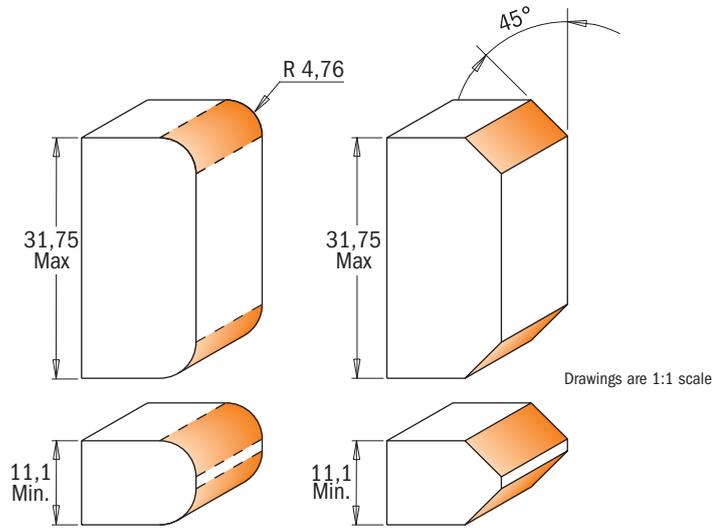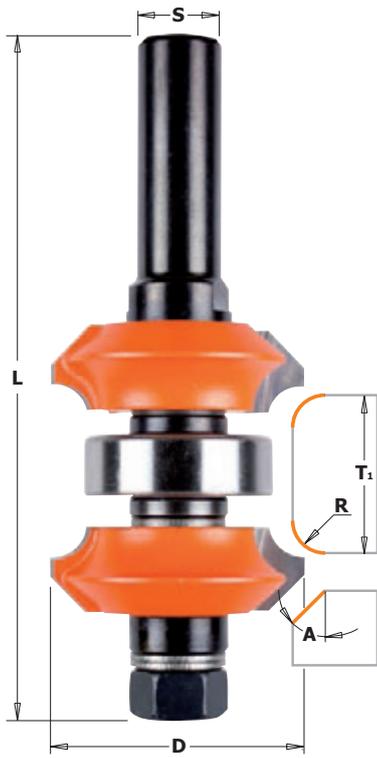

Drawings are 1:1 scale

| D mm | T ₁ mm | R mm | A | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------|-------------------|------|-----|------|-------------------|---------------------|
| 38,1 | 11,1 - 31,75 | 4,76 | 45° | 100 | 900.623.11 | |
| 38,1 | 11,1 - 31,75 | 4,76 | 45° | 100 | | 800.623.11 |

Spare parts

| | | | | | |
|------------|------------|------------|------------|------------|--|
| | | | | | |
| 924.137.00 | 791.037.00 | 822.029.11 | 822.030.11 | 990.020.11 | |
| 824.137.00 | 791.037.00 | 822.029.11 | 822.030.11 | 990.020.11 | |

Spare parts

| | |
|------------|--------------|
| 541.500.00 | 3mm spacer |
| 541.515.00 | 0,1mm spacer |
| 541.517.00 | 0,5mm spacer |

| | |
|------------|--------------|
| 541.518.00 | 1mm spacer |
| 541.519.00 | 5,8mm spacer |



Adjustable double roundover router bits

new



8/900.622

Create awesome furnishing decorations with these new CMT bits! They provide a double 2mm (5/64") and 3mm (1/8") roundover profile on your wood panels easily and in a cost-effective way! Interchangeable shims are included to allow for different stock thicknesses according to the board. To be used on table-mounted routers. Avoid using these bits in hand-held power tools.

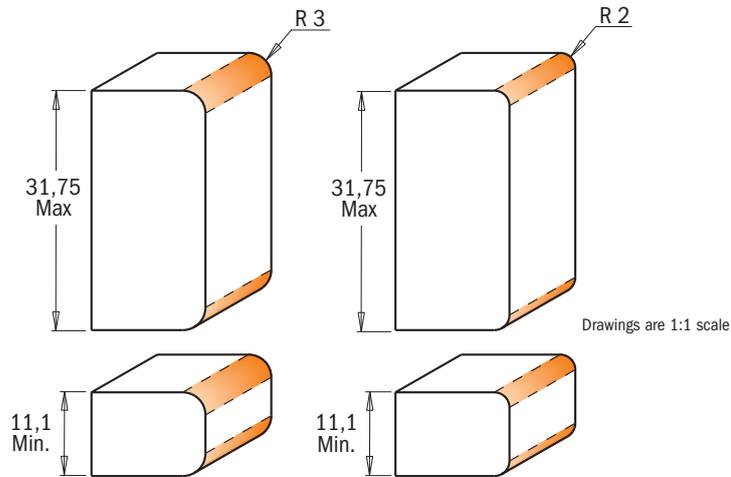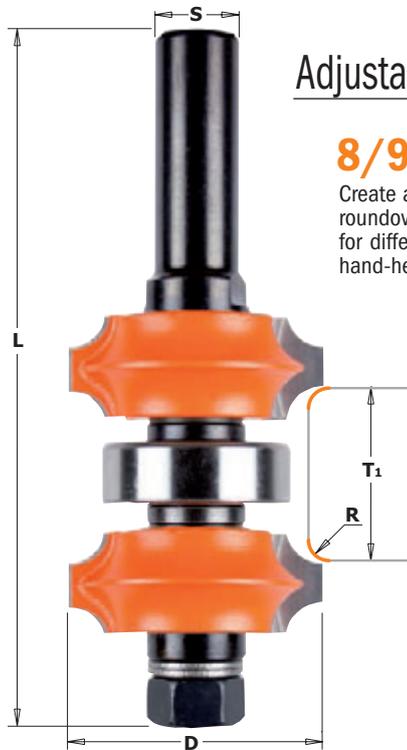

Drawings are 1:1 scale

| D mm | T ₁ mm | R mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------|-------------------|-------|------|-------------------|---------------------|
| 34 | 11,1 - 31,75 | 3 - 2 | 100 | 900.622.11 | |
| 34 | 11,1 - 31,75 | 3 - 2 | 100 | | 800.622.11 |

Spare parts

| | | | | |
|------------|------------|------------|------------|------------|
| | | | | |
| 924.137.00 | 791.037.00 | 822.031.11 | 822.032.11 | 990.020.11 |
| 824.137.00 | 791.037.00 | 822.031.11 | 822.032.11 | 990.020.11 |

Spare parts




| | |
|------------|--------------|
| 541.500.00 | 3mm spacer |
| 541.501.00 | 4mm spacer |
| 541.515.00 | 0,1mm spacer |

| | |
|------------|--------------|
| 541.516.00 | 0,3mm spacer |
| 541.518.00 | 1mm spacer |
| 541.519.00 | 5,8mm spacer |




8/961.6


This new router bit designed for 19mm (3/4") thick stock is perfect for creating wainscots and panels on your walls. Simply create a 6,35mm (1/4") tongue-and-groove interlock with a CMT 8/900.626.11, then, with two passes mill an attractive traditional beadboard profile with this new bit. Perfect for cabinets, bookcase backings, ceiling and wall paneling.

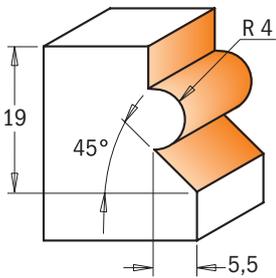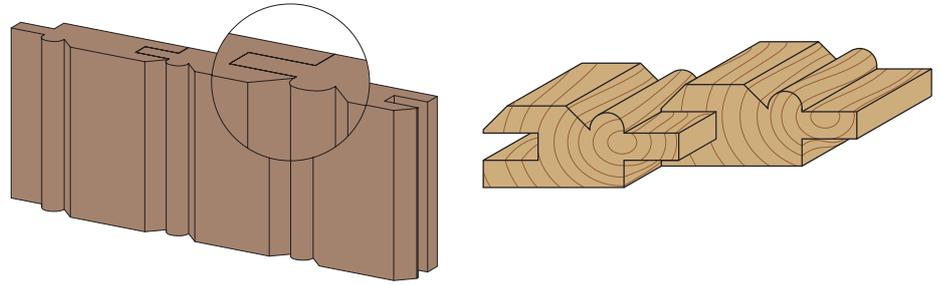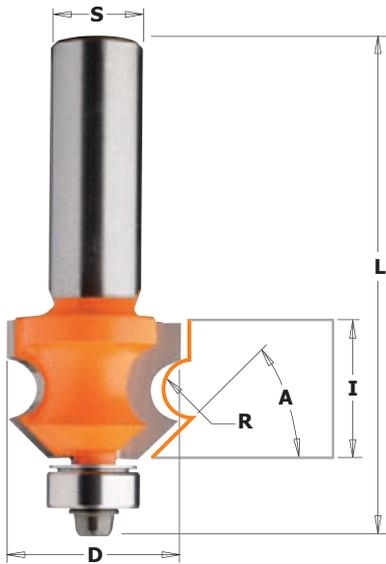

Drawing is 1:1 scale

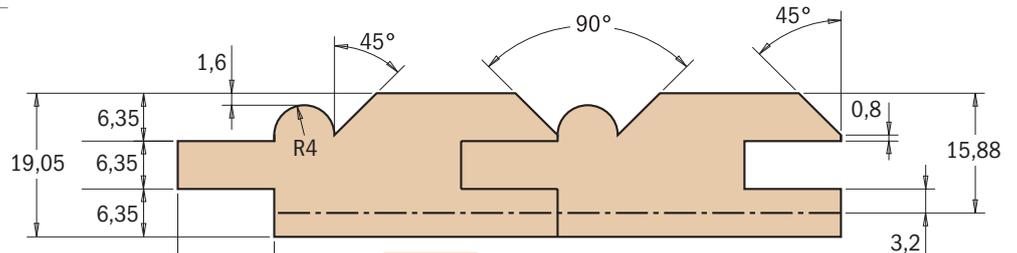

Standard with bearing Ø12,7mm (791.003.00)

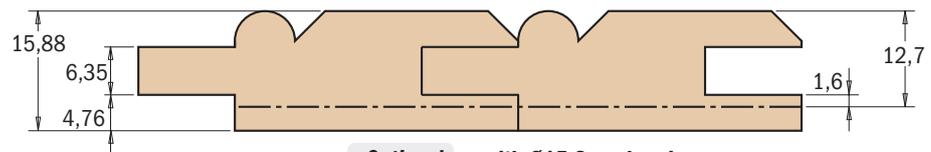

Optional with Ø15,8mm bearing (791.018.00)

Spare parts



| D mm | I mm | R mm | A | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------|-------|------|-----|------|----------------------|------------------------|
| 23,8 | 19,05 | 4 | 45° | 67,7 | 961.601.11 | 861.601.11 |


| | | | |
|------------|------------|------------|------------|
| 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
|------------|------------|------------|------------|

Corner beading bit with 45° chamfer


954

An innovative bit to create beautiful edges and corner beads.

SAFETY TIPS: to be used only on CNC machines or router tables equipped with a fence.

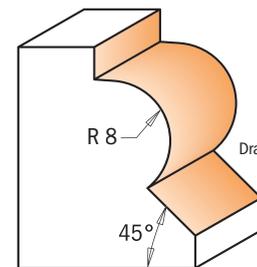


Drawing is 1:1 scale

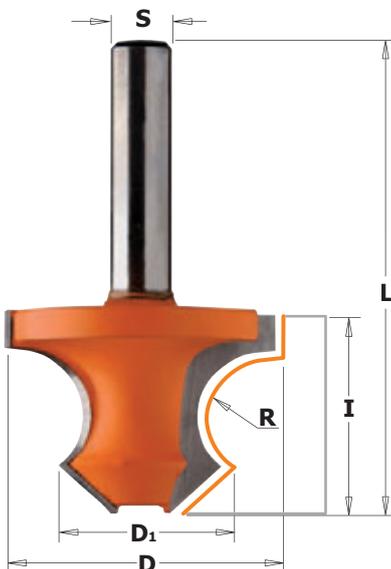

| D mm | D ₁ mm | I mm | R mm | L mm | ORDER NO. S=Ø8mm |
|------|-------------------|------|------|------|---------------------|
| 36 | 22 | 25 | 8 | 60 | 954.080.11 |

Bead & bull nose bits

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

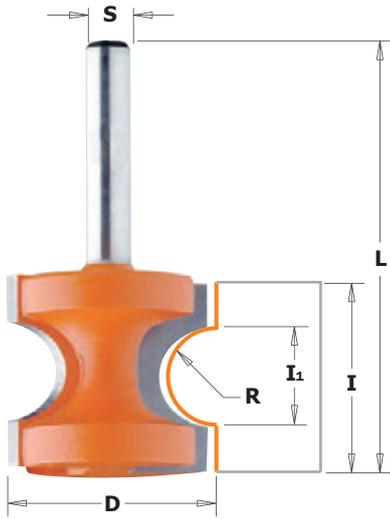


7/8/954



CMT bull nose bits create beautifully finished edges on stair treads, window sills and shelves in a pass. Ad a final touch by using a cutter with a bead diameter wider than the stock thickness. CMT bull nose bits have bead diameters from 6,35mm (1/4") to 25,4mm (1") and each bit features carbide-tipped cutting edges, anti-kickback design and the orange PTFE non-stick coating trademark.


SAFETY TIPS: to be used only on router tables equipped with a fence. Do not remove the workpiece while the bit is routing.

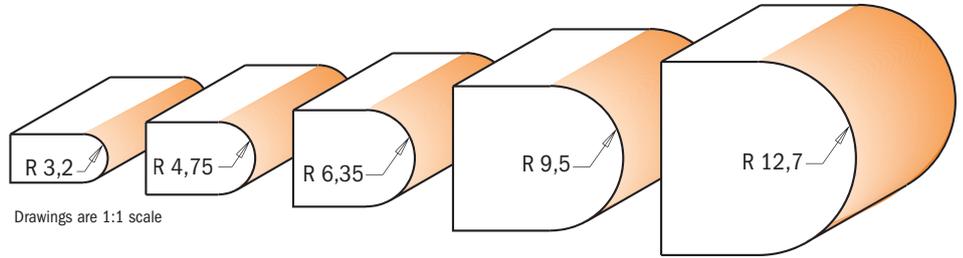

Drawings are 1:1 scale

| R | D | I ₁ | I | L | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------|------|----------------|------|------|---------------------|------------------------|---------------------|----------------------|------------------------|
| 3,2 | 22,2 | 6,56 | 19 | 50,8 | 754.002.11 | 854.002.11 | 954.002.11 | | |
| 3,2 | 22,2 | 6,56 | 19 | 57,2 | | | | 954.502.11 | 854.502.11 |
| 4,75 | 25,4 | 9,85 | 22 | 54 | 754.003.11 | 854.003.11 | 954.003.11 | | |
| 4,75 | 25,4 | 9,85 | 22 | 60,4 | | | | 954.503.11 | 854.503.11 |
| 6,35 | 28,6 | 13,15 | 25,5 | 57,2 | 754.004.11 | 854.004.11 | 954.004.11 | | |
| 6,35 | 28,6 | 13,15 | 25,5 | 63,5 | | | | 954.504.11 | 854.504.11 |
| 9,5 | 34,9 | 19,71 | 35 | 73 | | | | 954.507.11 | 854.507.11 |
| 12,7 | 44,5 | 26,30 | 41 | 79,4 | | | | 954.509.11 | 854.509.11 |


Corner beading bits

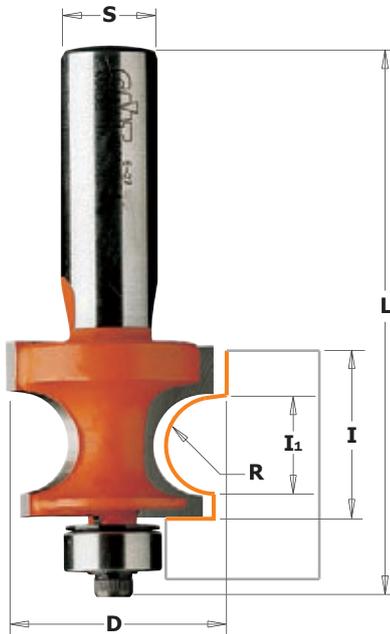

7/8/961



Make beautiful traditional beads and edge beads or turn old beads into new moldings with the new CMT corner beading bits with bearing. Featuring carbide-tipped cutting edges and orange PTFE non-stick coating, these bits provide excellent results on corner beads. Run the bead twice to form a complete corner bead.

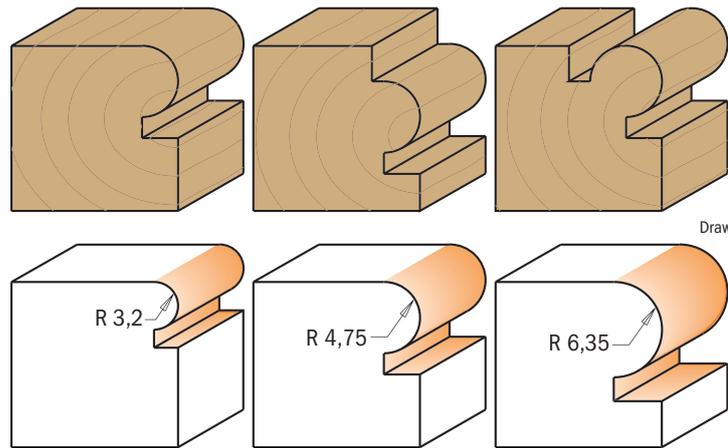


Drawings are 1:1 scale

| R | D | I ₁ | I | L | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | |
|------|------|----------------|------|------|---------------------|------------------------|---------------------|----------------------|------------------------|-------------|------------|------------|
| 3,2 | 22,2 | 6,50 | 15 | 57,7 | 761.032.11 | 861.032.11 | 961.032.11 | | | | | |
| 3,2 | 22,2 | 6,50 | 15 | 64 | | | | 961.532.11 | 861.532.11 | 990.423.00 | 791.003.00 | 990.058.00 |
| 4,75 | 25,4 | 9,68 | 18,6 | 61,2 | 761.048.11 | 861.048.11 | 961.048.11 | | | 990.423.00 | 791.003.00 | 990.058.00 |
| 4,75 | 25,4 | 9,68 | 18,6 | 67,6 | | | | 961.548.11 | 861.548.11 | 990.423.00 | 791.003.00 | 990.058.00 |
| 6,35 | 28,6 | 12,86 | 22,2 | 64,8 | 761.064.11 | 861.064.11 | 961.064.11 | | | 990.423.00 | 791.003.00 | 990.058.00 |
| 6,35 | 28,6 | 12,86 | 22,2 | 71,7 | | | | 961.564.11 | 861.564.11 | 990.423.00 | 791.003.00 | 990.058.00 |


Spare parts 991.057.00 3/32" hex key

Edge-fluting bits

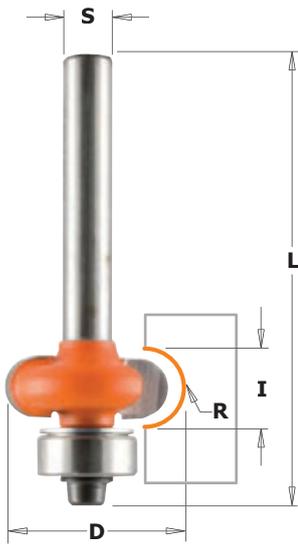

7/862

The edge-fluting bearing guided bits are quick to set up can be used for curved screens, small radius grooves, doors etc. no side fence required. Use in a handheld or table-mounted router.

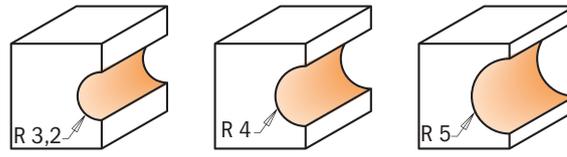


Drawings are 1:1 scale



For Top bearing version: use bearing 791.010.00 and stop collar 541.001.00 (optional)

| R mm | D mm | I mm | L mm | ORDER NO. S=Ø6mm | ORDER NO. S=Ø6,35mm | Spare parts | | | | |
|------|-------|------|------|------------------|---------------------|-------------|------------|------------|------------|--|
| 3,2 | 19,05 | 6,4 | 57 | 762.032.11 | 862.032.11 | | | | | |
| 4 | 20,7 | 8 | 57 | 762.040.11 | 862.040.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 | |
| 5 | 22,7 | 10 | 57 | 762.050.11 | 862.050.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 | |


CMT Molding system

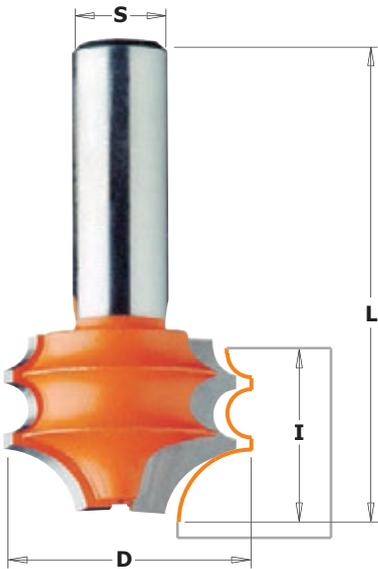

8/956.852


If the standard selection of molding and mill work you find in today's lumber shops isn't satisfactory to your woodworking tastes, then look to CMT's molding system instead. With these bits, you can make dozens of elaborate profiles by combining two or more passes. Avoid the average and create your own moldings. Some initial suggestions are illustrated below.

SAFETY TIPS: use these bits with a fence. The profiles shown below are milled from heavy stock then refined to the desired shape.

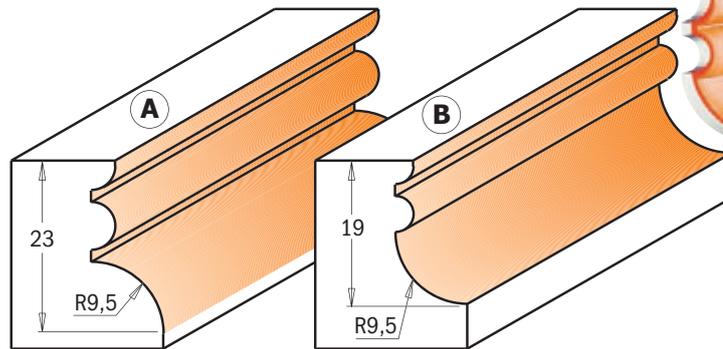

Drawings are 1:1 scale

8/956.851

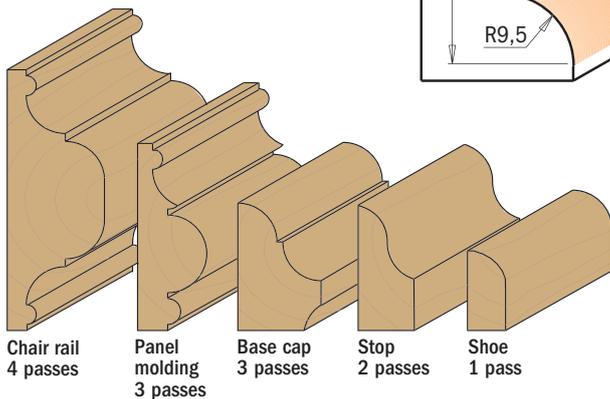

| Profile | D mm | I mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|------|------|------|-------------------|---------------------|
| A | 31,7 | 23 | 61,1 | 956.852.11 | 856.852.11 |
| B | 31,7 | 19 | 57,2 | 956.851.11 | 856.851.11 |





Multiprofile bits



8/956.8

Create endless profiles with CMT multiprofile bits. Simply adjust the height of the bit to create classic profiles in one single pass, or make more complex decorative effects in multiple passes. The bits super-strength steel body can withstand long-lasting cutting operations, and the micrograin carbide tips remain sharp longer for superior performance. In addition these bits feature baked-on non-stick PTFE coating and anti-kickback design. To be used on tables equipped with a fence.

SAFETY TIPS: to make small molding as shown below, cut the profile from very wide stock. Remove the excess material and work on the bigger piece to give you easier control. Keep hands far from the bit when working.

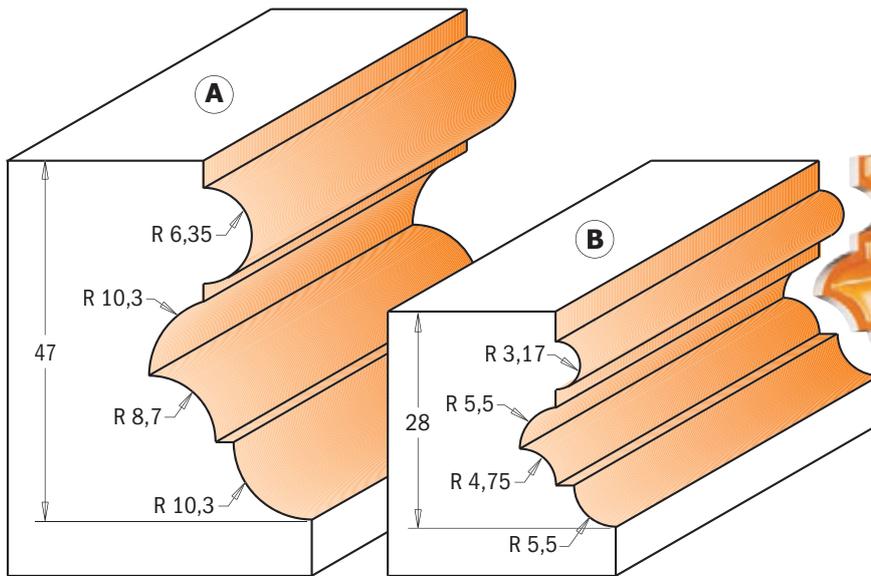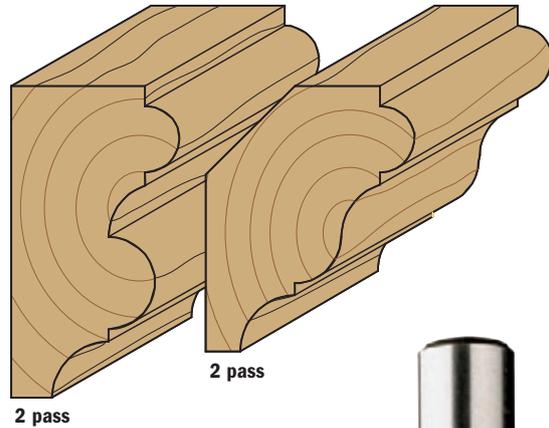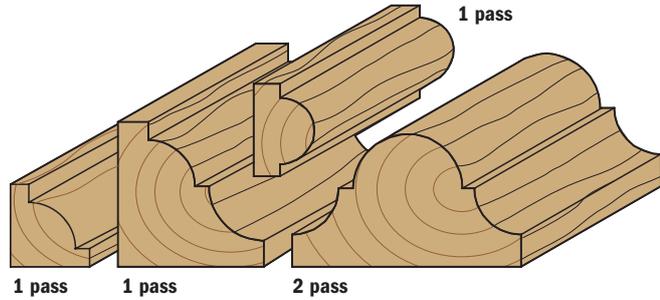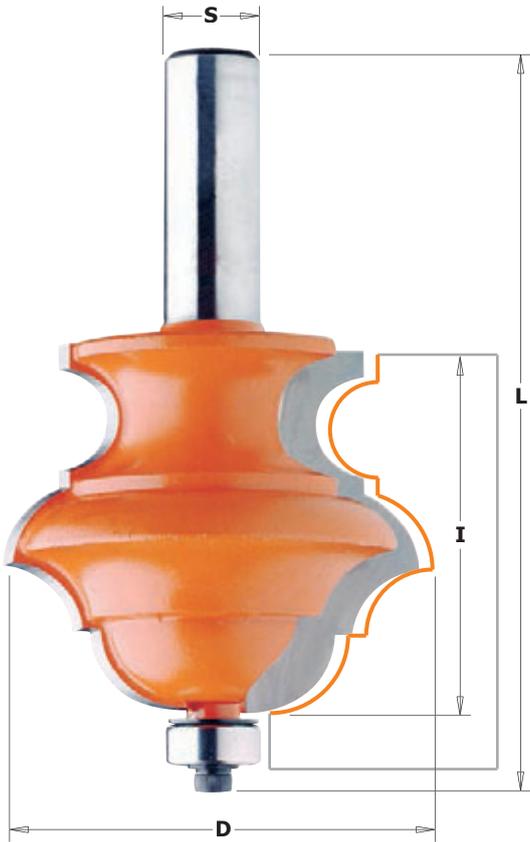

Drawings are 1:1 scale



| Profile | D mm | I mm | L mm | ORDER NO. | ORDER NO. | Spare parts | | | |
|---------|---------|---------|---------|-------------------|-------------------|-------------|------------|------------|------------|
| | | | | S=Ø12mm | S=Ø12,7mm | | | | |
| A | 55,6 | 47 | 96,4 | 956.802.11 | 856.802.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| B | 38,1 | 28 | 77,5 | 956.801.11 | 856.801.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |

Molding bits

Why waste time searching for a particular style of frame molding when you can just as quickly and easily make your own. With the wide range of decorative possibilities offered by CMT molding bits, you can always create the edge profile you want, anywhere you want and any time you want. These CMT bits are made to last a lifetime - carbide-tipped cutters and solid bar stock steel shanks can withstand serious use and the baked-on non-stick PTFE coating makes sure you continuously get clean, smooth-running cuts. Our anti-kickback feature helps guarantee you work more safely when using these wide profile bits.


SHOP TIPS: multiple pass operations require advance planning. To avoid making a mistake that could render it impossible to finish the job, carefully consider the entire cutting sequence before you begin.

SAFETY TIPS: all large diameter bits such as these should be used with caution and on router tables equipped with a fence. For best results, 1,7 KW (2-1/4 HP) routers are recommended. Routers as low-powered as 1,1 KW (1-1/2 HP) can be used if limited to shorter, shallower runs. When possible, reduce the RPMs of the router for operations requiring the use of these bits.


Drawings are 1:1 scale




8/955.901

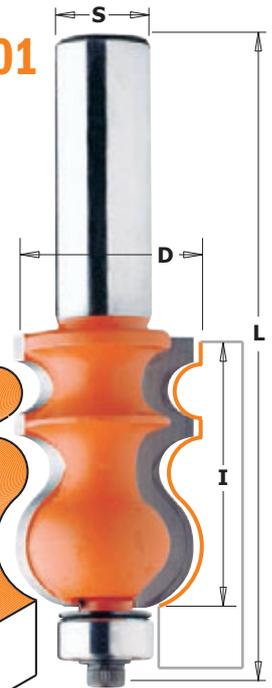

8/955.902

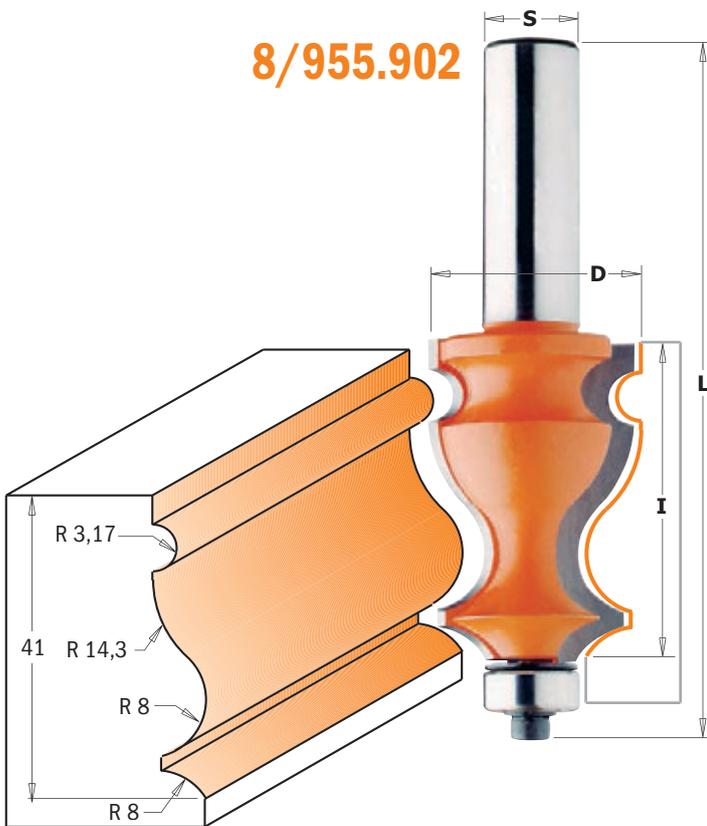


8/956.501

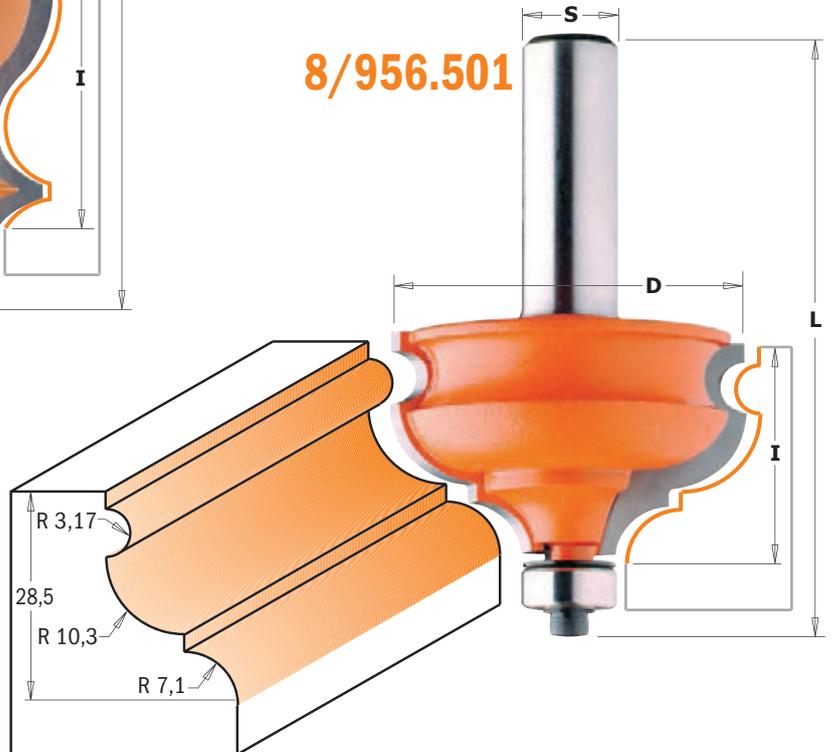


| D | I | L | ORDER NO. | ORDER NO. | Spare parts | | | |
|------|------|------|-------------------|-------------------|-------------|------------|------------|------------|
| mm | mm | mm | S=Ø12mm | S=Ø12,7mm | | | | |
| 23,8 | 35 | 83,8 | 955.901.11 | 855.901.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 27 | 41 | 90,2 | 955.902.11 | 855.902.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| 47,5 | 28,5 | 77,4 | 956.501.11 | 856.501.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |

Molding bits

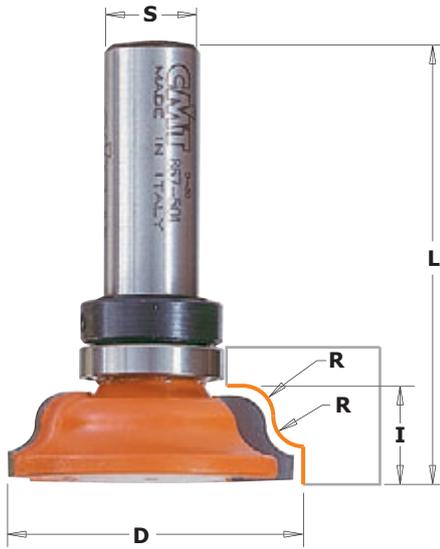


8/967.5B

CMT's new molding bits allow you to shape elegant moldings with your table saw and router. Unlike any commercially available crown moldings, moldings made with these bits are easy to install and create a finished appearance. After shaping the cove, you can use special router bits with inverted profiles to create different edges and complete the molding.

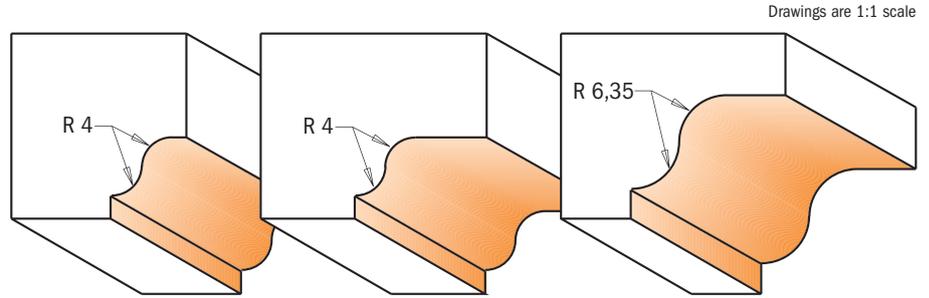


| R mm | D mm | I mm | L mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | |
|------|-------|------|------|---------------------|----------------------|------------------------|-------------|------------|------------|------------|
| 4 | 39,05 | 11,5 | 57 | 967.001.11B | 967.501.11B | 867.501.11B | | | | |
| 4 | 54 | 11,5 | 65,9 | | 967.502.11B | 867.502.11B | 791.011.00 | 541.002.00 | 990.005.00 | 991.056.00 |
| 6,35 | 60,5 | 17,3 | 71,7 | | 967.503.11B | 867.503.11B | 791.011.00 | 541.002.00 | 990.005.00 | 991.056.00 |

Molding bits

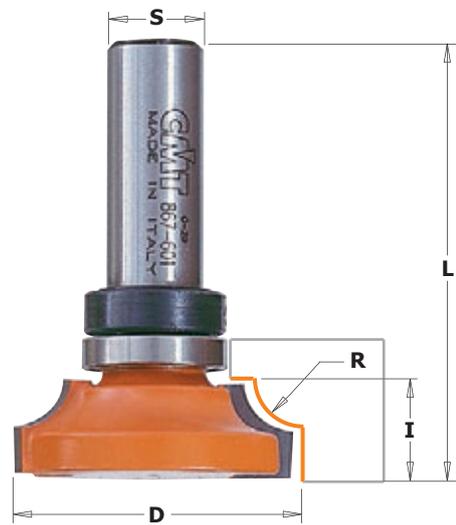

8/967.6B

CMT's molding bits allow you to shape elegant moldings with your table saw and router. Unlike any commercially available crown moldings, moldings made with these bits are easy to install and create a finished appearance. After shaping the cove, you can use special router bits with inverted profiles to create different edges and complete the molding.

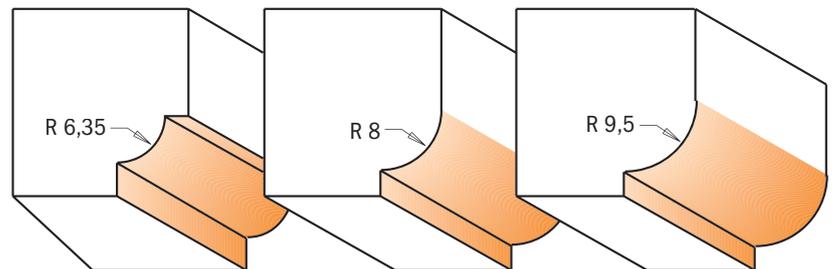

| R mm | D mm | I mm | L mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | |
|------|------|------|------|---------------------|----------------------|------------------------|-------------|------------|------------|------------|
| 6,35 | 38 | 12,5 | 57 | 967.101.11B | 967.601.11B | 867.601.11B | | | | |
| 8 | 35 | 13,2 | 57,7 | 967.102.11B | 967.602.11B | 867.602.11B | 791.011.00 | 541.002.00 | 990.005.00 | 991.056.00 |
| 9,5 | 38 | 14,5 | 59 | 967.103.11B | 967.603.11B | 867.603.11B | 791.011.00 | 541.002.00 | 990.005.00 | 991.056.00 |

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools





Power tools & accessories

Display cabinets & spare parts

Finger pull bit

855/955

Why interrupt the subtle linearity of an all-wood drawer front or cabinet door with a metal knob or handle? Use a CMT finger pull bit and make a harmonious wooden handle. Choose your preference - a template profile made directly in the wood or a European-style hardwood pull as illustrated below.

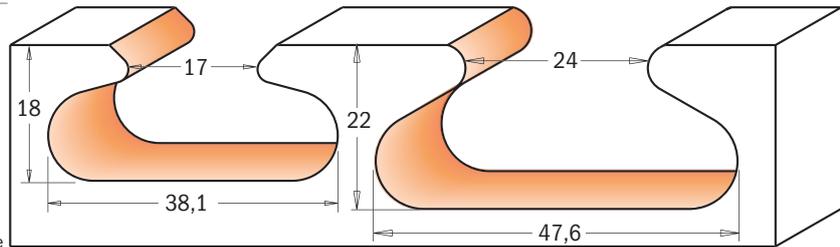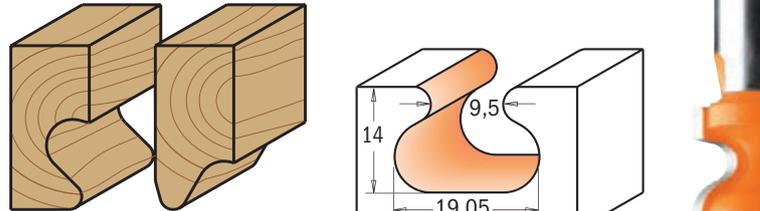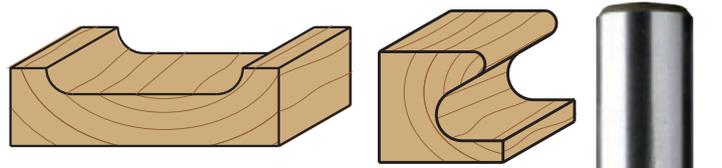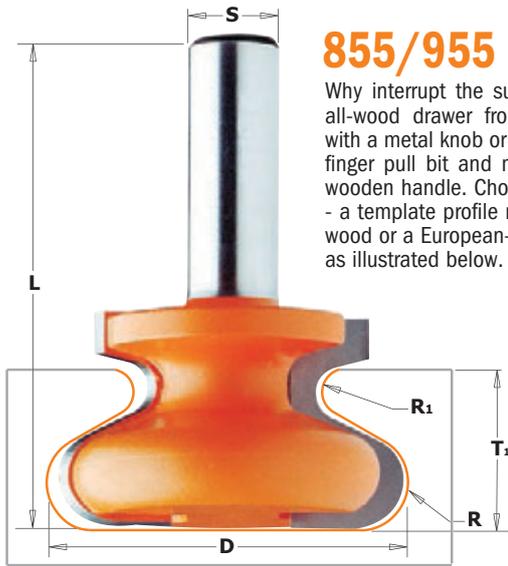

Drawings are 1:1 scale



| D mm | d mm | T ₁ mm | l mm | R mm | R ₁ mm | L mm | ORDER NO. S=∅8mm | ORDER NO. S=∅12mm | ORDER NO. S=∅12,7mm |
|-------------|-----------|----------------------|-------------|-------------|----------------------|-------------|---------------------|----------------------|------------------------|
| 19,05 | 9,5 | 14 | 19,05 | 4,76 | 2,4 | 57,2 | 955.102.11 | | 855.602.11 |
| 38,1 | 17 | 18 | 20,7 | 6 | 1,8 | 55,5 | 955.103.11 | | |
| 38,1 | 17 | 18 | 20,7 | 6 | 1,8 | 61,8 | | | 855.603.11 |
| 47,6 | 24 | 22 | 28,5 | 6,35 | 3,2 | 66,6 | | 955.601.11 | 855.601.11 |

Window sill and finger bits



8/955.804/805 - 8/955.804B/805B

These profiles were originally intended for shaping the edges of window sills. Now these bits are also used for creating finger pulls on the edges of doors and drawers. These bits are available with top bearings for curved template work or without bearings for straight cuts against a fence. Recommended for router table use only.

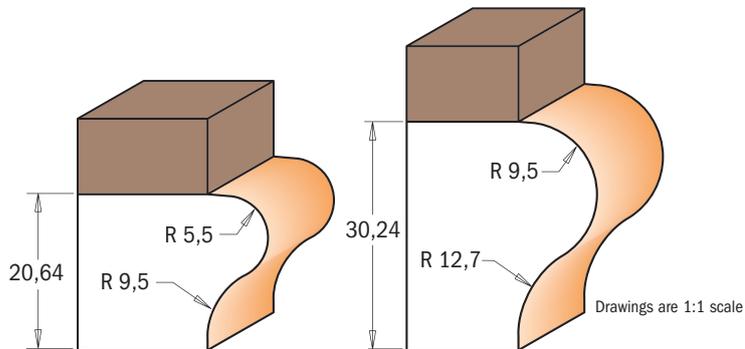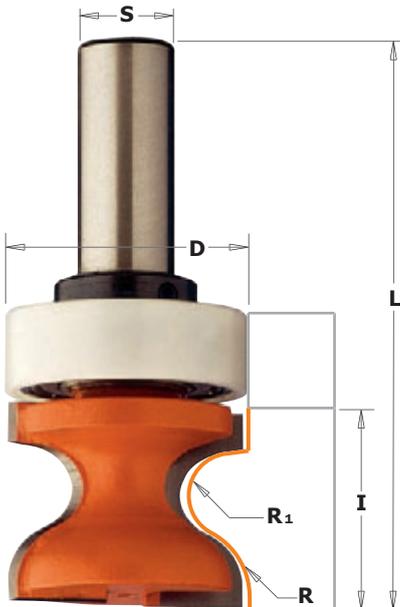

Drawings are 1:1 scale


| R ₁ mm | R mm | D mm | l mm | L mm | ORDER NO. S=∅12mm | ORDER NO. S=∅12,7mm |
|----------------------|---------|---------|---------|---------|----------------------|------------------------|
| 5,5 | 9,5 | 31,7 | 25,4 | 73 | 955.804.11 | 855.804.11 |
| 9,5 | 12,7 | 38,1 | 35 | 85,8 | 955.805.11 | 855.805.11 |

Spare parts



| with top bearing | | | | | | | | | | |
|-------------------------|------|------|------|------|--------------------|--------------------|------------|------------|------------|------------|
| 5,5 | 9,5 | 31,7 | 25,4 | 73 | 955.804.11B | | 791.015.00 | 541.005.00 | 990.005.00 | 991.056.00 |
| 5,5 | 9,5 | 31,7 | 25,4 | 73 | | 855.804.11B | 791.015.00 | 541.002.00 | 990.005.00 | 991.056.00 |
| 9,5 | 12,7 | 38,1 | 35 | 85,8 | 955.805.11B | | 791.020.00 | 541.005.00 | 990.005.00 | 991.056.00 |
| 9,5 | 12,7 | 38,1 | 35 | 85,8 | | 855.805.11B | 791.020.00 | 541.002.00 | 990.005.00 | 991.056.00 |


Table edge and hand rail bits

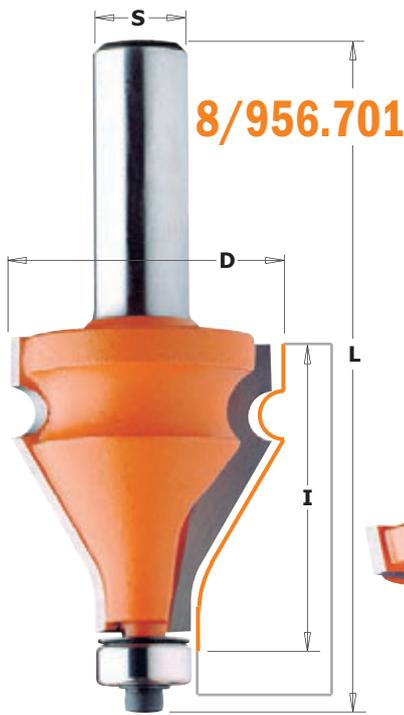

8/956.701

Turn a small investment into a big return with these CMT bits! They give you well-proportioned smooth curves for elegant eye-catching work on your tables. CMT hand rail bits feature 30° bevel edge and 3,2mm bead that allow you to make beautiful and functional hand rails. Add a touch of class to your architectural settings!

SAFETY TIPS: these profile bits remove large amounts of stock and make consistent quantities of dust. We recommend using a vacuum to keep the work area safe.

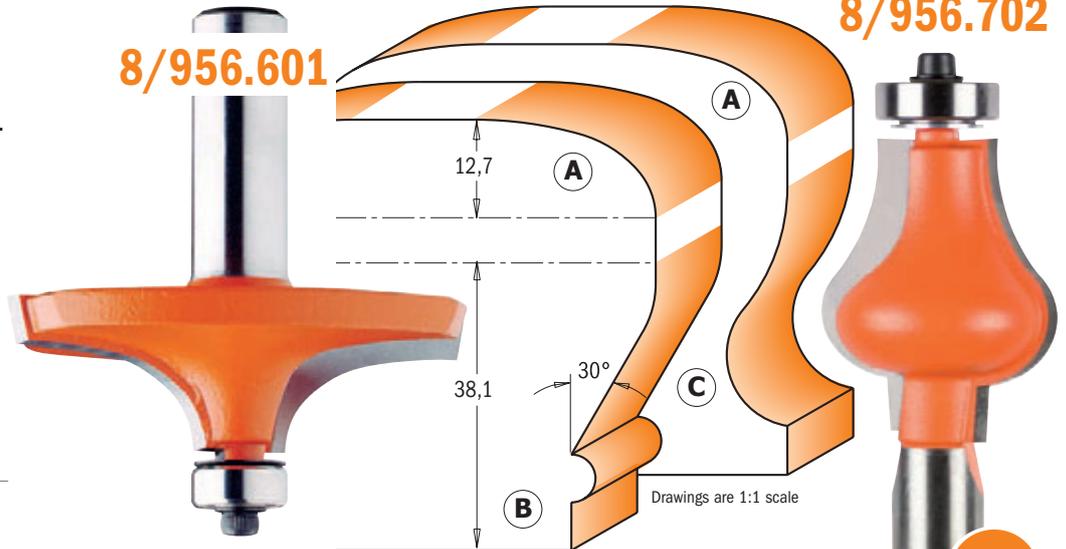


8/956.601

8/956.702

| Profile | D mm | I mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | |
|---------|------|------|------|----------------------|------------------------|-------------|--|--|--|---|
| A | 63,5 | 19 | 67,9 | 956.601.11 | 856.601.11 | | | | | 990.423.00 791.003.00 990.058.00 991.057.00 |
| B | 35 | 38 | 87 | 956.701.11 | 856.701.11 | | | | | 990.423.00 791.003.00 990.058.00 991.057.00 |
| C | 31,7 | 38,1 | 87 | 956.702.11 | 856.702.11 | | | | | 990.423.00 791.018.00 990.058.00 991.057.00 |

Vertical raised panel bits

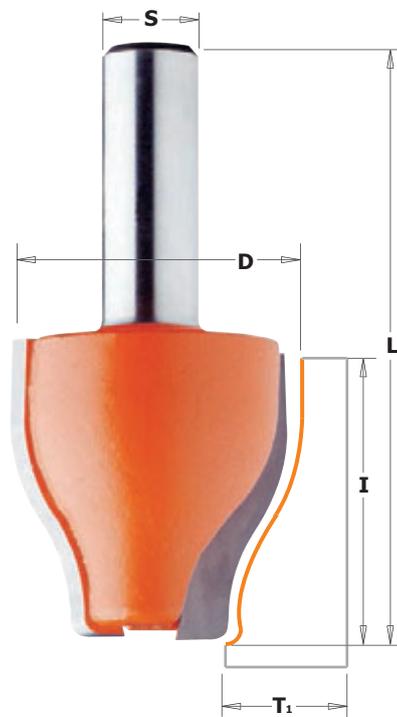


8/990.6



Mill raised panel doors and drawer fronts easily and economically just by putting a CMT vertical raised panel bit in your router* and a sturdy 90° fence on your router table. Meticulously studied, designed and crafted using the highest technology available, these bits are perfected down to the smallest detail. And just like any true craftsman, we are as proud of our work as you are of yours. Choose any of the three vertical profile designs for the style you want.

* Recommended for use on routers with a minimum speed of 1,7 KW (2-1/4 HP). Routers as low-powered as 1,1 KW (1-1/2 HP) can be used but we suggest limiting their use to shorter, shallower runs.

SAFETY TIPS: the template must be at least 150mm and clamps should be used whenever possible. Three to five passes are recommended to safely and accurately obtain the profile you desire.

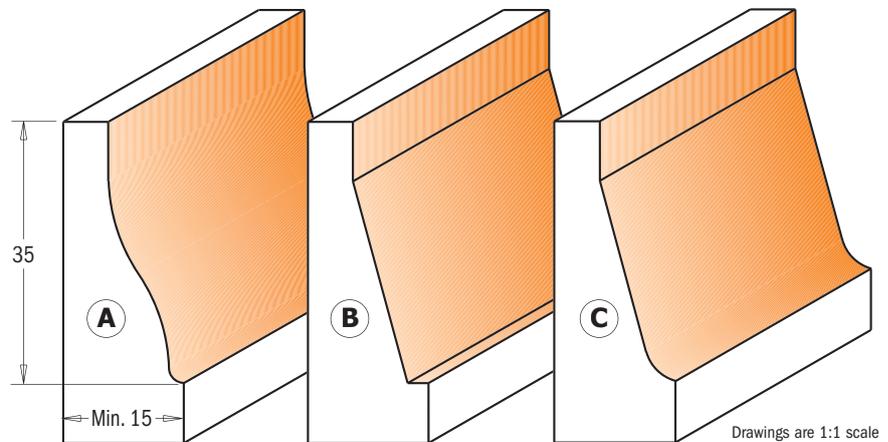

| Profile | D mm | I mm | T ₁ mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|------|------|-------------------|------|----------------------|------------------------|
| A | 38 | 38 | 15 ÷ 18 | 76,2 | 990.601.11 | 890.601.11 |
| B | 38 | 38 | 15 ÷ 18 | 76,2 | 990.602.11 | 890.602.11 |
| C | 38 | 38 | 15 ÷ 18 | 76,2 | 990.603.11 | 890.603.11 |



Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Raised panel bit with back cutter





8/990



These bits has a back-cutter which allows milling of both the front and back of the panel in the same cut. An additional 31,7mm diameter bearing promotes safety by allowing you to take two shallow passes (only for Ø89mm).

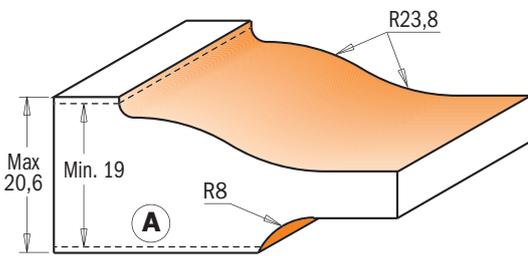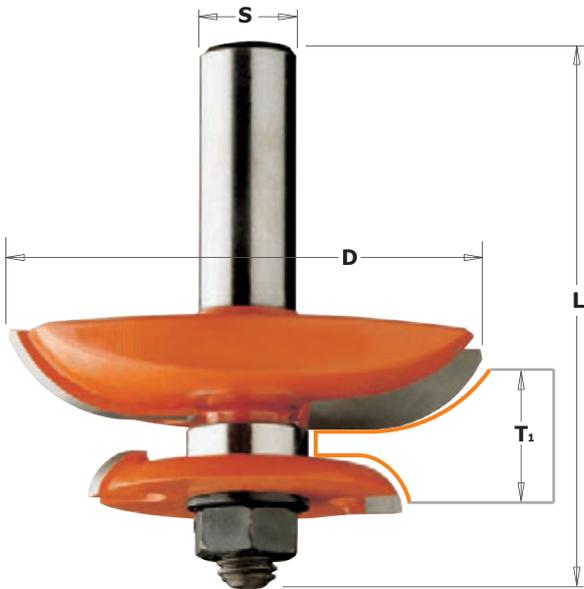

Drawings are 1:1 scale

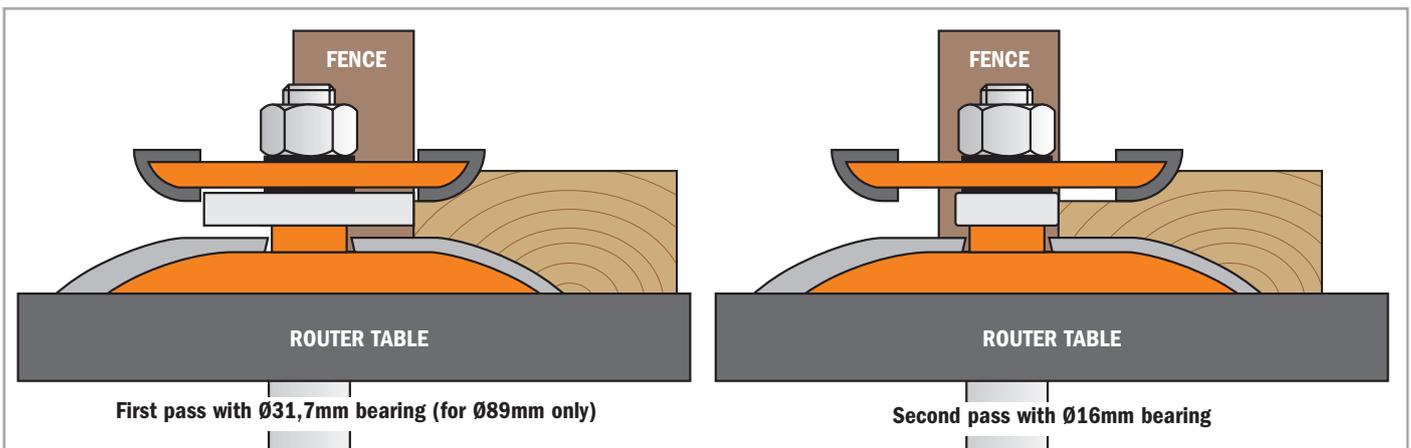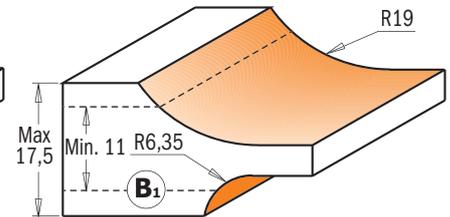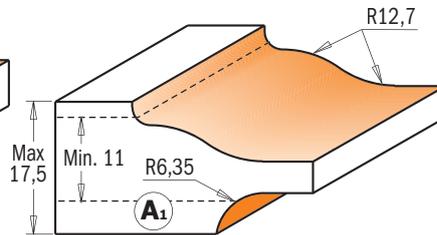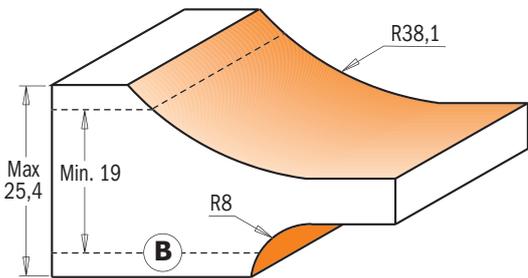

First pass with Ø31,7mm bearing (for Ø89mm only)


Second pass with Ø16mm bearing

| Profile | D mm | T ₁ mm | L mm | ORDER NO. | ORDER NO. | Spare parts | | | |
|----------------|------|-------------------|------|-------------------|-------------------|---|---|---|---|
| | | | | S=Ø12mm | S=Ø12,7mm |  |  |  |  |
| A | 89 | 19 - 20,6 | 78,1 | 990.524.11 | 890.524.11 | 822.007.11 | 791.025.00 | 791.033.00 | 990.020.00 |
| B | 89 | 19 - 25,4 | 78,1 | 990.527.11 | 890.527.11 | 822.007.11 | 791.025.00 | 791.033.00 | 990.020.00 |
| A ₁ | 63,5 | 11,1 - 17,5 | 70 | 990.534.11 | 890.534.11 | 822.010.11 | 791.025.00 | | 990.020.00 |
| B ₁ | 63,5 | 11,1 - 17,5 | 70 | 990.537.11 | 890.537.11 | 822.010.11 | 791.025.00 | | 990.020.00 |

Spare parts
 541.515.00 0,1mm spacer
 541.516.00 0,3mm spacer

541.518.00 1,0mm spacer
 990.407.00 Shield conical

Raised panel bits

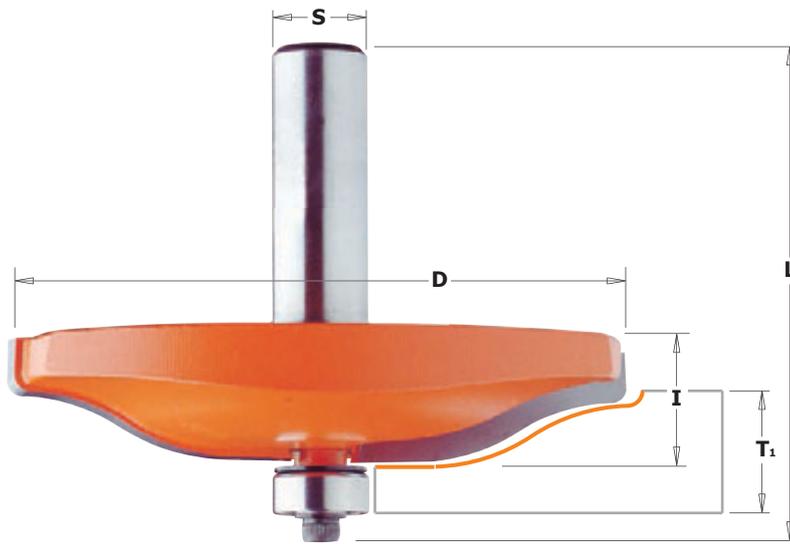

8/990.5




We offer you the traditional approach to panel construction with the CMT raised panel bit. Make classic raised panel doors as shown in the profiles below.

These raised panel bits have carbide-faced cutting edges and are equipped with our anti-kickback design and orange non-stick coating to further increase your safety when working with larger diameter bits.

SAFETY TIPS: Horizontally employed bits should be used at a lower speed, between 10,000 and 12,000 RPMs.

Three to five passes are recommended to safely and accurately obtain the profile you desire.

To be used on jigs with at least 1,7 KW (2-1/4 HP).

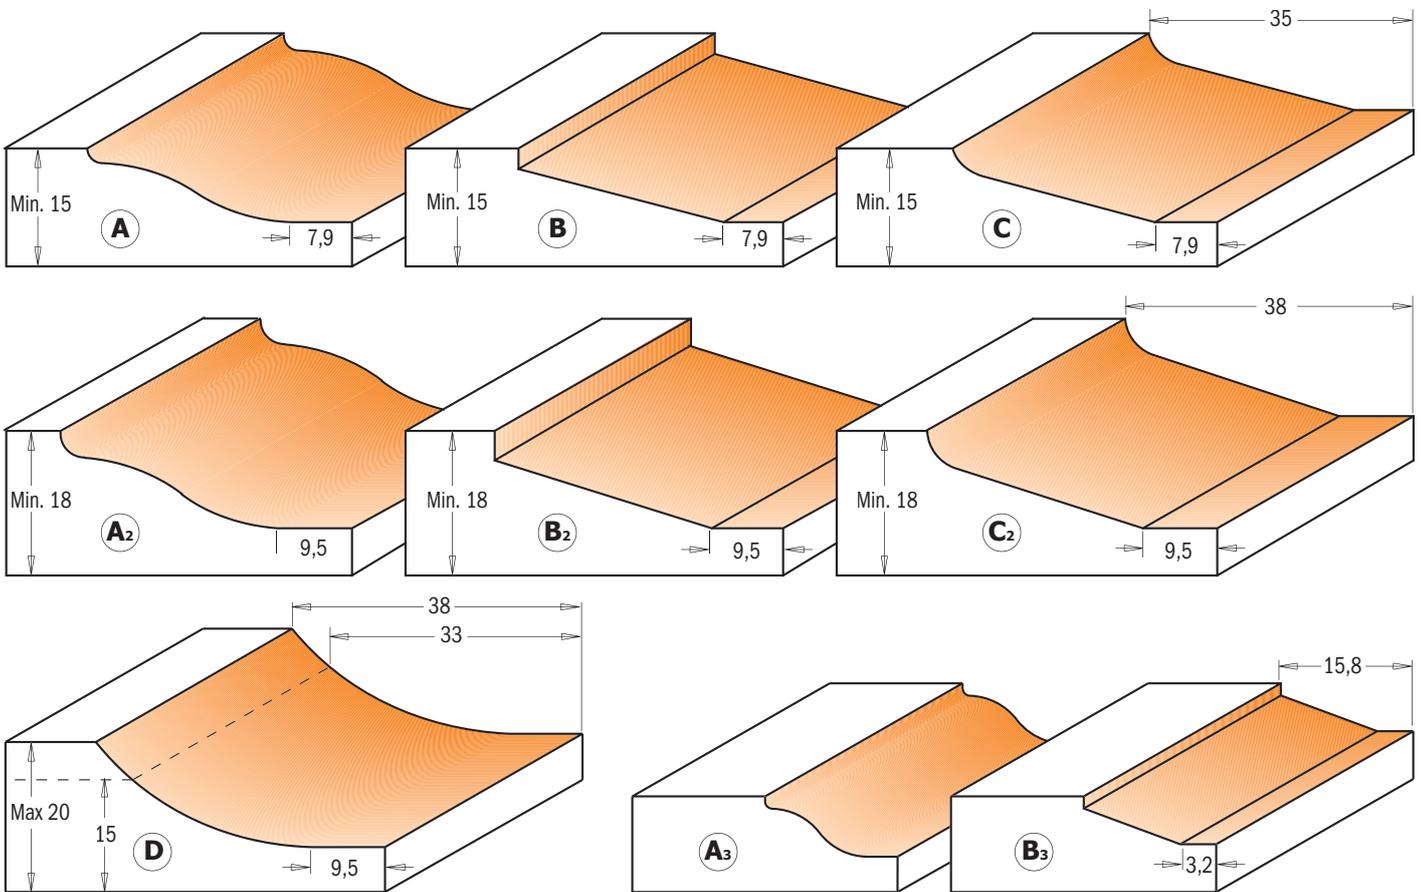


Drawings are 1:1 scale

| Profile | D mm | I mm | L mm | T ₁ mm | ORDER NO. | ORDER NO. | ORDER NO. | Spare parts | | | |
|----------------|---------|---------|---------|----------------------|-------------------|-------------------|-------------------|-------------|------------|------------|------------|
| | | | | | S=Ø8mm | S=Ø12mm | S=Ø12,7mm | | | | |
| A | 82,5 | 15 | 63,8 | 15 ÷ 18 | | 990.501.11 | 890.501.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| B | 82,5 | 15 | 63,8 | 15 ÷ 18 | | 990.502.11 | 890.502.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| C | 82,5 | 15 | 64,6 | 15 ÷ 18 | | 990.503.11 | 890.503.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| A ₂ | 89 | 15 | 64,6 | 18 ÷ 20 | | 990.504.11 | 890.504.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| B ₂ | 89 | 15 | 64,6 | 18 ÷ 20 | | 990.505.11 | 890.505.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| C ₂ | 89 | 15 | 64,6 | 18 ÷ 20 | | 990.506.11 | 890.506.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| D | 89 | 15 | 64,6 | 15 ÷ 20 | | 990.507.11 | 890.507.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| A ₃ | 47,6 | 9,5 | 58,1 | 12,7 ÷ 15 | 990.011.11 | | | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |
| B ₃ | 47,6 | 9,5 | 58,1 | 12,7 ÷ 15 | 990.012.11 | | 890.512.11 | 990.423.00 | 791.003.00 | 990.058.00 | 991.057.00 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts


Junior ogee rail and stile set

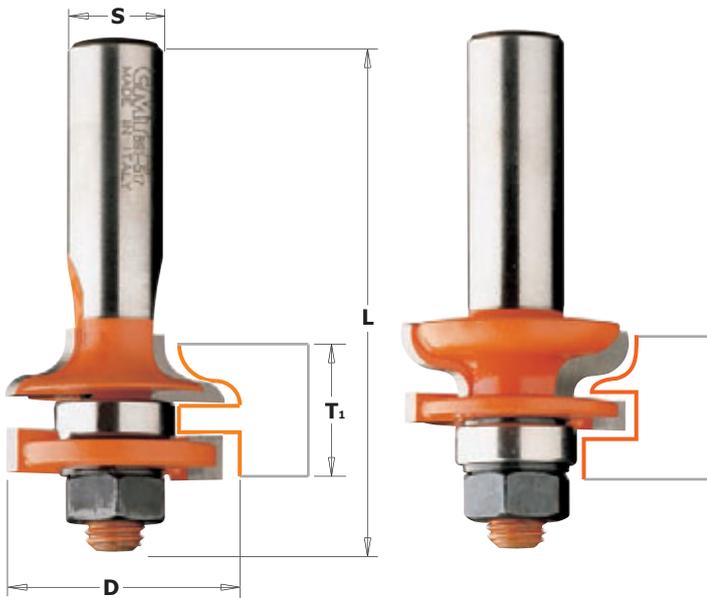

8/991.517



These bits are designed for those special projects that require a smaller panel door. Use these bits with stock from 11,1mm to 17,4mm thick, and build doors as small as 70mm.

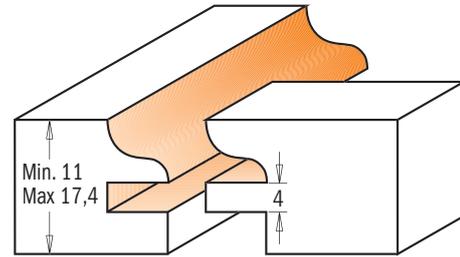


Drawing is 1:1 scale

| D mm | T ₁ mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | |
|---------|----------------------|---------|----------------------|------------------------|--|---|---|---|
| 31,75 | 11 ÷ 17,4 | 67 | 991.517.11 | 891.517.11 |  4mm |  6mm |  |  |

Spare parts

| | |
|------------|--------------|
| 541.515.00 | 0,1mm spacer |
| 541.516.00 | 0,3mm spacer |
| 541.518.00 | 1,0mm spacer |


Rail and stile set

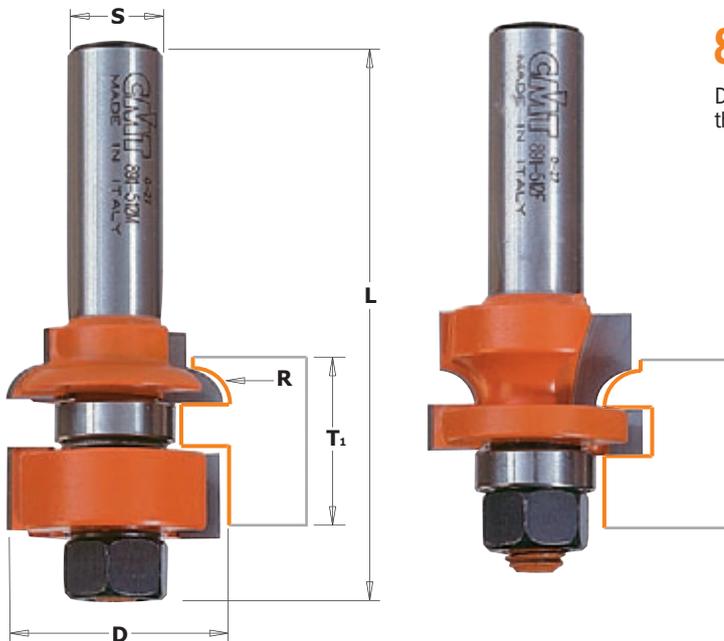

8/991.512



Designed for fine furniture construction, these bits mill a delicate 4,75mm thumbnail profile in stock from 15,8mm to 20,6mm.

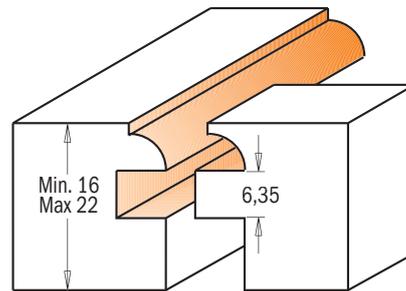

Drawing is 1:1 scale


| D mm | T ₁ mm | R mm | L mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm | Spare parts | | | |
|---------|----------------------|---------|---------|---------------------|------------------------|---|--|---|---|
| 28,7 | 16 ÷ 22 | 4,8 | 79,2 | 991.012.11 | 891.512.11 |  6,35mm |  10,8mm |  |  |

Spare parts

| | |
|------------|--------------|
| 541.515.00 | 0,1mm spacer |
| 541.516.00 | 0,3mm spacer |
| 541.518.00 | 1,0mm spacer |

Rail & stile sets


Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

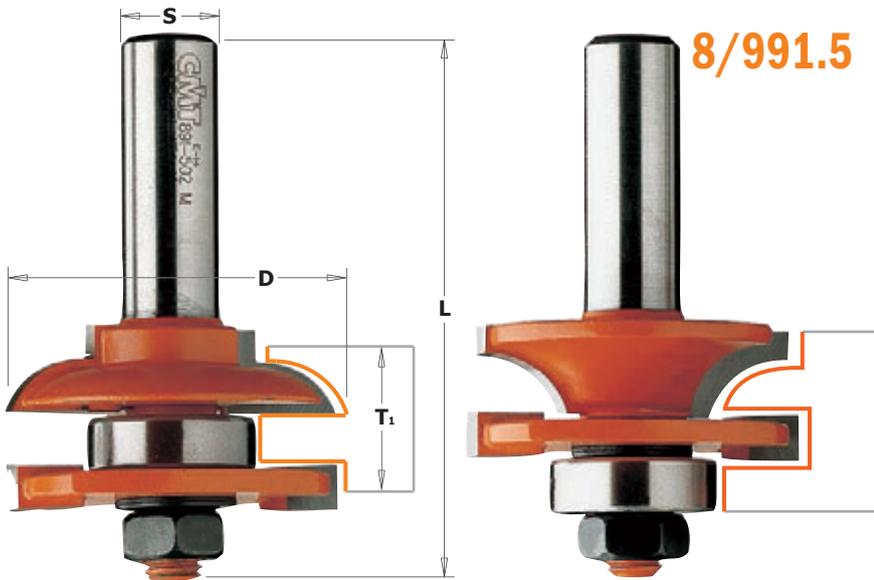

8/991.5


A well-constructed door will bear the mark of a perfect joint-clean, exact and well-crafted for strength. For this project, the CMT male-female rail and stile sets are the perfect pair. Made to our specifications they match exactly; not simply approximated like standard reversible cutters.

Choose the style of CMT rail and stile set that best suits your needs and create smooth, perfect joints in hard and soft woods with accuracy and speed. Perfect for working in stock from 18mm to 22mm. See chart and illustrations below for profile options available.

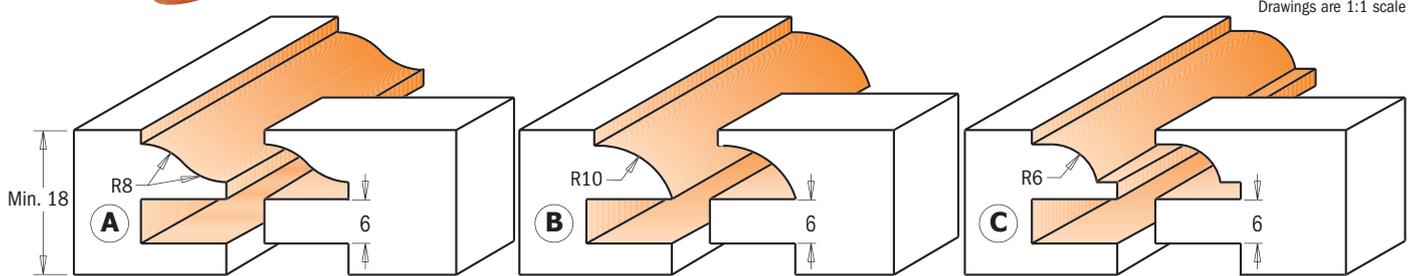

Drawings are 1:1 scale


| Profile | D mm | L mm | T ₁ mm | ORDER NO. | ORDER NO. | ORDER NO. | Spare parts | | | | | | | | | |
|---------|------|------|-------------------|-------------------|-------------------|-------------------|-------------|------------|------------|------------|------------|------------|-------|-------|-------|--|
| | | | | S=Ø8mm | S=Ø12mm | S=Ø12,7mm | 822.003.11 | 791.012.00 | 541.515.00 | 514.516.00 | 990.407.00 | 990.020.00 | | | | |
| A | 44,4 | 71 | 18 ÷ 22 | 991.001.11 | 991.501.11 | 891.501.11 | 822.003.11 | 791.012.00 | 541.515.00 | 514.516.00 | 990.407.00 | 990.020.00 | 0,1mm | 0,3mm | 0,9mm | |
| B | 44,4 | 71 | 18 ÷ 22 | | 991.502.11 | 891.502.11 | 822.003.11 | 791.012.00 | 541.515.00 | 514.516.00 | 990.407.00 | 990.020.00 | | | | |
| C | 44,4 | 71 | 18 ÷ 22 | | 991.503.11 | 891.503.11 | 822.003.11 | 791.012.00 | 541.515.00 | 514.516.00 | 990.407.00 | 990.020.00 | | | | |

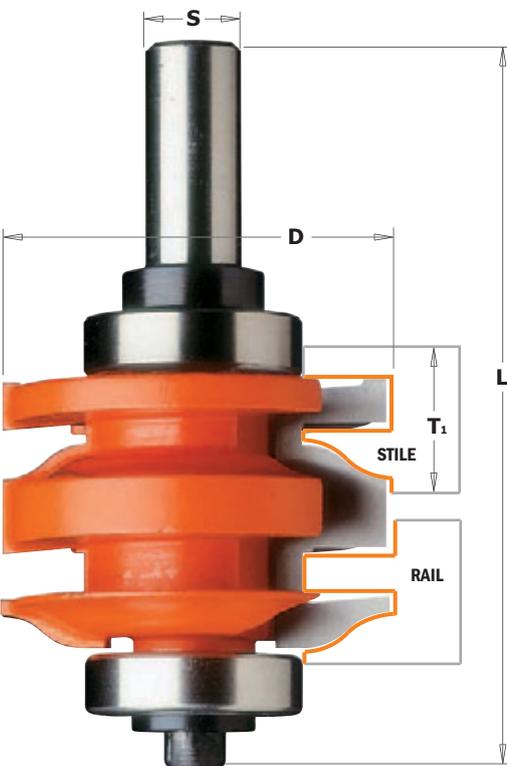

8/991.521



The most innovative bit for the construction of furniture doors and drawers. The new CMT One-Piece Rail and Stile Bit represents the union of two cutters in one bit. By simply adjusting the height of the bit, you can cut two perfectly joining profiles with no wasted time or effort moving the fence or changing the bit. Save money by investing in a single CMT bit and a more efficient production. For working in stock from 18mm to 22,2mm.

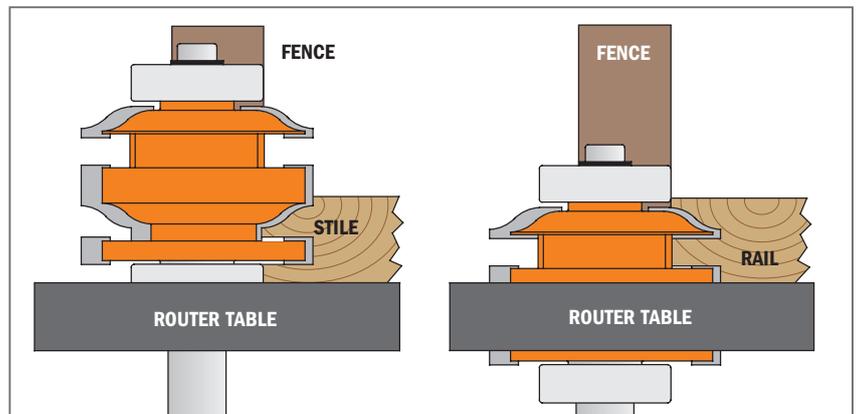

| Profile | D mm | L mm | T ₁ mm | ORDER NO. | ORDER NO. | Spare parts | | | | | | | | | | |
|---------|-------|------|-------------------|-------------------|-------------------|-------------|------------|------------|------------|------------|------------|------------|--|--|--|--|
| | | | | S=Ø12mm | S=Ø12,7mm | 791.027.00 | 541.002.00 | 990.005.00 | 991.056.00 | 541.551.00 | 990.010.00 | 991.064.00 | | | | |
| A | 50,87 | 87,5 | 18 ÷ 22 | | 891.521.11 | 791.027.00 | 541.002.00 | 990.005.00 | 991.056.00 | 541.551.00 | 990.010.00 | 991.064.00 | | | | |
| A | 50,87 | 87,5 | 18 ÷ 22 | 991.521.11 | | 791.027.00 | 541.005.00 | 990.005.00 | 991.056.00 | 541.551.00 | 990.010.00 | 991.064.00 | | | | |

In our step-by-step example of panel door construction, we used the following:

- CMT Rail & Stile set (item #891.502.11)
- CMT Reverse Glue Joint (item #855.501.11)
- pre-cut to length stiles - 19mm thick x 57mm wide
- pre-cut to length rails - 19mm thick x 57mm wide
- panel - 16mm thick
- scrap stock

The CMT Rail & Stile set was designed ideally for the construction of panel doors from 19mm thick stock, however any variation of size up to 22mm thick can be used. Remember to adjust your measurements and cutting depths according to the wood thickness you use.

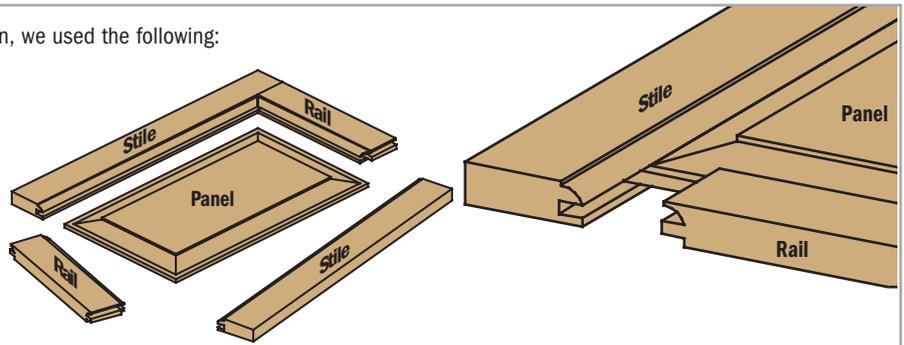


ILLUSTRATION A


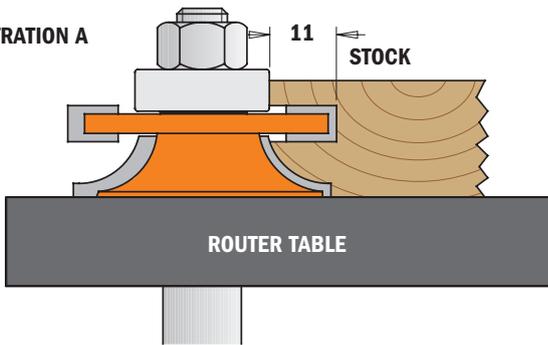


ILLUSTRATION B

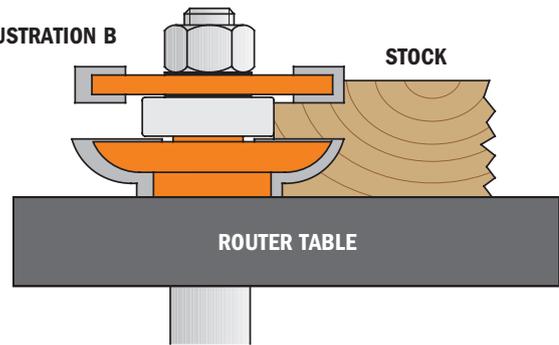

MILLING THE RAILS AND STILES

First make trial cuts of the cope profile (rail) and the stick profile (stile) in scrap stock and check the accuracy of the joint. This is extremely important when working at maximum thickness (22mm). Make sure your stock is flat and cut straight with square edges. Using the CMT Stile Bit shown in illustration A, place the stock front face-down on the router table and mill the stick profile in the stile and rail pieces. To mill the rails, use the CMT Rail Bit shown in illustration A, position the rails face-down on the router table and mill the cope profile in the ends. If you are milling cope and stick profiles before cutting the rails and stiles to length, be sure to make the proper calculations before cutting the rails. The stiles are the same length as the door. The rails must be calculated by the following equation (CMT standard tenon length is 22mm):

(total door width - sum of stile widths) + sum of 2 tenons = total rail length
 therefore, using our example measurements listed above, for a 300mm cabinet door:
 $300 - 114 + 22 = 208\text{mm}$

GLUEING UP PANELS

If the panel requires a width greater than the width of your stock, you will need to edge glue stock for the central floating panel. This is simply accomplished using the CMT Reverse Glue Joint bit. For making a two panel glue joint, place the first panel front face down on the router table and accurately centre the wood to the bit: Adjust the bit according to the thickness of the wood you are cutting by lining up the cut edge of the wood to the centre point of the bit as illustrated in illustration B and mill the cut edge of the wood. Place the second panel front face up and repeat the milling process. This assures you will have the best side of your stock as a front face. If a third panel is required, mill one cut edge of the piece as instructed above, turn the piece over and run the other edge. Assemble the reverse cut pairs together for beautiful, strong joints that match up perfectly.

MILLING THE FLOATING PANEL

Make trial cuts in scrap stock to create a tongue that fits snugly into the groove in the stile without forcing it. To cut your panel to size be sure to make the proper calculations, taking into account the length of the tongue. The CMT Raised Panel Bit in our example has a standard tongue length of 8mm (The New CMT Raised Panel Bit profile has a 9,5mm tongue).

Use the following equation:
 (Total door length - Sum of Stile widths) + Sum of 2 Tongues = Overall Panel Length


Therefore, using our example measurements listed above for a 600mm long cabinet door: $(600 - 114) + 16\text{mm} = 502\text{mm}$

And accordingly:

(Total door width - Sum of Stile widths) + Sum of 2 Tongues = Overall Panel Width.

Once the panel has been cut to proper dimensions, position the panel front face side down on the router table tongue as shown in illustration C and use the CMT Raised Panel Bit to mill the tongue. ATTENTION: this bit is capable of removing large amounts of stock. To safely and effectively produce the profile you want, we suggest making several shallow passes. It can be dangerous to try to mill the entire profile in a single run.

ILLUSTRATION C

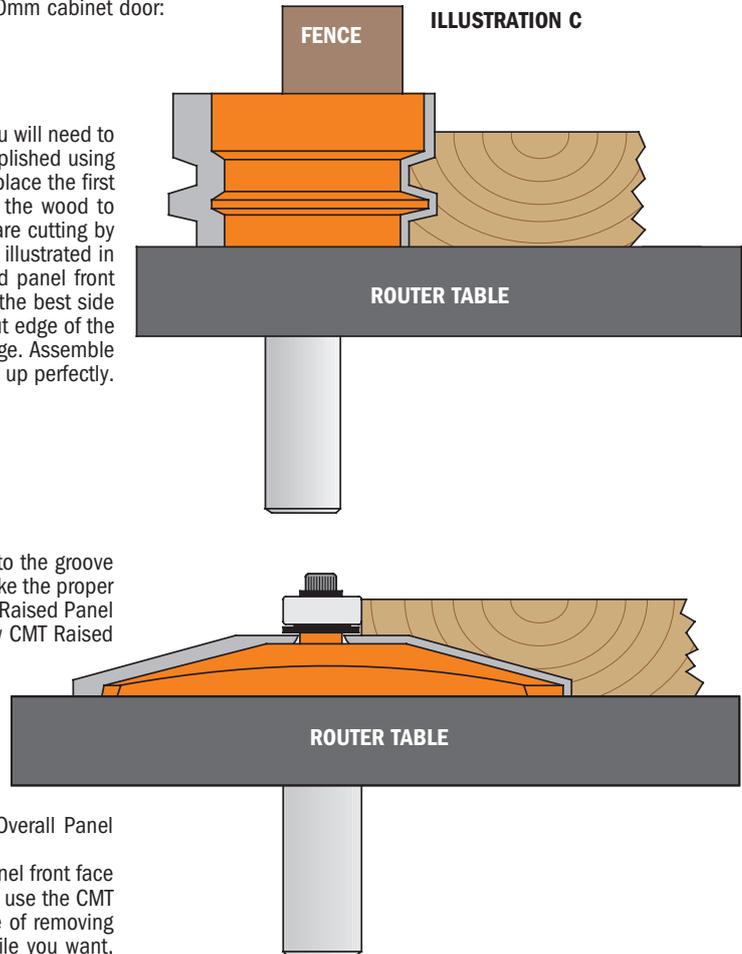

Stile & panel router bits



8/970

These bits can be used for decorative work on solid wood panels and MDF materials. Use them in one pass or in combination with CMT's MDF panel bits for complex and intricate profiles. A simple approach for an elegant appearance.

Featuring large cutting diameters and available in the most popular profiles, these panel bits guarantee excellent performance on both solid wood panels and MDF materials.

PANEL BITS



870.501.11
970.501.11




870.502.11
970.502.11




870.503.11
970.503.11


STILE BITS

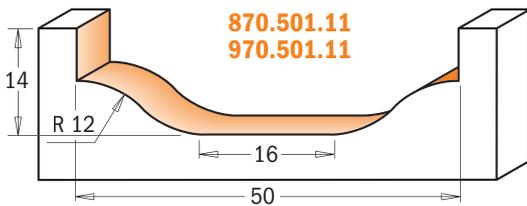


870.501.11
970.501.11

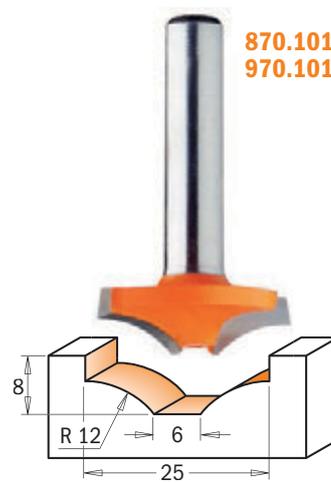


870.101.11
970.101.11

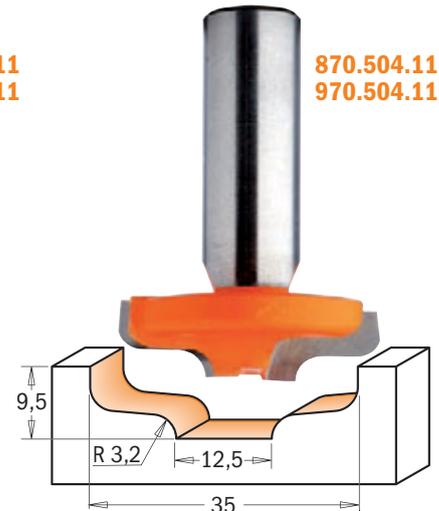


870.504.11
970.504.11

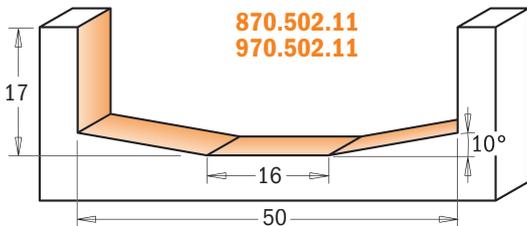


870.502.11
970.502.11

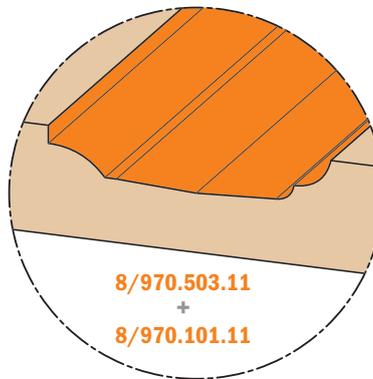

8/970.503.11
+
8/970.101.11

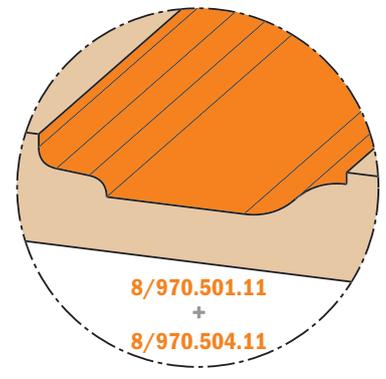

8/970.501.11
+
8/970.504.11

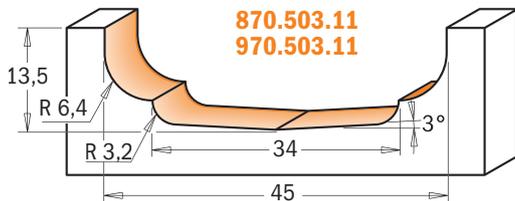


870.503.11
970.503.11

| D mm | d mm | I mm | R mm | A | L mm | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|---------|-----------|-----|---------|------------------------|---------------------|----------------------|------------------------|
| 25 | 6 | 8 | 12 | | 39,8 | 870.101.11 | 970.101.11 | | |
| 50 | 16 | 14 | 12 | | 52,1 | | | 970.501.11 | 870.501.11 |
| 50 | 16 | 17 | | 10° | 55,1 | | | 970.502.11 | 870.502.11 |
| 45 | 34 | 13,5 | 3,2 - 6,4 | 3° | 51,6 | | | 970.503.11 | 870.503.11 |
| 35 | 12,5 | 9,5 | 3,2 | | 47,6 | | | 970.504.11 | 870.504.11 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts


Solid surface rounding over bits

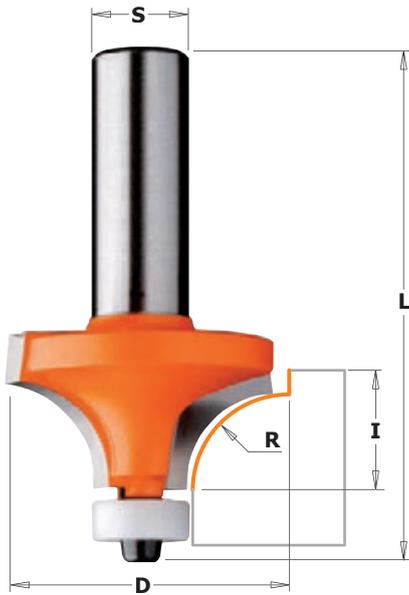

8/980.501-502-503-504




Use these bits to create a traditional roundover edge on solid surface countertops. Equipped with a non-marring Delrin® bearing to protect the finished edges. For use on hand-held portable routers.

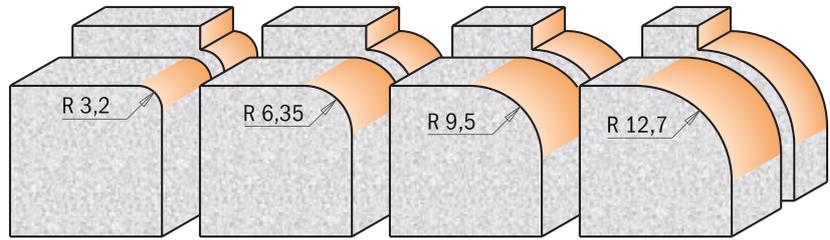

Drawings are 1:1 scale

| D mm | I mm | R mm | L mm | ORDER NO. S=∅12mm | ORDER NO. S=∅12,7mm | Spare parts | | |
|---------|---------|---------|---------|----------------------|------------------------|-------------|------------|------------|
| 19,05 | 12,7 | 3,2 | 59,4 | 980.501.11 | 880.501.11 | | | |
| 25,4 | 12,7 | 6,35 | 59,4 | 980.502.11 | 880.502.11 | 791.044.00 | 990.058.00 | 991.057.00 |
| 31,75 | 14 | 9,5 | 60,7 | 980.503.11 | 880.503.11 | 791.044.00 | 990.058.00 | 991.057.00 |
| 38,1 | 19,05 | 12,7 | 65,8 | 980.504.11 | 880.504.11 | 791.044.00 | 990.058.00 | 991.057.00 |


Solid surface decorative edge profile bits

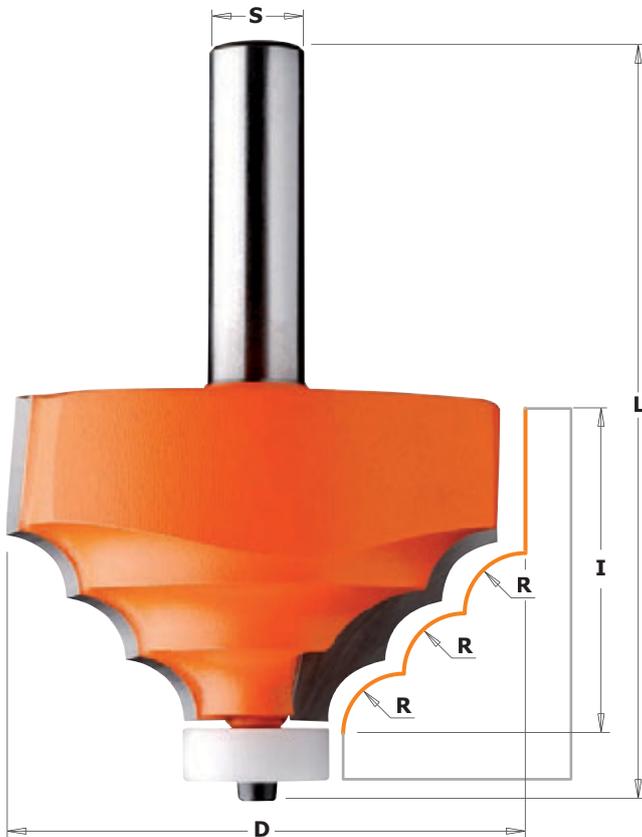

8/980.521



Create elegant countertops with flawless results. Features a non-marring Delrin® bearing to protect the finished edges. For use on hand-held portable routers.

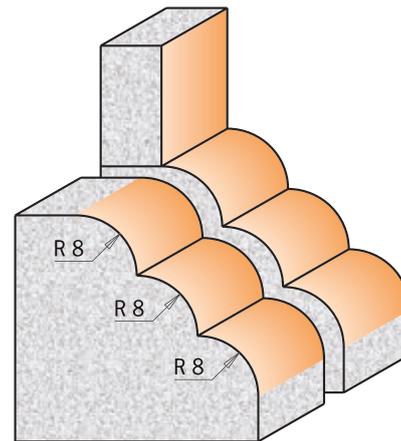


Drawings are 1:1 scale

| D mm | I mm | R mm | L mm | ORDER NO. S=∅12mm | ORDER NO. S=∅12,7mm | Spare parts | | |
|---------|---------|---------|---------|----------------------|------------------------|-------------|------------|------------|
| 66,7 | 41,3 | 8 | 89,8 | 980.521.11 | 880.521.11 | | | |
| | | | | | | 791.046.00 | 990.058.00 | 991.057.00 |

Solid surface rounding over bowl bits

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

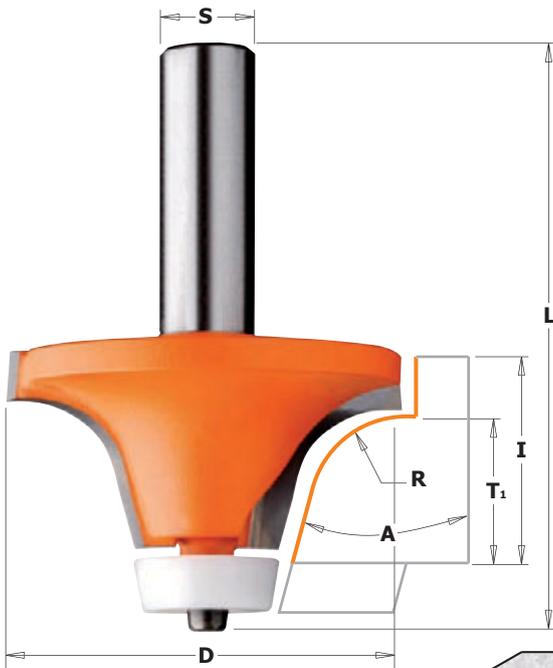


8/966.601/602
8/980.541



These bits roundover and trim the countertop edges after the bowl is mounted. Can be used with the CMT 880.551.11 bevel cutter for a flush cut-out between the countertop and installed undermount bowl. For use on hand-held portable routers. Features a non-marring Delrin® bearing to protect the finished edges.


Special angled Delrin® sleeve on the bearing of the CMT bevel cutter lets you work without leaving marks on the workpiece. Trims and shapes all wood and wood materials. Perfect for kitchen and bathroom counter top work.

880.541.11
980.541.11

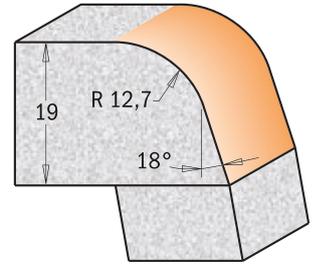


Drawings are 1:1 scale

966.601.11
866.601.11

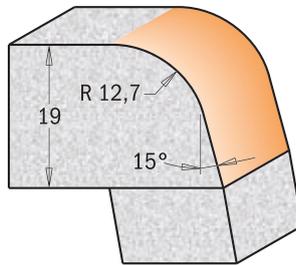

966.602.11
866.602.11

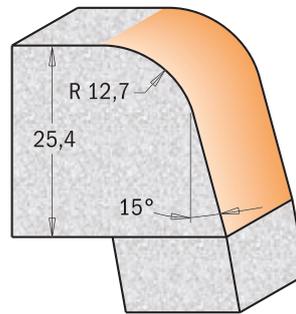


| A | D mm | T ₁ mm | I mm | R mm | L mm | ORDER NO. S=∅12mm | ORDER NO. S=∅12,7mm |
|-----|---------|----------------------|---------|---------|---------|----------------------|------------------------|
| 15° | 50,8 | 19 | 25,4 | 12,7 | 74,9 | 966.601.11 | 866.601.11 |
| 15° | 50,8 | 25,4 | 31,75 | 12,7 | 81,3 | 966.602.11 | 866.602.11 |
| 18° | 54 | 19 | 25,4 | 12,7 | 78,1 | 980.541.11 | 880.541.11 |

Spare parts




Solid surface rounding over bowl bit (ogee profile)

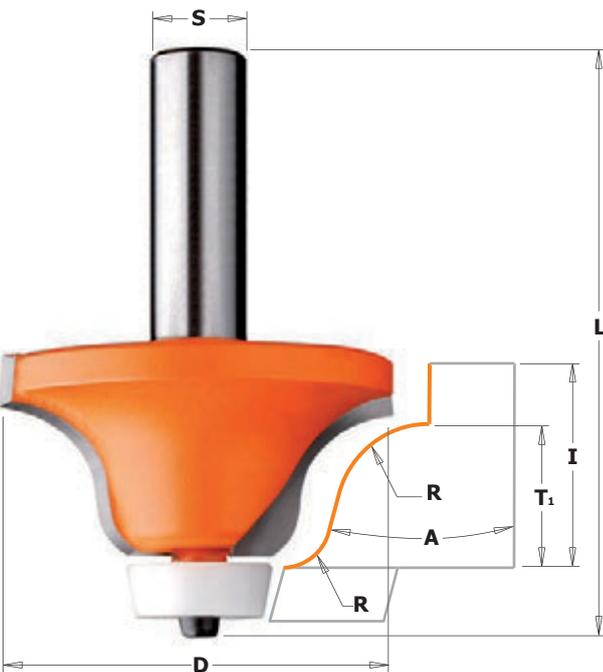

8/980.542



These bits roundover and trim the countertop edges after the bowl is mounted. Can be used with the CMT 880.551.11 bevel cutter for a flush cut-out between the countertop and installed undermount bowl. For use on hand-held portable routers. Features a non-marring Delrin® bearing to protect the finished edges.

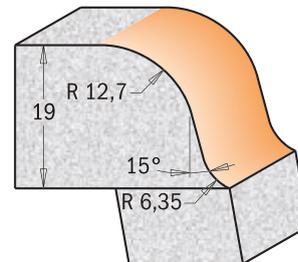


Drawing is 1:1 scale

| A | D mm | T ₁ mm | I mm | R mm | L mm | ORDER NO. S=∅12mm | ORDER NO. S=∅12,7mm |
|-----|---------|----------------------|---------|-----------|---------|----------------------|------------------------|
| 15° | 54 | 19 | 25,4 | 6,35-12,7 | 77,6 | 980.542.11 | 880.542.11 |

Spare parts



Solid surface bevel bowl bits

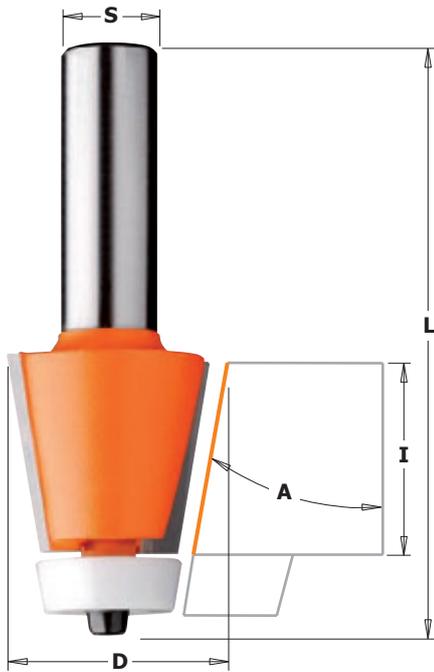


8/966.501 - 8/980.551




These bits are designed for undermount applications joining the countertops and sink bowls with a 10 (degree) beveled edge. Can be used with the 880.541.11 and 880.542.11 for complete undermount applications. For use on hand-held routers. Features a non-marring Delrin® bearing to protect the finished edges.

Special angled Delrin® sleeve on the bearing of the CMT bevel cutter lets you work without leaving marks on the workpiece. Trims and shapes all wood and wood materials. Perfect for kitchen and bathroom counter top work.

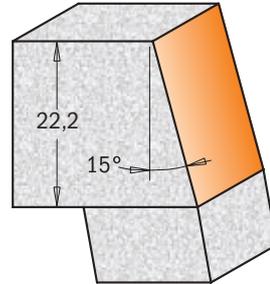

866.501.11
966.501.11

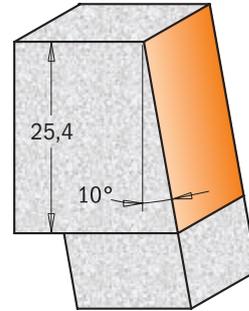


880.551.11
980.551.11

Drawings are 1:1 scale

| A | D mm | I mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | |
|-----|------|------|------|----------------------|------------------------|---|---|---|
| 15° | 31,7 | 22,2 | 72 | 966.501.11 | 866.501.11 |  |  |  |
| 10° | 28,5 | 25,4 | 77 | 980.551.11 | 880.551.11 | 791.041.00 | 990.058.00 | 991.057.00 |


Solid surface bevel bit

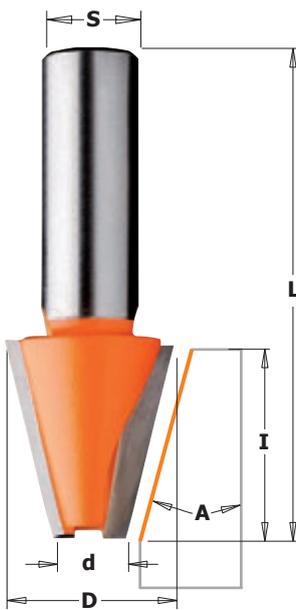

8/981.521



Edge profile bit designed to create a 15° bevel on solid surface countertops. Can also be used for European type topmount installation with sinks and bowls. For use on hand-held portable routers.

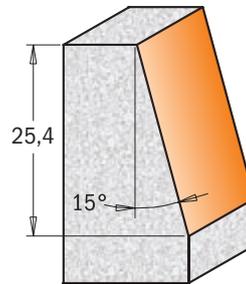

Drawings are 1:1 scale

| D mm | d mm | I mm | A | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------|------|------|-----|------|----------------------|------------------------|
| 23 | 9,52 | 25,4 | 15° | 63,5 | 981.521.11 | 881.521.11 |

Solid surface cut and plug repair set



new

CMT ORANGE TOOLS™

HW Z2 RH

9/881.541

Special carbide-tipped bits to be used on solid surface for repairing your ruined surfaces. To repair, create the plug with the plug cutter first, then use the other bit to easily make the hole. Your surfaces will look like new. To be used on hand-held routers or CNC machines.

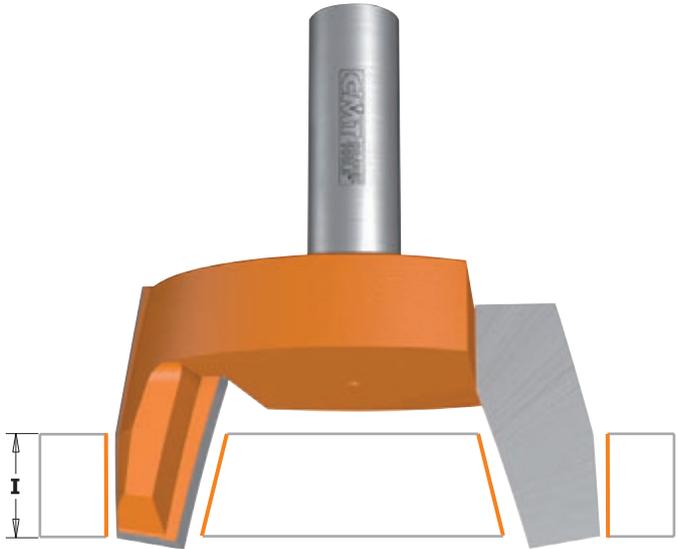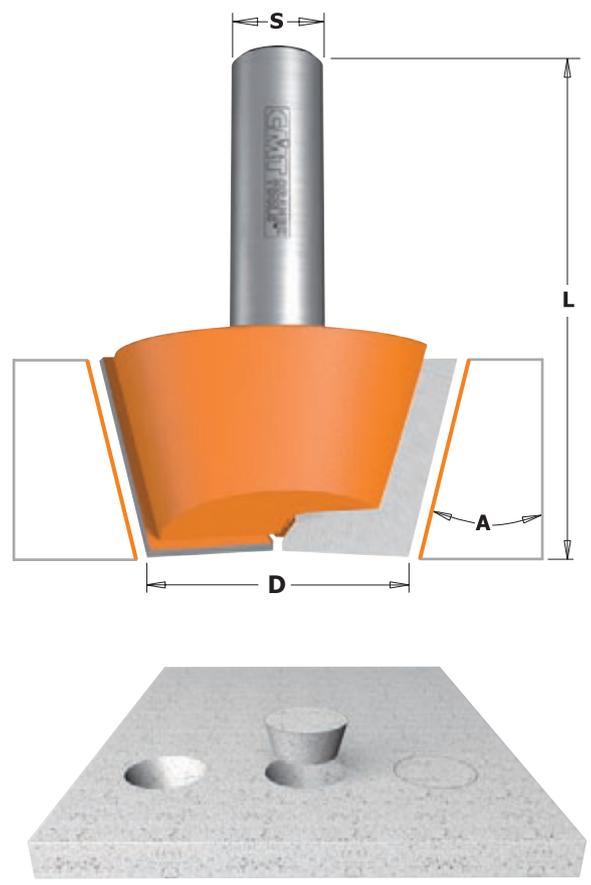

| D mm | I mm | A | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|-----|---------|----------------------|------------------------|
| 33,5 | 20 | 15° | 68,5-74 | 981.541.11 | 881.541.11 |



4-wing cut out slot cutters for solid surface

new

8/922.033B

HW Z4 RH

Tools featuring specially formulated carbide-tipped cutting edges for cutting your solid surface undermount bowls. For use on hand-held portable routers. Bits feature a non-marring Delrin® bearing to protect your surfaces.

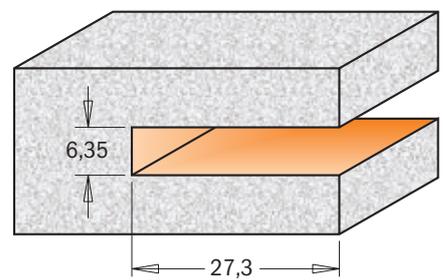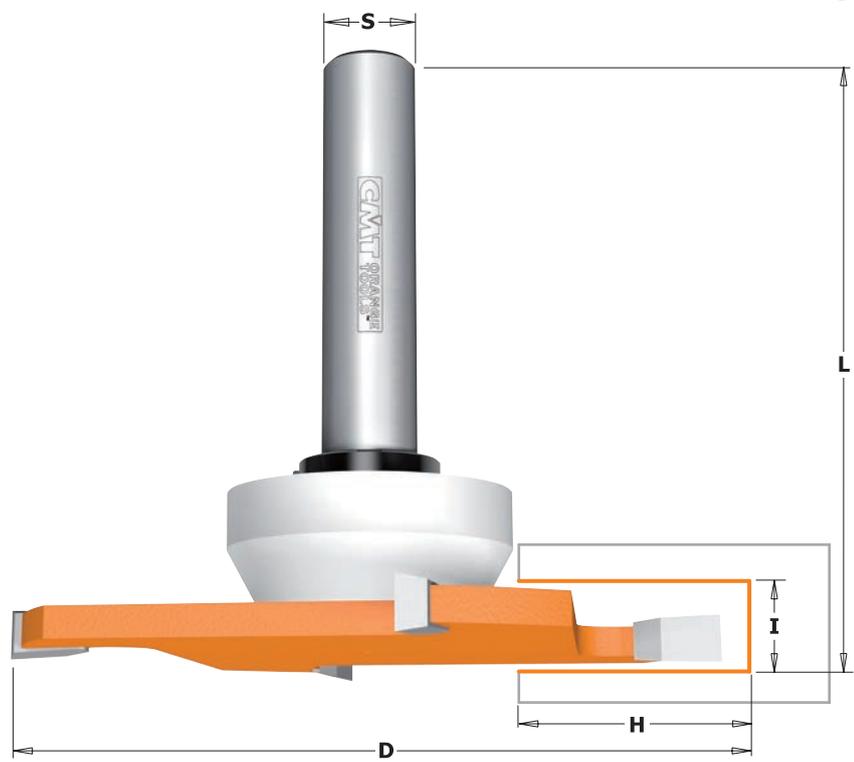

Drawing is 1:1 scale

| D mm | I mm | H mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|---------|---------|----------------------|------------------------|
| 92 | 6,35 | 27,3 | 82,5 | 922.033.11B | 822.033.11B |

Spare parts




541.553.00 791.047.00 541.002.00 991.056.00

Solid surface no-drip bit




8/981.501

This bit is designed to create "no-drip" edges on kitchen and vanity counter tops. Designed for hand-held portable routers on applications where a guide bearing can not be used. This one bit will cut both the outer and inner profiles creating a slightly raised edge, controlling spilled liquids.

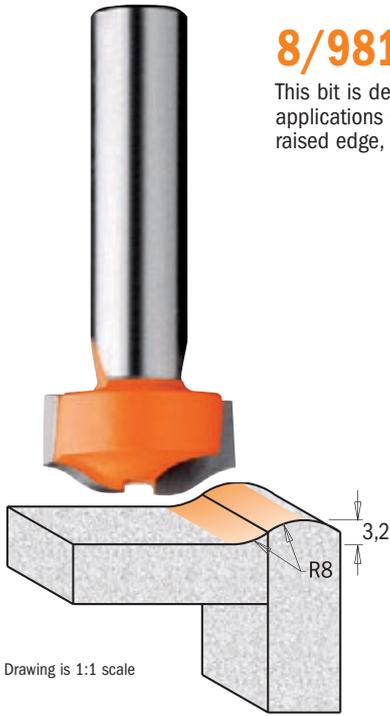


Drawing is 1:1 scale

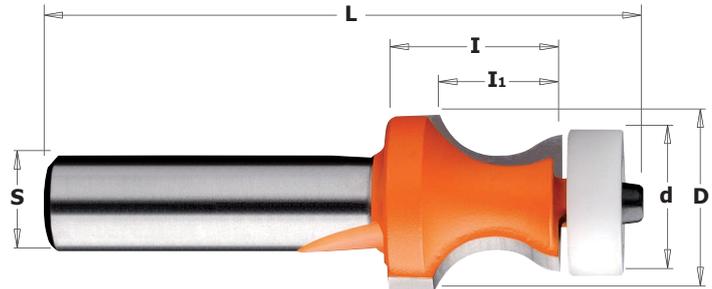

8/980.531

This bit is designed to create "no-drip" edges on kitchen and vanity counter tops in a single pass. For use on hand-held portable routers. This one bit will cut both the outer and inner profiles creating a slightly raised edge that controls spilled liquids. Features a non-marring Delrin® bearing to protect the finished edges.

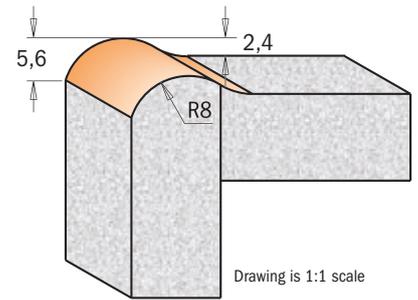



Drawing is 1:1 scale

| D | d | I | I ₁ | R | L | ORDER NO. | ORDER NO. | Spare parts | | |
|------|----|------|----------------|----|------|-------------------|-------------------|-------------|------------|------------|
| mm | mm | mm | mm | mm | mm | S=∅12mm | S=∅12,7mm | | | |
| 25,4 | | 12,7 | 3,2 | 8 | 63,5 | 981.501.11 | 881.501.11 | | | |
| 25,4 | 19 | 22,2 | 15,87 | 8 | 77 | 980.531.11 | 880.531.11 | 791.046.00 | 990.058.00 | 991.057.00 |


Solid surface wavy joint bit

8/981.531

These bits are ideal for making strong joints on any solid surface, thanks to a wider area for glue.

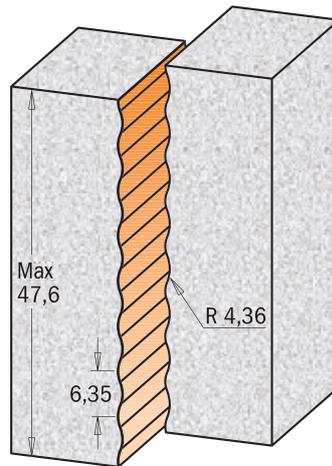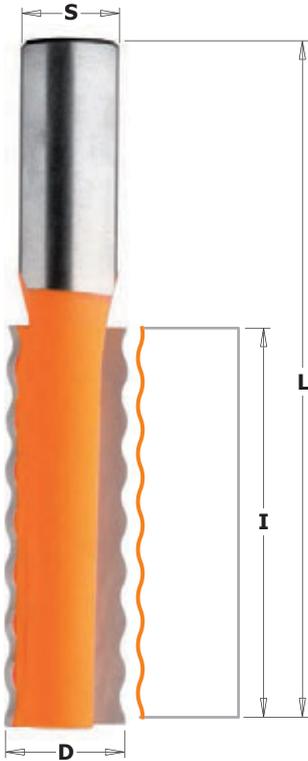


Drawings are 1:1 scale

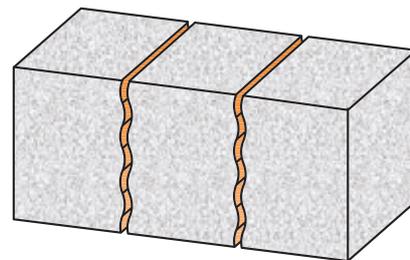



| D | I | R | L | ORDER NO. | ORDER NO. |
|-------|------|------|----|-------------------|-------------------|
| mm | mm | mm | mm | S=∅12mm | S=∅12,7mm |
| 15,87 | 51,5 | 4,36 | 89 | 981.531.11 | 881.531.11 |

Solid surface drainboard bits

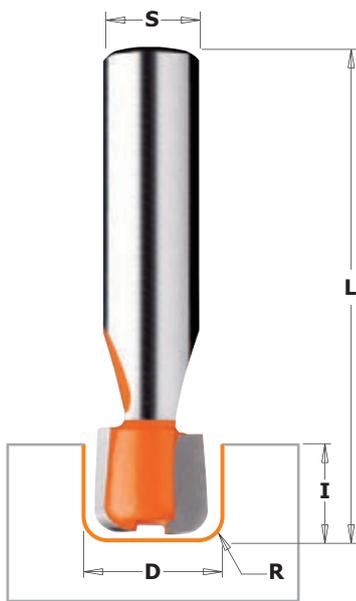

8/981.511-512


This bit is ideal for creating custom Drainboard patterns in solid surface countertops. For use on hand-held portable routers.

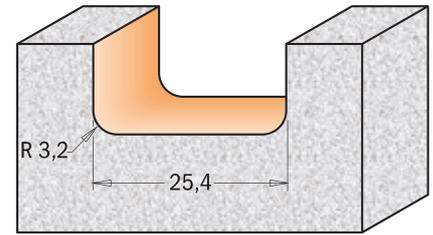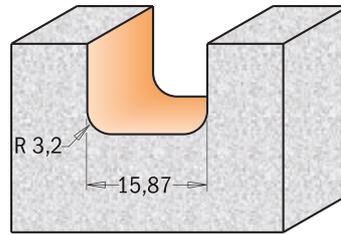

Drawings are 1:1 scale


| D mm | I mm | R mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---------|---------|---------|---------|----------------------|------------------------|
| 15,87 | 12,7 | 3,2 | 63,5 | 981.511.11 | 881.511.11 |
| 25,4 | 12,7 | 3,2 | 69,8 | 981.512.11 | 881.512.11 |

Solid surface - inlay bits

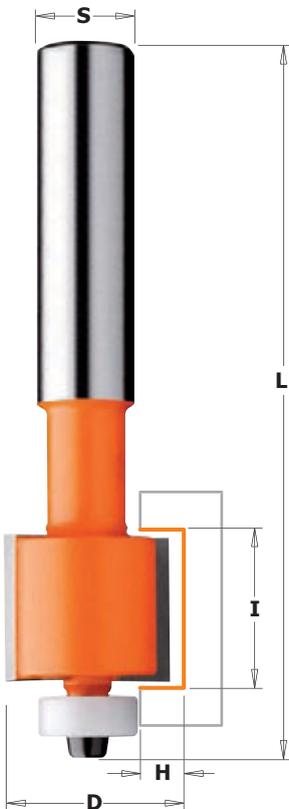


8/980.511-512-513

Add a decorative wood, plastic or metal inlay to solid surface countertops. Equipped with a non-marring Delrin® bearing to protect the finished edges. For use on hand-held portable routers.

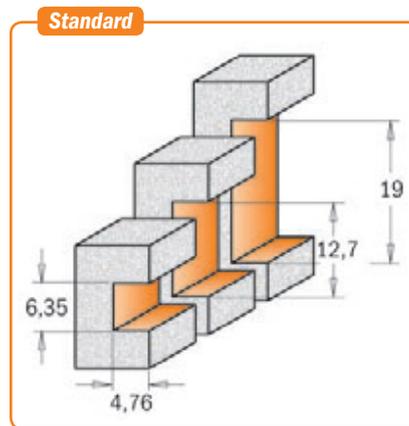

Drawings are 1:1 scale

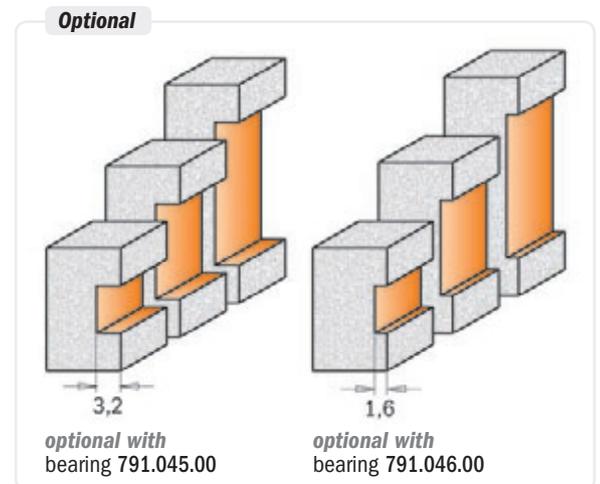

| D mm | I mm | H mm | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | |
|---------|---------|---------|---------|----------------------|------------------------|-------------|------------|------------|
| 22,2 | 6,35 | 4,76 | 77 | 980.511.11 | 880.511.11 | | | |
| 22,2 | 12,7 | 4,76 | 90 | 980.512.11 | 880.512.11 | 791.044.00 | 990.058.00 | 991.057.00 |
| 22,2 | 19,05 | 4,76 | 90 | 980.513.11 | 880.513.11 | 791.044.00 | 990.058.00 | 991.057.00 |



Router bit sets



7/900.003



Find a whole workshop in practical 26 piece router bit sets! With a wide selection of the most demanded tools, these sets include straight bits, flush trim bits, dovetail bits, cove bits, ogee bits and many more. You will have an endless choice to express your creativity! Ideal for master craftsmen, these sets are available from 6 to 8mm shank diametres. See chart below for details.

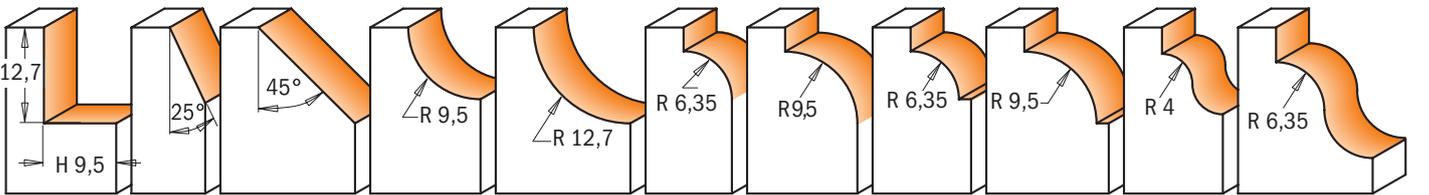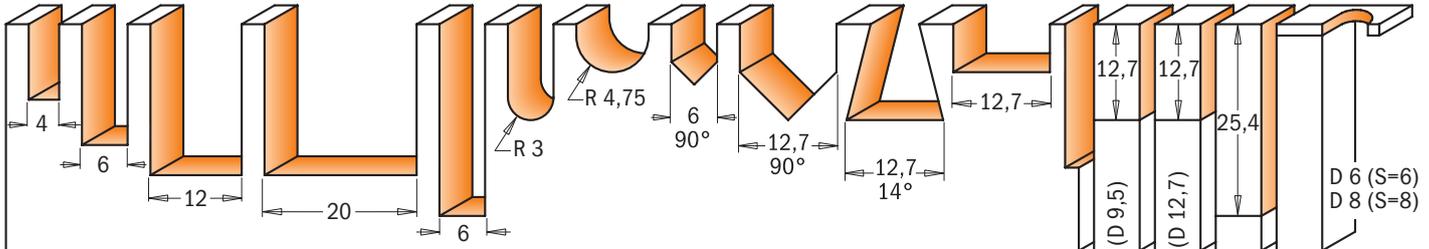

Drawings are 1:1 scale



| DESCRIPTION | ORDER NO. | ORDER NO. |
|--------------------------|-------------------|-------------------|
| | S=Ø6mm | S=Ø8mm |
| 26 piece router bit sets | 700.003.00 | 900.003.00 |



7/8/900.001



CMT's beautiful sets are the perfect companions for the professional craftsman. These sets offer a selection of organized and ready-to-use straight and profile bits; added value for any woodworker! Each bit is made of Fatigue Proof® steel, micrograin carbide and is coated with orange non-stick PTFE. The bits can be safely stored in their hardwood snap lock cases.

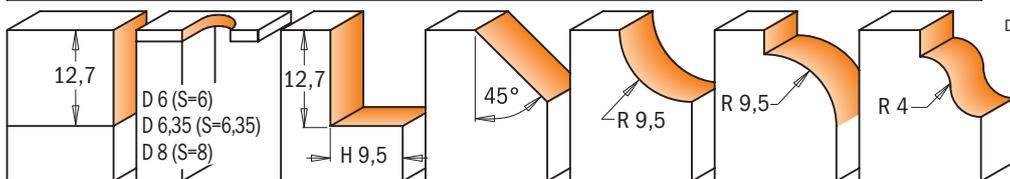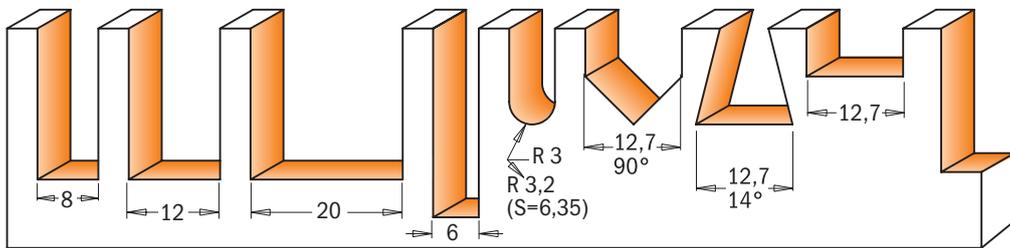

Drawings are 1:1 scale

| DESCRIPTION | ORDER NO. | ORDER NO. | ORDER NO. |
|--------------------------|-------------------|-------------------|-------------------|
| | S=Ø6mm | S=Ø6,35mm | S=Ø8mm |
| 15 piece router bit sets | 700.001.00 | 800.001.00 | 900.001.00 |

8 piece dovetail and straight bit sets

PATENT NR. 7,703,605 B2




800.500/501



Perfect for the craftsman with a creative flair, these CMT's sets contain the most frequently used bits for boxes, creative joinery and a wide range of other projects. Safely packaged in a hardwood box to have the bits within a hand's reach. The bits suit most popular jigs.

IDEAL FOR INCRA & JOINTECH JIGS.

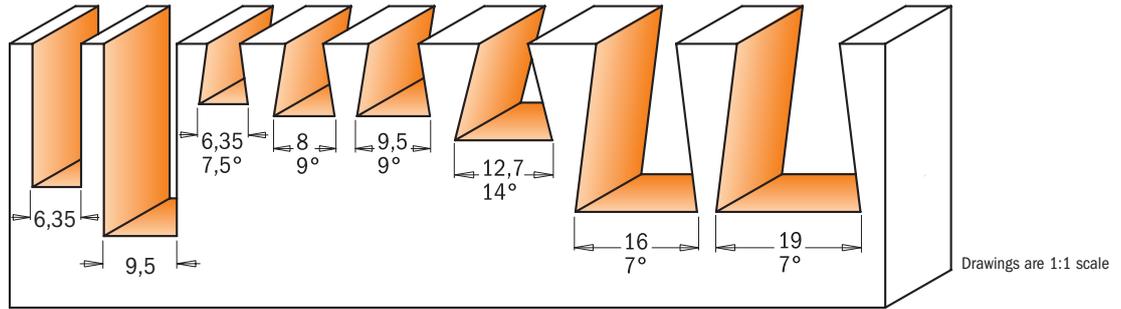

| DESCRIPTION | ORDER NO. S=Ø6,35mm | ORDER NO. S=Ø12,7mm |
|--|------------------------|------------------------|
| 8 piece dovetail and straight bit sets | 800.500.11 | 800.501.11 |

13 piece dovetail and straight bit sets

PATENT NR. 7,703,605 B2




800.519



Perfect for the craftsman with a creative flair, these CMT's sets contain the most frequently used bits for making boxes, creative joinery and a wide range of other projects. Safely packaged in a hardwood box to have the bits within a hand's reach. The bits suit most popular jigs.

IDEAL FOR D4 LEIGH JIGS.

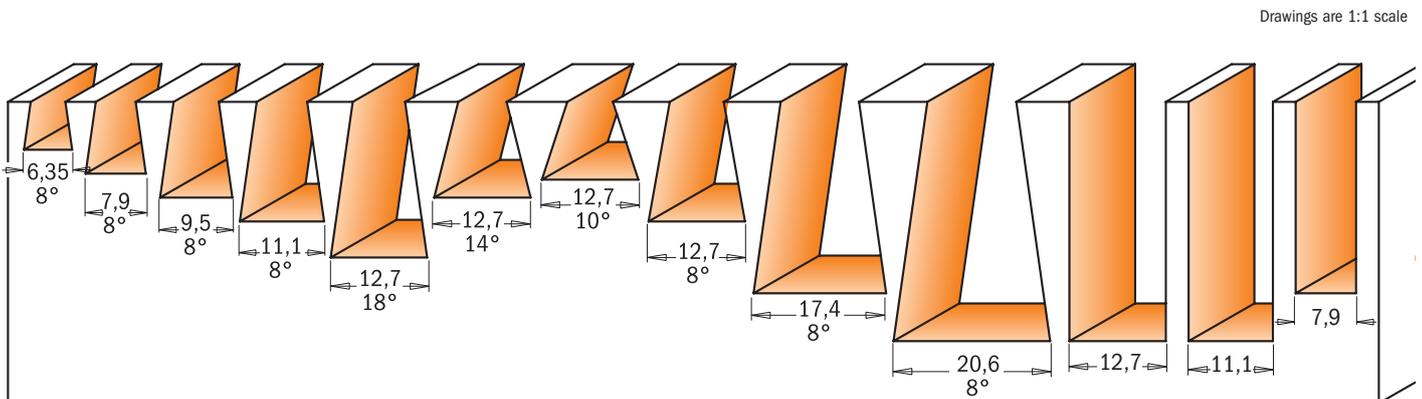

| DESCRIPTION | ORDER NO. S=Ø6,35-12,7mm |
|---|-----------------------------|
| 13 piece dovetail and straight bit sets | 800.519.11 |


12 piece router bit set with wooden case



800.503



Containing 12 of CMT's most frequently used 6,35mm shank router bits featuring the finest steel and carbide, plus CMT's baked-on orange PTFE non-stick coating, this compact Italian hardwood case is beautiful and convenient for your woodworking needs. You will have exactly what you need within hand's reach.

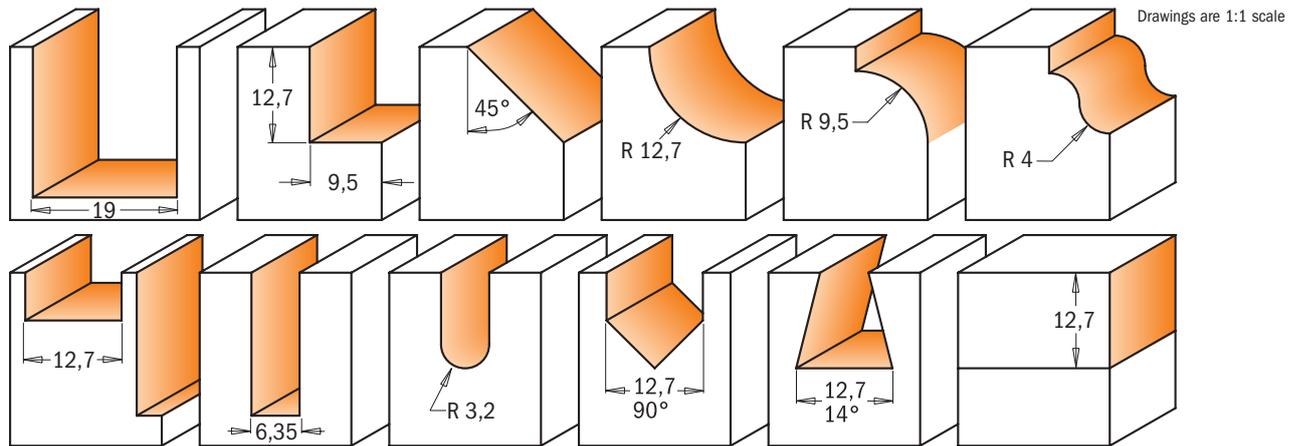

DESCRIPTION

12 piece router bit set with wooden case

ORDER NO.
S=Ø6,35mm
800.503.11


13 piece router bit set with wooden case



800.505



Containing 13 of CMT's most frequently used 12,7mm shank router bits featuring the finest steel and carbide, plus CMT's baked-on orange PTFE non-stick coating, this compact Italian hardwood case is beautiful and convenient for your woodworking needs. You will have exactly what you need within hand's reach.

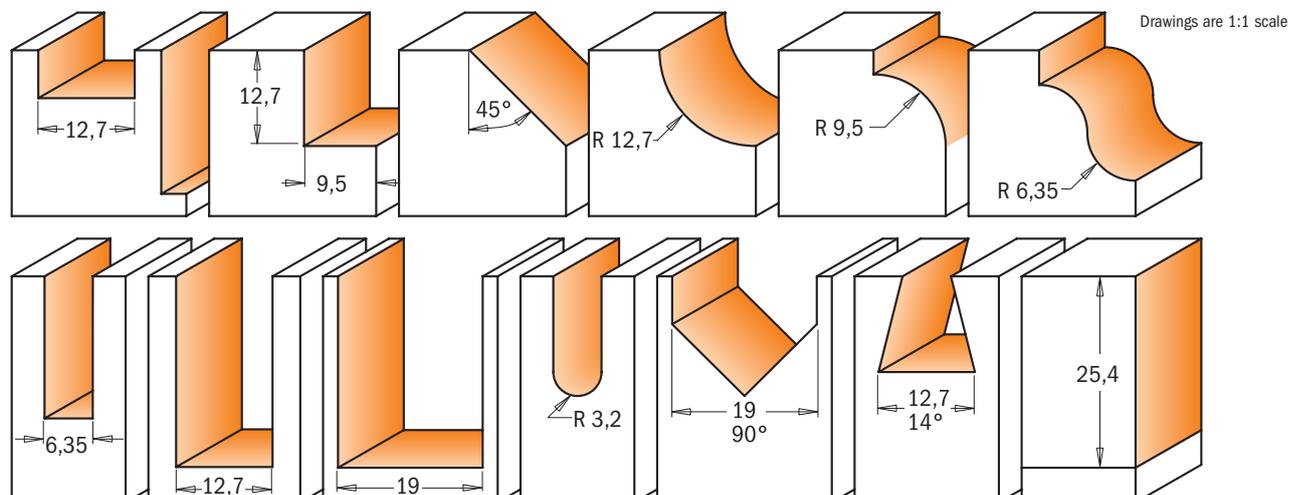

DESCRIPTION


13 piece router bit set with wooden case

ORDER NO.
S=Ø12,7mm
800.505.11

6 piece profile bit set with wooden case



800.504

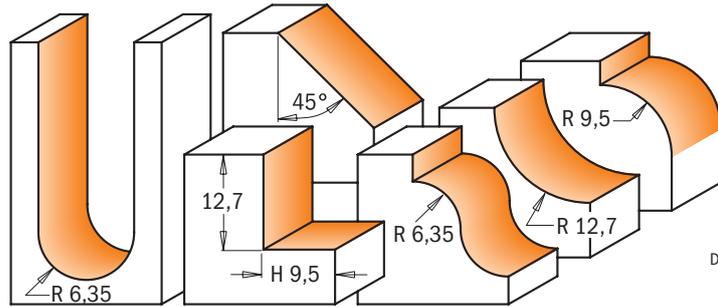

Drawings are 1:1 scale

Containing 6 of CMT's most frequently used 12,7mm shank router bits, this compact Italian hardwood case is beautiful and convenient for your woodworking needs. All the bits contained feature the finest steel and carbide, plus CMT's baked-on orange PTFE non-stick coating.

| DESCRIPTION | ORDER NO. |
|--|--------------------------------|
| 6 piece profile bit set with wooden case | S=Ø12,7mm 800.504.11 |

Entry & interior door router bit set




8/900.527




This CMT three-piece router bit set simplifies door construction, making it easy as 1, 2, 3! It is not the only advantage, in fact this is a multifunctional set for door and furniture makers, building entry or passage doors and any furniture tenons. The included tenon cutter produces a beefy 27mm long tenon. Coupled with the cope cutter, you can produce long and strong tenons with minimum setup. As an extra bonus the tenon cutter can be used for furniture making requiring any tenon from 4,7mm to 16mm thick.


Entry & interior door construction Easy as 1, 2, 3!

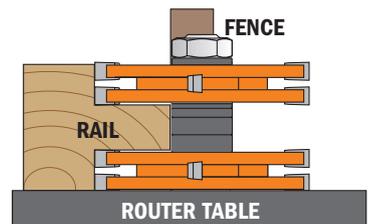


Step 1. Cut the tenon into the rails

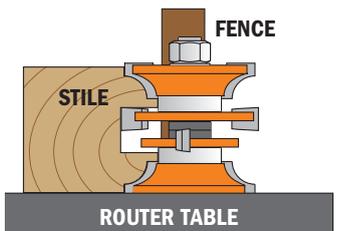

Step 2. Cut the groove and door profile in pieces.

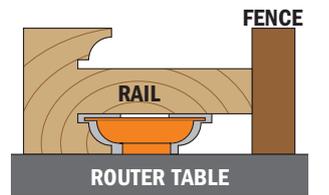

Step 3. Undercut the tenons to cope the ends of the rails.

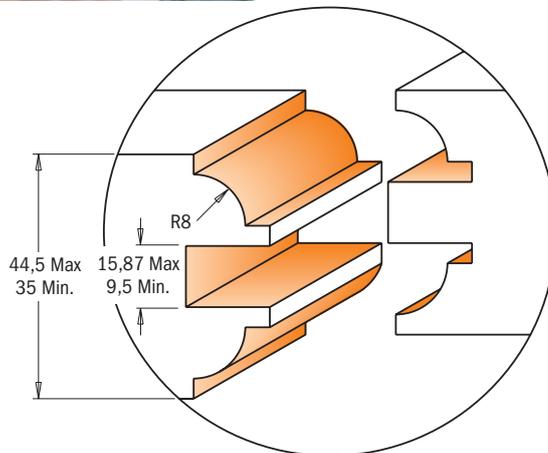


| DESCRIPTION | ORDER NO. | ORDER NO. |
|--|------------------------------|--------------------------------|
| 3 piece entry & interior door router bit set | S=Ø12mm 900.527.11 | S=Ø12,7mm 800.527.11 |

2-piece entry door router bit set

new


CMT ORANGE TOOLS™

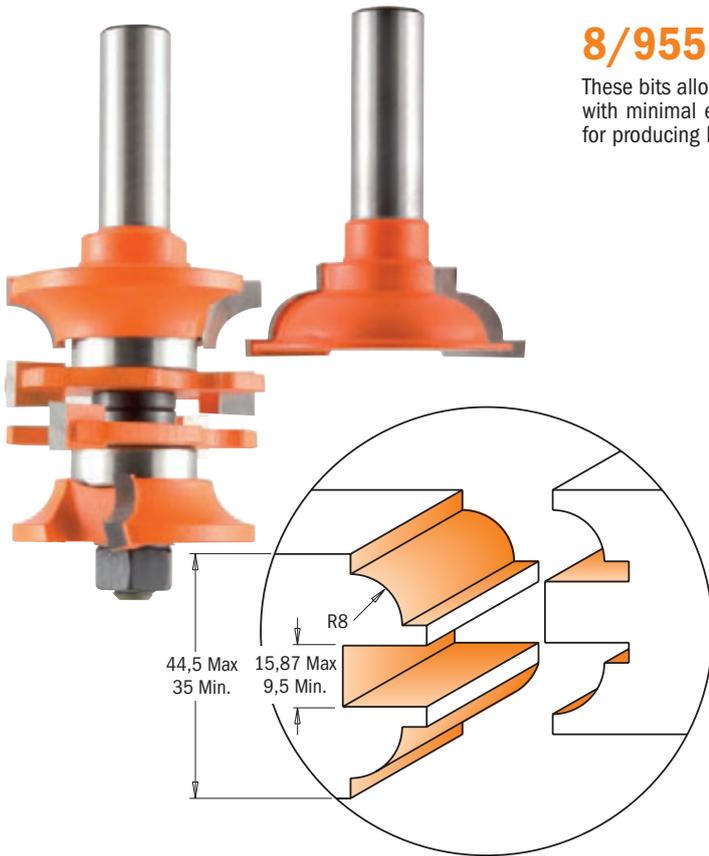

8/955.806



These bits allow you to create tongue-and-groove joints and produce entry and passage doors with minimal effort. The bit on the left, when used in pair with the bit 800.628.11, is great for producing long and beefy tenons, whereas the other tool makes the decorating profile.

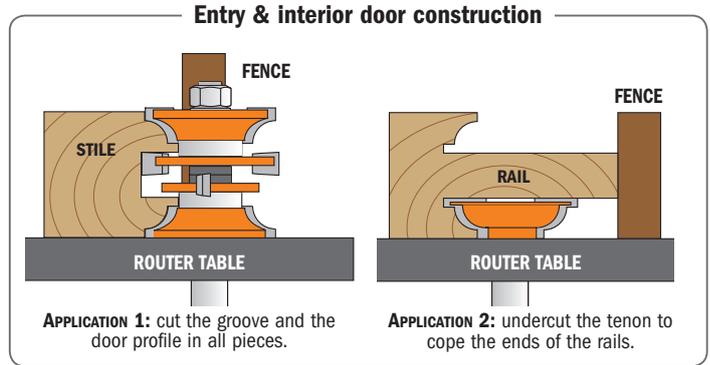

| D mm | I mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | | | | |
|---------|---------|----------------------|------------------------|-------------|-------------|-------------|------------|------------|------------|------------|------------|
| 44,5-48 | 35-44,5 | 955.806.11 | 855.806.11 | 8-22mm | up | down | | 0,1mm | 0,3mm | 3mm | |
| | | | | 791.005.00 | 822.021.11A | 822.021.11B | 822.022.11 | 541.515.00 | 541.516.00 | 541.500.00 | 990.020.00 |


Tenon cutting router bits



If you've struggled cutting fitting tenons, here's the perfect solution for you. CMT's tenon cutting router bit will produce perfectly fitting tenons in every board you cut, even if the boards vary slightly in thickness. Simply set the distance between the cutters using the included spacers, and you can easily cut tenons from 4,76mm (3/16") to 9,5mm (3/8") thick, up to 27mm (1-1/16") long. This simple-to-use router bit takes the mystery out of achieving the excellent tenon-to-mortise fit required for high quality joinery.

8-900.627

| T ₁ | Spacers (mm) | | |
|----------------|--------------|-------|-------|
| | 6,35mm | 3,2mm | 1,6mm |
| 4,76mm | 1 | 0 | 0 |
| 6,35mm | 1 | 0 | 1 |
| 8mm | 1 | 1 | 0 |
| 9,5mm | 1 | 1 | 1 |

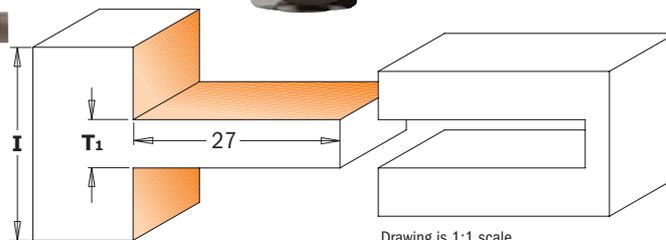

Maximum speed
MAX RPM 12.000

| D mm | I mm | T ₁ mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | | | | |
|---------|---------|----------------------|----------------------|------------------------|-------------|------------|------------|------------|------------|------------|------------|------------|
| 75 | 34,9 | 4,76-9,5 | 900.627.11 | 800.627.11 | | | 0,1mm | 0,3mm | 1,6mm | 3,2mm | 6,2mm | |
| 75 | 34,9 | 4,76-9,5 | | | 924.134.00 | 822.020.11 | 541.513.00 | 541.520.00 | 541.521.00 | 541.522.00 | 541.523.00 | 990.022.00 |
| 75 | 34,9 | 4,76-9,5 | | | 824.134.00 | 822.020.11 | 541.513.00 | 541.520.00 | 541.521.00 | 541.522.00 | 541.523.00 | 990.022.00 |
| 75 | 44,5 | 9,5-15,8 | 900.628.11 | 800.628.11 | 924.135.00 | 822.020.11 | 541.513.00 | 541.520.00 | 541.521.00 | 541.522.00 | 541.523.00 | 990.022.00 |
| 75 | 44,5 | 9,5-15,8 | | | 824.135.00 | 822.020.11 | 541.513.00 | 541.520.00 | 541.521.00 | 541.522.00 | 541.523.00 | 990.022.00 |

Slot cutter sets



8/923.001

Create slots, grooves and rabbets on all materials using the CMT slot cutter sets. Ideal for biscuit and tongue and groove joints. **These sets include 4 different bearings to allow a cutting depth of 7,95mm, 9,5mm, 12,8mm and 14,3mm.** Please refer to the chart below for applications and the correct cutter combinations.

Safety tips: never use the slot cutter sets without shims between cutters, whose distance can vary from 1mm to 1,7mm. Shims can also be positioned between the ball bearings and the cutters.



Assembly illustration

| Part No. | Shims | Cutting Depth (S) |
|------------|-------|-------------------|
| 924.081.10 | 0 | 8mm |
| 924.082.10 | 1 | 8mm |
| 924.080.10 | 2 | 8mm |
| 924.083.10 | 3 | 8mm |
| 824.121.10 | 0 | 12,7mm |
| 824.122.10 | 1 | 12,7mm |
| 824.127.10 | 2 | 12,7mm |
| 824.128.10 | 3 | 12,7mm |

| Spare parts | | |
|-------------|----------|------------|
| H mm | Part No. | ORDER NO. |
| 14,3 | 8-19 | 791.033.00 |
| 12,7 | 8-22 | 791.005.00 |
| 9,5 | 8-28,5 | 791.030.00 |
| 8 | 8-31,5 | 791.033.00 |

| DESCRIPTION | ORDER NO. | Spare parts | | | | | | | | | |
|-------------|-------------------|-------------|------------|------------|------------|------------|------------|------------|------------|------------|--|
| | S=Ø8mm | 2mm | 3mm | 4mm | 5mm | 6mm | | | | | |
| Set | 923.001.11 | 822.320.11 | 823.330.11 | 823.340.11 | 823.350.11 | 822.360.11 | 924.081.10 | 924.082.10 | 924.080.10 | 924.083.10 | |


| DESCRIPTION | ORDER NO. | Spare parts | | | | | | | | | |
|-------------|-------------------|-------------|------------|------------|------------|------------|------------|------------|------------|------------|--|
| | S=Ø12,7mm | 1,6mm | 3,2mm | 4mm | 4,8mm | 6,4mm | | | | | |
| Set | 823.001.11 | 822.316.11 | 823.332.11 | 823.340.11 | 823.348.11 | 822.364.11 | 824.121.10 | 824.122.10 | 824.127.10 | 824.128.10 | |

5 piece straight bit set and profile bit set

Our beautiful sets are the perfect companion for the professional craftsman. We offer three 5 piece sets with a selection of straight bits and the most popular profile router bits. These tools feature Fatigue Proof® steel, micrograin carbide and orange PTFE non-stick coating. Safely stored in a solid plastic box to fit in your display cabinet.




8/900.005.01

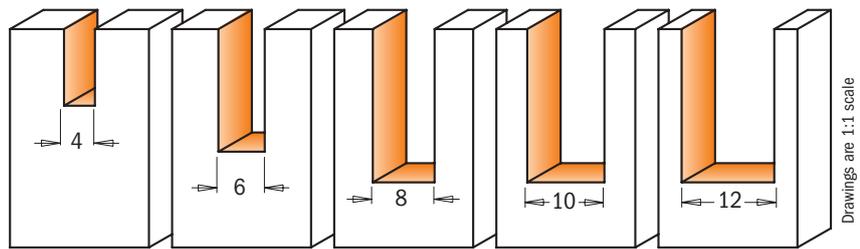

| DESCRIPTION | ORDER NO. | ORDER NO. |
|--------------------------|-------------------|-------------------|
| | S=Ø6,35mm | S=Ø8mm |
| 5 piece straight bit set | 800.005.01 | 900.005.01 |

7/900.005.03

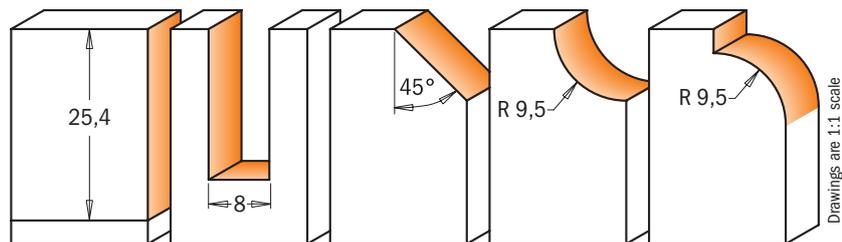

| DESCRIPTION | ORDER NO. | ORDER NO. |
|-------------------------|-------------------|-------------------|
| | S=Ø6mm | S=Ø8mm |
| 5 piece profile bit set | 700.005.03 | 900.005.03 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts


Router bit set with insert knives



600.005.01



This set is the perfect companion for the professional craftsman. We offer the 5 most popular bits with knives and all necessary spare knives and Torx keys. They are perfect for working on all materials such as solid wood, wood composites, plastic and laminated materials. For use with a hand held or CNC router.

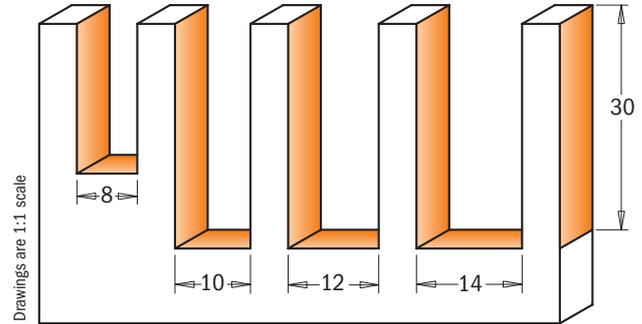

| DESCRIPTION | ORDER NO. |
|-----------------------------------|-----------------------------|
| Router bit set with insert knives | S=Ø8mm 600.005.01 |

10 spare knives and 2 torx keys included


| Set contains | D mm | I mm | Spare knives | ORDER NO. S=Ø8mm |
|--------------------------------|------|------|-------------------------------|-----------------------|
| Straight router bit with knife | 8 | 20 | 790.200.01 - 20 x 4,1 x 1,1mm | 651.080.11 |
| Straight router bit with knife | 10 | 30 | 790.300.01 - 30 x 5,5 x 1,1mm | 651.100.11 |
| Straight router bit with knife | 12 | 30 | 790.300.01 - 30 x 5,5 x 1,1mm | 651.120.11 |
| Straight router bit with knife | 14 | 30 | 790.300.01 - 30 x 5,5 x 1,1mm | 651.140.11 |
| Flush trim bit with knife | 19 | 30 | 790.300.00 - 30 x 12 x 1,5mm | 791.007.00 657.191.11 |

5 piece spiral bit sets



191
Upcut



192
Downcut

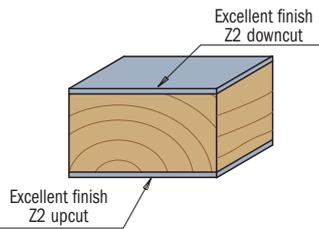

191/192



CMT is proud to offer you these new sets of high quality solid tungsten carbide upcut and downcut spiral bits in the most popular diameters. The new formulated super micrograin composition guarantees extremely sharp long-lasting cutting edges, whereas the spiral layout allows for a more efficient chip ejection. In addition these bits stay cooler during work and are suitable for CMT's new precision machines. Recommended for use on soft and hardwood, plywood, laminates, MDF and plastic materials. To be used on handheld routers and CNC machines.

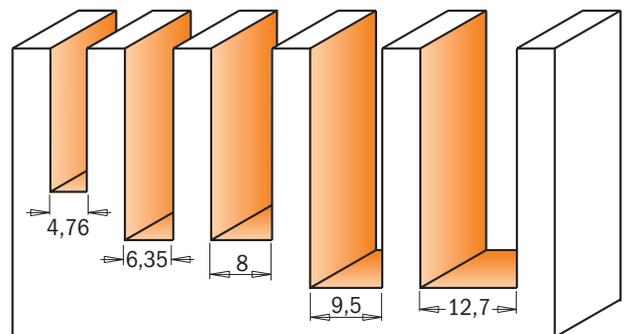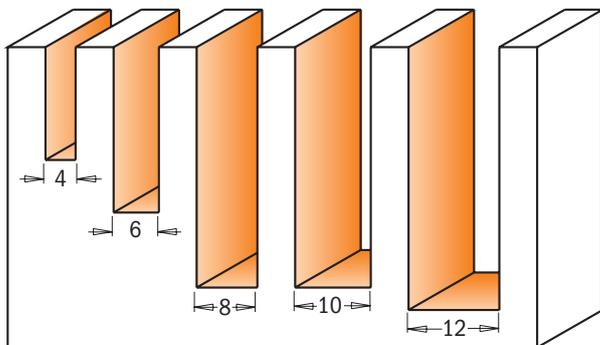

Drawings are 1:1 scale

| DESCRIPTION | ORDER NO. S=Ø8mm | ORDER NO. S=Ø6,35-12,7mm |
|---|-------------------|--------------------------|
| 5 piece upcut spiral bit sets (Ø4 - 6 - 8 - 10 - 12mm) | 191.000.01 | |
| 5 piece downcut spiral bit sets (Ø4 - 6 - 8 - 10 - 12mm) | 192.000.01 | |
| 5 piece upcut spiral bit sets (Ø4,76 - 6,35 - 8 - 9,5 - 12,7mm) | | 191.000.02 |
| 5 piece downcut spiral bit sets (Ø4,76 - 6,35 - 8 - 9,5 - 12,7mm) | | 192.000.02 |




These CMT's sets aren't only a random selection of odds and ends packaged in a nice elegant box, but they are also professional kits for drawer and door makers. 3 sets to choose from, 5 different bits to suit your needs: a raised panel bit, rail and stile bits, a glue joint and a drawer lock bit. Please refer to the illustrations below for complete profile options.


Drawings are 1:1 scale




8/900.509.11

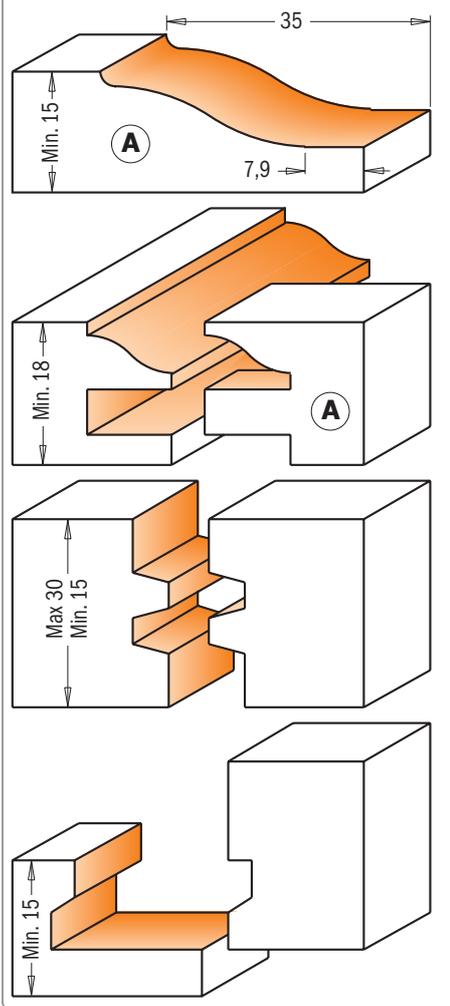

8/900.510.11

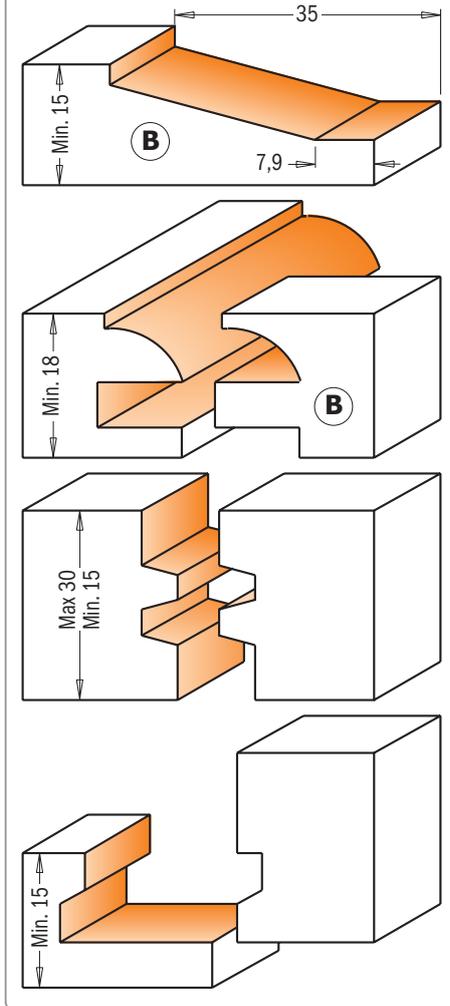

8/900.511.11

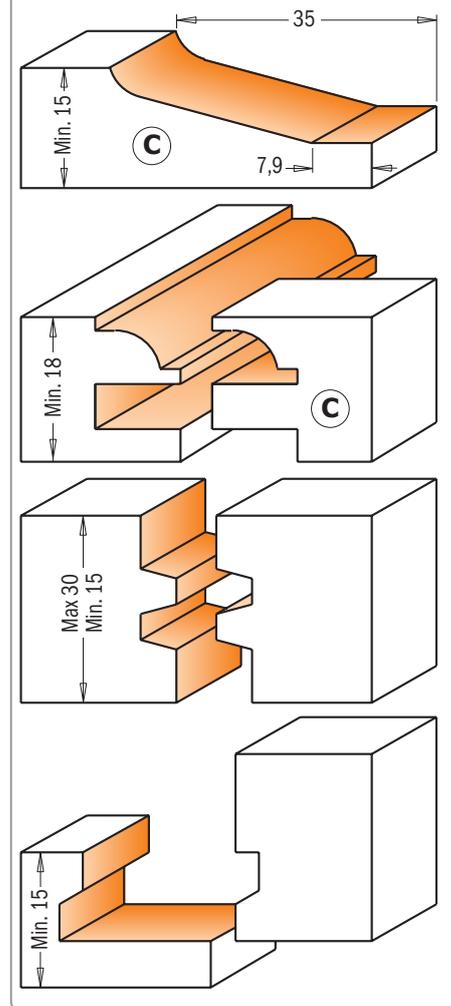

DESCRIPTION

CMT's complete kitchen set - Profile A (5 HW pcs.)
 CMT's complete kitchen set - Profile B (5 HW pcs.)
 CMT's complete kitchen set - Profile C (5 HW pcs.)

ORDER NO.
S=Ø12mm

900.509.11
900.510.11
900.511.11

ORDER NO.
S=Ø12,7mm


800.509.11
800.510.11
800.511.11

Panalign strips

Beautiful panel doors can be ruined by a poorly-aligned panel. Next time, slip panalign strips into the rails to keep panels perfectly centred while allowing for expansion. Unlike carpet foam, which eventually loses elasticity and ceases to work, the rubber in panalign strips is specially designed to spring back indefinitely. The rectangular shape makes the strips easy to handle. Typical doors require 4 to 8 strips each.



PNL

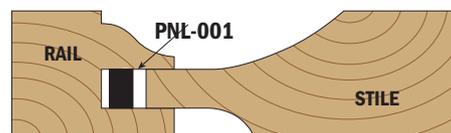

DESCRIPTION

Panalign strips Q.ty 200

ORDER NO.


PNL-001



PATENT NR. 7,703,605 B2

Open new doors with CMT! Our 3 piece kitchen sets include a couple of rail and style bits and a raised panel bit. Choose among 4 possible profiles to make panel doors easy and economical. Each bit is made from bar stock steel and the highest quality tungsten carbide, along with the trademark orange non-stick PTFE coating. Also, they all come with their protective hardwood case: a very nice object to keep your bits safe, organized and within hand's reach.

Drawings are 1:1 scale

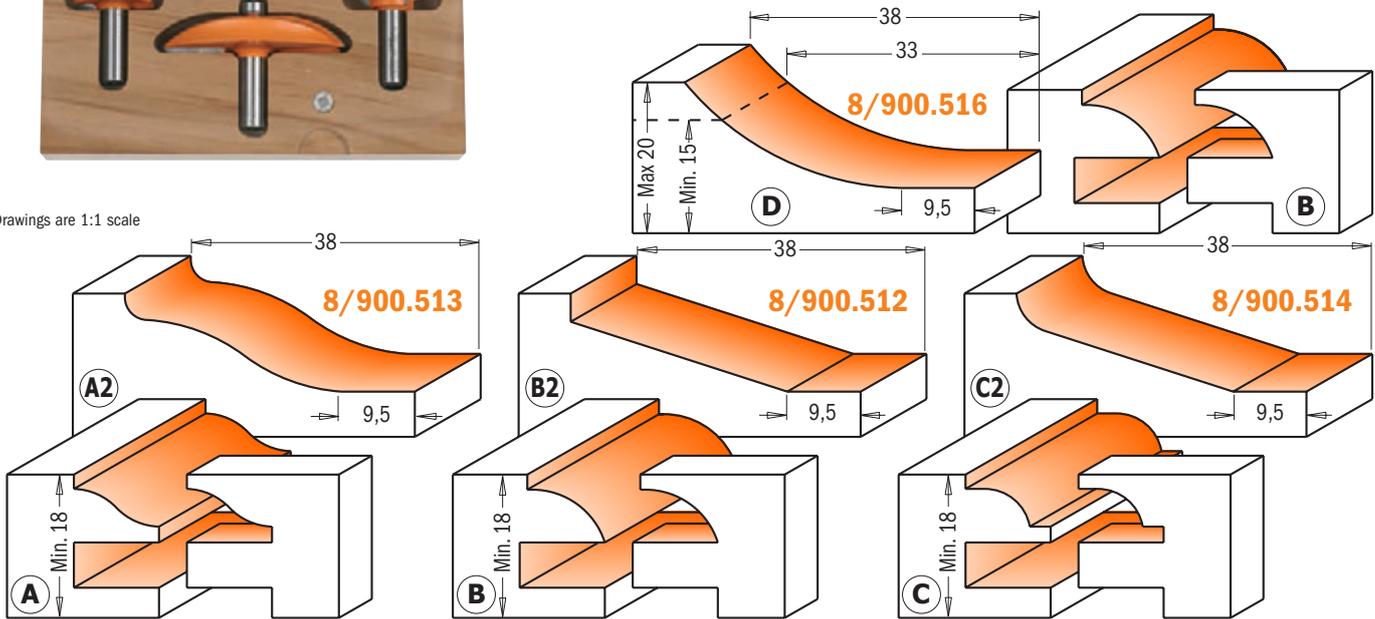


| DESCRIPTION | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|--|----------------------|------------------------|
| Kitchen set - Profile A+A ₂ | 900.513.11 | 800.513.11 |
| Kitchen set - Profile B+B ₂ | 900.512.11 | 800.512.11 |
| Kitchen set - Profile C+C ₂ | 900.514.11 | 800.514.11 |
| Kitchen set - Profile D+B | 900.516.11 | 800.516.11 |

The raised panel sets with backcutter




PATENT NR. 7,703,605 B2

8/900.518 - 8/900.522

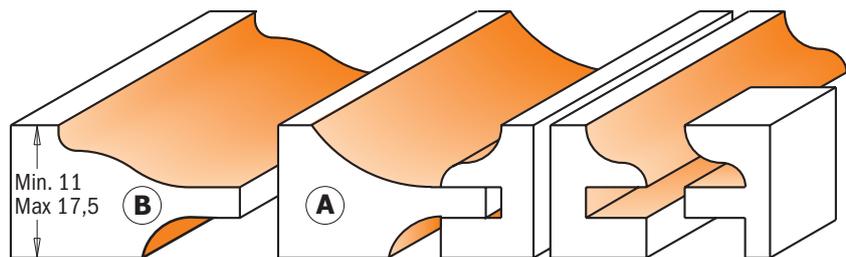

8/900.517 - 8/900.521

Drawings are 1:1 scale

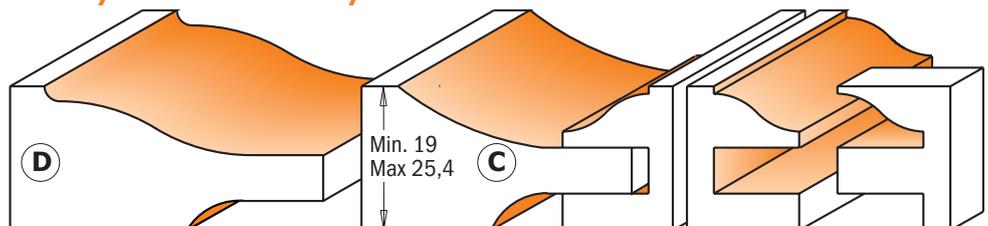

CMT's junior raised panel sets add intricate detail on a whole new scale! You will make frame and panel details as small as 70mm square in material as thin as 11mm. Delicate panel doors are only the beginning - use these bits with templates to add interesting arches to your work. The sets include a choice of a cove or an ogee raised panel bit and an ogee rail & stile pair. Packaged in beautiful hardwood cases.

| DESCRIPTION | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|---|----------------------|------------------------|
| The junior raised panel sets - Profile A (3 HW pcs.) Ø63,5mm. | 900.518.11 | 800.518.11 |
| The junior raised panel sets - Profile B (3 HW pcs.) Ø63,5mm. | 900.522.11 | 800.522.11 |
| The raised panel sets - Profile C (3 HW pcs.) Ø89mm. | 900.517.11 | 800.517.11 |
| The raised panel sets - Profile D (3 HW pcs.) Ø89mm. | 900.521.11 | 800.521.11 |

The cabinetmaking sets



800.515 - 800.520



Available with raised panel bits in two different profiles, these sets feature six router bits for making arched raised panel doors and professional drawer fronts. These sets include:


OGEE RAIL & STILE BITS: these two perfectly matched tools will eliminate the frustration of setting up reversible cutters. The stile bits also feature shear angles for neater cuts.

RAISED PANEL BIT WITH BACKCUTTER: this 88,9mm diameter bit features a backcutter for milling both the front and the back on the panel in a single cut. We recommend using a 31mm diameter bearing to work safely in two shallow passes.

SUPER-DUTY FLUSH TRIM BIT: this 19mm diameter bit gives you a superior cut with minimal chipping, even on end grain.

OGEE DOOR EDGE BIT: a subtle cove followed by a subtle roundover adds an elegant touch to your door edge.

DRAWER FRONT BIT: this bit makes a mini-raised panel cut on the outside edges of your drawer fronts.

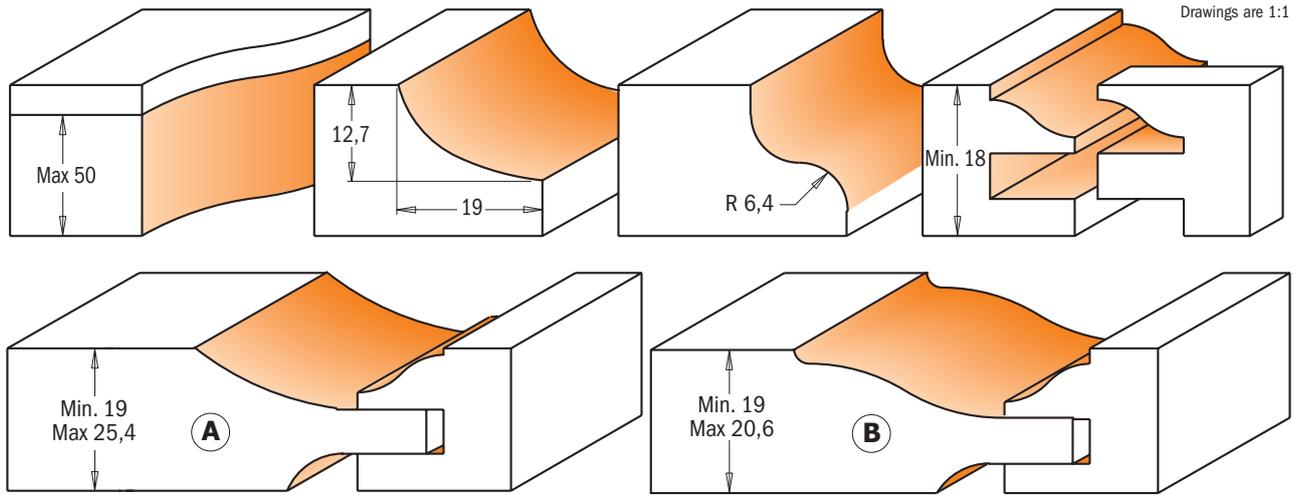

| DESCRIPTION | ORDER NO. |
|--|--------------------------------|
| The cabinetmaking sets - Profile A (6 HW pcs.) | S=Ø12,7mm 800.515.11 |
| The cabinetmaking sets - Profile B (6 HW pcs.) | 800.520.11 |

Small arch door sets




800.524 - 900.024



These 3 piece sets will produce beautiful raised panel doors with a classic bevelled profile. Designed for use in fine furniture making, these sets include two matched cope and stick bits to produce frames from 15,87mm to 19mm in thickness. The stick bit shapes a decorative 4,76mm thumbnail moulding along the edge of the frame.


The panel bit is designed for 12,7mm thick material. All bits are equipped with guide bearings for shaping curved work such as the small arched panel doors seen on secretaries and corner cabinetry. These sets also produce panels for small chests, lids for small boxes, or drawer fronts. Instructions included.

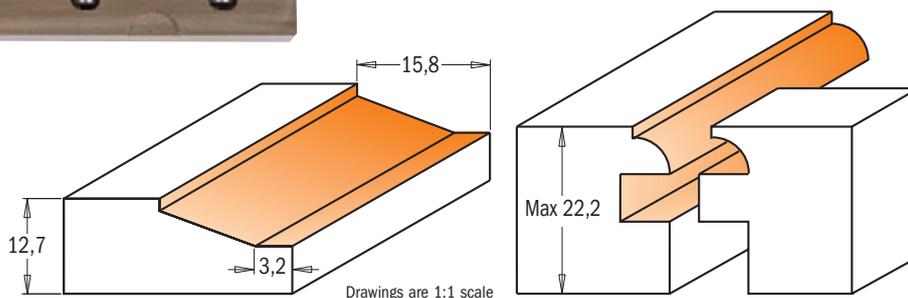

| DESCRIPTION | ORDER NO. | ORDER NO. |
|----------------------------------|-----------------------------|--------------------------------|
| Small arch door sets (3 HW pcs.) | S=Ø8mm 900.024.11 | S=Ø12,7mm 800.524.11 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts


Divided light door sets

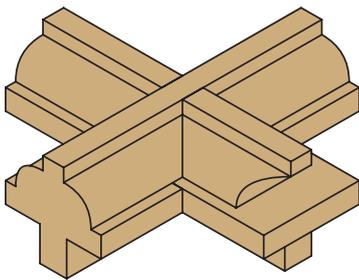

800.525 - 900.025



Build authentic divided light doors for fine furniture and cabinets with these 3 piece sets. They include a stuck bit to cut the decorative ovolo profile on the frame edges, a cope to shape the mating profile on the ends of the stock, and a rabbeting bit to cut the recess for the glass. Thanks to the guide bearings, you can also create arched on curved frames. The unique design of the cope bit allows you to use full-length tenons to create strong, authentic mortise-and-tenon joinery. As the stock is coped, the tenon passes over the bit. These sets are designed for 22,2mm wide bars such as those on corner cupboard door. Available in 8mm and 12,7mm shanks. Instructions included.

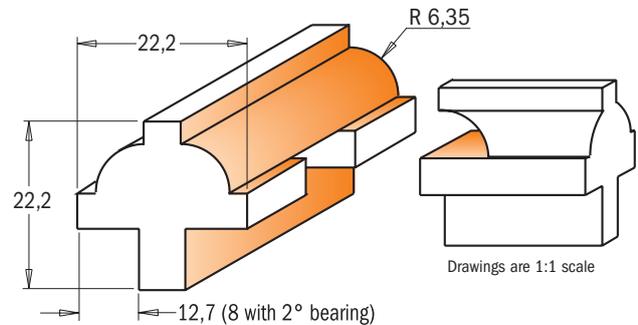


| DESCRIPTION | ORDER NO. S=Ø8mm | ORDER NO. S=Ø12,7mm |
|-------------------------|---------------------|------------------------|
| Divided light door sets | 900.025.11 | 800.525.11 |

Glass panel sets



8/955.803

CMT's unique stile and rail router bit sets allow you to produce glass panel doors by using a rubber panel retain to secure the glass in a 3,2mm slot cut into the frames. These bits work the same as other CMT's stile and rail sets, but they leave you with a square rabbet on the inside of your door for installing the glass panel. Available in 12mm and 12,7mm shanks.

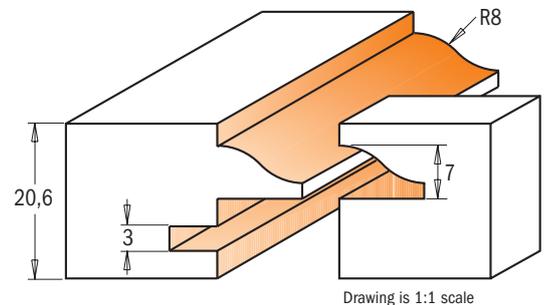

Glass panel retainers

new

HERE'S HOW IT WORKS:
Mill the cope and pattern cuts first, then use the slot cutter to cut the groove for the rubber panel retainer. The edge of the pattern cut will ride on the bearing of the slot cutter bit. When you cut the slot in the rails you can cut the slot the full length of the stock. When you cut the slot in the stiles you need to set up reference points to stop and start the cuts so they are hidden from view on the top and bottom of the doors.

Fresa
922.016.11B (S=12mm)
822.016.11B (S=12,7mm)

GLAS/RTBRN

Our unique retainer strips fit perfectly in the slots created by the slot cutter bit and hold your glass securely in the frame. Sold in 23 metre (25') lengths.

| DESCRIPTION | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm |
|------------------|----------------------|------------------------|
| Glass panel sets | 955.803.11 | 855.803.11 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Adjustable shaker router bit sets

new


CMT ORANGE TOOLS™



8/900.624



These new bit sets are excellent for producing adjustable tongue and groove joints with a bevel, in order to eliminate the panel rattle that may come up with the production of standards cabinets. Cut precise grooves into your plywood veneered panels and make perfect rattle-free fits. To be used on table-mounted routers. Avoid using these bits in hand-held power tools.

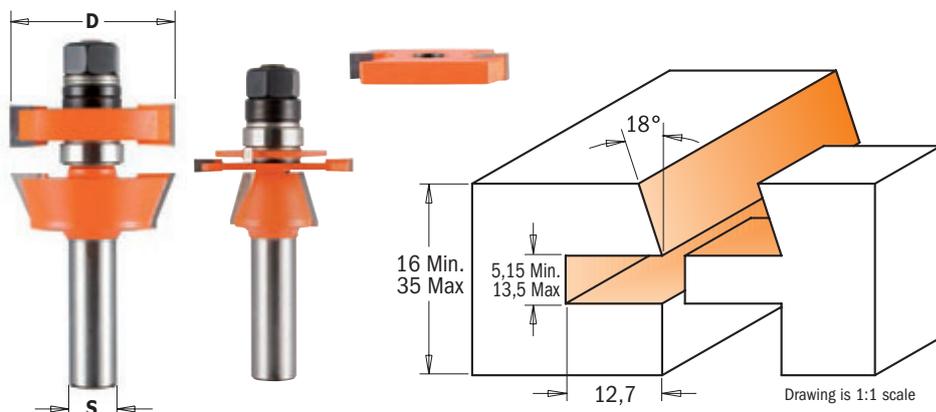

| D mm | T ₁ mm | A | L mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | | |
|---------|----------------------|-----|---------|----------------------|------------------------|-------------|--|--|--|--|--|
| 41,2 | 16 - 35 | 18° | 87 | 900.624.11 | 800.624.11 | | | | | | |
| | | | | 541.515.00 | 541.518.00 | | | | | | |
| | | | | 541.516.00 | 541.500.00 | | | | | | |
| | | | | 541.517.00 | 541.519.00 | | | | | | |

Spare parts
541.515.00 0,1mm spacer
541.516.00 0,3mm spacer
541.517.00 0,5mm spacer
541.518.00 1mm spacer
541.500.00 3mm spacer
541.519.00 5,8mm spacer

Adjustable tongue & groove bit set for mission style cabinet doors




8/900.625



Exclusive CMT design which allows the perfect fit for undersized plywood panel. The tongue cutter features opposing shear angles to obtain flawless finishing on a large variety of material such as plywood, softwood and hardwood.


For use on a table-mounted router, not for handheld routers.

- Adjustable at 0.050mm (0.002") increments;
- For groove width from 5mm (13/64") to 13,5mm (17/32");
- Cut stock thickness of 12,7mm (1/2") to 31,7mm (1-1/4");
- Features micrograin carbide for longer life.

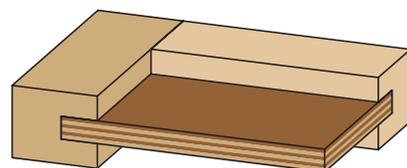

| D mm | T ₁ mm | ORDER NO. S=Ø12mm | ORDER NO. S=Ø12,7mm | Spare parts | | | | | | | |
|---------|----------------------|----------------------|------------------------|-------------|------------|------------|------------|------------|------------|------------|--|
| 41,2 | 5,15-13,5 | 900.625.11 | 800.625.11 | | | | | | | | |
| 41,2 | 5,15-13,5 | | | 924.136.00 | 791.012.00 | 822.025.11 | 822.026.11 | 822.027.11 | 822.028.11 | 990.020.00 | |
| | | | | 824.136.00 | 791.012.00 | 822.025.11 | 822.026.11 | 822.027.11 | 822.028.11 | 990.020.00 | |

Spare parts
541.515.00 0,1mm spacer
541.516.00 0,3mm spacer
541.517.00 0,5mm spacer
541.518.00 1mm spacer
541.500.00 3mm spacer
541.519.00 5,8mm spacer

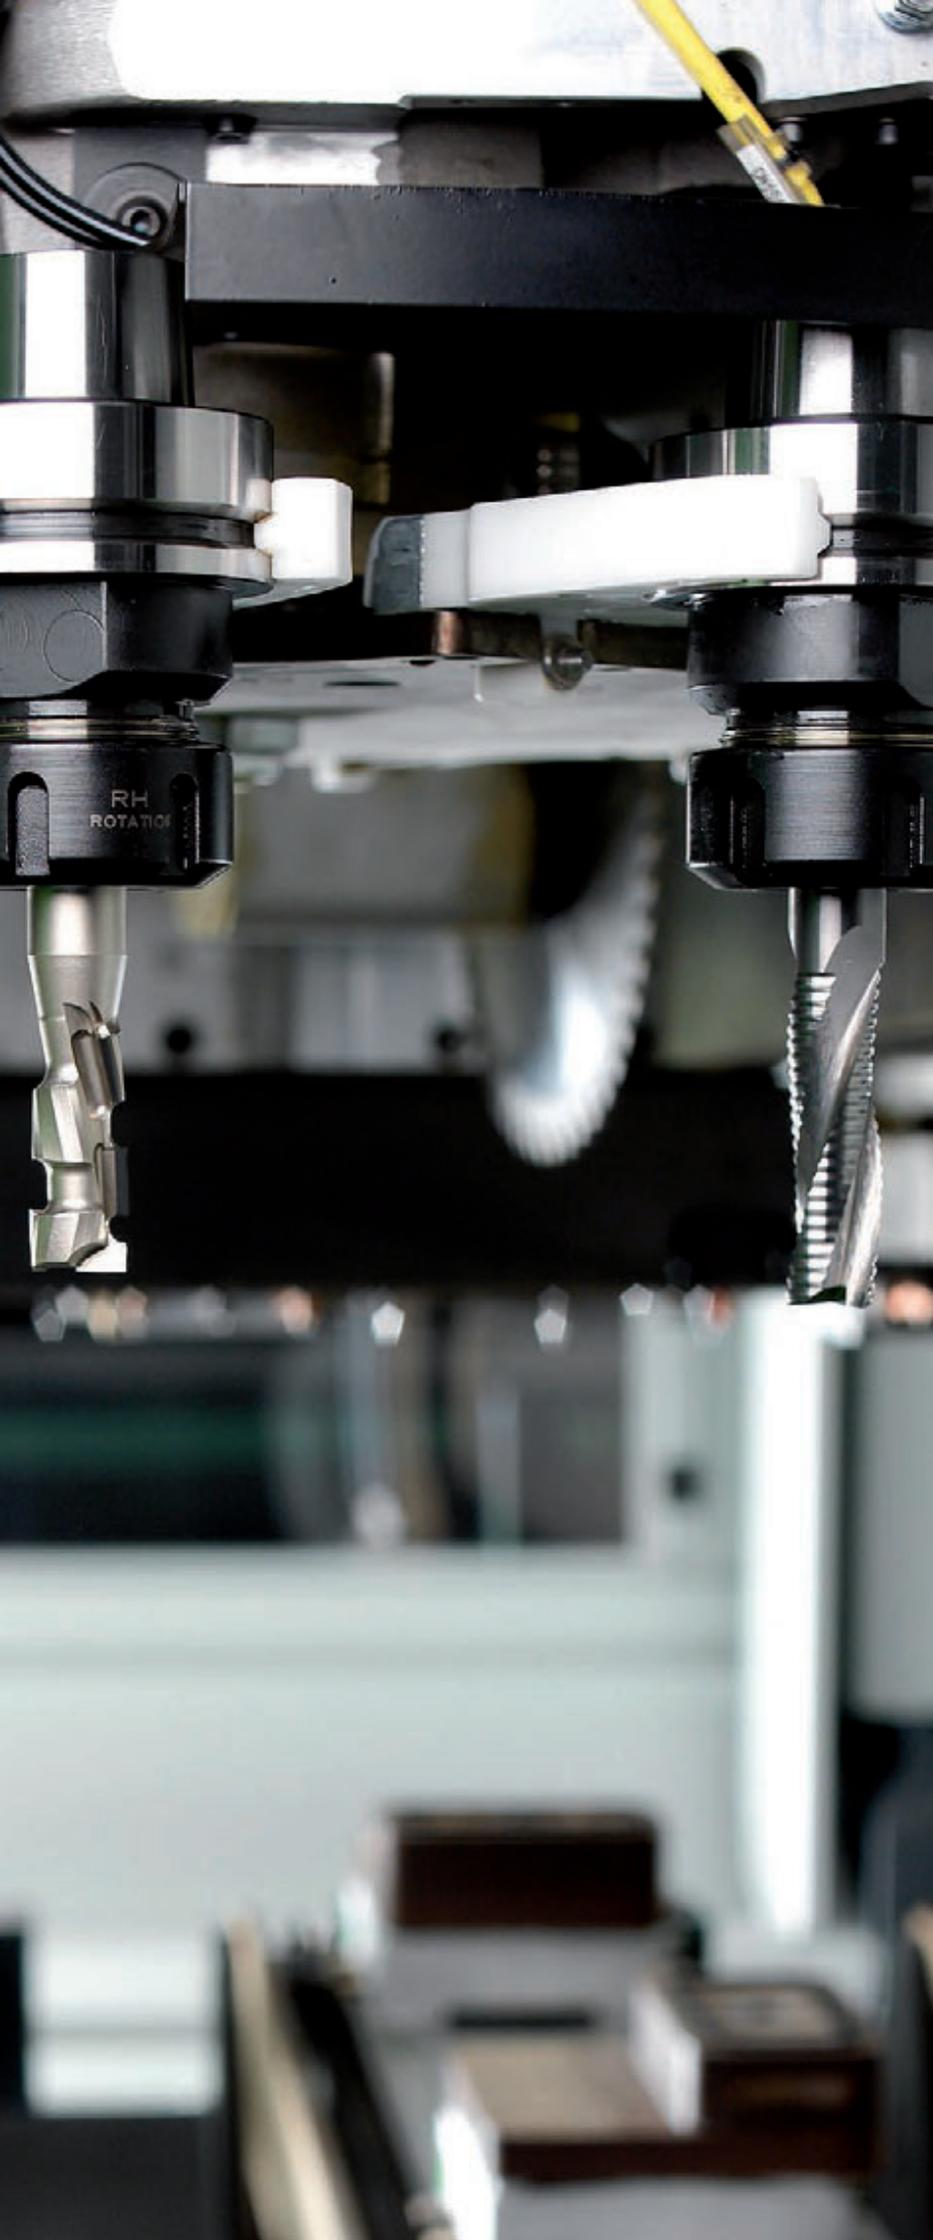

CNC router cutters & chucks

| PRODUCTS | PAGE |
|--|-----------|
| Universal assembly supports for chucks | 190 |
| CNC chucks | 190 ~ 194 |
| Precision collets | 194- 195 |
| Cutter arbor | 196 - 197 |
| MK2 chucks | 197 |
| Solid carbide spiral bits | 198 ~ 204 |
| CNC straight cutters | 205 ~ 213 |
| CNC profiled cutters | 213 ~ 217 |
| Slot & mortise bits | 218 ~ 224 |

Precision chucks and collets

The ideal accessories for machining centres, point-to-point machines and CNC routers.

- extreme precision and reliability;
- perfect tool centering;
- defect-free rotation;
- made from extremely high resistant steel;
- precision grinding on all jointed parts;
- extreme high rotation performance >= 15 HP – 20.000 RPM;
- for very efficient sizing on extreme unprecedented high feed speed;
- excellent finishing quality on the workpiece and longer tool life;
- sturdy design with reduced height to increase the work space between the machine and the piece;
- safe and fast tool setup;
- interchangeable collet clamps with radial grooves for secure parallel tool clamping;
- wide clamping tolerance (-0.7mm);
- right or left-hand rotation chucks with self clamping threads;
- clamping nut with Woodruff radial grooves for c-spanners;
- practical withdrawal sleeves with double differential threads for the chuck spindle;
- central hexagonal low profile for easy tool clamping through a c-spanner;
- designed and tested in collaboration with the most renowned machining and CNC router construction centres;
- delivered in a smart professional packaging.

Universal assembly supports for chucks




183

| DESCRIPTION | D mm | ORDER NO. |
|--|------|----------------|
| Universal assembly supports for chucks HSK-F63 | 63 | 183-HSK |
| Universal assembly supports for chucks ISO30 | 50 | 183-ISO |

For HSK-F63 and ISO30 chucks

CMT now offers new universal assembly supports for HSK-F63 and ISO30 chucks. Thanks to the bidirectional roller bearings, which clamp the tool to the flange, the system offers the highest protection to the tool taper and clamps are no longer needed.

The special bidirectional roller bearing clamps the tool to the flange, offering the highest protection to the tool taper.

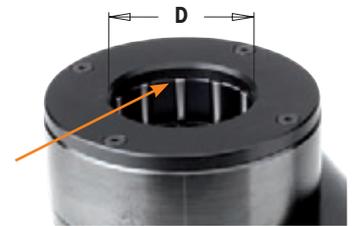

HSK chuck for “ER32” precision collets



183.300

RH LH

| S | DESCRIPTION | To be used with collet | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|--------------------|------------------------------|------------------------|-------------------------------|------------------------------|
| HSK-F63 | Clamping nut without bearing | ER32 | 183.300.01 | 183.300.02 |
| new HSK-F63 | Clamping nut with bearing | ER32 | 183.300.11* | |

* Suitable for right-hand and left-hand rotation.

For Homag, Eima from 9/94, Dubus, Weeke, Biesse, SCM, Morbidelli and Masterwood machines.

ISO30 chucks for "ER32" precision collets



995.200

183.200

RH LH

| S | To be used with collet | Retaining stud mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|--------|------------------------|-------------------|----------------------------------|---------------------------------|
| ISO 30 | ER32 | Ø12-8 | 183.200.01 | 183.200.02 |

For Biesse machines.



995.201

183.210

RH LH

| S | To be used with collet | Retaining stud mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|--------|------------------------|-------------------|----------------------------------|---------------------------------|
| ISO 30 | ER32 | Ø13-9 | 183.210.01 | 183.210.02 |

For Biesse machines with Omlat engine, Bulleri, Busellato, CMS and IMA machines.



995.202

183.220

RH LH

| S | To be used with collet | Retaining stud mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|--------|------------------------|-------------------|----------------------------------|---------------------------------|
| ISO 30 | ER32 | Ø12,8-9 | 183.220.01 | 183.220.02 |

For Alberti and Masterwood machines.

ISO30 chucks for "ER32" precision collets



995.250

183.250

RH LH

| S | To be used with collet | Retaining stud mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|--------|------------------------|-------------------|----------------------------------|---------------------------------|
| ISO 30 | ER32 | Ø8,5 | 183.250.01 | 183.250.02 |

For Morbidelli and SCM machines.



183.251

RH LH

| S | To be used with collet | Retaining stud mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|--------|------------------------|-------------------|----------------------------------|---------------------------------|
| ISO 30 | ER32 | Ø8,5 | 183.251.01 | 183.251.02 |

For Morbidelli and SCM machines (with aluminium flange already assembled Ø69,5mm).

*Retaining stud and aluminium flange

| DESCRIPTION | ORDER NO. |
|--------------------------|-------------------|
| Ø69,5mm aluminium flange | 992.501.00 |

Chucks for “ER32” precision collets

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets


CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts

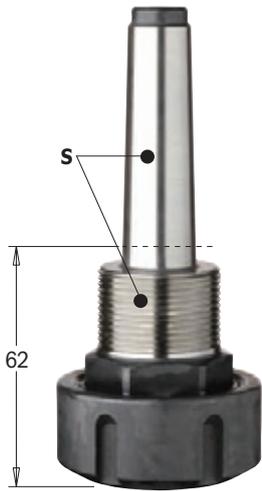
183.000/100
RH LH

| S mm | To be used with collet | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|-------------|---------------------------|----------------------------------|---------------------------------|
| MK2/M30x1,5 | ER32 | 183.000.01 | 183.000.02 |
| MK3/M30x1,5 | ER32 | 183.100.01 | |

MK2/MK3 tapered shank

Chucks for “ER32” precision collets



995.400

183.400
RH

| S mm | To be used with collet | Retaining stud mm | ORDER NO. Right-hand rotation |
|---------|---------------------------|----------------------|----------------------------------|
| Ø25x55 | ER32 | PS LEUCO | 183.400.01 |

For machines with PS Leuco system.

Clamping nuts for chucks with “ER32” collets


992.183
RH LH

| DESCRIPTION | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|--|----------------------------------|---------------------------------|
| Clamping nut without bearing For 183.000/100/200/250/300/400 chucks | 992.183.01 | 992.183.02 |
| Clamping nut with bearing For 183.000/100/200/250/300/400 chucks | 992.183.11 | 992.183.12 |

C-Spanner for “ER32” precision collets


991.183

| DESCRIPTION | ORDER NO. |
|--|-------------------|
| C-Spanner for “ER32” precision collets | 991.183.00 |

HSK chucks for "ER40" precision collets



183.310

RH LH

| S | DESCRIPTION | To be used with collet | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------------------------|------------------------------|------------------------|----------------------------------|---------------------------------|
| HSK-F63 | Clamping nut without bearing | ER40 | 183.310.01 | 183.310.02 |
| <small>new</small> HSK-F63 | Clamping nut with bearing | ER40 | 183.310.11* | |

* Suitable for right-hand and left-hand rotation.

For Homag, Eima, IMA from 9/94, Dubus, Weeke, Biesse, SCM, Morbidelli and Masterwood machines.

ISO30 chucks for "ER40" precision collets



995.200

183.201

RH

| S | To be used with collet | Retaining stud mm | ORDER NO. Right-hand rotation |
|-------|------------------------|-------------------|----------------------------------|
| ISO30 | ER40 | Ø12-8 | 183.201.01 |

For Biesse machines



995.201

183.211

RH

| S | To be used with collet | Retaining stud mm | ORDER NO. Right-hand rotation |
|-------|------------------------|-------------------|----------------------------------|
| ISO30 | ER40 | Ø13-9 | 183.211.01 |

For Biesse machines with Omlat engine, Bulleri, Busellato, CMS and IMA machines.



995.202

183.221

RH

| S | To be used with collet | Retaining stud mm | ORDER NO. Right-hand rotation |
|-------|------------------------|-------------------|----------------------------------|
| ISO30 | ER40 | Ø12,8-9 | 183.221.01 |

For Alberti and Masterwood machines.

Clamping nuts for chucks with "ER40" precision collets



992.383

RH LH

| DESCRIPTION | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---|----------------------------------|---------------------------------|
| Clamping nut without bearing For 183.201/211/221/310 chucks | 992.383.01 | 992.383.02 |
| Clamping nut with bearing For 183.201/211/221/310 chucks | 992.383.11 | |

C-spanner for "ER40" precision collets



991.184

| DESCRIPTION | ORDER NO. |
|---------------------------------------|-------------------|
| C-Spanner for "ER40" precision collet | 991.184.00 |

HSK chuck for "DIN6388" precision collet

RH

183.320

| S | DESCRIPTION | To be used with collet | ORDER NO. Right-hand rotation |
|---------|----------------------------|------------------------|----------------------------------|
| HSK-F63 | HSK chuck with bearing nut | DIN6388 | 183.320.01* |

Spare parts 992.283.11 Clamping nut with bearing

* Suitable for left-hand rotation too.

For Homag, Eima from 9/94, Dubus, Weeke, Biesse, SCM, Morbidelli & Masterwood machines.

"DIN6388" precision collets


185

| D ₃ | | | D ₃ | | |
|----------------|--------|-------------------|----------------|--------|-------------------|
| mm | inches | ORDER NO. | mm | inches | ORDER NO. |
| 6 | | 185.060.00 | 14 | | 185.140.00 |
| 8 | 5/16 | 185.080.00 | 16 | 5/8 | 185.160.00 |
| 10 | | 185.100.00 | 18 | | 185.180.00 |
| 12 | | 185.120.00 | 20 | | 185.200.00 |
| 13 | 1/2 | 185.130.00 | 25 | | 185.250.00 |

REMARK: special dimensions available on request.

Clamping nuts


992.283
RH

| DESCRIPTION | ORDER NO. Right-hand rotation |
|------------------------------|----------------------------------|
| Clamping nut without bearing | 992.283.01 |
| Clamping nut with bearing | 992.283.11 |

For chuck 183.320.

C-Spanner for "DIN6388" & "ER40"


991.283

| DESCRIPTION | ORDER NO. |
|-------------------------------|-------------------|
| C-Spanner for "Usag" 58-62-65 | 991.283.00 |



new

184.xxx.11

| D ₃ mm | ORDER NO. |
|----------------------|------------|
| 2 | 184.020.11 |
| 3 | 184.030.11 |
| 4 | 184.040.11 |
| 5 | 184.050.11 |
| 6 | 184.060.11 |

TECHNICAL DETAILS:

- replaceable Std "ER11" collets (from 1 to 7mm)
- fit most tapered spindle noses
- +0-0,7mm wide clamping tolerance
- suitable for most conical chucks.

REMARK: special dimensions available on request.



new

184.xxx.16

| D ₃ mm | ORDER NO. |
|----------------------|------------|
| 2 | 184.020.16 |
| 3 | 184.030.16 |
| 4 | 184.040.16 |
| 5 | 184.050.16 |
| 6 | 184.060.16 |
| 7 | 184.070.16 |
| 8 | 184.080.16 |
| 9 | 184.090.16 |
| 10 | 184.100.16 |

TECHNICAL DETAILS:

- replaceable Std "ER16" collets (from 1 to 10mm)
- fit most tapered spindle noses
- +0-0,7mm wide clamping tolerance
- suitable for most conical chucks.

REMARK: special dimensions available on request.



new

184.xxx.20

| D ₃ mm | ORDER NO. |
|----------------------|------------|
| 3 | 184.030.20 |
| 5 | 184.050.20 |
| 6 | 184.060.20 |
| 6,35 | 184.064.20 |
| 8 | 184.080.20 |
| 10 | 184.100.20 |
| 12 | 184.120.20 |
| 12,7 | 184.127.20 |

TECHNICAL DETAILS:

- replaceable Std "ER20" collets (from 3 to 12,7mm)
- fit most tapered spindle noses
- +0-0,7mm wide clamping tolerance
- suitable for most conical chucks.

REMARK: special dimensions available on request.



184.xxx.25

| D ₃ mm | ORDER NO. |
|----------------------|------------|
| 6 | 184.060.25 |
| 8 | 184.080.25 |
| 10 | 184.100.25 |
| 12 | 184.120.25 |
| 14 | 184.140.25 |
| 16 | 184.160.25 |

TECHNICAL DETAILS:

- replaceable Std "ER25" collets (from 6 to 16mm)
- fit most tapered spindle noses
- +0-0,7mm wide clamping tolerance
- suitable for most conical chucks.

REMARK: special dimensions available on request.



new

184.000

| D ₃ mm | ORDER NO. |
|----------------------|------------|
| 3 | 184.030.00 |
| 4 | 184.040.00 |
| 5 | 184.050.00 |
| 6 | 184.060.00 |
| 6,35 | 184.065.00 |
| 7 | 184.070.00 |
| 8 | 184.080.00 |
| 9,52 | 184.095.00 |
| 10 | 184.100.00 |
| 12 | 184.120.00 |
| 13 | 184.130.00 |
| 14 | 184.140.00 |
| 16 | 184.160.00 |
| 18 | 184.180.00 |
| 19 | 184.190.00 |
| 20 | 184.200.00 |

Per mandrini serie
183.000/100/200/250/300/400

TECHNICAL DETAILS:

- replaceable Std "ER32" collets (from 3 to 20mm)
- fit most tapered spindle noses
- +0-0,7mm wide clamping tolerance
- suitable for most conical chucks.

REMARK: special dimensions available on request.



new

184.002

| D ₃ mm | ORDER NO. |
|----------------------|------------|
| 4 | 184.042.00 |
| 5 | 184.052.00 |
| 6 | 184.062.00 |
| 7 | 184.072.00 |
| 8 | 184.082.00 |
| 9,52 | 184.096.00 |
| 10 | 184.102.00 |
| 12 | 184.122.00 |
| 13 | 184.132.00 |
| 14 | 184.142.00 |
| 16 | 184.162.00 |
| 18 | 184.182.00 |
| 19 | 184.192.00 |
| 20 | 184.202.00 |
| 25 | 184.252.00 |

Per mandrini serie
183.201/211/221/310

TECHNICAL DETAILS:

- replaceable Std "ER40" collets (from 4 to 25mm)
- fit most tapered spindle noses
- +0-0,7mm wide clamping tolerance
- suitable for most conical chucks.

REMARK: special dimensions available on request.

Cap nuts for CNC machines



993.0

RH LH

| Internal thread | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|-----------------|----------------------------------|---------------------------------|
| Ø20x14Fx1" | 993.020.01 | 993.020.02 |
| M30x1,5 | 993.030.01 | 993.030.02 |

For machines with M33x3 threaded spindle nose.

Cap nuts for router machines




993.5

RH LH

| Internal thread | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|-----------------|----------------------------------|---------------------------------|
| Ø20x14Fx1" | 993.520.01 | 993.530.01 |
| M30x1,5 | 993.530.01 | 993.530.02 |

For machines with 1-1/8"x7 threaded spindle nose.

ISO30 retaining studs

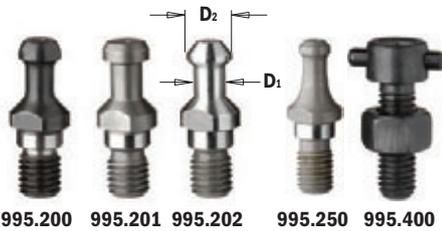

995.200 995.201 995.202 995.250 995.400

| DESCRIPTION | D ₁ mm | D ₂ mm | ORDER NO. |
|--|----------------------|----------------------|-------------------|
| Retaining stud for 183.200/201 "Biesse" chucks | 8 | 12 | 995.200.00 |
| Retaining stud for 183.210/211 "Biesse, Omlat, Bulleri, Busellato, CMS and IMA" chucks | 9 | 13 | 995.201.00 |
| Retaining stud for 183.220/221 "Alberti-Masterwood" chucks | 9 | 12,8 | 995.202.00 |
| Retaining stud for 183.250/251 "SCM - Morbidelli" chucks | 6,5 | 8,5 | 995.250.00 |
| Retaining stud for "PS and Leuco" 183.400 chucks | M8 | | 995.400.00 |

Cutter arbor with HSK tapered shank



183.360

RH LH

| S | D mm | D ₃ mm | ORDER NO. |
|---------|---------|----------------------|-------------------|
| HSK-F63 | Ø30x100 | 63 | 183.360.00 |
| HSK-F63 | Ø35x100 | 63 | 183.361.00 |
| HSK-F63 | Ø40x100 | 63 | 183.362.00 |

For Homag, Eima from 9/94, Dubus, Weeke, Biesse, SCM, Morbidelli and Masterwood machines.

Cutter arbor with ISO30 tapered shank



183.260

RH LH

| S | D mm | D ₃ mm | ORDER NO. |
|--------|---------|----------------------|-------------------|
| ISO 30 | Ø30x100 | 50 | 183.260.00 |

For Biesse machines.

REMARK: special dimensions available on request.

Spare parts for chucks


Standard

Optional



| DESCRIPTION | ORDER NO. | DESCRIPTION | ORDER NO. |
|---|--------------------|---|--------------------|
| M6x25 TCEI screw | 990.098.00 | <i>Optional</i> | |
| Steel flange for with Ø30mm arbors - Male | 992.560.30M | Steel flange for with Ø30mm arbors - Female | 992.560.30F |
| Steel flange for with Ø35mm arbors - Male | 992.560.35M | Steel flange for with Ø35mm arbors - Female | 992.560.35F |
| Steel flange for with Ø40mm arbors - Male | 992.560.40M | Steel flange for with Ø40mm arbors - Female | 992.560.40F |

Saw blade arbor with parallel shank

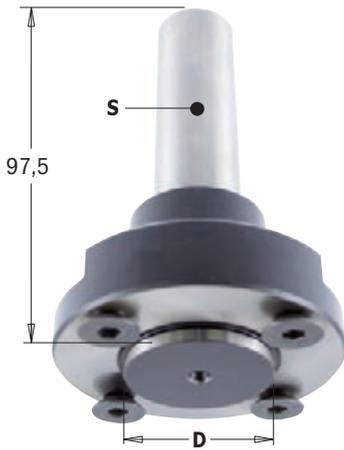

183.410


RH
LH

| S mm | D mm | Pin Hole ⊕⊗ | L mm | ORDER NO. |
|---------|---------|----------------|---------|-------------------|
| 20 | 30 | 4/M6/48 | 97,5 | 183.410.30 |

Spare parts

| | |
|------------|--------------------|
| 990.083.00 | M6x10mm TCEI screw |
| 991.067.00 | 3mm allen key |
| 991.064.00 | 4mm allen key |

Collet chucks clamp with MK2 tapered shank

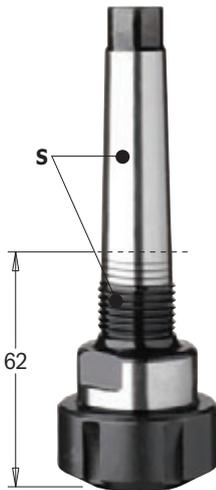

123

RH LH

| S | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------------|----------------------------------|---------------------------------|
| MK2/∅20x14Fx1" | 123.000.01 | 123.000.02 |

Collets for 123 chucks



124

| D ₃ mm | ORDER NO. | D ₃ mm | ORDER NO. |
|----------------------|-------------------|----------------------|-------------------|
| 6 | 124.060.00 | 10 | 124.100.00 |
| 6,35 | 124.064.00 | 12 | 124.120.00 |
| 8 | 124.080.00 | 12,7 | 124.127.00 |
| 9,5 | 124.095.00 | 14 | 124.140.00 |

Clamping nuts



992.123

RH LH

| DESCRIPTION | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|--------------|----------------------------------|---------------------------------|
| Clamping nut | 992.123.01 | 992.123.02 |

C-spanner



991.123

| DESCRIPTION | ORDER NO. |
|-----------------------------|-------------------|
| Type 40-42 "Usag" c-spanner | 991.123.00 |


Sharp technology with a new twist

A special super-micrograin carbide formulation was created to produce and hold a keen cutting edge.


The new low-angle spiral is designed specifically to shear wood cleanly and provide efficient chip ejection.

The tools run cooler and the edges last longer.

Increased feed rate and improved cutting quality for enhanced productivity with CMT!

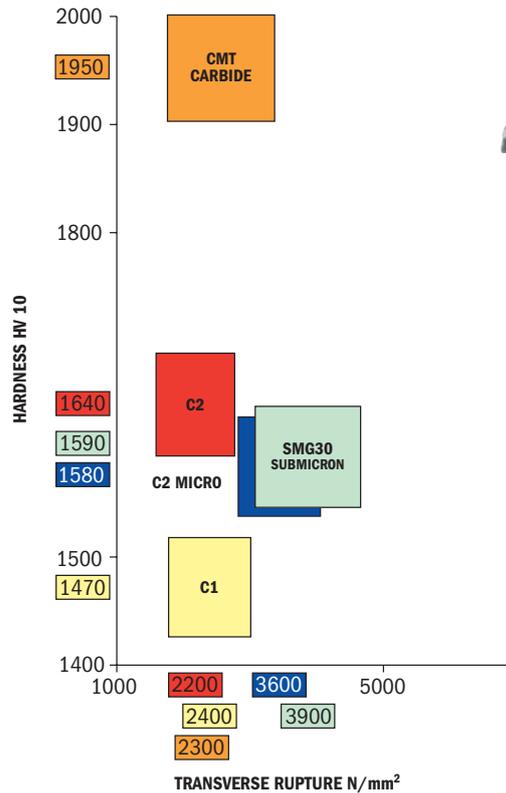

Solid carbide upcut spiral bits

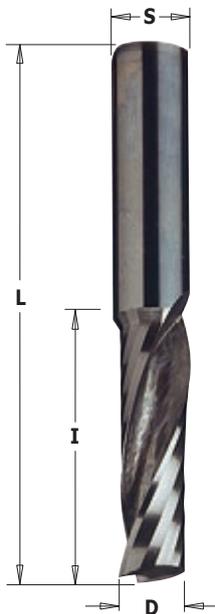

198

HWM Z1 RH

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|--------------|---------|---------|---------|----------------------------------|
| 3 | 12 | 50 | 3 | 198.030.11 |
| 3,18 | 12,7 | 50,8 | 6,35 | 198.001.11 |
| 4 | 15 | 50 | 4 | 198.040.11 |
| 4,76 | 15,87 | 50,8 | 6,35 | 198.005.11 |
| 5 | 17 | 50 | 5 | 198.050.11 |
| 6 | 22 | 60 | 6 | 198.060.11 |
| 6,35 | 19,05 | 50,8 | 6,35 | 198.007.11 |
| 6,35 | 25,4 | 63,5 | 6,35 | 198.008.11 |
| 8 | 22 | 70 | 8 | 198.080.11 |
| new 8 | 32 | 80 | 8 | 198.081.11 |
| 9,52 | 28,57 | 76,2 | 9,52 | 198.504.11 |
| 10 | 32 | 70 | 10 | 198.100.11 |
| 10 | 42 | 80 | 10 | 198.101.11 |
| 10 | 52 | 90 | 10 | 198.102.11 |
| 12 | 32 | 83 | 12 | 198.120.11 |


TECHNICAL DETAILS:

- Premium quality HWM.
- 1 spiral cutting edge [Z1].
- Provide an excellent finish on the lower side of the workpiece.
- **Upward chip ejection.**

APPLICATION: used for cutting, copying, panel sizing and any routing applications on solid wood, wood composites, plastic materials and laminates. Use a high feed speed on well-clamped workpieces. Can be used on machining centres, point to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Solid carbide up & downcut spiral bits

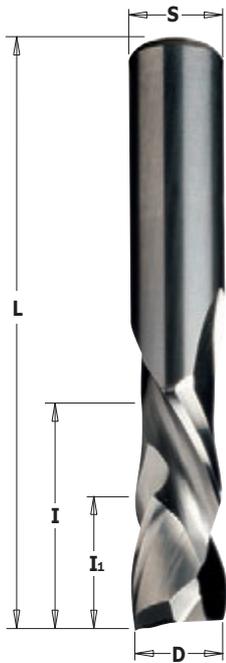

190

HWM Z2+2 Z3+3 RH


| | D mm | I mm | I ₁ mm | L mm | S mm | Z | ORDER NO. Right-hand rotation |
|---|---------|---------|----------------------|---------|---------|-----|----------------------------------|
| new | 4 | 15 | 7 | 50 | 4 | 2+2 | 190.040.11 |
| new | 5 | 22 | 8 | 60 | 5 | 2+2 | 190.050.11 |
| new | 6 | 22 | 8 | 60 | 6 | 2+2 | 190.060.11 |
| | 8 | 32 | 7 | 80 | 8 | 2+2 | 190.080.11 |
| | 9,52 | 28,6 | 7 | 76,2 | 9,52 | 2+2 | 190.504.11 |
| | 10 | 32 | 7 | 80 | 10 | 2+2 | 190.100.11 |
| new | 10 | 42 | 7 | 90 | 10 | 2+2 | 190.101.11 |
| | 12 | 42 | 7 | 90 | 12 | 2+2 | 190.120.11 |
| new | 12 | 52 | 7 | 100 | 12 | 2+2 | 190.121.11 |
| | 12,7 | 25,4 | 16 | 76,2 | 12,7 | 2+2 | 190.505.11 |
| | 12,7 | 28,6 | 16 | 76,2 | 12,7 | 2+2 | 190.506.11 |
| | 12,7 | 34,9 | 16 | 88,9 | 12,7 | 2+2 | 190.507.11 |
| | 12,7 | 41,3 | 16 | 101,6 | 12,7 | 2+2 | 190.508.11 |
| | 16 | 55 | 24 | 110 | 16 | 2+2 | 190.160.11 |
| | 18 | 55 | 30 | 110 | 18 | 2+2 | 190.180.11 |
| ...up & downcut mortising bits | | | | | | | |
| | 9,52 | 22,2 | 4,8 | 76,2 | 9,52 | 2+2 | 190.513.11 |
| | 9,52 | 25,4 | 5,2 | 76,2 | 9,52 | 3+3 | 190.813.11 |
| | 12 | 25 | 5,2 | 83 | 12 | 3+3 | 190.320.11 |
| | 12,7 | 22,2 | 5,2 | 76,2 | 12,7 | 2+2 | 190.515.11 |
| | 12,7 | 34,9 | 5,2 | 88,9 | 12,7 | 2+2 | 190.517.11 |

TECHNICAL DETAILS:

- Premium quality HWM.
- 2+2 spiral cutting edges [Z2+2].
- 3+3 spiral cutting edges [Z3+3].
- Provide an excellent finish on both the upper and the lower side of the workpiece.

APPLICATION: used for cutting, copying, panel sizing and any routing application on solid wood, wood composites, plastic materials and laminates. Use a high feed speed on well-clamped workpieces. Can be used on machining centres, point to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.

Solid carbide upcut spiral bits

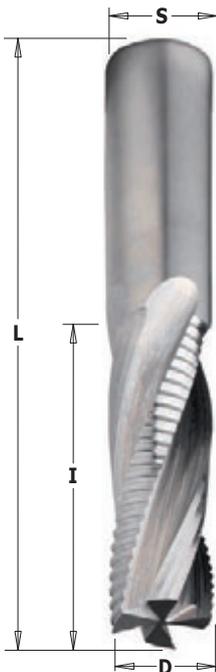

197

HWM Z4 RH

| | D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|--|---------|---------|---------|---------|----------------------------------|
| | 12 | 42 | 90 | 12 | 197.121.11 |
| | 14 | 50 | 110 | 14 | 197.140.11 |
| | 16 | 55 | 110 | 16 | 197.160.11 |
| | 16 | 35 | 90 | 16 | 197.161.11 |
| | 18 | 55 | 110 | 18 | 197.180.11 |
| | 20 | 60 | 120 | 20 | 197.200.11 |
| | 20 | 70 | 120 | 20 | 197.201.11 |

TECHNICAL DETAILS:


- Premium quality HWM.
- 4 spiral cutting edges (2 with chip-breaker) [Z2+2R].
- Max 0.1mm tooth depth.
- Provide excellent finish on the lower side of the workpiece.
- Upward chip ejection.

APPLICATION: used for ripping, template routing, panel sizing and any routing application on solid wood and wood composites. Can be used on machining centres, point to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.



**The special 4 flute design
(Z2 finishing + Z2R with chipbreaker)
allows high speed with excellent finish on the workpiece.**

Solid carbide upcut spiral bits with chip-breaker

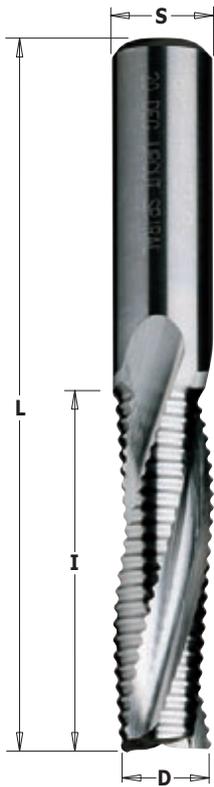HWM **Z3R** **RH** **LH**

195


| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------------|---------|---------|---------|----------------------------------|---------------------------------|
| 8 | 32 | 80 | 8 | 195.081.11 | 195.081.12 |
| 8 | 42 | 90 | 8 | 195.082.11 | |
| 10 | 32 | 80 | 10 | 195.100.11 | 195.100.12 |
| 10 | 42 | 90 | 10 | 195.101.11 | |
| 12 | 35 | 83 | 12 | 195.120.11 | 195.120.12 |
| 12 | 42 | 90 | 12 | 195.121.11 | |
| 12 | 52 | 100 | 12 | 195.122.11 | |
| 12,7 | 38,1 | 88,9 | 12,7 | 195.506.11 | |
| 14 | 58 | 110 | 14 | 195.140.11 | |
| 15,88 | 54 | 109,5 | 15,88 | 195.509.11 | |
| 16 | 55 | 110 | 16 | 195.160.11 | 195.160.12 |
| 16 | 35 | 90 | 16 | 195.161.11 | |
| new 16 | 72 | 120 | 16 | 195.165.11 | |
| 18 | 55 | 110 | 18 | 195.180.11 | |
| 19,05 | 54 | 109,5 | 19,05 | 195.511.11 | |
| 20 | 60 | 120 | 20 | 195.200.11 | 195.200.12 |
| 20 | 72 | 120 | 20 | 195.201.11 | |
| new 20 | 102 | 165 | 20 | 195.202.11 | |

TECHNICAL DETAILS:

- Premium quality HWM.
- 3 spiral cutting edges [Z3R].
- Chip breaker teeth.
- Max 0.3mm tooth depth.
- Provide an excellent finish on the lower side of the workpiece.
- Upward chip ejection.

APPLICATION: used for ripping, template routing, panel sizing and any routing application on solid wood, or wood composites. Can be used at a high feed speed on well-clamped workpieces. Can be used on machining centres, point to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.

Solid carbide downcut spiral bits with chip-breaker

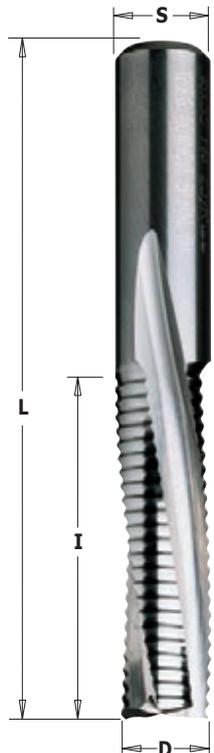HWM **Z3R** **RH** **LH**

196


| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------------|---------|---------|---------|----------------------------------|---------------------------------|
| 8 | 32 | 80 | 8 | 196.081.11 | |
| 10 | 42 | 90 | 10 | 196.101.11 | |
| 12 | 35 | 83 | 12 | 196.120.11 | 196.120.12 |
| new 12 | 42 | 90 | 12 | 196.121.11 | |
| new 12 | 52 | 100 | 12 | 196.122.11 | |
| 12,7 | 38,1 | 88,9 | 12,7 | 196.506.11 | |
| 14 | 50 | 110 | 14 | 196.140.11 | |
| 15,88 | 54 | 109,5 | 15,88 | 196.509.11 | |
| 16 | 55 | 110 | 16 | 196.160.11 | 196.160.12 |
| 18 | 55 | 110 | 18 | 196.180.11 | |
| 19,05 | 54 | 109,5 | 19,05 | 196.511.11 | |
| 20 | 60 | 120 | 20 | 196.200.11 | 196.200.12 |
| new 20 | 72 | 120 | 20 | 196.201.11 | |

TECHNICAL DETAILS:

- Premium quality HWM.
- 3 spiral cutting edges [Z3R].
- Chip breaker teeth.
- Max 0.3mm tooth depth.
- Provide excellent finish on the upper side of the workpiece.
- Downward chip ejection.

APPLICATION: used for ripping, template routing, panel sizing and any routing application on solid wood and wood composites. Can be used on machining centres, point to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.

Solid carbide upcut spiral bits

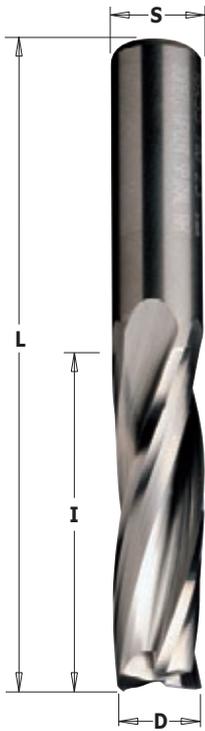

193

HWM Z3 RH LH


| D | I | L | S | ORDER NO. | ORDER NO. |
|---------------|----|-----|----|---------------------|--------------------|
| mm | mm | mm | mm | Right-hand rotation | Left-hand rotation |
| 8 | 32 | 80 | 8 | 193.081.11 | 193.081.12 |
| 10 | 32 | 80 | 10 | 193.100.11 | 193.100.12 |
| 10 | 42 | 90 | 10 | 193.101.11 | |
| 12 | 35 | 83 | 12 | 193.120.11 | 193.120.12 |
| 12 | 42 | 90 | 12 | 193.121.11 | |
| NEW 12 | 52 | 100 | 12 | 193.122.11 | |
| 14 | 58 | 110 | 14 | 193.140.11 | |
| 16 | 55 | 110 | 16 | 193.160.11 | 193.160.12 |
| 16 | 35 | 90 | 16 | 193.161.11 | |
| NEW 16 | 72 | 120 | 16 | 193.165.11 | |
| 18 | 55 | 110 | 18 | 193.180.11 | |
| 20 | 60 | 120 | 20 | 193.200.11 | 193.200.12 |
| 20 | 70 | 120 | 20 | 193.201.11 | |

TECHNICAL DETAILS:

- Premium quality HWM.
- 3 spiral cutting edges [Z3].
- Provide an excellent finish on the lower side of the workpiece.
- Upward chip ejection.

APPLICATION: used for ripping, template routing, panel sizing and any routing application on solid wood, or wood composites. Can be used at a high feed speed on well-clamped workpieces. Can be used on machining centres, point to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.

Solid carbide spiral bits downcut

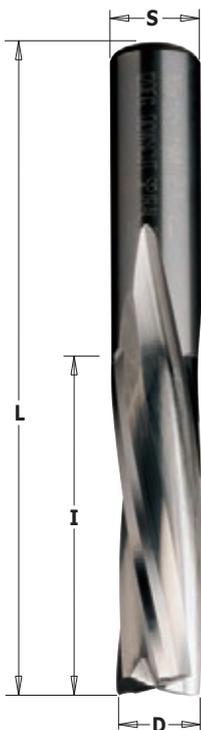

194

HWM Z3 RH LH


| D | I | L | S | ORDER NO. | ORDER NO. |
|---------------|-----|-----|----|---------------------|--------------------|
| mm | mm | mm | mm | Right-hand rotation | Left-hand rotation |
| 10 | 32 | 80 | 10 | 194.100.11 | |
| NEW 10 | 42 | 90 | 10 | 194.101.11 | |
| 12 | 35 | 83 | 12 | 194.120.11 | 194.120.12 |
| NEW 12 | 42 | 90 | 12 | 194.121.11 | |
| 14 | 50 | 110 | 14 | 194.140.11 | |
| 16 | 55 | 110 | 16 | 194.160.11 | 194.160.12 |
| 16 | 35 | 90 | 16 | 194.161.11 | |
| 18 | 55 | 110 | 18 | 194.180.11 | |
| 20 | 60 | 120 | 20 | 194.200.11 | 194.200.12 |
| NEW 20 | 72 | 120 | 20 | 194.201.11 | |
| NEW 20 | 102 | 165 | 20 | 194.202.11 | |

TECHNICAL DETAILS:

- Premium quality HWM.
- 3 spiral cutting edges [Z3].
- Provide an excellent finish on the upper side of the workpiece.
- Downward chip ejection.

APPLICATION: used for ripping, template routing, panel sizing and any routing application on solid wood, wood composites, plastic materials and laminates. Can be used at a high feed speed on small, difficult to clamp workpieces. Can be used on machining centres, point to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.

Solid carbide upcut spiral bits

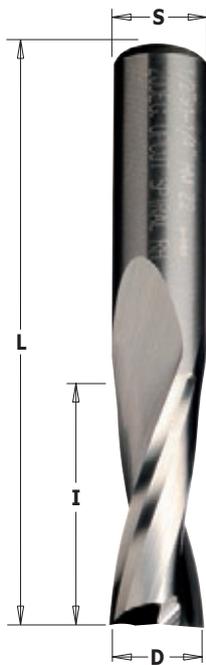HWM **Z2** **RH**


191

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------------|---------|---------|---------|----------------------------------|
| 3 | 12 | 50 | 3 | 191.030.11 |
| 3 | 12 | 60 | 6 | 191.630.11 |
| 3 | 12 | 60 | 8 | 191.830.11 |
| 3,18 | 12,7 | 50,8 | 6,35 | 191.001.11 |
| 3,5 | 12 | 60 | 6 | 191.635.11 |
| 3,97 | 12,7 | 50,8 | 6,35 | 191.003.11 |
| 4 | 15 | 50 | 4 | 191.040.11 |
| 4 | 15 | 60 | 6 | 191.640.11 |
| 4 | 15 | 60 | 8 | 191.840.11 |
| 4,76 | 19,05 | 50,8 | 6,35 | 191.005.11 |
| 5 | 17 | 50 | 5 | 191.050.11 |
| 5 | 17 | 60 | 6 | 191.650.11 |
| 5 | 17 | 60 | 8 | 191.850.11 |
| 6 | 27 | 70 | 6 | 191.060.11 |
| 6 | 27 | 70 | 8 | 191.860.11 |
| 6,35 | 19,05 | 50,8 | 6,35 | 191.007.11 |
| 6,35 | 25,4 | 63,5 | 6,35 | 191.008.11 |
| 7 | 32 | 80 | 8 | 191.870.11 |
| 7,94 | 25,4 | 76,2 | 12,7 | 191.501.11 |
| 8 | 22 | 70 | 8 | 191.080.11 |
| 8 | 32 | 80 | 8 | 191.081.11 |
| 8 | 42 | 90 | 8 | 191.082.11 |
| 9 | 32 | 83 | 12 | 191.890.11 |
| 9,52 | 31,75 | 76,2 | 12,7 | 191.503.11 |
| 10 | 32 | 80 | 8 | 191.800.11 |
| 10 | 32 | 80 | 10 | 191.100.11 |
| 10 | 32 | 83 | 12 | 191.900.11 |
| 10 | 42 | 90 | 10 | 191.101.11 |
| 10 | 42 | 90 | 12 | 191.901.11 |
| 12 | 35 | 83 | 8 | 191.820.11 |
| 12 | 35 | 83 | 12 | 191.120.11 |
| 12 | 42 | 90 | 12 | 191.121.11 |
| 12 | 52 | 100 | 12 | 191.122.11 |
| 12,7 | 31,75 | 76,2 | 12,7 | 191.505.11 |
| 12,7 | 38,1 | 88,9 | 12,7 | 191.506.11 |
| 12,7 | 50,8 | 101,6 | 12,7 | 191.507.11 |
| 14 | 50 | 110 | 14 | 191.140.11 |
| 15,88 | 55 | 109,5 | 15,88 | 191.509.11 |
| 16 | 55 | 110 | 16 | 191.160.11 |
| 16 | 35 | 90 | 16 | 191.161.11 |
| new 16 | 72 | 120 | 16 | 191.165.11 |
| 19,05 | 55 | 109,5 | 19,05 | 191.511.11 |
| 20 | 60 | 120 | 20 | 191.200.11 |


TECHNICAL DETAILS:

- Premium quality HWM.
- 2 spiral cutting edges [Z2].
- Provide an excellent finish on the lower side of the workpiece.
- Upward chip ejection.

APPLICATION: used for ripping, template routing, panel sizing and any routing application on solid wood, wood composites, plastic materials and laminates.

Can be used at a high feed speed on well-clamped workpieces.

Can be used on machining centres, point to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.

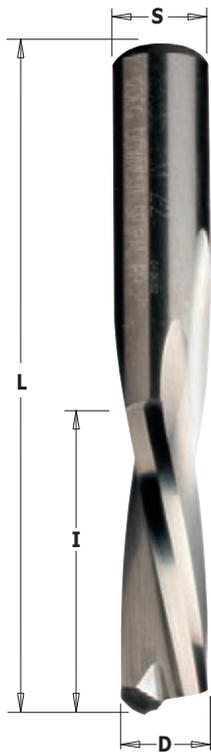

192

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------------|---------|---------|---------|----------------------------------|
| 3 | 12 | 50 | 3 | 192.030.11 |
| 3 | 12 | 60 | 6 | 192.630.11 |
| 3 | 12 | 60 | 8 | 192.830.11 |
| 3,18 | 12,7 | 50,8 | 6,35 | 192.001.11 |
| 3,97 | 12,7 | 50,8 | 6,35 | 192.003.11 |
| 4 | 15 | 50 | 4 | 192.040.11 |
| 4 | 15 | 60 | 6 | 192.640.11 |
| 4 | 15 | 60 | 8 | 192.840.11 |
| 4,76 | 19,05 | 50,8 | 6,35 | 192.005.11 |
| 5 | 17 | 50 | 5 | 192.050.11 |
| 5 | 17 | 60 | 6 | 192.650.11 |
| 5 | 17 | 60 | 8 | 192.850.11 |
| 6 | 27 | 70 | 6 | 192.060.11 |
| 6 | 27 | 70 | 8 | 192.860.11 |
| 6,35 | 19,05 | 50,8 | 6,35 | 192.007.11 |
| 6,35 | 25,4 | 63,5 | 6,35 | 192.008.11 |
| 7,94 | 25,4 | 76,2 | 12,7 | 192.501.11 |
| 8 | 22 | 70 | 8 | 192.080.11 |
| 8 | 32 | 80 | 8 | 192.081.11 |
| 8 | 42 | 90 | 8 | 192.082.11 |
| 9,52 | 31,75 | 76,2 | 12,7 | 192.503.11 |
| 10 | 32 | 80 | 8 | 192.800.11 |
| 10 | 32 | 80 | 10 | 192.100.11 |
| new 10 | 42 | 90 | 10 | 192.101.11 |
| 10 | 32 | 83 | 12 | 192.900.11 |
| 12 | 35 | 83 | 8 | 192.820.11 |
| 12 | 35 | 83 | 12 | 192.120.11 |
| 12,7 | 31,75 | 76,2 | 12,7 | 192.505.11 |
| 12,7 | 38,1 | 88,9 | 12,7 | 192.506.11 |
| 12,7 | 50,8 | 101,6 | 12,7 | 192.507.11 |
| new 14 | 52 | 110 | 14 | 192.140.11 |
| 16 | 55 | 110 | 16 | 192.160.11 |

TECHNICAL DETAILS:

- Premium quality HWM.
- 2 spiral edges [Z2].
- Provide an excellent finish on the upper side of the workpiece.
- Downward chip ejection.


APPLICATION: used for ripping, template routing, panel sizing and any routing application on solid wood, wood composites, plastic materials and laminates.

Can be used at a high feed speed on small, difficult to clamp work pieces.

Can be used on machining centres, point to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.

Solid carbide upcut spiral bits for locksets

HWM Z3R Z3 RH

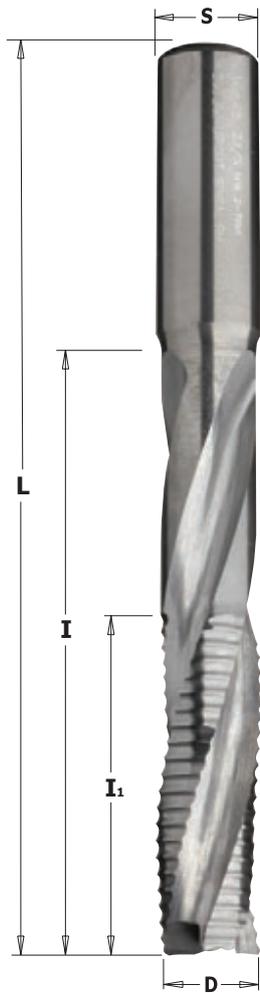

195


| D mm | I mm | I ₁ mm | L mm | S mm | ORDER NO. Right-hand rotation |
|-----------------------------|---------|----------------------|---------|---------|----------------------------------|
| <i>with chip-breaker</i> | | | | | |
| 14 | 95* | 45 | 150 | 14 | 195.142.11 |
| new 14 | 125* | 45 | 170 | 14 | 195.144.11 |
| 16 | 95* | 45 | 150 | 16 | 195.162.11 |
| new 16 | 120* | 50 | 170 | 16 | 195.164.11 |
| 18 | 95* | 45 | 150 | 18 | 195.182.11 |
| <i>without chip-breaker</i> | | | | | |
| new 16 | 95* | 45 | 150 | 16 | 193.162.11 |

* The maximum cutting length is achieved in 2-3 passes.

TECHNICAL DETAILS:


- Premium quality HWM.
- 3 spiral cutting edges [Z3] and [Z3R].
- Max 0.3mm tooth depth.
- Provide an excellent finish on the lower side of the workpiece.
- Upward chip ejection.

APPLICATION: used for ripping, template routing, panel sizing and any routing application on solid wood, or wood composites. Can be used at a high feed speed on well-clamped workpieces. Can be used on machining centres, point to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.

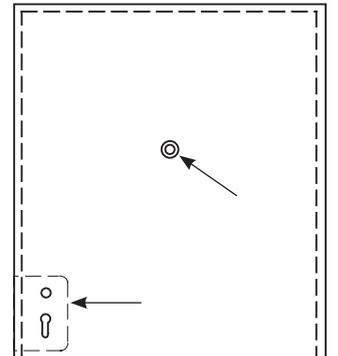

Solid carbide upcut with spiral bits chip-breaker for 60° V-point locksets

HWM Z3R RH

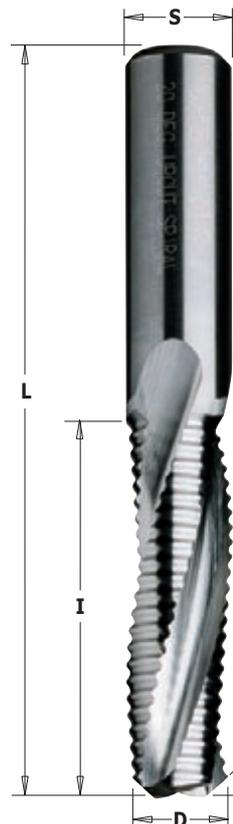

195.143/163

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|----------------------------------|
| 14 | 58 | 110 | 14 | 195.143.11 |
| 16 | 55 | 110 | 16 | 195.163.11 |

Solid carbide upcut spiral bits without chip-breaker for 60° V-point locksets

HWM Z3 RH

191.143/163


| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|----------------------------------|
| 14 | 50 | 110 | 14 | 191.143.11 |
| 16 | 55 | 110 | 16 | 191.163.11 |

TECHNICAL DETAILS:

- Premium quality HWM.
- 3 spiral cutting edges [Z3].
- Provide an excellent finish on the lower side of the workpiece.
- Upward chip ejection.

APPLICATION: used for ripping, template routing, panel sizing and any routing application on solid wood, or wood composites. Can be used at a high feed speed on well-clamped workpieces. Can be used on machining centres, point to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.

Spiral bits with insert knives and chip-breaker for locksets

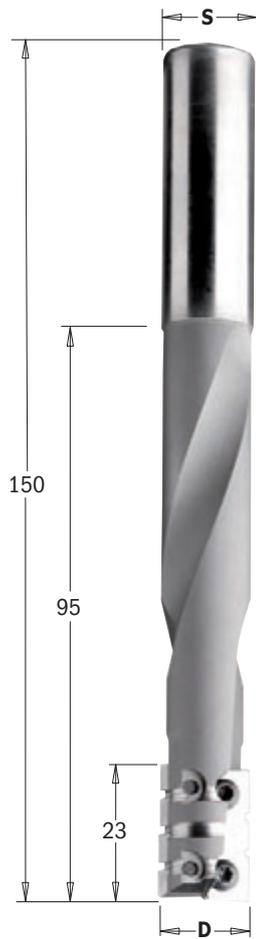

662

INSERT CARBIDE Z2R RH

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|----------------------------------|
| 16 | 23/95* | 150 | 16 | 662.160.11 |

Spare parts


| | |
|------------|----------------------------|
| 790.230.2R | 23x7x1.5mm 2-RT HWM knives |
| 790.230.3R | 23x7x1.5mm 3-RT HWM knives |
| 990.082.00 | M3x4mm T9 Torx screw |
| 991.069.00 | T9 Torx key |

* The 95mm length is achieved in 3-4 passes.

TECHNICAL DETAILS:


- Densimet® tungsten heavy metal alloys for low-vibration.
- 2 cutting edges [Z2R].
- Chip-breaker teeth.

APPLICATION: used for ripping, template routing, panel sizing and any routing application on solid wood, or wood composites. Can be used at a high feed speed on well-clamped workpieces. Can be used on machining centres, point to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.

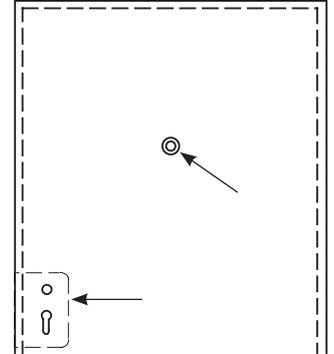

Upcut spiral bits with chipbreaker for glue-laminated wooden beams

new

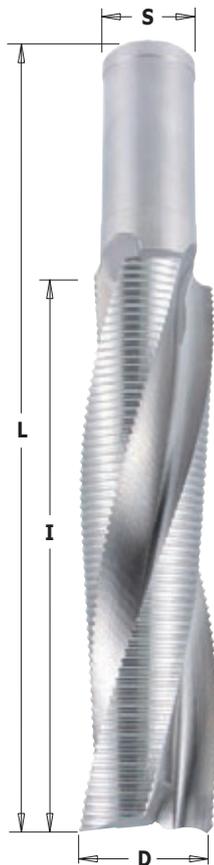

195

HS Z3R RH

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|----------------------------------|
| □ 30 | 170 | 235 | 30 | Y195.300.51 |
| 40 | 165 | 235 | 30 | 195.400.51 |
| 50 | 215 | 295 | 30 | 195.500.51 |

TECHNICAL DETAILS:

- High speed cobalt steel.
- 3 upcut spiral cutting edges with chipbreaker [Z3R].
- Upward chip ejection.
- Resharpenable cutters (max 6000~10000 times).
- Maximum feed speed 2m/minute.


APPLICATION: Used for cutting, copying, and routing on glue-laminated wooden beams. To be inserted on Hundegger machines.

□ **On request**

We manufacture bits without chipbreaker, with left-hand rotation and also in custom dimensions.

Round nose solid carbide upcut spiral bits

HWM Z2 RH

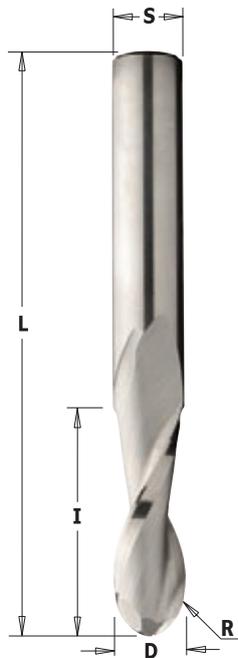

199

| D mm | R mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|---------|----------------------------------|
| 3,18 | 1,6 | 12,7 | 50,8 | 6,35 | 199.001.11 |
| 6 | 3 | 27 | 70 | 6 | 199.060.11 |
| 6,35 | 3,18 | 25,4 | 63,5 | 6,35 | 199.008.11 |
| 8 | 4 | 32 | 80 | 8 | 199.081.11 |
| 9,52 | 4,76 | 28,57 | 76,2 | 9,52 | 199.504.11 |
| 10 | 5 | 32 | 80 | 10 | 199.100.11 |
| 12 | 6 | 35 | 80 | 12 | 199.120.11 |
| 12,7 | 6,35 | 31,75 | 76,2 | 12,7 | 199.505.11 |
| 15,88 | 7,94 | 57,15 | 109,5 | 15,88 | 199.509.11 |
| 16 | 8 | 55 | 110 | 16 | 199.160.11 |
| 19,05 | 9,52 | 57,15 | 109,5 | 19,05 | 199.511.11 |

TECHNICAL DETAILS:

- Premium quality HWM.
- 2 upcut spiral cutting edges [Z2].
- Excellent finish on the lower side of the work piece.
- Upward chip ejection.

APPLICATION: used for ripping, template routing, panel sizing and any routing application on solid wood, wood composites, plastic materials and laminates. Can be used at a high feed speed on well-clamped workpieces. For use on machining centers, point-to point machines, CNC routers and hand-held routers equipped with chucks or adaptors.

DP router cutters with shear angle



141

DP Z1+1 Z1 RH


| D mm | I mm | L mm | S mm | Z | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|-----|----------------------------------|
| 6 | 8 | 65 | 12x40 | 1 | 141.060.61 |
| 8 | 12 | 65 | 12x40 | 1 | 141.080.61 |
| *10 | 22 | 75 | 12x40 | 1+1 | 141.101.61 |

TECHNICAL DETAILS:

- Super strength steel.
- DP cutting edge.
- HW plunging tip for diagonal plunge-cutting.
- Resharpenable cutter (max 3 times).
- Max feed speed 4 m/min.

40X
LONGER LIFE
THAN CARBIDE

APPLICATION: to be used on all CNC routers for jointing and sizing of solid wood and wood-based panels.

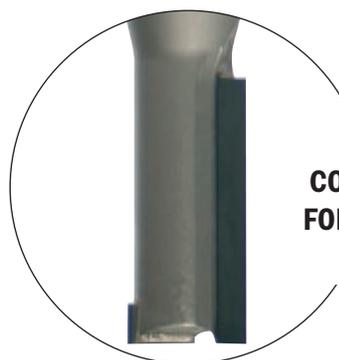

*** Z1+1
CONSTRUCTION
FOR 141.101.61
ITEM**

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

DP router cutters with shear angle



140

DP Z1+1 RH

new

| D mm | I mm | L mm | S mm | Z | ORDER NO. Right-hand rotation |
|---------|---------|---------|----------|-----------------|----------------------------------|
| 10 | 22 | 75 | 12x40 | 1+1 (3 DP+1 HW) | 140.039.56 |
| 12 | 27 | 75 | 12x40 | 1+1 (3 DP+1 HW) | 140.120.61 |
| 12 | 35 | 84 | 12x40 | 1+1 (4 DP+1 HW) | 140.121.61 |
| 12,7 | 27 | 75 | 12,7x40 | 1+1 (3 DP+1 HW) | 140.127.61 |
| 12,7 | 35 | 84 | 12,7x40 | 1+1 (4 DP+1 HW) | 140.128.61 |
| 15,87 | 27 | 87 | 15,87x50 | 1+1 (3 DP+1 HW) | 140.158.61 |
| 15,87 | 44 | 103 | 15,87x50 | 1+1 (5 DP+1 HW) | 140.159.61 |
| 16 | 27 | 87 | 16x50 | 1+1 (3 DP+1 HW) | 140.160.61 |
| 16 | 35 | 95 | 16x50 | 1+1 (4 DP+1 HW) | 140.161.61 |
| 18 | 27 | 87 | 20x50 | 1+1 (3 DP+1 HW) | 140.180.61 |
| 18 | 35 | 95 | 20x50 | 1+1 (4 DP+1 HW) | 140.181.61 |
| 18 | 44 | 103 | 20x50 | 1+1 (5 DP+1 HW) | 140.182.61 |
| 19,05 | 27 | 87 | 19,05x50 | 1+1 (3 DP+1 HW) | 140.190.61 |
| 19,05 | 44 | 103 | 19,05x50 | 1+1 (5 DP+1 HW) | 140.192.61 |
| 20 | 27 | 87 | 20x50 | 1+1 (3 DP+1 HW) | 140.200.61 |
| 20 | 35 | 95 | 20x50 | 1+1 (4 DP+1 HW) | 140.201.61 |
| 20 | 44 | 103 | 20x50 | 1+1 (5 DP+1 HW) | 140.202.61 |
| 20 | 53 | 112 | 20x50 | 1+1 (6 DP+1 HW) | 140.203.61 |

TECHNICAL DETAILS:


- Super strength steel.
- DP cutting edge.
- HW plunging tip for diagonal plunge-cutting (Z-axis tool entrance).
- Resharpenable cutter (max 3 times).
- Max feed speed 5 m/min.



APPLICATION: to be used on all CNC routers for jointing, rabbeting, grooving and copying of raw material, melamine and laminates, MDF, HPL and veneered panels.

Diamond router cutters with 45° shear angle

new

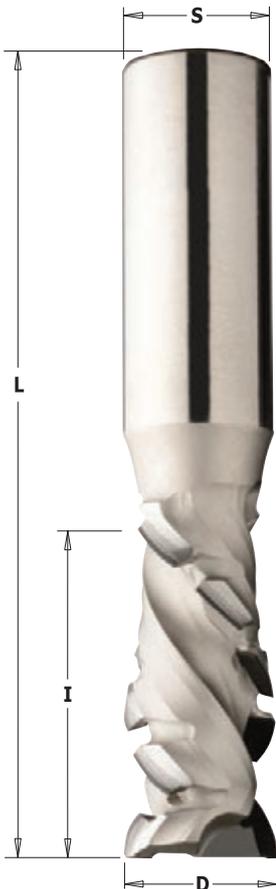

140

DP Z1+1 RH

| D mm | I mm | L mm | S mm | Z | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|------------------|----------------------------------|
| 20 | 25 | 85 | 20x50 | 1+1 (6 DP+1 HW) | 140.720.61 |
| 20 | 35 | 95 | 20x50 | 1+1 (8 DP+1 HW) | 140.721.61 |
| 20 | 45 | 105 | 20x50 | 1+1 (10 DP+1 HW) | 140.722.61 |


TECHNICAL DETAILS:

- Super strength steel.
- "H4" diamond cutting edges featuring 45° shear angle.
- HW plunging tip for plunge cutting.
- Resharpenable cutters (max 8-9 times).
- Maximum feed speed 5m/minute.



APPLICATION: to be used on all CNC routers for jointing, rabbeting, grooving and copying of raw material, melamine and laminates, MDF, HPL and veneered panels.

DP router cutters with shear angle

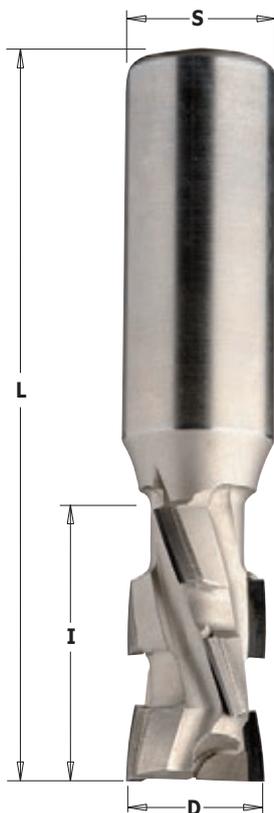

142

DP Z2+2 RH

| D mm | I mm | L mm | S mm | Z | ORDER NO. Right-hand rotation |
|---------------|---------|---------|---------|------------------|----------------------------------|
| 20 | 27 | 85 | 20x50 | 2+2 (6 DP+1 HW) | 142.200.61 |
| 20 | 36 | 95 | 20x50 | 2+2 (8 DP+1 HW) | 142.201.61 |
| 20 | 45 | 105 | 20x50 | 2+2 (10 DP+1 HW) | 142.202.61 |
| 20 | 54 | 115 | 20x50 | 2+2 (12 DP+1 HW) | 142.203.61 |
| new 25 | 27 | 85 | 25x50 | 2+2 (6 DP+1 HW) | 142.250.61 |
| new 25 | 36 | 95 | 25x50 | 2+2 (8 DP+1 HW) | 142.251.61 |
| new 25 | 45 | 105 | 25x50 | 2+2 (10 DP+1 HW) | 142.252.61 |
| new 25 | 54 | 115 | 25x50 | 2+2 (12 DP+1 HW) | 142.253.61 |

TECHNICAL DETAILS:

- Super strength steel.
- DP cutting edge.
- HW plunging tip for diagonal plunge-cutting (Z-axis tool entrance).
- Resharpenable cutter (max 3 times).
- Max feed speed 10 m/min.


APPLICATION: to be used on all CNC routers for jointing, rabbeting, grooving, copying and dividing cuts of raw material, melamine and laminates, MDF, HPL and veneered panels.

40X
LONGER LIFE
THAN CARBIDE

Diamond router cutters with 20° shear angle



new

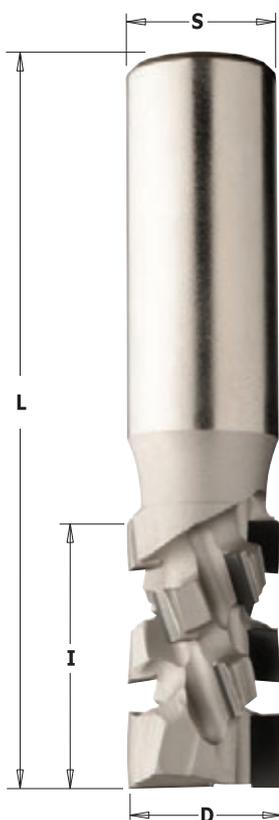

142

DP Z2+2 RH

| D mm | I mm | L mm | S mm | Z | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|------------------|----------------------------------|
| 20 | 25 | 85 | 20x45 | 2+2 (8 DP+1 HW) | 142.720.61 |
| 20 | 30 | 90 | 20x45 | 2+2 (10 DP+1 HW) | 142.721.61 |
| 20 | 35 | 95 | 20x45 | 2+2 (12 DP+1 HW) | 142.722.61 |
| 20 | 40 | 100 | 20x45 | 2+2 (14 DP+1 HW) | 142.723.61 |
| 20 | 45 | 105 | 20x45 | 2+2 (16 DP+1 HW) | 142.724.61 |
| 20 | 50 | 110 | 20x45 | 2+2 (18 DP+1 HW) | 142.725.61 |
| 20 | 55 | 115 | 20x45 | 2+2 (20 DP+1 HW) | 142.726.61 |

TECHNICAL DETAILS:

- Super strength steel.
- "H4" diamond cutting edges featuring 20° shear angle.
- HW plunging tip for diagonal plunge-cutting (Z-axis tool entrance).
- Resharpenable cutters (max 8-10 times).
- Maximum feed speed 20m/minute.


APPLICATION: used on all CNC routers for jointing, rabbeting, grooving, copying and dividing raw material, melamine, laminated, MDF, HPL and veneered panels.

40X
LONGER LIFE
THAN CARBIDE

DP spiral router cutters with shear angle



DP Z3 RH

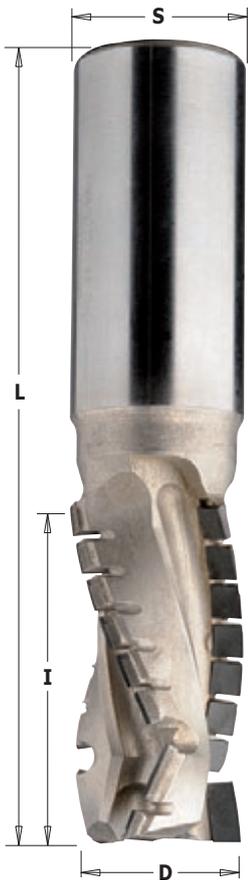

143

| D mm | I mm | L mm | S mm | Z | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|----------------|----------------------------------|
| 22 | 30 | 90 | 25x50 | 3 (12 DP+1 HW) | 143.220.61 |
| □ 22 | 35 | 95 | 25x50 | 3 (15 DP+1 HW) | 143.221.61 |
| 22 | 40 | 100 | 25x50 | 3 (18 DP+1 HW) | 143.222.61 |
| □ 22 | 45 | 105 | 25x50 | 3 (20 DP+1 HW) | 143.223.61 |
| 22 | 50 | 110 | 25x50 | 3 (21 DP+1 HW) | 143.224.61 |
| □ 22 | 55 | 115 | 25x50 | 3 (24 DP+1 HW) | 143.225.61 |
| 22 | 60 | 120 | 25x50 | 3 (27 DP+1 HW) | 143.226.61 |
| □ 22 | 65 | 125 | 25x50 | 3 (29 DP+1 HW) | 143.227.61 |
| □ 22 | 70 | 130 | 25x50 | 3 (30 DP+1 HW) | 143.228.61 |

□ On request

TECHNICAL DETAILS:

- Super strength steel. - DP cutting edge.
- HW plunging tip for diagonal plunge-cutting (Z-axis tool entrance).
- Resharpenable cutter (max 6 times). - Max feed speed 25 m/min.

40X
LONGER LIFE
THAN CARBIDE

DP router cutters with shear angle for Nesting (Densimet® tungsten heavy metal alloys)

| D mm | I mm | L mm | S mm | Z | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|-----------|----------------------------------|
| new 12 | 25 | 70 | 12x40 | 3 (9 DP) | 143.120.61 |
| new 12 | 31 | 80 | 12x40 | 3 (12 DP) | 143.121.61 |

TECHNICAL DETAILS:

- Densimet® tungsten heavy metal alloys for low-vibration. - DP cutting edge.
- Resharpenable cutter (max 6 times).
- Max feed speed 25 m/min.


40X
LONGER LIFE
THAN CARBIDE

APPLICATION: to be used on all CNC routers for jointing, rabbeting, grooving, copying and dividing cuts of raw material, melamine and laminates, MDF, HPL and veneered panels. High performance on pre-and finish-routing.

Diamond router cutters with 40° shear angle for roughing



new

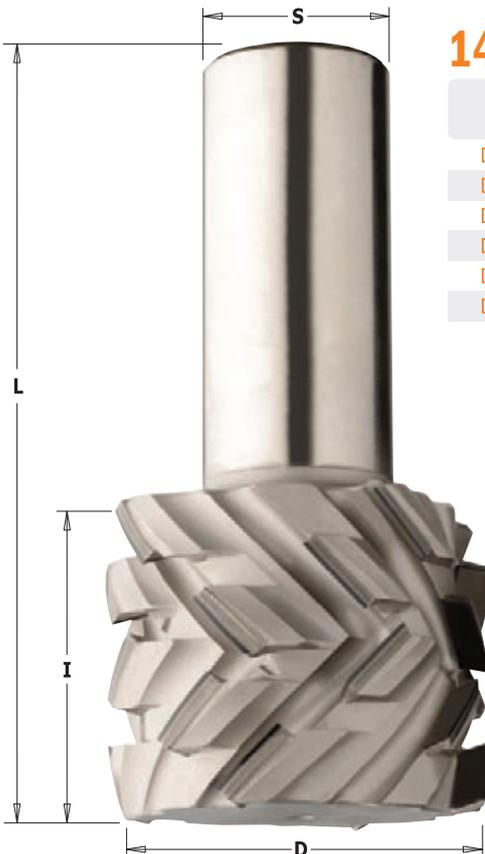

145

DP Z3 Z4 RH

| D mm | I mm | L mm | S mm | Z | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|-------------|----------------------------------|
| □ 50 | 23 | 80 | 25x55 | 3+3 (9 DP) | 145.501.61 |
| □ 50 | 23 | 80 | 25x55 | 4+4 (12 DP) | 145.511.61 |
| □ 50 | 28 | 85 | 25x55 | 3+3 (15 DP) | 145.502.61 |
| □ 50 | 28 | 85 | 25x55 | 4+4 (20 DP) | 145.512.61 |
| □ 50 | 38 | 95 | 25x55 | 3+3 (21 DP) | 145.503.61 |
| □ 50 | 38 | 95 | 25x55 | 4+4 (28 DP) | 145.513.61 |

TECHNICAL DETAILS:


- Super strength steel.
- "H4" diamond cutting edges featuring 40° shear angle.
- Resharpenable cutters (max 8-10 times).
- Maximum feed speed 30m/minute.

40X
LONGER LIFE
THAN CARBIDE

APPLICATION: used on all CNC routers for jointing, rabbeting, grooving, copying and dividing raw material, melamine, laminated, MDF, HPL and veneered panels. High performance routing.

□ On request

Solid carbide router cutters

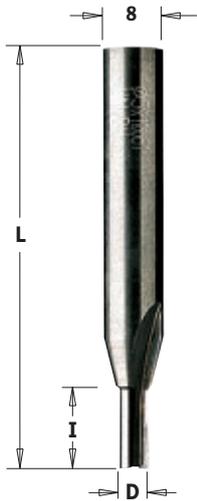

174



| D | I | L | S | ORDER NO. |
|----|----|----|----|---------------------|
| mm | mm | mm | mm | Right-hand rotation |
| 3 | 10 | 55 | 8 | 174.030.11 |
| 4 | 10 | 55 | 8 | 174.040.11 |
| 5 | 12 | 55 | 8 | 174.050.11 |
| 6 | 14 | 55 | 8 | 174.060.11 |
| 7 | 20 | 55 | 8 | 174.070.11 |

TECHNICAL DETAILS:
 - Premium quality HWM.
 - 2 radial relief cutting edges [Z2].

Router cutters



174




| D | I | L | S | ORDER NO. |
|----|----|----|----|---------------------|
| mm | mm | mm | mm | Right-hand rotation |
| 8 | 20 | 55 | 8 | 174.080.11 |
| 8 | 30 | 70 | 8 | 174.081.11 |
| 8 | 40 | 90 | 8 | 174.082.11 |
| 9 | 20 | 55 | 8 | 174.090.11 |
| 10 | 20 | 60 | 8 | 174.100.11 |
| 10 | 30 | 70 | 8 | 174.102.11 |
| 10 | 40 | 90 | 8 | 174.101.11 |
| 11 | 20 | 60 | 8 | 174.110.11 |
| 12 | 20 | 60 | 8 | 174.120.11 |
| 12 | 30 | 70 | 8 | 174.122.11 |
| 12 | 40 | 90 | 8 | 174.121.11 |
| 13 | 20 | 60 | 8 | 174.130.11 |
| 14 | 20 | 60 | 8 | 174.140.11 |
| 14 | 30 | 70 | 8 | 174.142.11 |
| 14 | 40 | 90 | 8 | 174.141.11 |
| 15 | 20 | 60 | 8 | 174.150.11 |
| 16 | 20 | 70 | 8 | 174.160.11 |
| 16 | 30 | 70 | 8 | 174.162.11 |
| 16 | 40 | 90 | 8 | 174.161.11 |
| 18 | 20 | 70 | 8 | 174.180.11 |
| 18 | 30 | 70 | 8 | 174.181.11 |
| 18 | 40 | 80 | 8 | 174.182.11 |
| 19 | 20 | 70 | 8 | 174.190.11 |
| 20 | 20 | 70 | 8 | 174.200.11 |
| 20 | 30 | 70 | 8 | 174.201.11 |
| 20 | 40 | 90 | 8 | 174.202.11 |
| 22 | 20 | 70 | 8 | 174.220.11 |
| 22 | 30 | 70 | 8 | 174.221.11 |
| 22 | 40 | 90 | 8 | 174.222.11 |
| 24 | 20 | 70 | 8 | 174.240.11 |
| 24 | 30 | 70 | 8 | 174.241.11 |
| 24 | 40 | 90 | 8 | 174.242.11 |
| 25 | 20 | 70 | 8 | 174.250.11 |
| 26 | 20 | 70 | 8 | 174.260.11 |
| 26 | 30 | 70 | 8 | 174.261.11 |
| 28 | 20 | 70 | 8 | 174.280.11 |
| 28 | 30 | 70 | 8 | 174.281.11 |
| 29 | 20 | 70 | 8 | 174.290.11 |
| 30 | 20 | 70 | 8 | 174.300.11 |

HW plunge centre tip



TECHNICAL DETAILS:
 - Super strength steel.
 - 2 precision ground HW cutting edges and 1 HW plunge centre tip [Z2+1].

APPLICATION: used for drilling, grooving or jointing on solid wood and wood composites. Can be used on machining centres, CNC routers and hand-held routers equipped with chucks or adaptors.

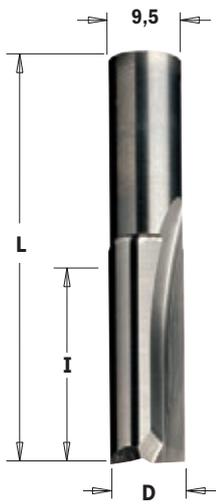

112



| D | I | L | S | ORDER NO. |
|-----|----|----|-----|---------------------|
| mm | mm | mm | mm | Right-hand rotation |
| 3 | 10 | 37 | 9,5 | 112.030.11 |
| 4 | 10 | 37 | 9,5 | 112.040.11 |
| 5 | 12 | 39 | 9,5 | 112.050.11 |
| 6 | 14 | 41 | 9,5 | 112.060.11 |
| 7 | 16 | 43 | 9,5 | 112.070.11 |
| 8 | 18 | 48 | 9,5 | 112.080.11 |
| 8 | 30 | 60 | 9,5 | 112.081.11 |
| 9 | 20 | 52 | 9,5 | 112.090.11 |
| 10* | 22 | 52 | 9,5 | 112.100.11 |
| 10* | 35 | 65 | 9,5 | 112.101.11 |
| 11* | 26 | 52 | 9,5 | 112.110.11 |
| 12* | 26 | 52 | 9,5 | 112.120.11 |

* Super strength steel
2 precision ground HW cutting edges [Z2+1]

TECHNICAL DETAILS:
- Premium quality HWM.
- 2 radial relief cutting edges [Z2+1].



Router cutters



113



| D | I | L | S | ORDER NO. |
|----|----|----|----|---------------------|
| mm | mm | mm | mm | Right-hand rotation |
| 12 | 26 | 52 | 12 | 113.120.11 |
| 12 | 40 | 70 | 12 | 113.121.11 |
| 13 | 26 | 52 | 12 | 113.130.11 |
| 14 | 28 | 56 | 12 | 113.140.11 |
| 14 | 40 | 72 | 12 | 113.141.11 |
| 15 | 32 | 60 | 12 | 113.150.11 |
| 16 | 32 | 60 | 12 | 113.160.11 |
| 16 | 40 | 72 | 12 | 113.161.11 |
| 17 | 35 | 64 | 12 | 113.170.11 |
| 18 | 35 | 64 | 12 | 113.180.11 |
| 19 | 38 | 68 | 12 | 113.190.11 |
| 20 | 38 | 68 | 12 | 113.200.11 |
| 22 | 40 | 72 | 12 | 113.220.11 |
| 24 | 40 | 72 | 12 | 113.240.11 |
| 25 | 40 | 72 | 12 | 113.250.11 |
| 26 | 42 | 74 | 12 | 113.260.11 |
| 28 | 42 | 74 | 12 | 113.280.11 |
| 30 | 42 | 74 | 12 | 113.300.11 |

TECHNICAL DETAILS:
- Super strength steel.
- 2 precision ground HW cutting edges and 1 HW plunge centre tip [Z2+1].

APPLICATION: used for grooving, jointing and routing on solid wood, wood composites, plastic materials and laminates.



Router cutters



HW plunge centre tip



TECHNICAL DETAILS:

- Premium quality HWM.
- 2 radial relief cutting edges [Z2].
- 1 HW [Z1] plunge centre tip.

APPLICATION: for grooving, jointing and routing on solid wood, wood composites, plastic materials and laminates.

175



| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|----------------------------------|
| • 4 | 10 | 65 | 10 | 175.040.11 |
| • 5 | 12 | 65 | 10 | 175.050.11 |
| • 6 | 14 | 65 | 10 | 175.060.11 |
| • 7 | 17 | 65 | 10 | 175.070.11 |
| 8 | 20 | 65 | 10 | 175.080.11 |
| 10 | 25 | 70 | 10 | 175.100.11 |
| 12 | 25 | 70 | 10 | 175.120.11 |
| 14 | 25 | 70 | 10 | 175.140.11 |
| 15 | 25 | 70 | 10 | 175.150.11 |
| 16 | 25 | 70 | 10 | 175.160.11 |
| 18 | 25 | 70 | 10 | 175.180.11 |
| 20 | 25 | 70 | 10 | 175.200.11 |
| 22 | 25 | 70 | 10 | 175.220.11 |
| 24 | 25 | 70 | 10 | 175.240.11 |
| 25 | 25 | 70 | 10 | 175.250.11 |
| 26 | 25 | 70 | 10 | 175.260.11 |
| 30 | 25 | 70 | 10 | 175.300.11 |
| 35 | 25 | 70 | 10 | 175.350.11 |

• HWM

176



| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|----------------------------------|
| 10 | 40 | 87 | 10 | 176.100.11 |
| 12 | 40 | 87 | 10 | 176.120.11 |
| 14 | 40 | 87 | 10 | 176.140.11 |
| 15 | 40 | 87 | 10 | 176.150.11 |
| 16 | 40 | 87 | 10 | 176.160.11 |
| 18 | 40 | 87 | 10 | 176.180.11 |
| 20 | 40 | 87 | 10 | 176.200.11 |

177




| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|----------------------------------|
| 10 | 35 | 90 | 12 | 177.100.11 |
| 12 | 35 | 90 | 12 | 177.120.11 |
| 12 | 50 | 100 | 12 | 177.121.11 |
| 14 | 35 | 90 | 12 | 177.140.11 |
| 16 | 35 | 90 | 12 | 177.160.11 |
| 16 | 60 | 110 | 12 | 177.161.11 |
| 18 | 35 | 90 | 12 | 177.180.11 |
| 18 | 60 | 110 | 12 | 177.181.11 |
| 20 | 35 | 90 | 12 | 177.200.11 |
| 22 | 35 | 90 | 12 | 177.220.11 |
| 24 | 35 | 90 | 12 | 177.240.11 |
| 25 | 35 | 90 | 12 | 177.250.11 |
| 26 | 35 | 90 | 12 | 177.260.11 |
| 28 | 35 | 90 | 12 | 177.280.11 |
| 30 | 35 | 90 | 12 | 177.300.11 |
| 35 | 35 | 90 | 12 | 177.350.11 |

TECHNICAL DETAILS:


- Super strength steel.
- 2 precision ground HW cutting edges and 1 HW plunge centre tip [Z2+1].

APPLICATION: used for grooving, jointing and general routing operation on solid wood, wood composites, plastics and laminates. Can be used on machining centres, CNC routers and hand-held routers.

HW plunge centre tip



HW plunge centre tip





653

| D mm | I mm | L mm | S mm | Spare knives | | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|--------------|------------|----------------------------------|
| | | | | side | top | |
| 16 | 28,3 | 91,5 | 20 | 790.283.12 | 790.075.00 | 653.661.11 |
| 16 | 48,3 | 111,5 | 20 | 790.483.12 | 790.075.00 | 653.662.11 |
| 18 | 48,3 | 111,5 | 20 | 790.483.12 | 790.075.00 | 653.681.11 |
| 20 | 48,3 | 111,5 | 20 | 790.483.12 | 790.096.00 | 653.701.11 |

Spare parts

| | |
|------------|-----------------------|
| 790.075.00 | 7,5x12x1,5mm knife |
| 790.096.00 | 9,6x12x1,5mm knife |
| 790.283.12 | 28,3x12x1,5mm knife |
| 790.483.12 | 48,3x12x1,5mm knife |
| 990.072.00 | M3,5x3,5mm Torx screw |
| 990.074.00 | M4x3,5mm Torx screw |
| 990.075.00 | M4x6mm Torx screw |
| 991.061.00 | T15 Torx key |

TECHNICAL DETAILS:

- Super strength steel.
- 2 cutting edges [Z1+1].

APPLICATION: straight router bit with one replaceable plunging knife and one side knife fixed by special Torx screws. The body is precise balanced. For finishing and routing, plunge cutting and grooving in boards materials (laminated chipboards, MDF) and hardwood. For use on CNC machining centres.

Spoilboard surfacing router cutters with insert knives



663.001.11

| D mm | I mm | L mm | S mm | ORDER NO. | |
|-----------------------|---------|---------|---------|---------------------|--|
| | | | | Right-hand rotation | |
| <small>new</small> 60 | 12 | 80 | 12 | 663.002.11 | |
| 80 | 12 | 90 | 20 | 663.001.11 | |

Spare parts



| | |
|------------|-----------------------|
| 790.120.00 | 12x12x1,5mm knife |
| 990.075.00 | M4x6mm Torx T15 screw |
| 991.061.00 | T15 Torx key |
| 790.140.00 | 14x14x2mm knife |
| 990.083.00 | M6x10mm TCEI screw |
| 991.067.00 | 3mm allen key |

TECHNICAL DETAILS:

- Super strength steel.
- 2 cutting edges [Z2].
- 2 scores knives [V2].

APPLICATION: new router bit for CNC router ideal for fast removal of material over a large surface area leaving an improved finish at the bottom of the cut. Used on soft and hardwood, particle board and MDF. The cutter uses 4-sided inserts.

Cost effective solution compared to brazed router bits and solid carbide spiral bits.

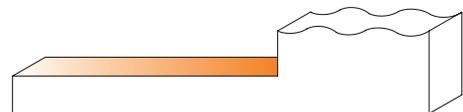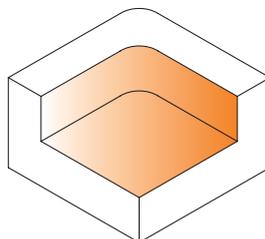

Drawings are 1:2 scale

Adjustable chamfering CNC cutter




663.201.11

| D mm | D_Max 45° mm | I mm | A | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|-----------------|---------|-----------------|---------|---------|----------------------------------|
| 85 | 102 | 39,5 | 0°-45° - 0°+90° | 92 | 20 | 663.201.11 |



Spare parts

| | |
|------------|---|
| 790.395.12 | 39x12x1,5mm knife |
| 663.999.01 | 38x6x12mm wedge |
| 990.087.00 | M6x8mm STEI screw (4x2mm threaded pin) |
| 991.067.00 | 3mm hex key |
| 663.999.02 | Kit with 2 wedges and 1 screw for blocking rotation |
| 990.099.00 | M8x25mm TCEI screw |
| 990.023.00 | M8 (4mm) nut |
| 991.081.00 | 4mm "T" hex key |

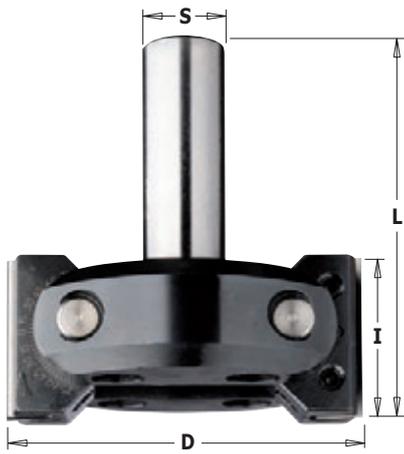

TECHNICAL DETAILS: tool body in steel, two TC reversible knives in swiveling blade carriers. Cutting on periphery and both sides. Swiveling range towards top 0-45°, toward bottom 0-90°, infinitely variable adjustment according to precise scale. With positive stops at 7,5° through adjustment aide. No displacement of adjusted beveling angle when replacing blades. Right rotation.

APPLICATION: for jointing, rebating and chamfering of solid wood and wooden boards. Suitable for CNC router machines and stationary router machine with manual or mechanical feed.

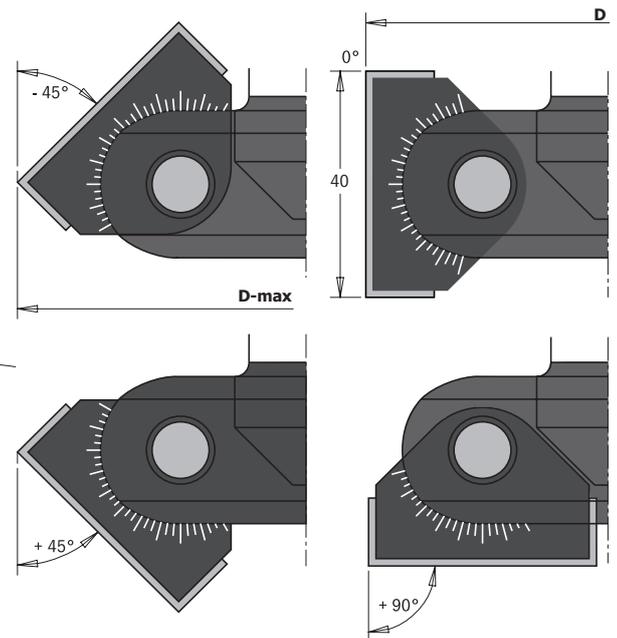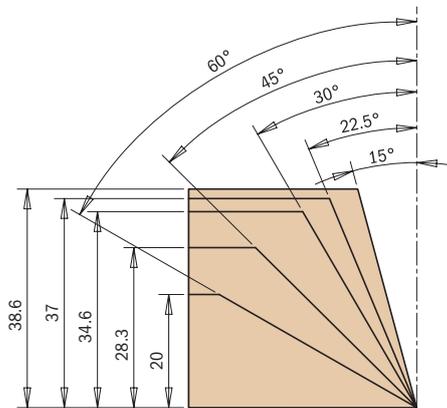

V-groove - folding - signmaking CNC router cutters with insert knives



663.101.11

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|----------------------------------|
| 52 | 25 | 100 | 20 | 663.101.11 |

Spare parts



| | |
|------------|---------------------|
| 790.360.01 | 36x12x1,5mm knife |
| 990.077.00 | M3,5x7mm Torx screw |
| 991.061.00 | T15 Torx key |

Optional

| | |
|-------------|--|
| S790.360.03 | 36x12x1,5mm HW-SMG replaceable knife (4 cutting edges 35°) |
|-------------|--|

TECHNICAL DETAILS:
 - Super Strength steel.
 - 1 cutting edges [Z1].

APPLICATION: This innovative CNC router bit offers you an endless range of possibilities for V-Groove, miter folds, signmaking, lettering and chamfer edges. The tool mounts a high grade HWM reversible knife ideal for general purpose, chipboard and plywood, but a higher quality is available for laminated and MDF material.

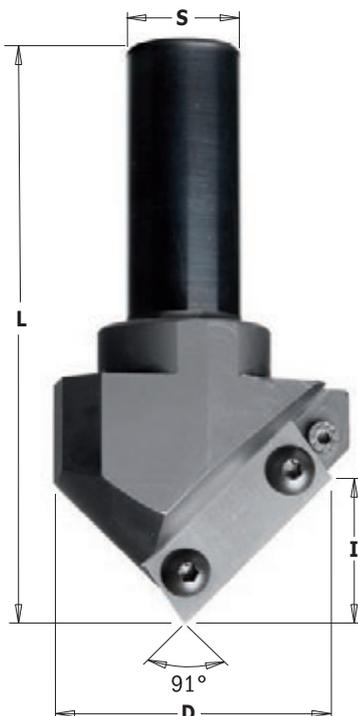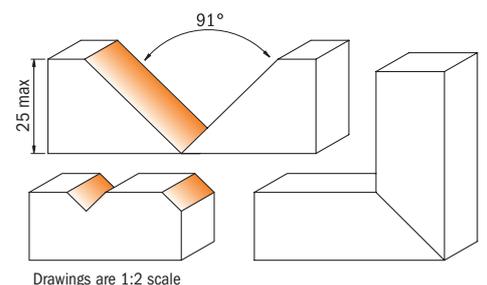

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts




616.000.01

This unique system includes a tool body with 22 profile knives designed for multiple applications on your CNC routers. Ideal for MDF, laminates, veneers, plastic, wood and solid surface materials.



TECHNICAL DETAILS:

- Knives 20x20x2mm.
- We recommend to re-sharpen the knives on the profiled cutting edges.

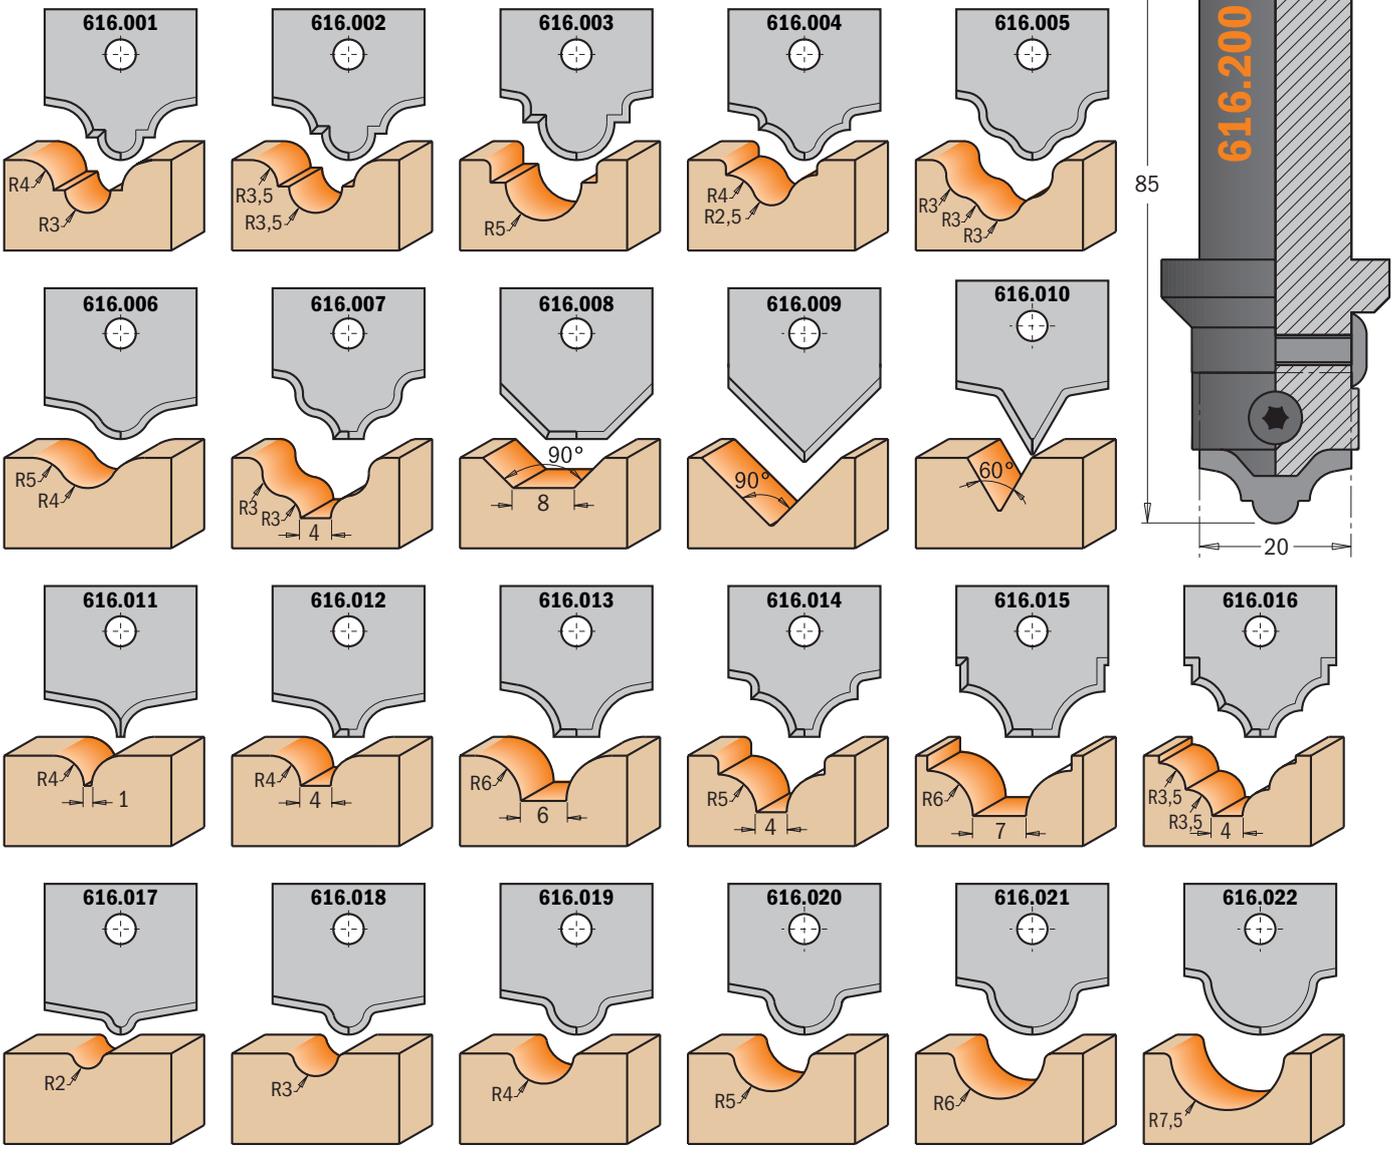

Drawings are 1:1 scale

| DESCRIPTION | S mm | ORDER NO. Right-hand rotation | Spare parts | | |
|---|---------|----------------------------------|-------------|------------|------------|
| Complete set for decorating and engraving | 20 | 616.000.01 | 616.200 | 990.077.00 | 991.061.00 |

REMARK: tool body and insert knives can be sold individually.

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts



Complete set for MDF doors



615.004.01

Open some new doors with CMT. Our 4-piece set includes the most popular profile to make MDF panel doors for kitchens and bathrooms. Each bit is made from bar stock steel and is equipped with 5 different profile knives allowing enormous possibilities for easy and economical construction. The highest materials, the lowest tolerance in balancing and the precision in the sharpening of the knives let you obtain a smooth finish on your CNC machine.





- Spare parts**
- 991.061.00 T15 Torx key
 - 990.073.00 M3,5x5mm Torx screw
 - 990.075.00 M4x6mm Torx screw
 - 990.077.00 M3,5x7mm Torx screw

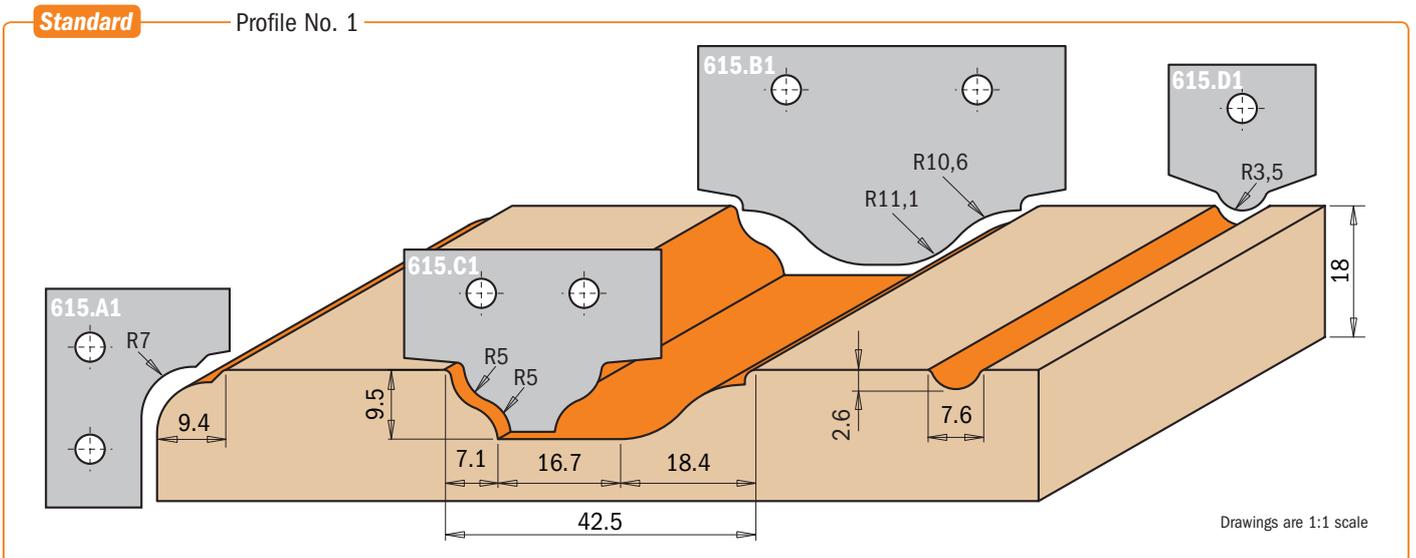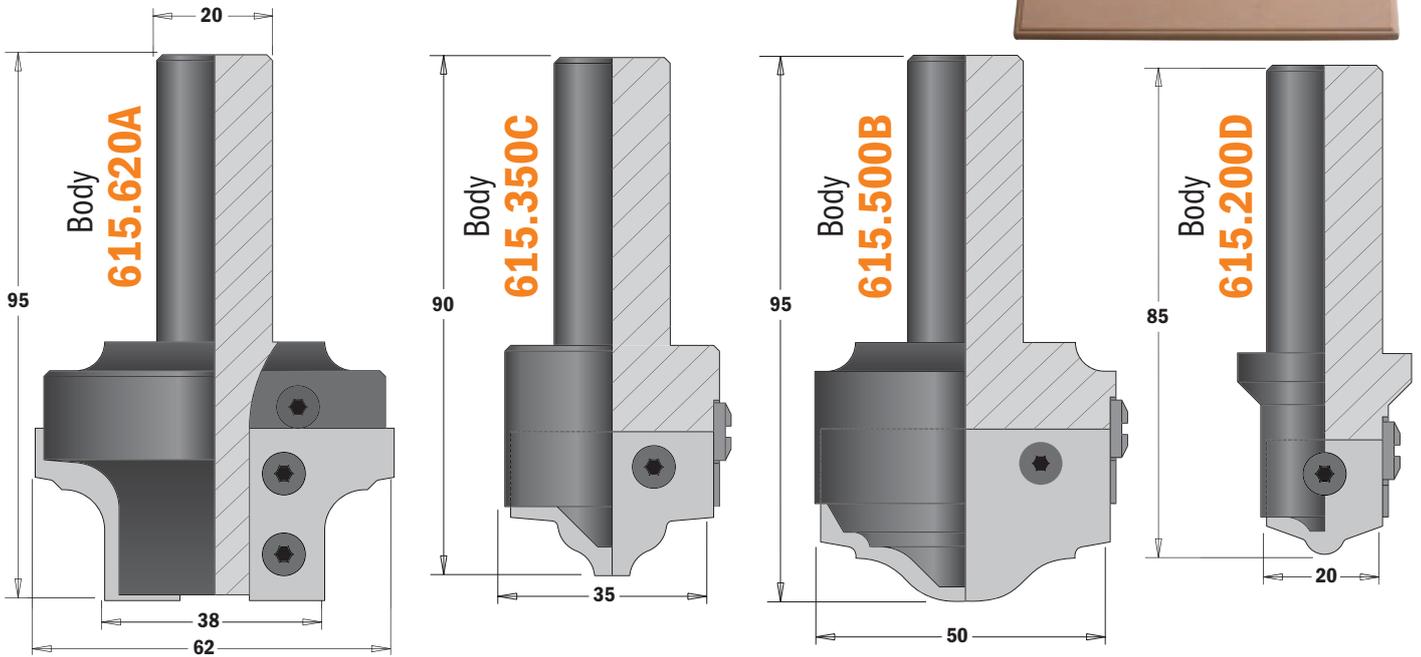

| DESCRIPTION | S mm | ORDER NO. Right-hand rotation |
|--|------|----------------------------------|
| Complete set for MDF doors (Profile no. 1) | 20 | 615.004.01 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Optional

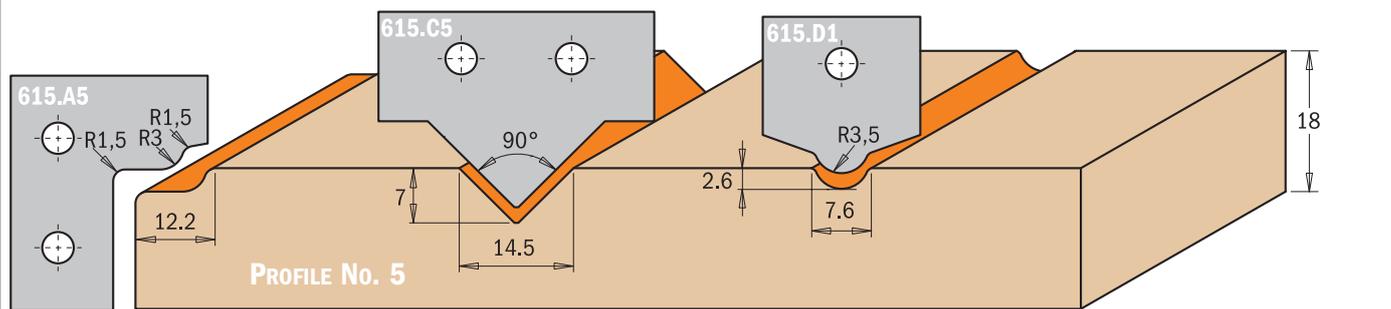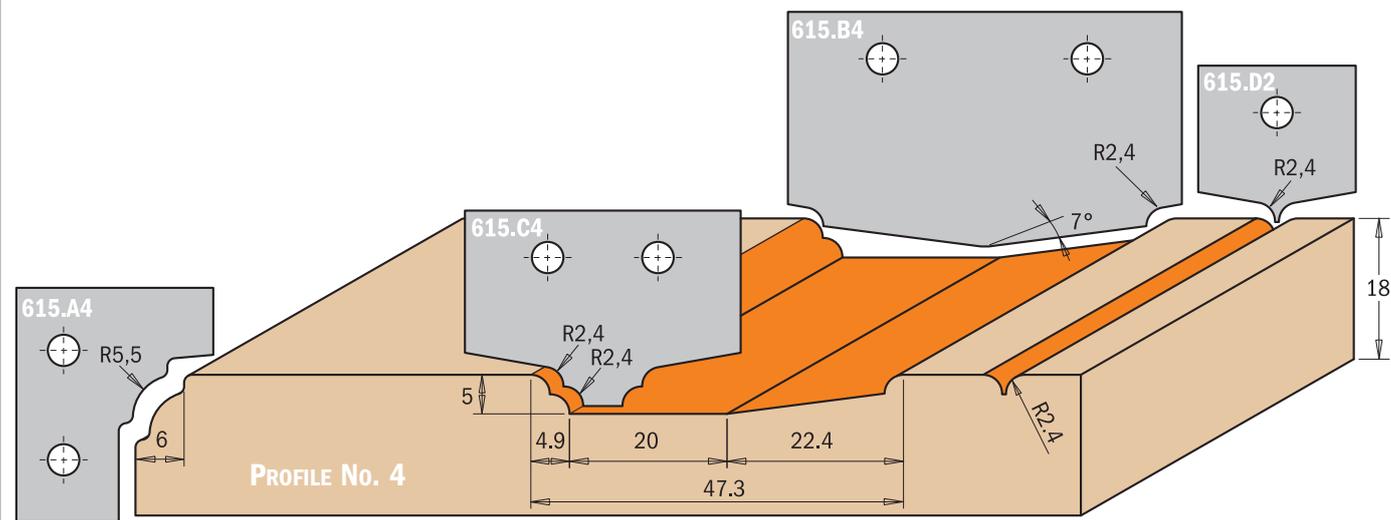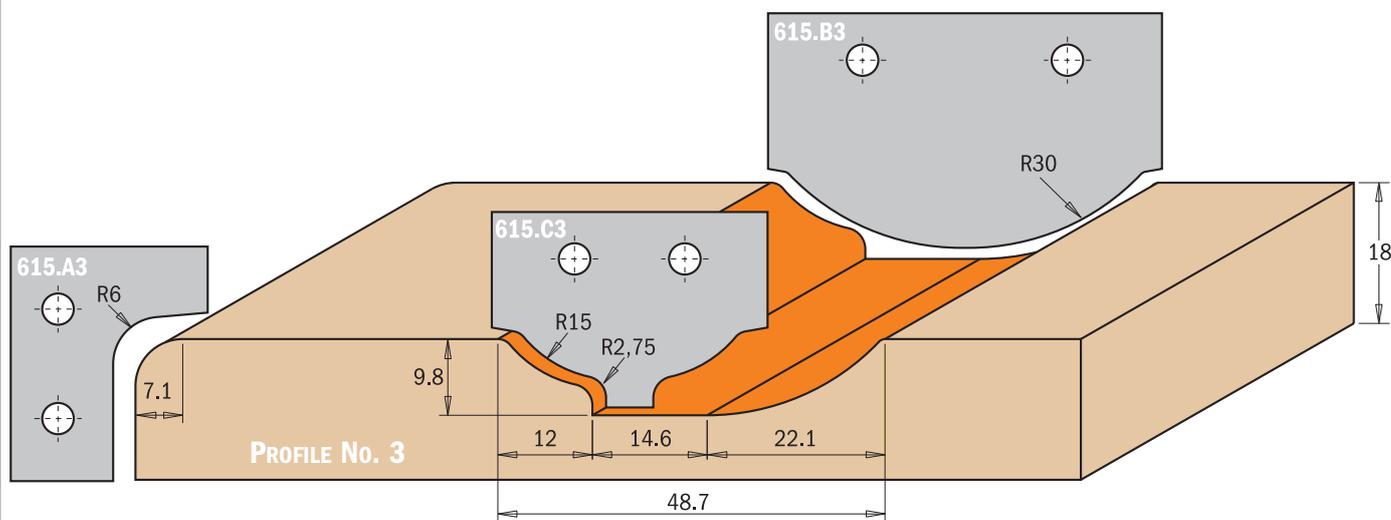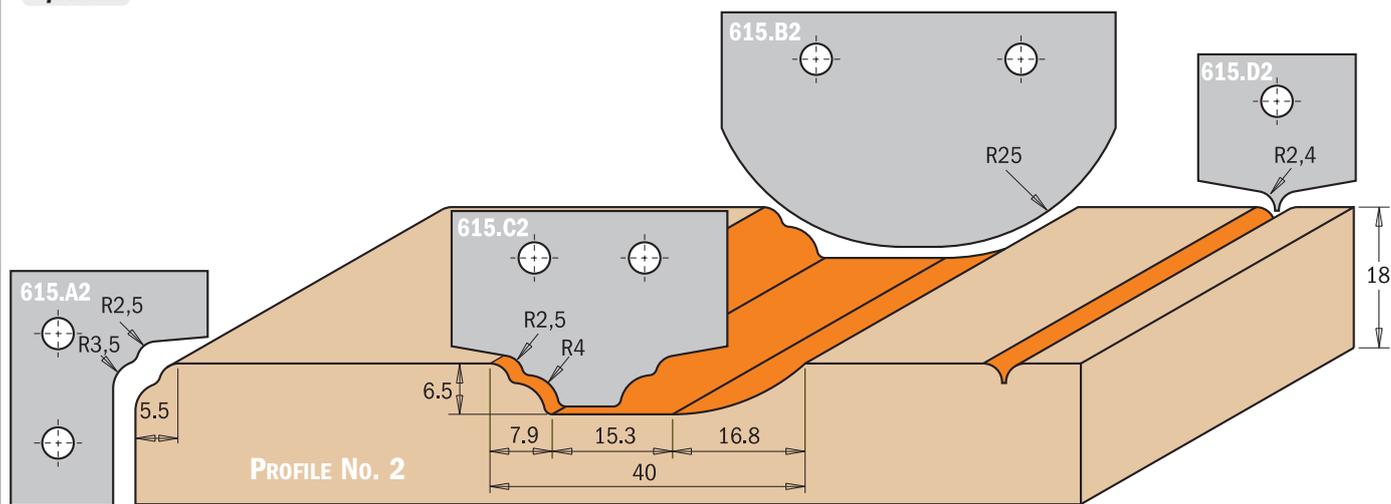

Drawings are 1:1 scale

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts

Slot and mortise boring bits

HW **Z2** **RH**

163

| D mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|----------------------------------|
| 12 | 100 | M12x1 | 163.120.11 |
| 14 | 100 | M12x1 | 163.140.11 |
| 16 | 100 | M12x1 | 163.160.11 |

TECHNICAL DETAILS:

- Super strength steel.
- 2 HW precision ground cutting edges [Z2].

APPLICATION: used for cutting mortises and slots in solid wood and wood composites. Assembled in chucks.

163
HL **Z2** **RH**

| D mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|----------------------------------|
| 12 | 100 | M12x1 | 163.120.31 |
| 14 | 100 | M12x1 | 163.140.31 |
| 16 | 100 | M12x1 | 163.160.31 |
| 18 | 100 | M12x1 | 163.180.31 |

TECHNICAL DETAILS:

- Long lasting cutter performance.
- 2 HL precision ground cutting edges [Z2].

APPLICATION: used for cutting mortises and slots in solid wood and wood composites. Assembled in chucks.

Slot and mortise boring bits


164
HW **Z2** **V2** **RH**

| D mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|----------------------------------|
| 18 | 100 | M12x1 | 164.180.11 |
| 20 | 100 | M12x1 | 164.200.11 |
| 22 | 100 | M12x1 | 164.220.11 |

TECHNICAL DETAILS:

- Super strength steel.
- HW cutting head with precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- 2 negatively ground spurs [V2].

APPLICATION: used for drilling blind holes in solid wood, wood composites, plastic and laminated materials. Used on slot and mortise machines equipped with chucks.

164
HL **Z2** **V2** **RH**

| D mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|----------------------------------|
| 15 | 100 | M12x1 | 164.150.31 |
| 18 | 100 | M12x1 | 164.180.31 |
| 20 | 100 | M12x1 | 164.200.31 |
| 24 | 100 | M12x1 | 164.240.31 |

TECHNICAL DETAILS:

- Long lasting cutter performance.
- HL cutting head with precision balanced centre point.
- 2 precision ground edges [Z2].
- 2 ground spurs [V2].

APPLICATION: used for drilling blind holes in soft and hardwood. Used on slot and mortise machines equipped with chucks.



166-167



| d mm | D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|---------|----------------------------------|
| 11 | 19 | 62 | 155 | M12x1 | 166.190.11 |
| 11 | 22 | 62 | 155 | M12x1 | 166.220.11 |
| 12 | 19 | 62 | 155 | M12x1 | 167.190.11 |
| 12 | 24 | 62 | 155 | M12x1 | 167.240.11 |

TECHNICAL DETAILS:

- Super strength steel.
- 2+2 HW precision ground cutting edges [Z2].
- 2 negatively ground spurs [V2].

APPLICATION: used for drilling and cutting mortise slots in solid wood, wood composites, plastic and laminated materials.

Lockset bits



169



| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|----------------------------------|
| 15 | 22 | 90 | M12x1 | 169.150.31 |
| 18 | 22 | 90 | M12x1 | 169.180.31 |
| 20 | 22 | 90 | M12x1 | 169.200.31 |

TECHNICAL DETAILS:

- Long-lasting cutting performance.
- 3 HL precision ground cutting edges [Z3].

APPLICATION: used for cutting mortise slots in soft and hardwood. Used on slot and mortise machines equipped with chucks.

Slot mortising bits with chip-breaker



102

HL Z2 RH LH

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| 6 | 50 | 105 | 16 | 102.060.31 | 102.060.32 |
| 7 | 55 | 110 | 16 | 102.070.31 | 102.070.32 |
| 8 | 60 | 115 | 16 | 102.080.31 | 102.080.32 |
| 9 | 65 | 120 | 16 | 102.090.31 | 102.090.32 |
| 10 | 70 | 125 | 16 | 102.100.31 | 102.100.32 |
| 11 | 75 | 130 | 16 | 102.110.31 | 102.110.32 |
| 12 | 80 | 135 | 16 | 102.120.31 | 102.120.32 |
| 13 | 85 | 140 | 16 | 102.130.31 | 102.130.32 |
| 14 | 90 | 145 | 16 | 102.140.31 | 102.140.32 |
| 15 | 95 | 150 | 16 | 102.150.31 | 102.150.32 |
| 16 | 100 | 155 | 16 | 102.160.31 | 102.160.32 |
| 17 | 105 | 160 | 16 | 102.170.31 | 102.170.32 |
| 18 | 110 | 165 | 16 | 102.180.31 | 102.180.32 |
| 19 | 115 | 170 | 16 | 102.190.31 | 102.190.32 |
| 20 | 120 | 175 | 16 | 102.200.31 | 102.200.32 |
| 22 | 125 | 180 | 16 | 102.220.31 | 102.220.32 |
| 24 | 125 | 180 | 16 | 102.240.31 | 102.240.32 |

172

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| 6 | 50 | 105 | 13 | 172.060.31 | 172.060.32 |
| 7 | 55 | 110 | 13 | 172.070.31 | 172.070.32 |
| 8 | 60 | 115 | 13 | 172.080.31 | 172.080.32 |
| 9 | 65 | 120 | 13 | 172.090.31 | 172.090.32 |
| 10 | 70 | 125 | 13 | 172.100.31 | 172.100.32 |
| 11 | 75 | 130 | 13 | 172.110.31 | 172.110.32 |
| 12 | 80 | 135 | 13 | 172.120.31 | 172.120.32 |
| 13 | 85 | 140 | 13 | 172.130.31 | 172.130.32 |
| 14 | 90 | 145 | 13 | 172.140.31 | 172.140.32 |
| 15 | 95 | 150 | 13 | 172.150.31 | 172.150.32 |
| 16 | 100 | 155 | 13 | 172.160.31 | 172.160.32 |
| 18 | 110 | 165 | 13 | 172.180.31 | 172.180.32 |
| 20 | 120 | 175 | 13 | 172.200.31 | 172.200.32 |

TECHNICAL DETAILS:

- Long-lasting cutting performance.
- 2 HL precision ground straight cutting edges with chip-breaker teeth [Z2].

APPLICATION: for cutting mortise slots in soft and hardwood.
Used on machining centres equipped with chucks.

6 piece mortising bit sets




102-172

HL Z2 RH LH

Ideal for heavy mortise jobs.
Made of super strength high speed steel and available in left-hand or right-hand rotation.
Safely packaged in a hardwood and glass box for protection, these sets are economical and a perfect addition to any workshop.

| S mm | D mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|-----------------|----------------------------------|---------------------------------|
| 16 | 6-8-10-12-14-16 | 102.001.00 | 102.001.10 |
| 13 | 6-8-10-12-14-16 | 172.001.00 | 172.001.10 |

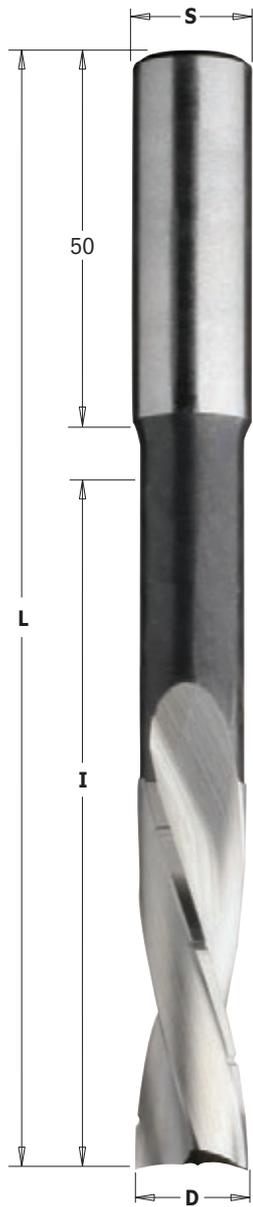

161

SP Z2 RH LH

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| 6 | 60 | 120 | 16 | 161.060.31 | 161.060.32 |
| 8 | 70 | 130 | 16 | 161.080.31 | 161.080.32 |
| 10 | 80 | 140 | 16 | 161.100.31 | 161.100.32 |
| 12 | 90 | 150 | 16 | 161.120.31 | 161.120.32 |
| 14 | 100 | 160 | 16 | 161.140.31 | 161.140.32 |
| 16 | 110 | 170 | 16 | 161.160.31 | 161.160.32 |

160

SP Z2 RH LH

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| 6 | 60 | 120 | 13 | 160.060.31 | 160.060.32 |
| 8 | 70 | 130 | 13 | 160.080.31 | 160.080.32 |
| 10 | 80 | 140 | 13 | 160.100.31 | 160.100.32 |
| 12 | 90 | 150 | 13 | 160.120.31 | 160.120.32 |
| 14 | 100 | 160 | 13 | 160.140.31 | 160.140.32 |
| 16 | 110 | 170 | 13 | 160.160.31 | 160.160.32 |

TECHNICAL DETAILS:

- Long-lasting cutting performance.
- 2 SP precision ground twisted cutting edges with chip-breaker teeth [Z2].

APPLICATION: for cutting mortise slots in soft and hardwood.
Used on machining centres equipped with chucks.

6 piece mortising bit sets




160-161

SP Z2 RH LH

Ideal for heavy mortise jobs.
Made of super strength high speed steel and available in left-hand or right-hand rotation.
Safely packaged in a hardwood and glass box for protection, these sets are economical and a perfect addition to any workshop.

| S mm | D mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|-----------------|----------------------------------|---------------------------------|
| 16 | 6-8-10-12-14-16 | 161.001.00 | 161.001.10 |
| 13 | 6-8-10-12-14-16 | 160.001.00 | 160.001.10 |

Reciprocating slot mortising bits

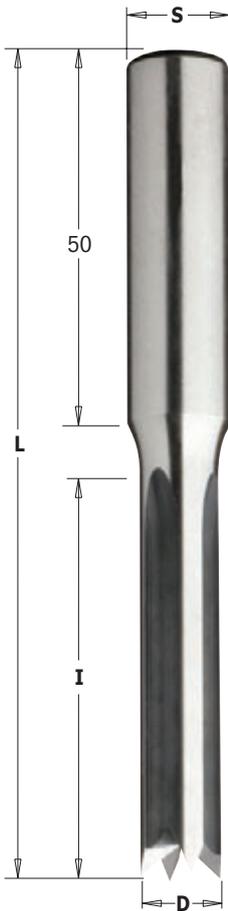

104

HL **Z4** **RH**
LH


| D | I | L | S | ORDER NO. |
|----|----|-----|----|---------------------------------|
| mm | mm | mm | mm | Right-hand & Left-hand rotation |
| 6 | 45 | 100 | 13 | 104.060.30 |
| 7 | 45 | 100 | 13 | 104.070.30 |
| 8 | 45 | 100 | 13 | 104.080.30 |
| 9 | 45 | 100 | 13 | 104.090.30 |
| 10 | 55 | 110 | 13 | 104.100.30 |
| 11 | 55 | 110 | 13 | 104.110.30 |
| 12 | 55 | 110 | 13 | 104.120.30 |
| 13 | 55 | 110 | 13 | 104.130.30 |
| 14 | 55 | 110 | 13 | 104.140.30 |
| 15 | 55 | 110 | 13 | 104.150.30 |
| 16 | 55 | 110 | 13 | 104.160.30 |

TECHNICAL DETAILS:

- Long-lasting cutting performance.
- 4 HL precision ground cutting edges [Z4].

APPLICATION: used for cutting mortise slots in soft and hardwood. Used on machining centres equipped with chucks.

Reciprocating slot mortising bits

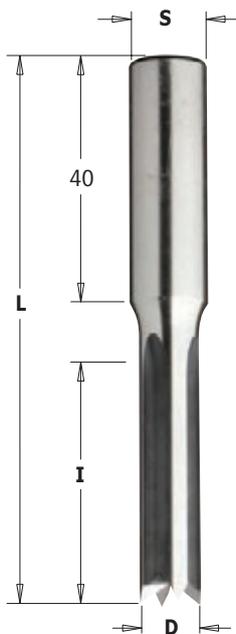

105

HL **Z4** **RH**
LH


| D | I | L | S | ORDER NO. |
|----|----|----|----|---------------------------------|
| mm | mm | mm | mm | Right-hand & Left-hand rotation |
| 6 | 28 | 73 | 10 | 105.060.30 |
| 7 | 28 | 73 | 10 | 105.070.30 |
| 8 | 28 | 73 | 10 | 105.080.30 |
| 9 | 28 | 73 | 10 | 105.090.30 |
| 10 | 28 | 73 | 10 | 105.100.30 |
| 11 | 28 | 73 | 10 | 105.110.30 |
| 12 | 28 | 73 | 10 | 105.120.30 |
| 13 | 28 | 73 | 10 | 105.130.30 |
| 14 | 28 | 73 | 10 | 105.140.30 |
| 15 | 28 | 73 | 10 | 105.150.30 |
| 16 | 28 | 73 | 10 | 105.160.30 |

TECHNICAL DETAILS:

- Long-lasting cutting performance.
- 4 HL precision ground cutting edges [Z4].

APPLICATION: used for cutting mortise slots in soft and hardwood. Used on machining centres equipped with chucks.

Reciprocating slot mortising bits

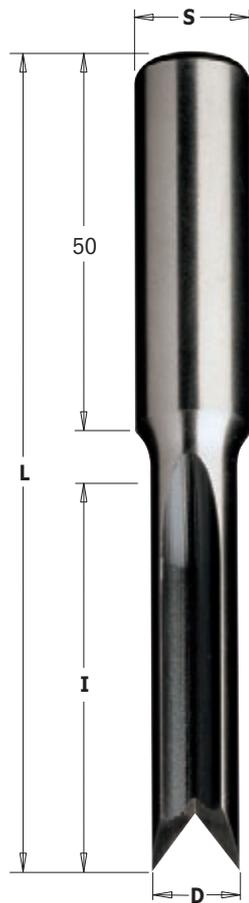

103

HL Z2 RH LH


| D | I | L | S | ORDER NO. |
|----|----|-----|----|---------------------------------|
| mm | mm | mm | mm | Right-hand & Left-hand rotation |
| 6 | 45 | 100 | 16 | 103.060.30 |
| 7 | 45 | 100 | 16 | 103.070.30 |
| 8 | 45 | 100 | 16 | 103.080.30 |
| 9 | 45 | 100 | 16 | 103.090.30 |
| 10 | 55 | 110 | 16 | 103.100.30 |
| 11 | 55 | 110 | 16 | 103.110.30 |
| 12 | 55 | 110 | 16 | 103.120.30 |
| 13 | 55 | 110 | 16 | 103.130.30 |
| 14 | 55 | 110 | 16 | 103.140.30 |
| 15 | 55 | 110 | 16 | 103.150.30 |
| 16 | 55 | 110 | 16 | 103.160.30 |

TECHNICAL DETAILS:

- Long-lasting cutter performance.
- 2 HL precision ground cutting edges [Z2].

APPLICATION: used for cutting mortise slots in soft and hardwood. Used on machining centres equipped with chucks.

Reciprocating slot mortising bits

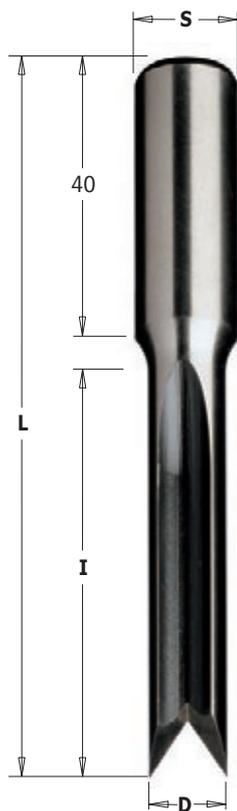

179

HS Z2 RH LH


| D | I | L | S | ORDER NO. |
|----|----|-----|----|---------------------------------|
| mm | mm | mm | mm | Right-hand & Left-hand rotation |
| 6 | 45 | 90 | 13 | 179.060.50 |
| 7 | 50 | 95 | 13 | 179.070.50 |
| 8 | 50 | 95 | 13 | 179.080.50 |
| 9 | 55 | 100 | 13 | 179.090.50 |
| 10 | 60 | 105 | 13 | 179.100.50 |
| 11 | 65 | 110 | 13 | 179.110.50 |
| 12 | 70 | 115 | 13 | 179.120.50 |
| 13 | 75 | 120 | 13 | 179.130.50 |

TECHNICAL DETAILS:

- Long-lasting cutter performance.
- 2 HS precision ground cutting edges [Z2].

APPLICATION: used for cutting mortise slots in soft and hardwood. Used on machining centres equipped with chucks.

Reciprocating slot mortising bits

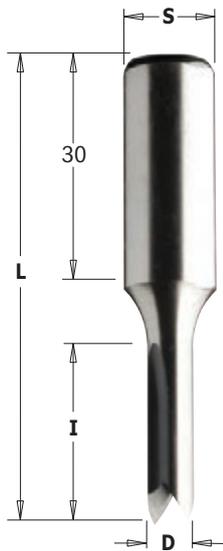

106


| | | | |
|----|----|----|----------|
| HL | Z2 | Z4 | RH LH |
|----|----|----|----------|

| D mm | I mm | L mm | S mm | Z | ORDER NO. Right-hand & Left-hand rotation |
|---------|---------|---------|---------|---|--|
| 6 | 25 | 60 | 12 | 2 | 106.060.30 |
| 7 | 25 | 60 | 12 | 2 | 106.070.30 |
| 8 | 25 | 60 | 12 | 2 | 106.080.30 |
| 9 | 25 | 60 | 12 | 2 | 106.090.30 |
| 10 | 25 | 60 | 12 | 4 | 106.100.30 |
| 11 | 25 | 60 | 12 | 4 | 106.110.30 |
| 12 | 25 | 60 | 12 | 4 | 106.120.30 |
| 13 | 25 | 60 | 12 | 4 | 106.130.30 |
| 14 | 25 | 60 | 12 | 4 | 106.140.30 |
| 15 | 25 | 60 | 12 | 4 | 106.150.30 |

TECHNICAL DETAILS:

- Long-lasting cutter performance.
- 2 or 4 HL precision ground cutting edges [Z2-Z4].

Slot mortising bits

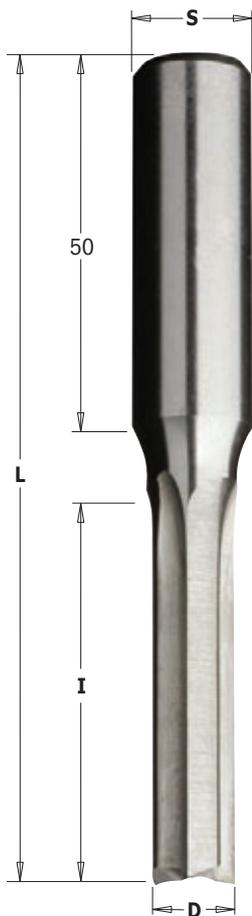

107


| | | | |
|----|----|----|----|
| HL | Z3 | RH | LH |
|----|----|----|----|

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| 6 | 55 | 110 | 16 | 107.060.31 | 107.060.32 |
| 8 | 55 | 110 | 16 | 107.080.31 | 107.080.32 |
| 10 | 55 | 110 | 16 | 107.100.31 | 107.100.32 |
| 12 | 55 | 110 | 16 | 107.120.31 | 107.120.32 |
| 14 | 60 | 115 | 16 | 107.140.31 | 107.140.32 |
| 16 | 60 | 115 | 16 | 107.160.31 | 107.160.32 |
| 18 | 60 | 115 | 16 | 107.180.31 | 107.180.32 |
| 20 | 60 | 115 | 16 | 107.200.31 | 107.200.32 |

TECHNICAL DETAILS:

- Long-lasting cutter performance.
- 3 HL precision ground cutting edges [Z3].

APPLICATION: used for cutting mortise slots in soft and hardwood. Used in machining centres equipped with chucks.

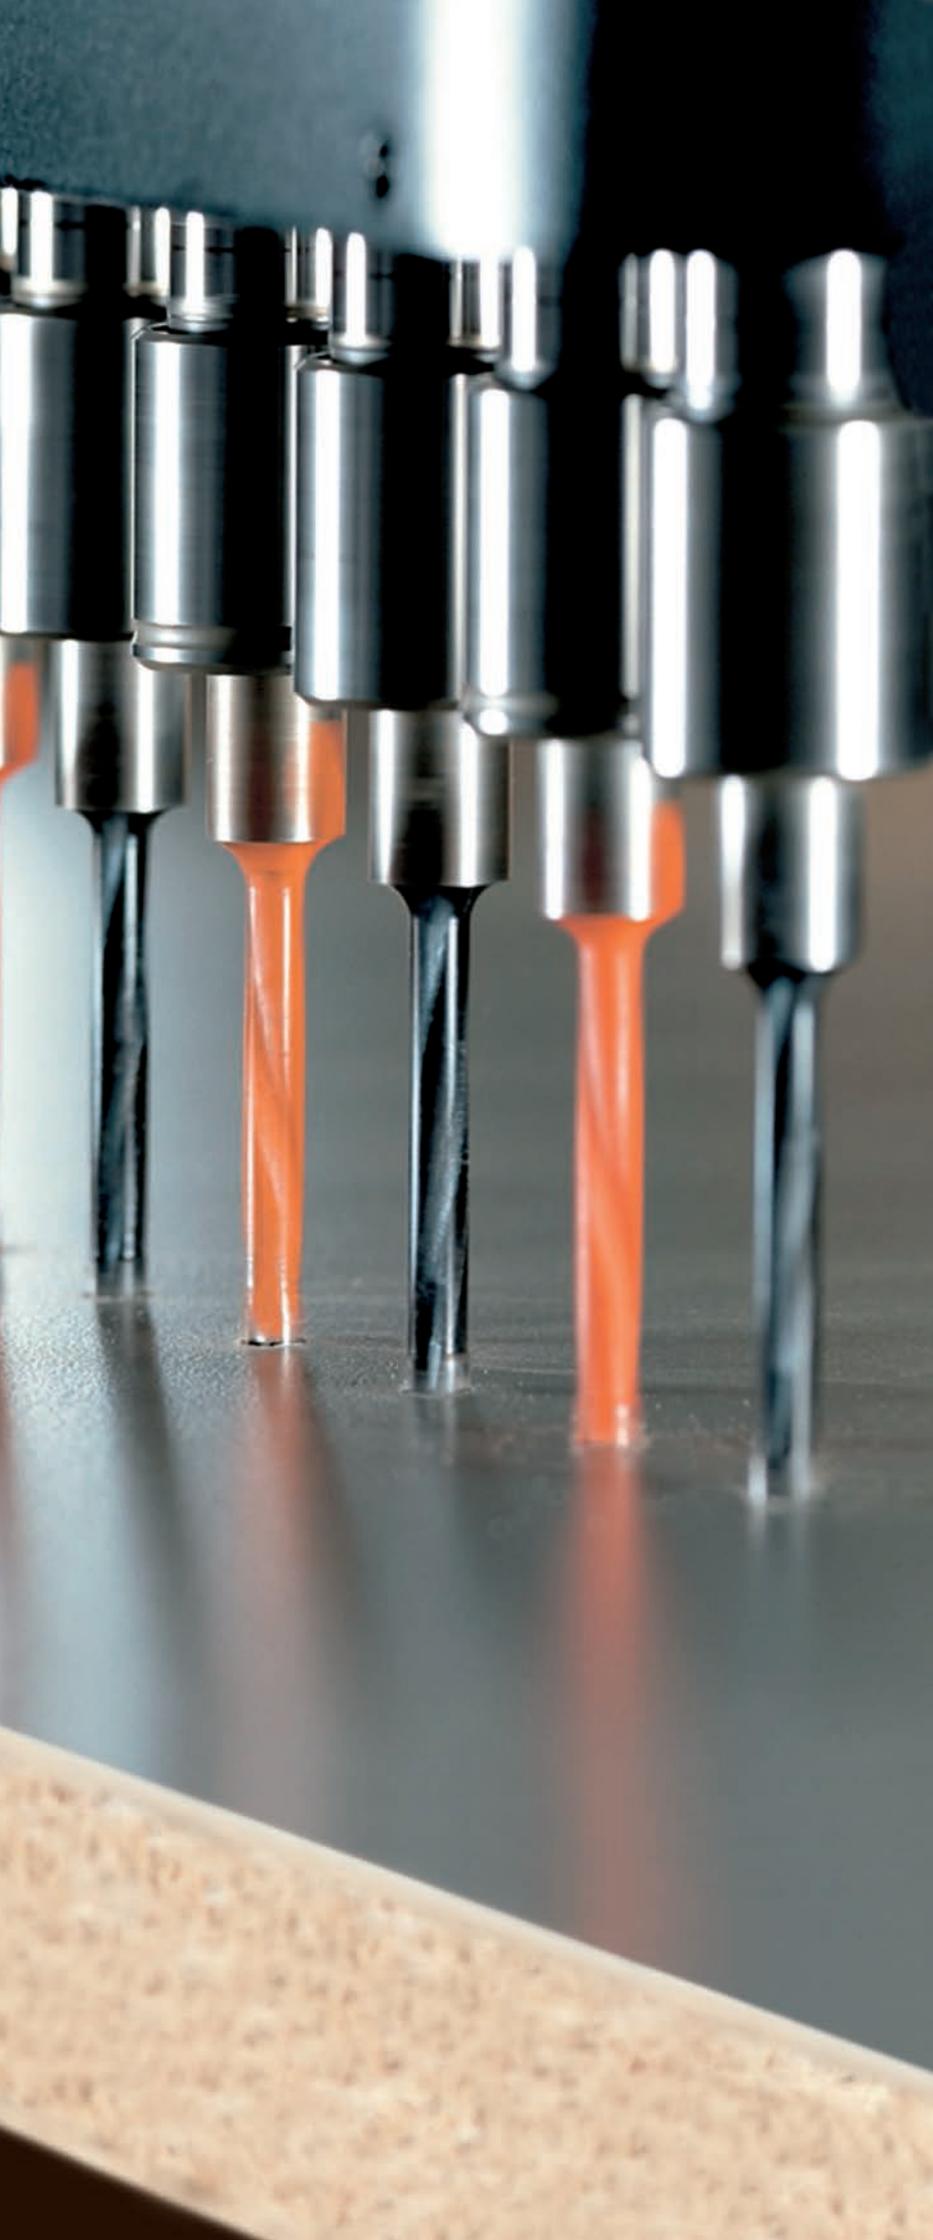

Industrial dowel drills

| PRODUCTS | PAGE |
|----------------------------------|------------------|
| Adaptors | 226 ~ 228 |
| XTreme solid carbide boring bits | 229 ~ 231 |
| XTreme boring bits | 232 - 233 |
| Solid carbide twist drills | 234 - 235 |
| 2 flute dowel drills | 236 - 237 |
| 4 flute dowel drills | 238 ~ 240 |
| Dowel drills with countersink | 241 |
| Through hole dowel drills | 242 - 243 |
| Countersinks | 244 |
| Hinge boring bits | 245 - 246 |
| Dowel drills with threaded shank | 247 ~ 250 |

Adaptors

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts



301

RH LH

| D ₃ mm | D ₂ mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------------------|----------------------|---------|----------------------------------|---------------------------------|
| 8 | 16 | M8 | 301.080.01 | 301.080.02 |
| 10 | 19,5 | M8 | 301.000.01 | 301.000.02 |

For use on the following machines:
Nottmeyer (older models).

Spare parts



990.006.00 991.062.00



302

RH LH

| D ₃ mm | D ₂ mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------------------|----------------------|---------|----------------------------------|---------------------------------|
| 8 | 16 | M10 | 302.080.01 | 302.080.02 |
| 10 | 19,5 | M10 | 302.000.01 | 302.000.02 |

For use on the following machines:
Ayen, Holzma, Knoevenagel, Mayer, Torwegge.

Spare parts



990.006.00 991.062.00



303

RH LH

| D ₃ mm | D ₂ mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------------------|----------------------|---------|----------------------------------|---------------------------------|
| 8 | 16 | M10/30° | 303.080.01 | 303.080.02 |
| 10 | 19,5 | M10/30° | 303.000.01 | 303.000.02 |

For use on the following machines:
Alberti (older models).
Balestrini, Bilek, Busellato (older models).
Schleicher, Vitap (older models).

Spare parts



990.006.00 991.062.00



304

RH LH


| D ₃ mm | D ₂ mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------------------|----------------------|------------|----------------------------------|---------------------------------|
| 8 | 16 | M8/20° 48' | 304.080.01 | 304.080.02 |
| 10 | 19,5 | M8/20° 48' | 304.000.01 | 304.000.02 |

For use on the following machines:
Balestrini, Bilek.

Spare parts



990.006.00 991.062.00

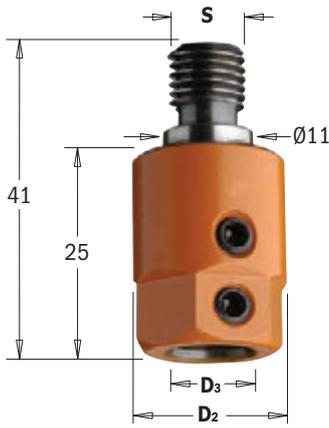

305

RH LH

| D ₃ mm | D ₂ mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------------------|----------------------|---------|----------------------------------|---------------------------------|
| 8 | 16 | M10/11 | 305.080.01 | 305.080.02 |
| 10 | 19,5 | M10/11 | 305.000.01 | 305.000.02 |

For use on the following machines:
 Biesse (older models).
 Masterwood (Zangheri & Boschetti).
 Morbidelli, Torwegge, Vitap (new design).
 Weeke.

Spare parts



990.006.00 991.062.00



358

RH LH

| D ₃ mm | D ₂ mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------------------|----------------------|---------|----------------------------------|---------------------------------|
| 8 | 16 | M8/9 | 358.080.01 | 358.080.02 |
| 10 | 19,5 | M8/9 | 358.000.01 | 358.000.02 |

For use on the following machines:
 Masterwood (Zangheri & Boschetti).
 Morbidelli, Nottmeyer (new design).

Spare parts



990.006.00 991.062.00



359

RH LH

| D ₃ mm | D ₂ mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------------------|----------------------|---------|----------------------------------|---------------------------------|
| 10 | 19,5 | M10 | 359.000.01 | 359.000.02 |

For use on the following machines:
 Scheer.

Spare parts



990.006.00 991.062.00



360.001

RH LH

| D ₃ mm | D ₂ mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------------------|----------------------|----------------------------------|---------------------------------|
| 10 | 20 | 360.001.01 | 360.001.02 |

For use on the following machines:
 For Biesse machines with quick drill change attachment.

Spare parts



990.007.00 991.067.00

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts

Adaptors

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts



360.101

RH
LH

| | | | | |
|----------------------------|----------------------------|--|--|---|
| D₃ mm | D₂ mm | | | ORDER NO. Right-hand & Left-hand rotation |
| 10 | 18 | | | 360.101.00 |

For use on the following machines:
Vitap.

Spare parts



990.015.00 991.062.00



360.201

RH
LH

| | | | | |
|----------------------------|----------------------------|--|--|---|
| D₃ mm | D₂ mm | | | ORDER NO. Right-hand & Left-hand rotation |
| 10 | 19,25 | | | 360.201.00 |

For use on the following machines:
Morbidelli.

Spare parts



990.015.00 991.062.00



360.301

RH
LH

| | | | | |
|----------------------------|----------------------------|--|--|---|
| D₃ mm | D₂ mm | | | ORDER NO. Right-hand & Left-hand rotation |
| 10 | 19,4 | | | 360.301.00 |

For use on the following machines:
Masterwood.

Spare parts



990.015.00 991.062.00

new



360.401

RH
LH

| | | | | |
|----------------------------|----------------------------|--|--|---|
| D₃ mm | D₂ mm | | | ORDER NO. Right-hand & Left-hand rotation |
| 10 | 20 | | | 360.401.00 |

For use on the following machines:
Weeke.

Spare parts



990.009.00 991.067.00



990.088


RH
LH

| | |
|------------------------------------|---|
| DESCRIPTION | ORDER NO. Right-hand & Left-hand rotation |
| Retaining screw for Weeke machines | 990.088.00 |


X TREME BORING BITS

Setting a new standard for performance and value

NEW DOWNCUT ROUND SHARPENING

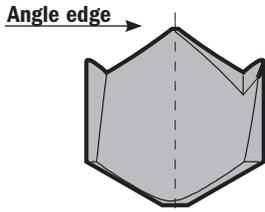


EXTRA-FINE MICROGRAIN CARBIDE




Reduced boring surface
for faster feed speed

STANDARD SHARPENING



STANDARD CARBIDE



Standard boring surface

The finest industrial quality micrograin carbide

CMT makes the finest quality cutting edges. Produced by Ceratizit in Luxembourg, CMT's carbide tips are selected among many carbide grades to ensure longer endurance and higher impact resistance.

P.T.F.E. Coating

CMT's P.T.F.E. coating provides a non-stick surface preventing any residue accumulation on the bit body. Baked on at 420°, this unique industrial material is specifically designed to fit woodworking tool requirements.

Highly-resistant steel body

Our bit bodies and shanks are machined from solid bar stock steel made by Von Moos Steel in Switzerland. The main mechanical properties are:

- superior strength
- high level uniformity
- minimal distortion
- exceptional resistance to fatigue and abrasion.



Micrograin carbide sharpening


Sharpening on the carbide cutting edges provides a 0,4µ/mm micrograin finish. This is processed on automated CNC machines equipped with as many as 6 axes for maximum accuracy

Special metal shock resistant brazing

Micrograin carbide tips are applied with a special brazing compound. This allows a higher brazing temperature than other methods and guarantees a solid bond of every tip on every bit.

Steel shank grinding

CMT grinds the steel shank to a micrograin finish of 0,8µ/mm. The smooth finish on the shank determines how well the drills fit into your machine. Rough grinding results in a poor chuck grip and in a poor wobbly rotation.


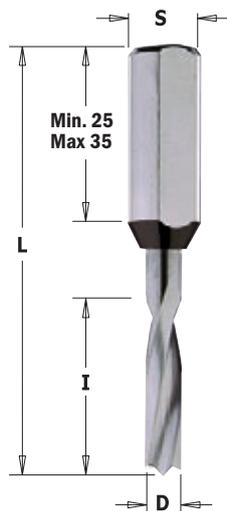


310.21/22 X-TREME



| D mm | I mm | L mm | S mm | ORDER NO. | |
|-------------|---------|---------|---------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 1,3 | 5 | 57,5 | 10x30 | 310.013.20* | |
| 2 | 12 | 57,5 | 10x27 | 310.020.21 | 310.020.22 |
| 3 | 9 | 57,5 | 10x35 | 310.530.21 | 310.530.22 |
| 3 | 18 | 57,5 | 10x25 | 310.030.21 | 310.030.22 |
| 4 | 20 | 57,5 | 10x25 | 310.040.21 | 310.040.22 |
| 5 | 22 | 57,5 | 10x27 | 310.050.21 | 310.050.22 |
| 6 | 22 | 57,5 | 10x25 | 310.060.21 | 310.060.22 |
| 6,35 (1/4") | 22 | 57,5 | 10x25 | 310.064.21 | 310.064.22 |
| 8 | 22 | 57,5 | 10x25 | 310.080.21 | 310.080.22 |

* Boring bit for panel preboring.
Suitable for both right-hand and left-hand rotation.

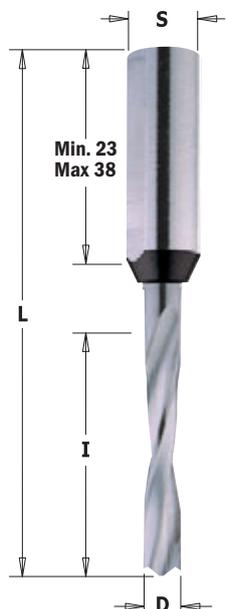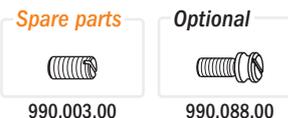


311.21/22 X-TREME



| D mm | I mm | L mm | S mm | ORDER NO. | |
|-------------|---------|---------|---------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 1,3 | 5 | 70 | 10x45 | 311.013.20* | |
| 2 | 12 | 70 | 10x39 | 311.020.21 | 311.020.22 |
| 3 | 18 | 70 | 10x38 | 311.030.21 | 311.030.22 |
| 4 | 27 | 70 | 10x30 | 311.040.21 | 311.040.22 |
| 5 | 30 | 70 | 10x28 | 311.050.21 | 311.050.22 |
| 6 | 30 | 70 | 10x29 | 311.060.21 | 311.060.22 |
| 6,35 (1/4") | 30 | 70 | 10x29 | 311.064.21 | 311.064.22 |
| 8 | 35 | 70 | 10x22 | 311.080.21 | 311.080.22 |

* Boring bit for panel preboring.
Suitable for both right-hand and left-hand rotation.

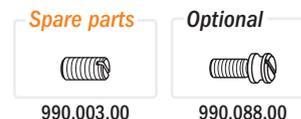

TECHNICAL DETAILS:

- Premium quality super-strength steel.
- HWM spiral portion with centre point.
- 2 cutting edges [Z2].
- 2 spiral flutes.
- 2 curved, negatively ground spurs [V2].
- Parallel shank with driving flat and adjustable screw length.

APPLICATION: used on boring machines separately or with chucks for drilling blind holes in solid wood, wood composites, plastic and laminated materials.

Perfect for all materials and long-lasting performance!


CMT announces the new series of solid carbide boring bits, now available from their extensive industrial line. These bits are entirely made of premium quality super micrograin carbide from Ceratizit in Luxemburg.

The entire series offers several design features:

- the unique tip has curved, negatively ground spurs to produce exceptionally clear bores with no rough edges. Centre point balanced;
- the cylindrical head is bigger than traditional tips and is extremely resistant to prolonged use.


It lasts longer between sharpenings;

- the plunge edge runs all the way to the centre of the bit to reduce drilling resistance and increase production speed;
- the solid carbide construction guarantees an almost infinite number of resharpenings, and since it is a solid unit of carbide, it offers extra safety features;
- ideal for hardwood and difficult composites such as particle boards, MDF and veneered wood.
- excellent performance on high-speed boring units and CNC routers.

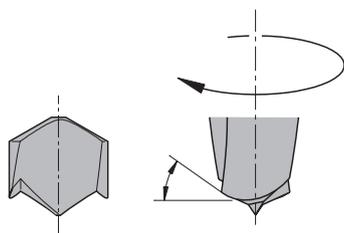

X-Treme sharpening

Solid carbide dowel drills for through holes

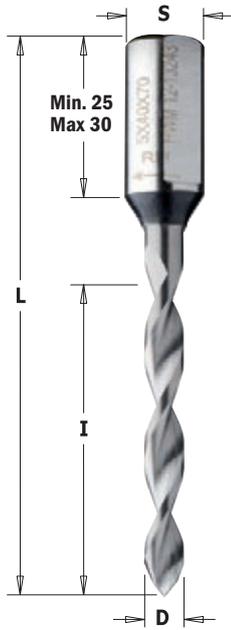

314.21/22

XTREME

HWM LONG LIFE Z2 RH LH

| D | I | L | S | ORDER NO. | ORDER NO. |
|----|----|----|-------|---------------------|--------------------|
| mm | mm | mm | mm | Right-hand rotation | Left-hand rotation |
| 3 | 27 | 70 | 10x30 | 314.030.21 | 314.030.22 |
| 4 | 35 | 70 | 10x26 | 314.040.21 | 314.040.22 |
| 5 | 35 | 70 | 10x26 | 314.050.21 | 314.050.22 |
| 6 | 35 | 70 | 10x26 | 314.060.21 | 314.060.22 |
| 8 | 35 | 70 | 10x26 | 314.080.21 | 314.080.22 |

For panels with maximum 20-30mm in thickness


TECHNICAL DETAILS:

- Premium quality super-strength steel.
- HWM spiral portion with centre point.
- 2 precision ground cutting edges [Z2].
- Double angle.
- 2 spiral flutes.
- Parallel shank with driving flat and adjustable screw length.

| Spare parts | Optional |
|---|---|
|  990.008.00 |  990.088.00 |


APPLICATION: used on boring machines and dowel drilling devices.

Use for drilling through holes in solid wood, wood composites, plastic and laminated materials.

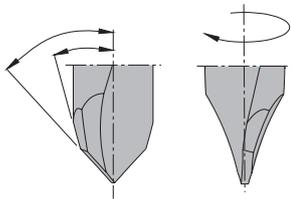



XTreme sharpening

Grinding wheels for XTreme sharpening

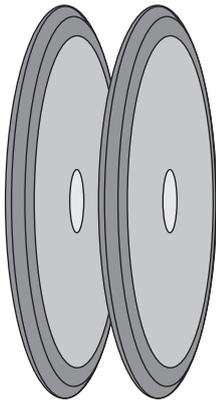


01.02

| D | DESCRIPTION | DIMENSION | B | ORDER NO. |
|---------|---------------------------------|-----------|-----|-------------------|
| mm | | mm | mm | |
| Ø3 a 7 | Grinding wheel for resharpening | Ø125x5,5 | Ø20 | 01.02.0316 |
| Ø8 a 10 | Grinding wheel for resharpening | Ø125x7 | Ø20 | 01.02.0317 |

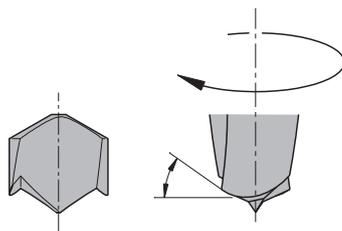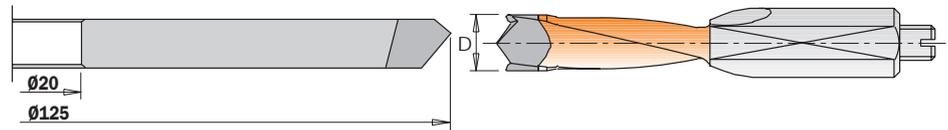

XTreme sharpening

Dowel drills

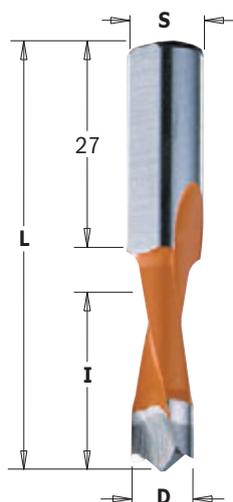

310.41/42 XTREME



| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| 5 | 27 | 57,5 | 10x27 | 310.050.41 | 310.050.42 |
| 6 | 27 | 57,5 | 10x27 | 310.060.41 | 310.060.42 |
| 7 | 27 | 57,5 | 10x27 | 310.070.41 | 310.070.42 |
| 8 | 27 | 57,5 | 10x27 | 310.080.41 | 310.080.42 |
| 9 | 27 | 57,5 | 10x27 | 310.090.41 | 310.090.42 |
| 10 | 27 | 57,5 | 10x27 | 310.100.41 | 310.100.42 |

TECHNICAL DETAILS:

- Premium quality super-strength steel.
- Spiral portion coated with orange or black P.T.F.E.
- Extra-fine micrograin carbide spiral portion with centre point.
- 2 cutting edges [Z2].
- 2 spiral flutes.
- 2 curved, negatively ground spurs [V2].
- Parallel shank with driving flat and adjustable screw length.

Spare parts



990.003.00


Optional



990.088.00

APPLICATION: used on boring machines separately or with chucks for drilling blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills

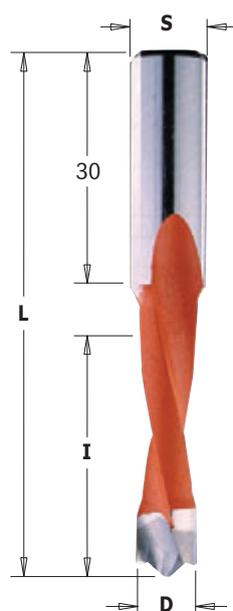

311.41/42 XTREME



| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| 5 | 35 | 70 | 10x30 | 311.050.41 | 311.050.42 |
| 6 | 35 | 70 | 10x30 | 311.060.41 | 311.060.42 |
| 7 | 35 | 70 | 10x30 | 311.070.41 | 311.070.42 |
| 8 | 35 | 70 | 10x30 | 311.080.41 | 311.080.42 |
| 9 | 35 | 70 | 10x30 | 311.090.41 | 311.090.42 |
| 10 | 35 | 70 | 10x30 | 311.100.41 | 311.100.42 |

TECHNICAL DETAILS:

- Premium quality super-strength steel.
- Spiral portion coated with orange or black P.T.F.E.
- Extra-fine micrograin carbide spiral portion with centre point.
- 2 cutting edges [Z2].
- 2 spiral flutes.
- 2 curved, negatively ground spurs [V2].
- Parallel shank with driving flat and adjustable screw length.

Spare parts




990.003.00

Optional



990.088.00

APPLICATION: used on boring machines separately or with chucks for drilling blind holes in solid wood, wood composites, plastic and laminated materials.

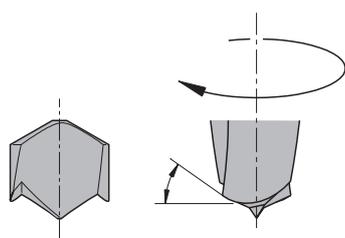

Xtreme sharpening

Perfect for all materials and long-lasting performance!

CMT announces the new series of solid carbide boring bits, now available from their extensive industrial line. These bits are entirely made of premium quality super micrograin carbide from Ceratizit in Luxembourg.


The entire series offers several design features:

- the unique tip has curved, negatively ground spurs to produce exceptionally clear bores with no rough edges. Centre point balanced;
- the cylindrical head is bigger than traditional tips and is extremely resistant to prolonged use.

It lasts longer between sharpenings;

- the plunge edge runs all the way to the centre of the bit to reduce drilling resistance and increase production speed;
- the solid carbide construction guarantees an almost infinite number of resharpenings, and since it is a solid unit of carbide, it offers extra safety features;
- ideal for hardwood and difficult composites such as particle boards, MDF and veneered wood.
- excellent performance on high-speed boring units and CNC routers.

Dowel drills for through holes

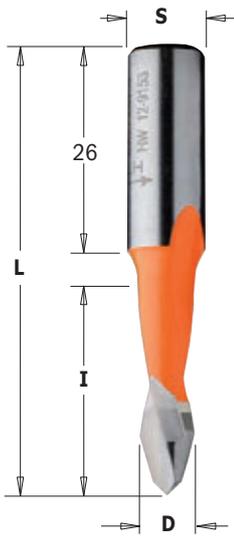

313.41/42

XTRME



| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| 5 | 27 | 57,5 | 10x26 | 313.050.41 | 313.050.42 |
| 8 | 27 | 57,5 | 10x26 | 313.080.41 | 313.080.42 |

For panels with maximum 20mm in thickness


TECHNICAL DETAILS:

- Super-strength steel.
- Spiral portion coated with orange or black P.T.F.E.
- Extra-fine micrograin carbide spiral portion with centre point.
- HW head with precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- Double angle.
- 2 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.

APPLICATION: used on boring machines and dowel drilling devices. Use for drilling through holes in solid wood, wood composites, plastic and laminated materials.



Dowel drills for through holes

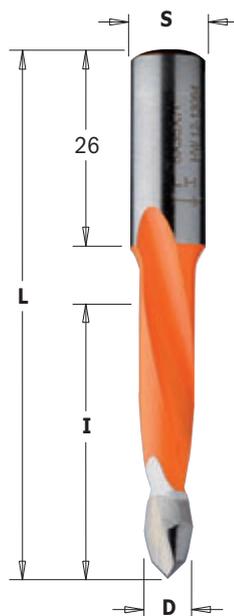

314.41/42

XTRME




| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| 5 | 35 | 70 | 10x26 | 314.050.41 | 314.050.42 |
| 6 | 35 | 70 | 10x26 | 314.060.41 | 314.060.42 |
| 7 | 35 | 70 | 10x26 | 314.070.41 | 314.070.42 |
| 8 | 35 | 70 | 10x26 | 314.080.41 | 314.080.42 |
| 10 | 35 | 70 | 10x26 | 314.100.41 | 314.100.42 |

For panels with maximum 30mm in thickness

TECHNICAL DETAILS:

- Super-strength steel.
- Spiral portion coated with orange or black P.T.F.E.
- Extra-fine micrograin carbide spiral portion with centre point.
- HW head with precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- Double angle.
- 2 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.

APPLICATION: used on boring machines and dowel drilling devices. Use for drilling through holes in solid wood, wood composites, plastic and laminated materials.

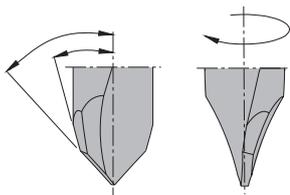

XTRme sharpening

Perfect for all materials and long-lasting performance!

CMT announces the new series of solid carbide boring bits, now available from their extensive industrial line. These bits are entirely made of premium quality super micrograin carbide from Ceratizit in Luxemburg.

The entire series offers several design features:

- the unique tip has curved, negatively ground spurs to produce exceptionally clear bores with no rough edges. Centre point balanced;
- the cylindrical head is bigger than traditional tips and is extremely resistant to prolonged use.

It lasts longer between sharpenings;

- the plunge edge runs all the way to the centre of the bit to reduce drilling resistance and increase production speed;
- the solid carbide construction guarantees an almost infinite number of resharpenings, and since it is a solid unit of carbide, it offers extra safety features;
- ideal for hardwood and difficult composites such as particle boards, MDF and veneered wood.
- excellent performance on high-speed boring units and CNC routers.

Adaptors for twist drills



364

| D ₃ mm | L mm | S mm | ORDER NO. |
|----------------------|---------|---------|-------------------|
| 2 | 38 | 10x20 | 364.020.00 |
| 2,5 | 38 | 10x20 | 364.025.00 |
| 3 | 38 | 10x20 | 364.030.00 |
| 3,2 | 38 | 10x20 | 364.032.00 |
| 3,5 | 38 | 10x20 | 364.035.00 |
| 4 | 38 | 10x20 | 364.040.00 |
| 4,5 | 38 | 10x20 | 364.045.00 |
| 5 | 38 | 10x20 | 364.050.00 |

For use with the following items: **363 HW**

TECHNICAL DETAILS:

- Super-strength steel.
- Quick and secure assembly on twist drills.
- Precision relief.
- Parallel shank with driving flat and length adjusting screw.

Spare parts



APPLICATION: for use with twist drills with common shank and bushing diameter. Used on boring machines equipped with adaptor chucks.

Bushings for twist drills



365

| D ₃ mm | L mm | S mm | ORDER NO. |
|----------------------|---------|---------|-------------------|
| 2 | 23 | 10 | 365.020.00 |
| 2,5 | 23 | 10 | 365.025.00 |
| 3 | 23 | 10 | 365.030.00 |
| 3,2 | 23 | 10 | 365.032.00 |
| 3,5 | 23 | 10 | 365.035.00 |
| 4 | 23 | 10 | 365.040.00 |
| 4,5 | 23 | 10 | 365.045.00 |
| 5 | 23 | 10 | 365.050.00 |


For use with the following items: **363 HW**

TECHNICAL DETAILS:

- Super-strength steel.
- Shank with driving flat.
- Axial cuttings for cylindrical drill clamps.

APPLICATION: used with spiral boring bits with shank diameters equal to the bushing diameter. Used on boring machines equipped with adaptors.

Solid carbide twist drills "V" point 120° sharpening

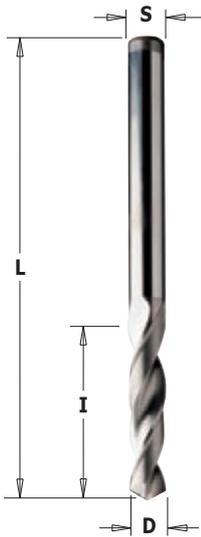

363


HWM LONG LIFE Z2 RH LH

| S=D mm | I mm | L mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|-----------|---------|---------|----------------------------------|---------------------------------|
| 2 | 25 | 50 | 363.020.11 | 363.020.12 |
| 2,5 | 27 | 55 | 363.025.11 | 363.025.12 |
| 3 | 27 | 55 | 363.030.11 | 363.030.12 |
| 3,2 | 27 | 55 | 363.032.11 | 363.032.12 |
| 3,5 | 27 | 55 | 363.035.11 | 363.035.12 |
| 4 | 27 | 55 | 363.040.11 | 363.040.12 |
| 4,5 | 28 | 60 | 363.045.11 | 363.045.12 |
| 5 | 28 | 60 | 363.050.11 | 363.050.12 |



"V" Point sharpening

Solid carbide twist drills negatively ground spurs sharpening

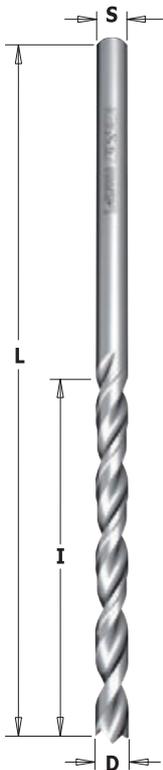

363

HWM LONG LIFE Z2 RH LH

| S=D mm | I mm | L mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|-----------|---------|---------|----------------------------------|---------------------------------|
| 2,5 | 27 | 55 | 363.025.21 | 363.025.22 |
| 3 | 27 | 55 | 363.030.21 | 363.030.22 |
| 4 | 27 | 55 | 363.040.21 | 363.040.22 |
| 5 | 28 | 60 | 363.050.21 | 363.050.22 |



X-Treme sharpening

For use with the following items: 364-365

TECHNICAL DETAILS:


- Premium quality HWM.
- 2 precision ground cutting edges [Z2].
- 2 spiral flutes.
- Common shank and drilling diameter (S=D).

APPLICATION: used in adaptor bushings.

Assembly Illustration



2 flute dowel drills

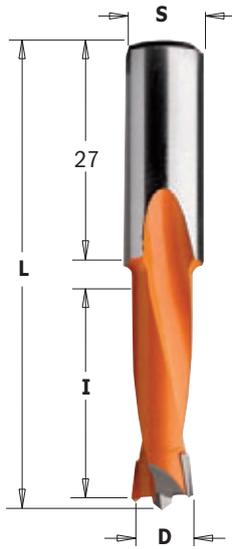

310



| D | I | L | S | ORDER NO. | ORDER NO. |
|------|----|------|-------|---------------------|--------------------|
| mm | mm | mm | mm | Right-hand rotation | Left-hand rotation |
| 4 | 27 | 57,5 | 10x27 | 310.040.11 | 310.040.12 |
| 4,5 | 27 | 57,5 | 10x27 | 310.045.11 | 310.045.12 |
| 4,76 | 27 | 57,5 | 10x27 | 310.047.11 | 310.047.12 |
| 5 | 27 | 57,5 | 10x27 | 310.050.11 | 310.050.12 |
| 5,1 | 27 | 57,5 | 10x27 | 310.051.11 | 310.051.12 |
| 5,2 | 27 | 57,5 | 10x27 | 310.052.11 | 310.052.12 |
| 5,55 | 27 | 57,5 | 10x27 | 310.055.11 | 310.055.12 |
| 6 | 27 | 57,5 | 10x27 | 310.060.11 | 310.060.12 |
| 6,35 | 27 | 57,5 | 10x27 | 310.064.11 | 310.064.12 |
| 6,5 | 27 | 57,5 | 10x27 | 310.065.11 | 310.065.12 |
| 7 | 27 | 57,5 | 10x27 | 310.070.11 | 310.070.12 |
| 8 | 27 | 57,5 | 10x27 | 310.080.11 | 310.080.12 |
| 8,2 | 27 | 57,5 | 10x27 | 310.082.11 | 310.082.12 |
| 9 | 27 | 57,5 | 10x27 | 310.090.11 | 310.090.12 |
| 9,52 | 27 | 57,5 | 10x27 | 310.095.11 | 310.095.12 |
| 10 | 27 | 57,5 | 10x27 | 310.100.11 | 310.100.12 |
| 11 | 27 | 57,5 | 10x27 | 310.110.11 | 310.110.12 |
| 12 | 27 | 57,5 | 10x27 | 310.120.11 | 310.120.12 |
| 12,7 | 27 | 57,5 | 10x27 | 310.127.11 | 310.127.12 |
| 13 | 27 | 57,5 | 10x27 | 310.130.11 | 310.130.12 |
| 14 | 27 | 57,5 | 10x27 | 310.140.11 | 310.140.12 |
| 15 | 27 | 57,5 | 10x27 | 310.150.11 | 310.150.12 |
| 16 | 27 | 57,5 | 10x27 | 310.160.11 | 310.160.12 |

Spare parts




990.003.00

Optional



990.088.00

2 flute dowel drills

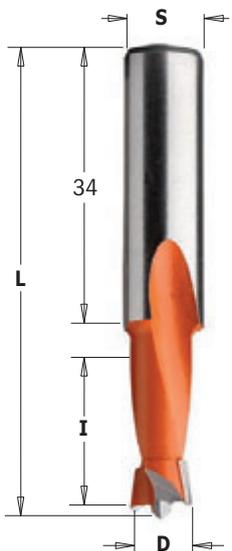

361



| D | I | L | S | ORDER NO. | ORDER NO. |
|----|----|------|-------|---------------------|--------------------|
| mm | mm | mm | mm | Right-hand rotation | Left-hand rotation |
| 5 | 18 | 57,5 | 10x34 | 361.050.11 | 361.050.12 |
| 6 | 18 | 57,5 | 10x34 | 361.060.11 | 361.060.12 |
| 7 | 18 | 57,5 | 10x34 | 361.070.11 | 361.070.12 |
| 8 | 18 | 57,5 | 10x34 | 361.080.11 | 361.080.12 |
| 10 | 18 | 57,5 | 10x34 | 361.100.11 | 361.100.12 |

TECHNICAL DETAILS:

- Super-strength steel.
- Spiral portion coated with orange or black P.T.F.E.
- HW head with precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- 2 negatively ground spurs [V2]
- 2 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.

Spare parts



990.003.00


Optional



990.088.00


APPLICATION: used on boring machines equipped with adaptors or chucks.

Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

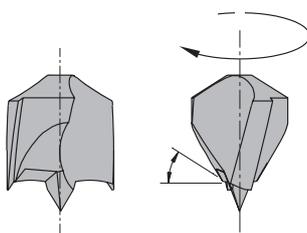

Negatively ground spurs


2 flute dowel drills

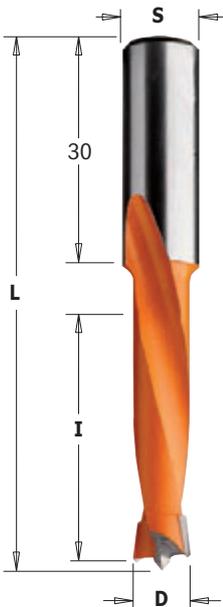


311



| D | I | L | S | ORDER NO. | ORDER NO. |
|------|----|----|-------|---------------------|--------------------|
| mm | mm | mm | mm | Right-hand rotation | Left-hand rotation |
| 4 | 35 | 70 | 10x30 | 311.040.11 | 311.040.12 |
| 4,5 | 35 | 70 | 10x30 | 311.045.11 | 311.045.12 |
| 4,76 | 35 | 70 | 10x30 | 311.047.11 | 311.047.12 |
| 5 | 35 | 70 | 10x30 | 311.050.11 | 311.050.12 |
| 5,1 | 35 | 70 | 10x30 | 311.051.11 | 311.051.12 |
| 5,2 | 35 | 70 | 10x30 | 311.052.11 | 311.052.12 |
| 5,55 | 35 | 70 | 10x30 | 311.055.11 | 311.055.12 |
| 6 | 35 | 70 | 10x30 | 311.060.11 | 311.060.12 |
| 6,35 | 35 | 70 | 10x30 | 311.064.11 | 311.064.12 |
| 6,5 | 35 | 70 | 10x30 | 311.065.11 | 311.065.12 |
| 7 | 35 | 70 | 10x30 | 311.070.11 | 311.070.12 |
| 8 | 35 | 70 | 10x30 | 311.080.11 | 311.080.12 |
| 8,2 | 35 | 70 | 10x30 | 311.082.11 | 311.082.12 |
| 9 | 35 | 70 | 10x30 | 311.090.11 | 311.090.12 |
| 9,52 | 35 | 70 | 10x30 | 311.095.11 | 311.095.12 |
| 10 | 35 | 70 | 10x30 | 311.100.11 | 311.100.12 |
| 11 | 35 | 70 | 10x30 | 311.110.11 | 311.110.12 |
| 11,1 | 35 | 70 | 10x30 | 311.111.11 | 311.111.12 |
| 12 | 35 | 70 | 10x30 | 311.120.11 | 311.120.12 |
| 12,7 | 35 | 70 | 10x30 | 311.127.11 | 311.127.12 |
| 13 | 35 | 70 | 10x30 | 311.130.11 | 311.130.12 |
| 14 | 35 | 70 | 10x30 | 311.140.11 | 311.140.12 |
| 15 | 35 | 70 | 10x30 | 311.150.11 | 311.150.12 |
| 16 | 35 | 70 | 10x30 | 311.160.11 | 311.160.12 |

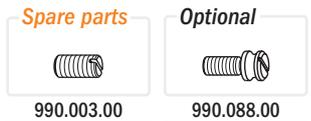

2 flute dowel drills

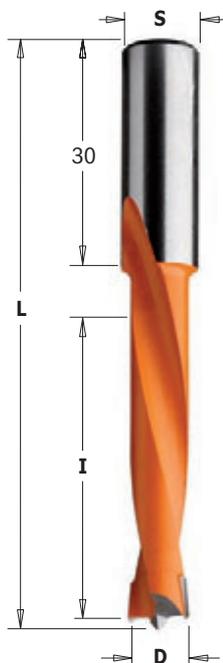

362




| D | I | L | S | ORDER NO. | ORDER NO. |
|----|----|----|-------|---------------------|--------------------|
| mm | mm | mm | mm | Right-hand rotation | Left-hand rotation |
| 5 | 44 | 77 | 10x30 | 362.050.11 | 362.050.12 |
| 6 | 44 | 77 | 10x30 | 362.060.11 | 362.060.12 |
| 7 | 44 | 77 | 10x30 | 362.070.11 | 362.070.12 |
| 8 | 44 | 77 | 10x30 | 362.080.11 | 362.080.12 |
| 10 | 44 | 77 | 10x30 | 362.100.11 | 362.100.12 |
| 12 | 44 | 77 | 10x30 | 362.120.11 | 362.120.12 |

TECHNICAL DETAILS:

- Super-strength steel.
- Spiral portion coated with orange or black P.T.F.E.
- HW head with precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- 2 negatively ground spurs [V2].
- 2 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.




APPLICATION: used on boring machines equipped with adaptors or chucks. Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.



Negatively ground spurs

4 flute dowel drills

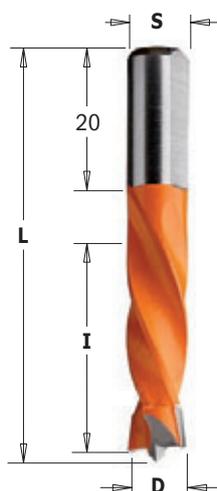

306



| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| • 3 | 18 | 55,5 | 8x20 | 306.030.21 | |
| 5 | 30 | 55,5 | 8x20 | 306.050.11 | 306.050.12 |
| 5,55 | 30 | 55,5 | 8x20 | 306.055.11 | 306.055.12 |
| 6 | 30 | 55,5 | 8x20 | 306.060.11 | 306.060.12 |
| 6,35 | 30 | 55,5 | 8x20 | 306.064.11 | 306.064.12 |
| 7 | 30 | 55,5 | 8x20 | 306.070.11 | 306.070.12 |
| 8 | 30 | 55,5 | 8x20 | 306.080.11 | 306.080.12 |
| 9 | 30 | 55,5 | 8x20 | 306.090.11 | 306.090.12 |
| 10 | 30 | 55,5 | 8x20 | 306.100.11 | 306.100.12 |
| 12 | 30 | 55,5 | 8x20 | 306.120.11 | 306.120.12 |

• HWM

Spare parts




990.003.00

Optional



990.088.00

4 flute dowel drills

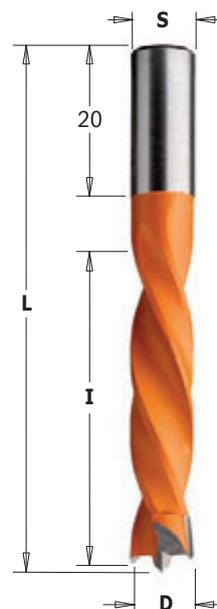

307



| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| 5 | 40 | 67 | 8x20 | 307.050.11 | 307.050.12 |
| 5,55 | 40 | 67 | 8x20 | 307.055.11 | 307.055.12 |
| 6 | 40 | 67 | 8x20 | 307.060.11 | 307.060.12 |
| 6,35 | 40 | 67 | 8x20 | 307.064.11 | 307.064.12 |
| 7 | 40 | 67 | 8x20 | 307.070.11 | 307.070.12 |
| 8 | 40 | 67 | 8x20 | 307.080.11 | 307.080.12 |
| 9 | 40 | 67 | 8x20 | 307.090.11 | 307.090.12 |
| 9,52 | 40 | 67 | 8x20 | 307.095.11 | 307.095.12 |
| 10 | 40 | 67 | 8x20 | 307.100.11 | 307.100.12 |
| 12 | 40 | 67 | 8x20 | 307.120.11 | 307.120.12 |

TECHNICAL DETAILS:

- Super-strength steel.
- Cutter portion coated with black or orange P.T.F.E.
- HW head with precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- Negatively ground spurs [V2].
- 4 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.

Spare parts




990.003.00

Optional




990.088.00

APPLICATION: used on boring machines equipped with adaptors or chucks. Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

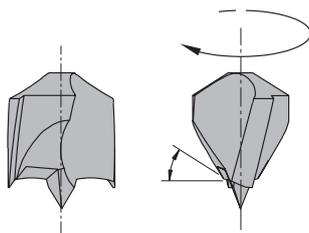

Negatively ground spurs

4 flute dowel drills

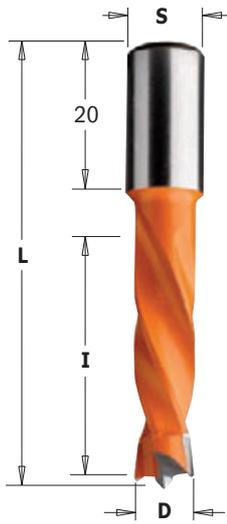


308



| D mm | I mm | L mm | S mm | ORDER NO. | ORDER NO. |
|---------|---------|---------|---------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 4 | 26 | 57,5 | 10x20 | 308.040.11 | 308.040.12 |
| 5 | 30 | 57,5 | 10x20 | 308.050.11 | 308.050.12 |
| 6 | 30 | 57,5 | 10x20 | 308.060.11 | 308.060.12 |
| 6,35 | 30 | 57,5 | 10x20 | 308.064.11 | 308.064.12 |
| 7 | 30 | 57,5 | 10x20 | 308.070.11 | 308.070.12 |
| 8 | 30 | 57,5 | 10x20 | 308.080.11 | 308.080.12 |
| 9 | 30 | 57,5 | 10x20 | 308.090.11 | 308.090.12 |
| 9,52 | 30 | 57,5 | 10x20 | 308.095.11 | 308.095.12 |
| 10 | 30 | 57,5 | 10x20 | 308.100.11 | 308.100.12 |
| 11 | 30 | 57,5 | 10x20 | 308.110.11 | 308.110.12 |
| 12 | 30 | 57,5 | 10x20 | 308.120.11 | 308.120.12 |
| 12,7 | 30 | 57,5 | 10x20 | 308.127.11 | 308.127.12 |
| 13 | 30 | 57,5 | 10x20 | 308.130.11 | 308.130.12 |
| 14 | 30 | 57,5 | 10x20 | 308.140.11 | 308.140.12 |
| 15 | 30 | 57,5 | 10x20 | 308.150.11 | 308.150.12 |
| 16 | 30 | 57,5 | 10x20 | 308.160.11 | 308.160.12 |



4 flute dowel drills

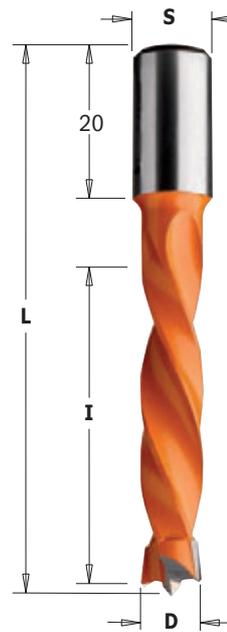

309




| D mm | I mm | L mm | S mm | ORDER NO. | ORDER NO. |
|---------|---------|---------|---------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 4 | 43 | 70 | 10x20 | 309.040.11 | 309.040.12 |
| 5 | 43 | 70 | 10x20 | 309.050.11 | 309.050.12 |
| 6 | 43 | 70 | 10x20 | 309.060.11 | 309.060.12 |
| 6,35 | 43 | 70 | 10x20 | 309.064.11 | 309.064.12 |
| 7 | 43 | 70 | 10x20 | 309.070.11 | 309.070.12 |
| 7,5 | 43 | 70 | 10x20 | 309.075.11 | 309.075.12 |
| 8 | 43 | 70 | 10x20 | 309.080.11 | 309.080.12 |
| 9 | 43 | 70 | 10x20 | 309.090.11 | 309.090.12 |
| 9,52 | 43 | 70 | 10x20 | 309.095.11 | 309.095.12 |
| 10 | 43 | 70 | 10x20 | 309.100.11 | 309.100.12 |
| 11 | 43 | 70 | 10x20 | 309.110.11 | 309.110.12 |
| 12 | 43 | 70 | 10x20 | 309.120.11 | 309.120.12 |
| 12,7 | 43 | 70 | 10x20 | 309.127.11 | 309.127.12 |
| 13 | 43 | 70 | 10x20 | 309.130.11 | 309.130.12 |
| 14 | 43 | 70 | 10x20 | 309.140.11 | 309.140.12 |
| 15 | 43 | 70 | 10x20 | 309.150.11 | 309.150.12 |
| 16 | 43 | 70 | 10x20 | 309.160.11 | 309.160.12 |



TECHNICAL DETAILS:


- Super-strength steel.
- Cutter portion coated with black or orange P.T.F.E.
- HW head with precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- Negatively ground spurs [V2].
- 4 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.

APPLICATION: used on boring machines equipped with adaptors or chucks. Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

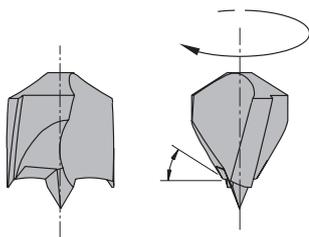

Negatively ground spurs

4 flute dowel drills

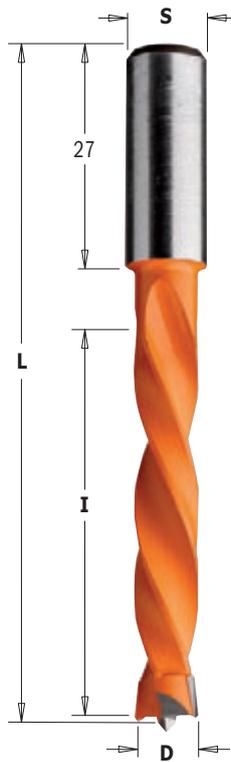

373

HW **Z2** **V2** **RH** **LH**

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| 5 | 50 | 85 | 10x27 | 373.050.11 | 373.050.12 |
| 6 | 50 | 85 | 10x27 | 373.060.11 | 373.060.12 |
| 7 | 50 | 85 | 10x27 | 373.070.11 | 373.070.12 |
| 8 | 50 | 85 | 10x27 | 373.080.11 | 373.080.12 |
| 10 | 50 | 85 | 10x27 | 373.100.11 | 373.100.12 |
| 12 | 50 | 85 | 10x27 | 373.120.11 | 373.120.12 |

TECHNICAL DETAILS:

- Super-strength steel.
- Cutter portion coated with black or orange P.T.F.E.
- HW head with precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- Negatively ground spurs [V2].
- 4 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.

Spare parts



990.003.00


Optional



990.088.00

APPLICATION: used on boring machines equipped with adaptors or chucks. Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

4 flute dowel drills

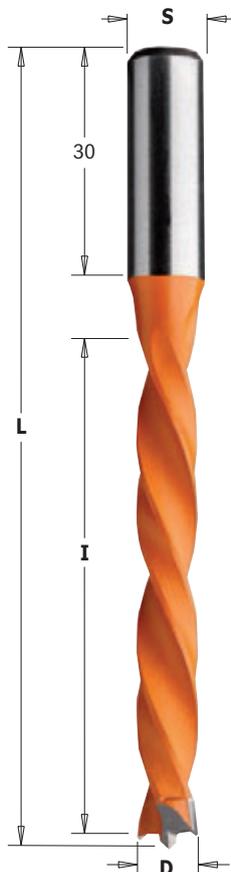

372

HW **Z2** **V2** **RH** **LH**

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|---------|----------------------------------|---------------------------------|
| 5 | 65 | 105 | 10x30 | 372.050.11 | 372.050.12 |
| 6 | 65 | 105 | 10x30 | 372.060.11 | 372.060.12 |
| 7 | 65 | 105 | 10x30 | 372.070.11 | 372.070.12 |
| 8 | 65 | 105 | 10x30 | 372.080.11 | 372.080.12 |
| 10 | 65 | 105 | 10x30 | 372.100.11 | 372.100.12 |
| 12 | 65 | 105 | 10x30 | 372.120.11 | 372.120.12 |

TECHNICAL DETAILS:

- Super-strength steel.
- Cutter portion coated with black or orange P.T.F.E.
- HW head with precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- Negatively ground spurs [V2].
- 4 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.

Spare parts




990.003.00

Optional



990.088.00


APPLICATION: used on boring machines equipped with adaptors or chucks. Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

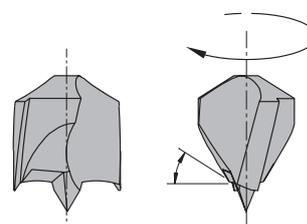

Negatively ground spurs

Dowel drills with countersink

HW Z2 V2 RH LH

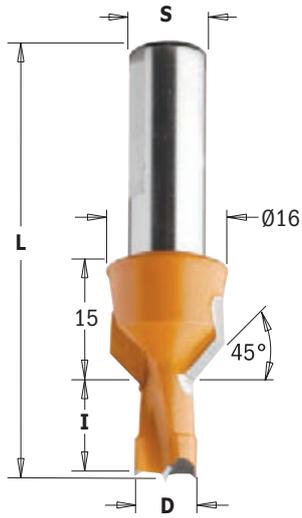


376-377

| D mm | I mm | L mm | S mm | ORDER NO. | ORDER NO. |
|---------|---------|---------|---------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 8 | 12 | 57,5 | 10 | 376.080.11 | 376.080.12 |
| 8 | 13 | 57,5 | 10 | 376.083.11 | 376.083.12 |
| 8 | 15 | 57,5 | 10 | 376.081.11 | 376.081.12 |
| 8 | 20 | 57,5 | 10 | 376.082.11 | 376.082.12 |
| 10 | 12 | 57,5 | 10 | 376.100.11 | 376.100.12 |
| 10 | 13 | 57,5 | 10 | 376.103.11 | 376.103.12 |
| 10 | 15 | 57,5 | 10 | 376.101.11 | 376.101.12 |
| 10 | 20 | 57,5 | 10 | 376.102.11 | 376.102.12 |
| | | | | | |
| 8 | 12 | 70 | 10 | 377.080.11 | 377.080.12 |
| 8 | 13 | 70 | 10 | 377.083.11 | 377.083.12 |
| 8 | 15 | 70 | 10 | 377.081.11 | 377.081.12 |
| 8 | 20 | 70 | 10 | 377.082.11 | 377.082.12 |
| 10 | 12 | 70 | 10 | 377.100.11 | 377.100.12 |
| 10 | 13 | 70 | 10 | 377.103.11 | 377.103.12 |
| 10 | 15 | 70 | 10 | 377.101.11 | 377.101.12 |
| 10 | 20 | 70 | 10 | 377.102.11 | 377.102.12 |

TECHNICAL DETAILS:

- Super-strength steel.
- Spiral portion coated with orange or black P.T.F.E.
- HW head with precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- 2 ground spurs [V2].
- 2 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.

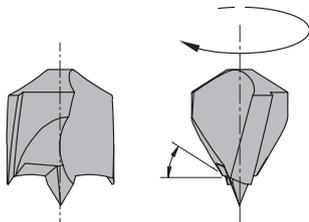


Negatively ground spurs

APPLICATION: used for drilling and countersinking in solid wood, wood composites, plastic and laminated materials. Suitable for high performance speed on boring machines equipped with adaptors or chucks.

Dowel drills for through holes with countersink

new

HW Z2 V2 RH LH

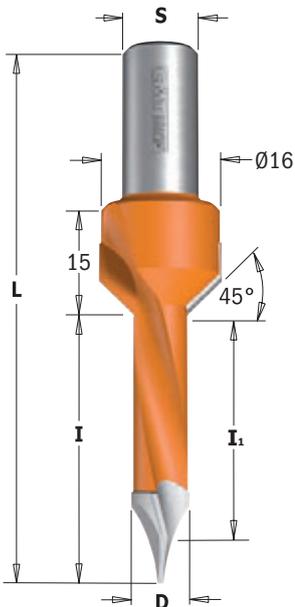

378


| D mm | I mm | I ₁ mm | L mm | S mm | ORDER NO. | ORDER NO. |
|---------|---------|----------------------|---------|---------|---------------------|--------------------|
| | | | | | Right-hand rotation | Left-hand rotation |
| 5 | 35 | 31 | 70 | 10 | 378.052.11 | 378.052.12 |
| 7 | 35 | 29,5 | 70 | 10 | 378.072.11 | 378.072.12 |
| 8 | 35 | 29 | 70 | 10 | 378.082.11 | 378.082.12 |
| 10 | 35 | 26,5 | 70 | 10 | 378.102.11 | 378.102.12 |

TECHNICAL DETAILS:

- Super-strength steel.
- Spiral portion coated with orange or black P.T.F.E.
- HW head with precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- 2 ground spurs [V2].
- 2 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.




APPLICATION: used for drilling and countersinking in solid wood, wood composites, plastic and laminated materials. Suitable for high performance speed on boring machines equipped with adaptors or chucks.

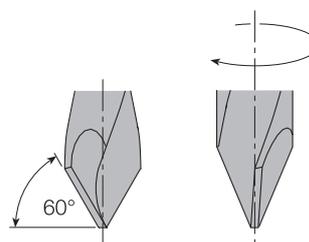

60° through holes

2 flute dowel drills for through holes

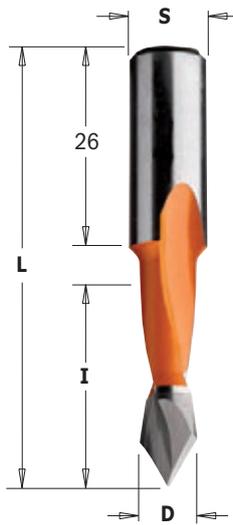

313



| D mm | I mm | L mm | S mm | ORDER NO. | ORDER NO. |
|---------|---------|---------|---------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 5 | 27 | 57,5 | 10x26 | 313.050.11 | 313.050.12 |
| 6 | 27 | 57,5 | 10x26 | 313.060.11 | 313.060.12 |
| 8 | 27 | 57,5 | 10x26 | 313.080.11 | 313.080.12 |
| 10 | 27 | 57,5 | 10x26 | 313.100.11 | 313.100.12 |

For panels with maximum 20mm in thickness.

TECHNICAL DETAILS:

- Super-strength steel.
- Spiral portion coated with orange or black P.T.F.E.
- HW head with precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- 2 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.

Spare parts




Optional



APPLICATION: used on boring machines and dowel drilling devices.

Use for drilling through holes in solid wood, wood composites, plastic and laminated materials.

2 flute dowel drills for through holes

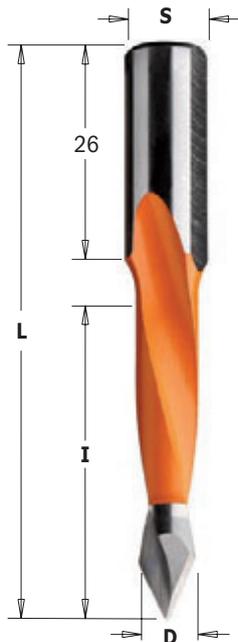

314



| D mm | I mm | L mm | S mm | ORDER NO. | ORDER NO. |
|---------|---------|---------|---------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 4 | 30 | 70 | 10x26 | 314.040.11 | 314.040.12 |
| 4,76 | 35 | 70 | 10x26 | 314.047.11 | 314.047.12 |
| 5 | 35 | 70 | 10x26 | 314.050.11 | 314.050.12 |
| 5,55 | 35 | 70 | 10x26 | 314.055.11 | 314.055.12 |
| 6 | 35 | 70 | 10x26 | 314.060.11 | 314.060.12 |
| 6,35 | 35 | 70 | 10x26 | 314.064.11 | 314.064.12 |
| 7 | 35 | 70 | 10x26 | 314.070.11 | 314.070.12 |
| 8 | 35 | 70 | 10x26 | 314.080.11 | 314.080.12 |
| 9 | 35 | 70 | 10x26 | 314.090.11 | 314.090.12 |
| 9,52 | 35 | 70 | 10x26 | 314.095.11 | 314.095.12 |
| 10 | 35 | 70 | 10x26 | 314.100.11 | 314.100.12 |
| 12 | 35 | 70 | 10x26 | 314.120.11 | 314.120.12 |
| 12,7 | 35 | 70 | 10x26 | 314.127.11 | 314.127.12 |

For panels with maximum 25-30mm in thickness.

366

| | | | | | |
|----|----|----|-------|-------------------|-------------------|
| 5 | 44 | 77 | 10x26 | 366.050.11 | 366.050.12 |
| 6 | 44 | 77 | 10x26 | 366.060.11 | 366.060.12 |
| 8 | 44 | 77 | 10x26 | 366.080.11 | 366.080.12 |
| 10 | 44 | 77 | 10x26 | 366.100.11 | 366.100.12 |
| 12 | 44 | 77 | 10x26 | 366.120.11 | 366.120.12 |

For panels with maximum 30-40mm in thickness.

TECHNICAL DETAILS:

- Super-strength steel.
- Spiral portion coated with orange or black P.T.F.E.
- HW head with precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- 2 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.

Spare parts




Optional




APPLICATION: used on boring machines and dowel drilling devices.

Use for drilling through holes in solid wood, wood composites, plastic and laminated materials.

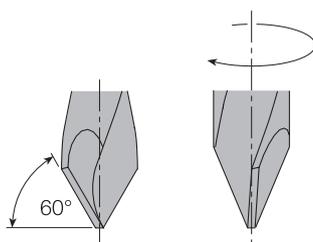

60° through holes

4 flute dowel drills for through holes

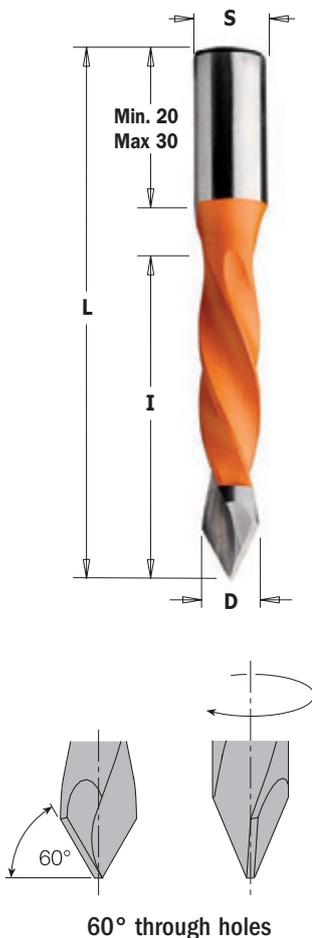

60° through holes

374 For panels with maximum 20-25mm in thickness.



| D | I | L | S | ORDER NO. | ORDER NO. |
|----|----|------|-------|---------------------|--------------------|
| mm | mm | mm | mm | Right-hand rotation | Left-hand rotation |
| 5 | 30 | 57,5 | 10x20 | 374.050.11 | 374.050.12 |
| 8 | 30 | 57,5 | 10x20 | 374.080.11 | 374.080.12 |

375 For panels with maximum 30-35mm in thickness.

| D | I | L | S | ORDER NO. | ORDER NO. |
|----|----|----|-------|---------------------|--------------------|
| mm | mm | mm | mm | Right-hand rotation | Left-hand rotation |
| 5 | 40 | 70 | 10x20 | 375.050.11 | 375.050.12 |
| 6 | 40 | 70 | 10x20 | 375.060.11 | 375.060.12 |
| 7 | 40 | 70 | 10x20 | 375.070.11 | 375.070.12 |
| 8 | 40 | 70 | 10x20 | 375.080.11 | 375.080.12 |
| 9 | 40 | 70 | 10x20 | 375.090.11 | 375.090.12 |
| 10 | 40 | 70 | 10x20 | 375.100.11 | 375.100.12 |

381 For panels with maximum 60-65mm in thickness.

| D | I | L | S | ORDER NO. | ORDER NO. |
|----|----|-----|-------|---------------------|--------------------|
| mm | mm | mm | mm | Right-hand rotation | Left-hand rotation |
| 5 | 70 | 115 | 10x30 | 381.050.11 | 381.050.12 |
| 6 | 70 | 115 | 10x30 | 381.060.11 | 381.060.12 |
| 8 | 70 | 115 | 10x30 | 381.080.11 | 381.080.12 |
| 10 | 70 | 115 | 10x30 | 381.100.11 | 381.100.12 |

TECHNICAL DETAILS:


- Super-strength steel
- Spiral portion coated with orange or black P.T.F.E.
- HW head with precision balanced centre point
- 2 precision ground cutting edges [Z2]
- 4 spiral flutes
- Parallel shank with driving flat and length adjusting screw.



APPLICATION: used on boring machines and dowel drilling devices.

Use for drilling through holes in solid wood, wood composites, plastic and laminated materials.

2 flute dowel drills for through holes

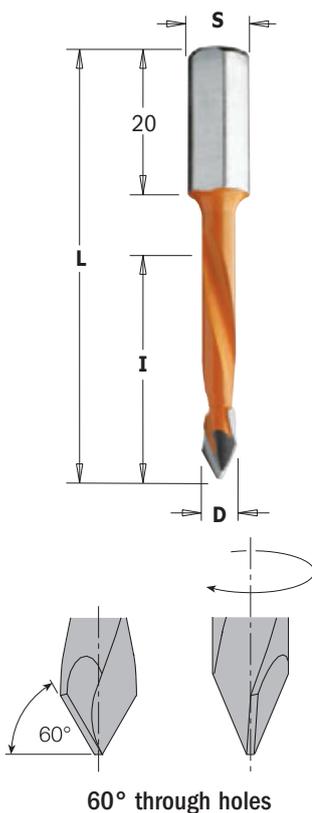

60° through holes

367



| D | I | L | S | ORDER NO. | ORDER NO. |
|----|----|----|------|---------------------|--------------------|
| mm | mm | mm | mm | Right-hand rotation | Left-hand rotation |
| 5 | 30 | 56 | 8x20 | 367.050.11 | 367.050.12 |
| 8 | 30 | 56 | 8x20 | 367.080.11 | 367.080.12 |

For panels with maximum 20-25mm in thickness.

368

| D | I | L | S | ORDER NO. | ORDER NO. |
|----|----|----|------|---------------------|--------------------|
| mm | mm | mm | mm | Right-hand rotation | Left-hand rotation |
| 5 | 43 | 70 | 8x20 | 368.050.11 | 368.050.12 |
| 6 | 43 | 70 | 8x20 | 368.060.11 | 368.060.12 |
| 7 | 43 | 70 | 8x20 | 368.070.11 | 368.070.12 |
| 8 | 43 | 70 | 8x20 | 368.080.11 | 368.080.12 |

For panels with maximum 35-40mm in thickness

TECHNICAL DETAILS:


- Super-strength steel
- Spiral portion coated with orange or black P.T.F.E.
- HW head with precision balanced centre point
- 2 precision ground cutting edges [Z2]
- 2 spiral flutes
- Parallel shank with driving flat and length adjusting screw.



APPLICATION: used on boring machines and dowel drilling devices.

Use for drilling through holes in solid wood, wood composites, plastic and laminated materials.

Countersinks for 2 flutes dowel drills

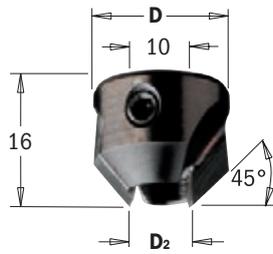

315

HW Z2 RH LH

| D ₂ mm | D mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------------------|---------|----------------------------------|---------------------------------|
| 5 ~ 10 | 20 | 315.200.11 | 315.200.12 |
| 11 ~ 12 | 22 | 315.220.11 | 315.220.12 |


**For assembly on the shank of the drill.
For use with the following parts: 310-311-362-313-314-366 HW**



TECHNICAL DETAILS:
 - Super-strength steel.
 - 2 precision ground carbide tipped cutting edges [Z2].
 - Direct clamp on the shank of the drills.

APPLICATION: used for chamfering and drilling in solid wood, wood composites, plastic and laminated materials.

Countersinks for 4 flutes dowel drills

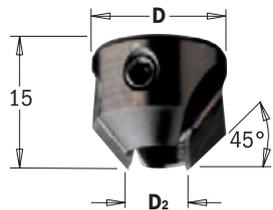

316

HW Z2 RH LH

| D ₂ mm | D mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------------------|---------|----------------------------------|---------------------------------|
| 4 | 16 | 316.040.11 | 316.040.12 |
| 5 | 16 | 316.050.11 | 316.050.12 |
| 6 | 16 | 316.060.11 | 316.060.12 |
| 7 | 16 | 316.070.11 | 316.070.12 |
| 8 | 18 | 316.080.11 | 316.080.12 |
| 9 | 18 | 316.090.11 | 316.090.12 |
| 10 | 20 | 316.100.11 | 316.100.12 |
| 12 | 20 | 316.120.11 | 316.120.12 |

**For assembly on the spiral head of the bit.
Adjustable depth.
For use with the following parts:
306-307-308-309-373-374-375-338-339-
340-341-342-343-344-346-352-353 HW**

TECHNICAL DETAILS:
 - Super-strength steel.
 - 2 HW precision ground cutting edges [Z2].



APPLICATION: used for drilling and chamfering in solid wood, wood composites, plastic and laminated materials.


315 assembly Illustration




316 assembly Illustration



Hinge boring bits

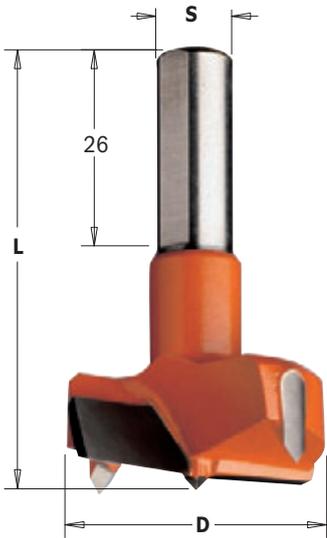

New construction with 1mm centre point

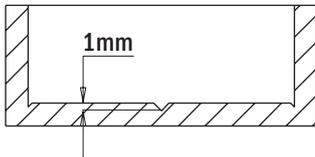

317



| D mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|----------------------------------|---------------------------------|
| 14 | 57,5 | 10x26 | 317.140.11 | 317.140.12 |
| 15 | 57,5 | 10x26 | 317.150.11 | 317.150.12 |
| 16 | 57,5 | 10x26 | 317.160.11 | 317.160.12 |
| 17 | 57,5 | 10x26 | 317.170.11 | 317.170.12 |
| 18 | 57,5 | 10x26 | 317.180.11 | 317.180.12 |
| 19 | 57,5 | 10x26 | 317.190.11 | 317.190.12 |
| 20 | 57,5 | 10x26 | 317.200.11 | 317.200.12 |
| 22 | 57,5 | 10x26 | 317.220.11 | 317.220.12 |
| 24 | 57,5 | 10x26 | 317.240.11 | 317.240.12 |
| 25 | 57,5 | 10x26 | 317.250.11 | 317.250.12 |
| 26 | 57,5 | 10x26 | 317.260.11 | 317.260.12 |
| 28 | 57,5 | 10x26 | 317.280.11 | 317.280.12 |
| 30 | 57,5 | 10x26 | 317.300.11 | 317.300.12 |
| 32 | 57,5 | 10x26 | 317.320.11 | 317.320.12 |
| 34 | 57,5 | 10x26 | 317.340.11 | 317.340.12 |
| 35 | 57,5 | 10x26 | 317.350.11 | 317.350.12 |
| 38 | 57,5 | 10x26 | 317.380.11 | 317.380.12 |
| 40 | 57,5 | 10x26 | 317.400.11 | 317.400.12 |
| 42 | 57,5 | 10x26 | 317.420.11 | 317.420.12 |
| 45 | 57,5 | 10x26 | 317.450.11 | 317.450.12 |
| 50 | 57,5 | 10x26 | 317.500.11 | 317.500.12 |
| 55 | 57,5 | 10x26 | 317.550.11 | 317.550.12 |
| 60 | 57,5 | 10x26 | 317.600.11 | 317.600.12 |

TECHNICAL DETAILS:

- Super-strength steel.
- Cutter portion coated with orange or black P.T.F.E.
- HW head with precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- 2 negatively ground spurs [V2].
- Parallel shank with driving flat and length adjusting screw.

Spare parts



Optional



APPLICATION: ideal for hinges. Use on boring machines equipped with adaptors or chucks. Use for drilling accurate and clean-cut blind holes in solid wood, wood composites, plastic and laminated materials.

DP Hinge boring bits



317-369



| D mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|----------------------------------|---------------------------------|
| 15 | 57,5 | 10x26 | 317.150.61 | 317.150.62 |
| 35 | 57,5 | 10x26 | 317.350.61 | 317.350.62 |
| 15 | 70 | 10x26 | 369.150.61 | 369.150.62 |
| 35 | 70 | 10x26 | 369.350.61 | 369.350.62 |

TECHNICAL DETAILS:

- Super-strength steel.
- DP head with precision balanced centre point.
- 2 DP precision ground cutting edges [Z2].
- 2 DP negatively ground spurs [V2].
- Parallel shank with driving flat and length adjusting screw.

Spare parts



Optional




APPLICATION: ideal for hinges. Use on boring machines equipped with adaptors or chucks. Use for drilling accurate and clean-cut blind holes in wood composites, plastic and laminated materials. Boring performance 20 times longer than HW materials.



REMARK: special dimensions available on request.

Hinge boring bits

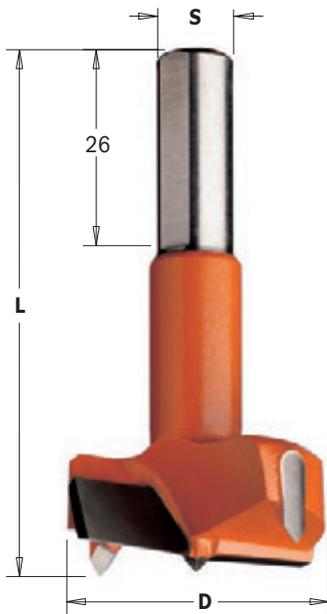HW **Z2** **V2** **RH** **LH**


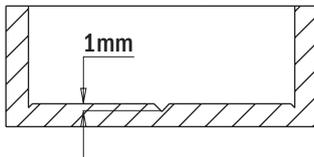
369

| D mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|----------------------------------|---------------------------------|
| 14 | 70 | 10x26 | 369.140.11 | 369.140.12 |
| 15 | 70 | 10x26 | 369.150.11 | 369.150.12 |
| 16 | 70 | 10x26 | 369.160.11 | 369.160.12 |
| 18 | 70 | 10x26 | 369.180.11 | 369.180.12 |
| 20 | 70 | 10x26 | 369.200.11 | 369.200.12 |
| 22 | 70 | 10x26 | 369.220.11 | 369.220.12 |
| 25 | 70 | 10x26 | 369.250.11 | 369.250.12 |
| 26 | 70 | 10x26 | 369.260.11 | 369.260.12 |
| 30 | 70 | 10x26 | 369.300.11 | 369.300.12 |
| 35 | 70 | 10x26 | 369.350.11 | 369.350.12 |
| 40 | 70 | 10x26 | 369.400.11 | 369.400.12 |
| 45 | 70 | 10x26 | 369.450.11 | 369.450.12 |
| 50 | 70 | 10x26 | 369.500.11 | 369.500.12 |
| 55 | 70 | 10x26 | 369.550.11 | 369.550.12 |
| 60 | 70 | 10x26 | 369.600.11 | 369.600.12 |

370

| D mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|----------------------------------|---------------------------------|
| 18 | 77 | 10x30 | 370.180.11 | 370.180.12 |
| 20 | 77 | 10x30 | 370.200.11 | 370.200.12 |
| 25 | 77 | 10x30 | 370.250.11 | 370.250.12 |
| 30 | 77 | 10x30 | 370.300.11 | 370.300.12 |
| 35 | 77 | 10x30 | 370.350.11 | 370.350.12 |

New construction with
1mm centre point



TECHNICAL DETAILS:

- Super-strength steel.
- Cutter portion coated with orange or black P.T.F.E.
- HW head with precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- 2 negatively ground spurs [V2].
- Parallel shank with driving flat and length adjusting screw.

Spare parts



990.003.00

Optional




990.088.00

APPLICATION: ideal for hinges. Use on boring machines equipped with adaptors or chucks.

Use for drilling accurate and clean-cut blind holes in solid wood, wood composites, plastic and laminated materials.

Hinge boring bits with chipbreaker for boring machines

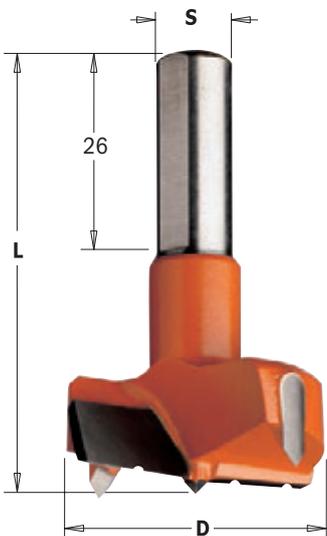new
HW **Z2R** **V2** **RH** **LH**


317C - 369C

| D mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|----------------------------------|---------------------------------|
| 35 | 57,5 | 10x26 | 317.350.11C | 317.350.12C |
| 40 | 57,5 | 10x26 | 317.400.11C | 317.400.12C |
| 45 | 57,5 | 10x26 | 317.450.11C | 317.450.12C |
| 35 | 70 | 10x26 | 369.350.11C | 369.350.12C |
| 40 | 70 | 10x26 | 369.400.11C | 369.400.12C |
| 45 | 70 | 10x26 | 369.450.11C | 369.450.12C |

TECHNICAL DETAILS:

- Super-strength steel.
- Cutter portion coated with orange or black P.T.F.E.
- HW head with precision balanced centre point.
- 2 HW precision ground cutting edges with chipbreaker [Z2R].
- 2 negatively ground spurs [V2].
- Parallel shank with driving flat and length adjusting screw.

Spare parts



990.003.00

Optional



990.088.00

APPLICATION:

Ideal for hinges. Used on boring machines equipped with adaptors or chucks. For drilling accurate and clean-cut blind holes in solid wood.

Dowel drills with threaded shank



344



| D mm | I mm | LB mm | S mm | ORDER NO. | |
|---------|---------|----------|---------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 5 | 43 | 63 | M8 | 344.050.11 | 344.050.12 |
| 6 | 43 | 63 | M8 | 344.060.11 | 344.060.12 |
| 8 | 43 | 63 | M8 | 344.080.11 | 344.080.12 |
| 10 | 43 | 63 | M8 | 344.100.11 | 344.100.12 |
| 12 | 43 | 63 | M8 | 344.120.11 | 344.120.12 |

FOR USE ON THE FOLLOWING MACHINES:
Nottmeyer (older models)

346



| D mm | I mm | LB mm | S mm | ORDER NO. | |
|---------|---------|----------|---------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 5 | 43 | 63 | M10 | 346.050.11 | 346.050.12 |
| 6 | 43 | 63 | M10 | 346.060.11 | 346.060.12 |
| 8 | 43 | 63 | M10 | 346.080.11 | 346.080.12 |
| 10 | 43 | 63 | M10 | 346.100.11 | 346.100.12 |
| 12 | 43 | 63 | M10 | 346.120.11 | 346.120.12 |

FOR USE ON THE FOLLOWING MACHINES:
Ayen, Holzma, Knoevenagel, Mayer, Torwegge.

TECHNICAL DETAILS:

- Super-strength steel.
- HW head with precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- 2 ground spurs [V2].
- 4 spiral flutes.

APPLICATION: used on boring machines equipped with chucks.
Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills with threaded shank



352-353



| D mm | I mm | LB mm | S mm | ORDER NO. | |
|---------|---------|----------|---------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 5 | 30 | 45 | M8/9 | 352.050.11 | 352.050.12 |
| 6 | 30 | 45 | M8/9 | 352.060.11 | 352.060.12 |
| 8 | 30 | 45 | M8/9 | 352.080.11 | 352.080.12 |
| 10 | 30 | 45 | M8/9 | 352.100.11 | 352.100.12 |
| 12 | 30 | 45 | M8/9 | 352.120.11 | 352.120.12 |
| 5 | 40 | 55 | M8/9 | 353.050.11 | 353.050.12 |
| 6 | 40 | 55 | M8/9 | 353.060.11 | 353.060.12 |
| 8 | 40 | 55 | M8/9 | 353.080.11 | 353.080.12 |
| 10 | 40 | 55 | M8/9 | 353.100.11 | 353.100.12 |
| 12 | 40 | 55 | M8/9 | 353.120.11 | 353.120.12 |


FOR USE ON THE FOLLOWING MACHINES:
Masterwood (Zangheri & Boschetti)
Morbidelli, Nottmeyer (new design)

TECHNICAL DETAILS:

- Super-strength steel.
- HW head with precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- 2 ground spurs [V2].
- 4 spiral flutes.

APPLICATION: used on boring machines equipped with chucks.
Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills with threaded shank with countersink

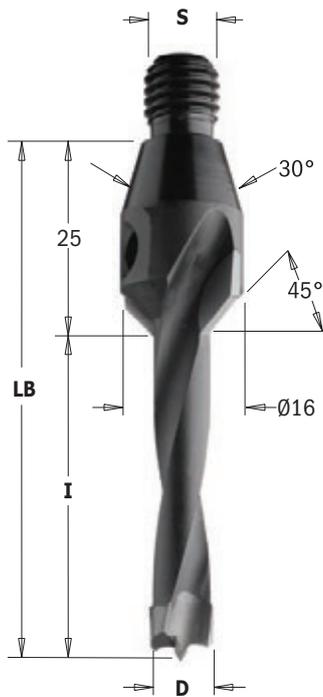

332-334-336-337



| D mm | I mm | LB mm | S mm | ORDER NO. | |
|---------|---------|----------|---------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 5 | 20 | 45 | M10/30° | 332.050.11 | 332.050.12 |
| 6 | 20 | 45 | M10/30° | 332.060.11 | 332.060.12 |
| 8 | 20 | 45 | M10/30° | 332.080.11 | 332.080.12 |
| 10 | 20 | 45 | M10/30° | 332.100.11 | 332.100.12 |
| 12 | 20 | 45 | M10/30° | 332.120.11 | 332.120.12 |
| | | | | | |
| 5 | 30 | 55 | M10/30° | 334.050.11 | 334.050.12 |
| 6 | 30 | 55 | M10/30° | 334.060.11 | 334.060.12 |
| 8 | 30 | 55 | M10/30° | 334.080.11 | 334.080.12 |
| 10 | 30 | 55 | M10/30° | 334.100.11 | 334.100.12 |
| 12 | 30 | 55 | M10/30° | 334.120.11 | 334.120.12 |
| | | | | | |
| 5 | 40 | 65 | M10/30° | 336.050.11 | 336.050.12 |
| 6 | 40 | 65 | M10/30° | 336.060.11 | 336.060.12 |
| 8 | 40 | 65 | M10/30° | 336.080.11 | 336.080.12 |
| 10 | 40 | 65 | M10/30° | 336.100.11 | 336.100.12 |
| 12 | 40 | 65 | M10/30° | 336.120.11 | 336.120.12 |
| | | | | | |
| 5 | 50 | 75 | M10/30° | 337.050.11 | 337.050.12 |
| 6 | 50 | 75 | M10/30° | 337.060.11 | 337.060.12 |
| 8 | 50 | 75 | M10/30° | 337.080.11 | 337.080.12 |
| 10 | 50 | 75 | M10/30° | 337.100.11 | 337.100.12 |
| 12 | 50 | 75 | M10/30° | 337.120.11 | 337.120.12 |

TECHNICAL DETAILS:

- Super-strength steel.
- HW head with precision balanced centre point.
- 2 precision ground cutting edge [Z2].
- 2 ground spurts [V2].
- 2 spiral flutes.

APPLICATION: used on boring machines equipped with chucks.

Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills with threaded shank without countersink



341-342-343



| D mm | I mm | LB mm | S mm | ORDER NO. | |
|---------|---------|----------|---------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 5 | 30 | 55 | M10/30° | 341.050.11 | 341.050.12 |
| 6 | 30 | 55 | M10/30° | 341.060.11 | 341.060.12 |
| 8 | 30 | 55 | M10/30° | 341.080.11 | 341.080.12 |
| 10 | 30 | 55 | M10/30° | 341.100.11 | 341.100.12 |
| 12 | 30 | 55 | M10/30° | 341.120.11 | 341.120.12 |
| | | | | | |
| 5 | 40 | 65 | M10/30° | 342.050.11 | 342.050.12 |
| 6 | 40 | 65 | M10/30° | 342.060.11 | 342.060.12 |
| 8 | 40 | 65 | M10/30° | 342.080.11 | 342.080.12 |
| 10 | 40 | 65 | M10/30° | 342.100.11 | 342.100.12 |
| 12 | 40 | 65 | M10/30° | 342.120.11 | 342.120.12 |
| | | | | | |
| 5 | 50 | 75 | M10/30° | 343.050.11 | 343.050.12 |
| 6 | 50 | 75 | M10/30° | 343.060.11 | 343.060.12 |
| 8 | 50 | 75 | M10/30° | 343.080.11 | 343.080.12 |
| 10 | 50 | 75 | M10/30° | 343.100.11 | 343.100.12 |
| 12 | 50 | 75 | M10/30° | 343.120.11 | 343.120.12 |


TECHNICAL DETAILS:

- Super-strength steel.
- HW head with precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- 2 ground spurts [V2].
- 4 spiral flutes.

APPLICATION: used on boring machines equipped with chucks.

Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills with threaded shank with countersink

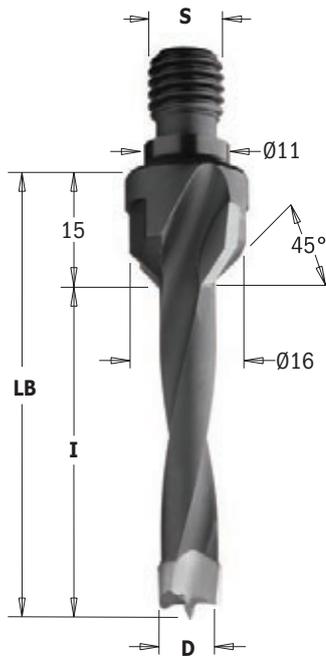

325-327-329-330



| D mm | I mm | LB mm | S mm | ORDER NO. | ORDER NO. |
|---------|---------|----------|----------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 5 | 20 | 35 | M10/11x4 | 325.050.11 | 325.050.12 |
| 6 | 20 | 35 | M10/11x4 | 325.060.11 | 325.060.12 |
| 8 | 20 | 35 | M10/11x4 | 325.080.11 | 325.080.12 |
| 10 | 20 | 35 | M10/11x4 | 325.100.11 | 325.100.12 |
| 12 | 20 | 35 | M10/11x4 | 325.120.11 | 325.120.12 |
| | | | | | |
| 5 | 30 | 45 | M10/11x4 | 327.050.11 | 327.050.12 |
| 6 | 30 | 45 | M10/11x4 | 327.060.11 | 327.060.12 |
| 8 | 30 | 45 | M10/11x4 | 327.080.11 | 327.080.12 |
| 10 | 30 | 45 | M10/11x4 | 327.100.11 | 327.100.12 |
| 12 | 30 | 45 | M10/11x4 | 327.120.11 | 327.120.12 |
| | | | | | |
| 5 | 40 | 55 | M10/11x4 | 329.050.11 | 329.050.12 |
| 6 | 40 | 55 | M10/11x4 | 329.060.11 | 329.060.12 |
| 8 | 40 | 55 | M10/11x4 | 329.080.11 | 329.080.12 |
| 10 | 40 | 55 | M10/11x4 | 329.100.11 | 329.100.12 |
| 12 | 40 | 55 | M10/11x4 | 329.120.11 | 329.120.12 |
| | | | | | |
| 5 | 50 | 65 | M10/11x4 | 330.050.11 | 330.050.12 |
| 6 | 50 | 65 | M10/11x4 | 330.060.11 | 330.060.12 |
| 8 | 50 | 65 | M10/11x4 | 330.080.11 | 330.080.12 |
| 10 | 50 | 65 | M10/11x4 | 330.100.11 | 330.100.12 |
| 12 | 50 | 65 | M10/11x4 | 330.120.11 | 330.120.12 |

TECHNICAL DETAILS:

- Super-strength steel.
- HW head with precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- 2 spiral flutes.
- 2 ground spurs [V2].

APPLICATION:

used on boring machines equipped with chucks. Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills with threaded shank without countersink



338-339-340



| D mm | I mm | LB mm | S mm | ORDER NO. | ORDER NO. |
|---------|---------|----------|----------|---------------------|--------------------|
| | | | | Right-hand rotation | Left-hand rotation |
| 5 | 30 | 45 | M10/11x4 | 338.050.11 | 338.050.12 |
| 6 | 30 | 45 | M10/11x4 | 338.060.11 | 338.060.12 |
| 8 | 30 | 45 | M10/11x4 | 338.080.11 | 338.080.12 |
| 10 | 30 | 45 | M10/11x4 | 338.100.11 | 338.100.12 |
| 12 | 30 | 45 | M10/11x4 | 338.120.11 | 338.120.12 |
| | | | | | |
| 5 | 40 | 55 | M10/11x4 | 339.050.11 | 339.050.12 |
| 6 | 40 | 55 | M10/11x4 | 339.060.11 | 339.060.12 |
| 8 | 40 | 55 | M10/11x4 | 339.080.11 | 339.080.12 |
| 10 | 40 | 55 | M10/11x4 | 339.100.11 | 339.100.12 |
| 12 | 40 | 55 | M10/11x4 | 339.120.11 | 339.120.12 |
| | | | | | |
| 5 | 50 | 65 | M10/11x4 | 340.050.11 | 340.050.12 |
| 6 | 50 | 65 | M10/11x4 | 340.060.11 | 340.060.12 |
| 8 | 50 | 65 | M10/11x4 | 340.080.11 | 340.080.12 |
| 10 | 50 | 65 | M10/11x4 | 340.100.11 | 340.100.12 |
| 12 | 50 | 65 | M10/11x4 | 340.120.11 | 340.120.12 |

TECHNICAL DETAILS:

- Super-strength steel.
- HW head with precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- 2 ground spurs [V2].
- 4 spiral flutes.

APPLICATION:

used on boring machines equipped with chucks. Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Special dowel drills

TOOL FEATURES

TOOL MATERIAL

- HW SP steel

QUANTITY AND ROTATION

Nr. RH Bits Nr. LH Bits

SHANK

- PARALLEL SHANK WITH DRIVING FLAT

- Ø8x20mm with driving flat and length adjusting screw
 Ø10x20mm with driving flat and length adjusting screw

- THREADED SHANK

- M8
 M10
 M8 with seating Ø9x4mm
 M10 with seating Ø11x4mm
 M 8 with 20° 48' centring cone
 M10 with 30° centring cone

- PARALLEL SHANK

- S x A =
(Specify diameter and shank length)
-
(Specify other shank types)

HOLE FEATURES

HOLE TO PRODUCE

- Drawing 1 - Blind hole with more than one diameter
 Drawing 2 - Blind hole with counter
 Drawing 3 - Through hole with more than one diameter
 Drawing 4 - Through hole with countersink

DIMENSIONS

d x C
(Specify diameter and depth of first hole)

D x B
(Specify diameter and depth of second hole)


(Specify countersink-angle) "standard 45°"

WORK MATERIAL

- Solid wood
 MDF/Melamine panels
 Chipboard panels and hardwood





(Specify other materials)

MACHINE DATA

Manufacturer/Model

RPM

Feed speed (metres/minute)

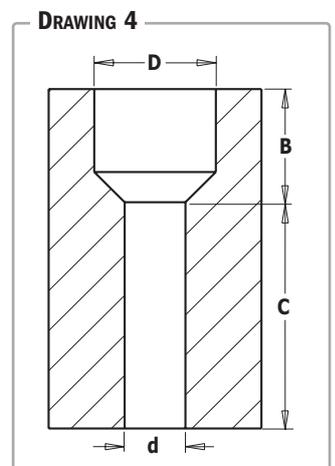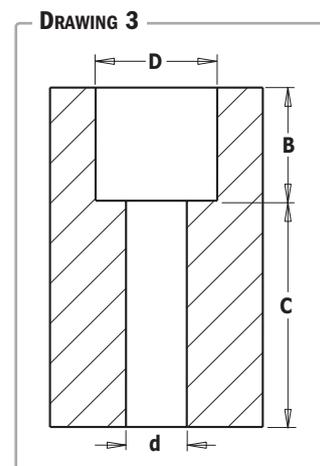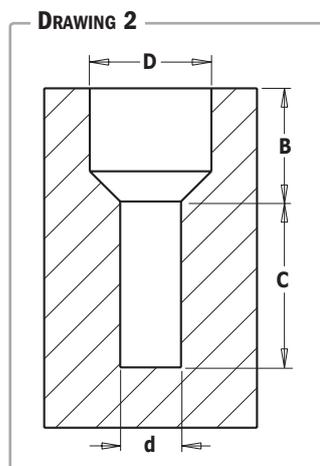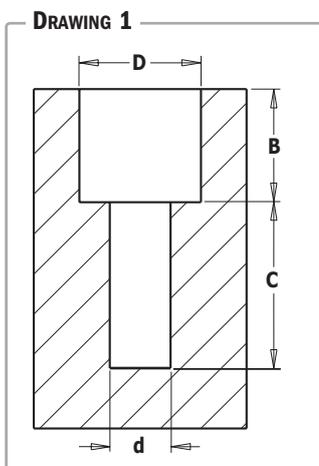

For orders, please fill out this form and fax it to:

#39 0721 481021 or mail to:

C.M.T. Utensili S.p.A. - Via della Meccanica, s.n. - 61122 Pesaro, Fraz. Chiusa di Ginestreto - Italia

Saw blades
 Jig saw blades
 Tools with bore & Knives
 Router bits & sets
 CNC router cutter & chucks
 Industrial dowel drills
 Bits for hand power tools
 Power tools & accessories
 Display cabinets & spare parts



Bits for hand power tools

| PRODUCTS | PAGE |
|--|------------------|
| Adaptors | 252 - 253 |
| Interchangeable boring bits | 253 |
| Boring bits | 254 ~ 257 |
| Chisel and bit sets | 257 |
| Plug cutters & sets | 258 - 259 |
| Forstner bits | 260 |
| Rosette cutters | 261 |
| Brad point bits | 262 ~ 265 |
| Bits for Mafell® and Festool® machines | 263 |
| Countersinks & drills | 266 - 268 |

Adaptors



509-532-533 ...with parallel shank for interchangeable bits




| S mm | LB mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|----------|----------------------------------|---------------------------------|
| 8x30 | 35 | 532.080.01 | |
| 9,5x30 | 35 | 532.095.01 | |
| 10x50 | 60 | 533.100.01 | 533.100.02 |
| 12x30 | 35 | 532.120.01 | |
| 13x50 | 100 | 509.130.01 | 509.130.02 |
| 16x50 | 100 | 509.160.01 | 509.160.02 |

TECHNICAL DETAILS:

- Super strength steel.
- Parallel shank with driving flat and adjustable screw length.

APPLICATION: used on boring machines with adaptor chucks.

Adaptors

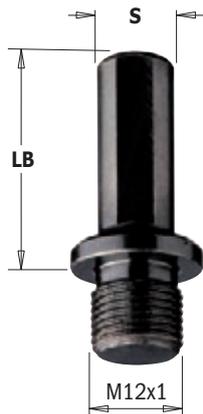

511 ...with parallel shank for quick change drills



| S mm | LB mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|-------------------------------------|----------|----------------------------------|---------------------------------|
| 10x20 (with driving flat and screw) | 27 | 511.270.01 | 511.270.02 |
| 10x35 (with driving flat and screw) | 40 | 511.400.01 | 511.400.02 |

For use with the following parts: 501 HW

TECHNICAL DETAILS:

- Super strength steel.
- Parallel shank with driving flat and adjustable screw length.

APPLICATION: used on boring machines with adaptor chucks.

Spare parts



990.003.00

Adaptors



506



| S mm | LB mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|----------|----------|----------------------------------|---------------------------------|
| M10/11x4 | 15 | 506.150.01 | 506.150.02 |
| M10/11x4 | 25 | 506.250.01 | 506.250.02 |
| M10/11x4 | 35 | 506.350.01 | 506.350.02 |

For use with the following parts: 501 HW

TECHNICAL DETAILS:

- Super strength steel.
- Parallel shank with driving flat and adjustable screw length.

APPLICATION: used on boring machines with adaptor chucks.



503

RH LH

| S mm | LB mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|----------|----------------------------------|---------------------------------|
| M10/30° | 25 | 503.250.01 | 503.250.02 |
| M10/30° | 35 | 503.350.01 | 503.350.02 |
| M10/30° | 45 | 503.450.01 | 503.450.02 |

For use with the following parts: 501 HW

TECHNICAL DETAILS:

- Super strength steel.
- Parallel shank with driving flat and adjustable screw length

APPLICATION: used on boring machines with adaptor chucks.



534

RH


| S | ORDER NO. Right-hand rotation |
|-----------------|----------------------------------|
| MK2/Ø20x14F.x1" | 534.020.01 |
| MK2/M30x1,5 | 534.030.01 |

For use with the following parts: 501 HW

TECHNICAL DETAILS:

- Super strength steel.

APPLICATION: used on CNC machines or hand-held routers equipped with adaptor chucks.

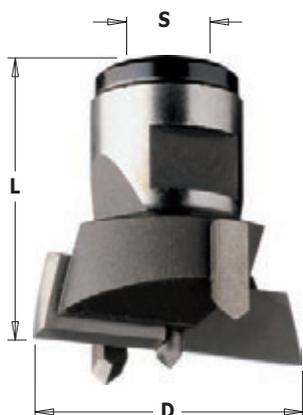


501

HW Z2+2 RH LH

| D mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|---------|---------|---------|----------------------------------|---------------------------------|
| 20 | 30 | M12x1 | 501.200.11 | 501.200.12 |
| 22 | 30 | M12x1 | 501.220.11 | 501.220.12 |
| 24 | 30 | M12x1 | 501.240.11 | 501.240.12 |
| 25 | 30 | M12x1 | 501.250.11 | 501.250.12 |
| 26 | 30 | M12x1 | 501.260.11 | 501.260.12 |
| 30 | 30 | M12x1 | 501.300.11 | 501.300.12 |
| 32 | 30 | M12x1 | 501.320.11 | 501.320.12 |
| 34 | 30 | M12x1 | 501.340.11 | 501.340.12 |
| 35 | 30 | M12x1 | 501.350.11 | 501.350.12 |
| 36 | 30 | M12x1 | 501.360.11 | 501.360.12 |
| 38 | 30 | M12x1 | 501.380.11 | 501.380.12 |
| 40 | 30 | M12x1 | 501.400.11 | 501.400.12 |
| 45 | 30 | M12x1 | 501.450.11 | 501.450.12 |
| 50 | 30 | M12x1 | 501.500.11 | 501.500.12 |
| 55 | 30 | M12x1 | 501.550.11 | 501.550.12 |
| 60 | 30 | M12x1 | 501.600.11 | 501.600.12 |

Boring bits with parallel shank

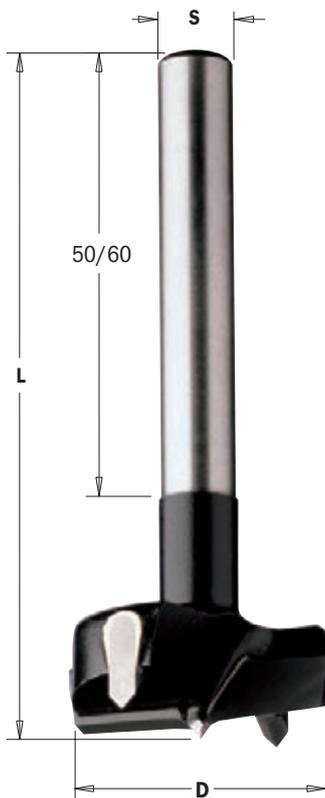HW Z2 V2 RH

512

| D | L | S | ORDER NO. |
|----|----|-------|---------------------|
| mm | mm | mm | Right-hand rotation |
| 14 | 90 | 10x60 | 512.140.11 |
| 15 | 90 | 10x60 | 512.150.11 |
| 16 | 90 | 10x60 | 512.160.11 |
| 17 | 90 | 10x60 | 512.170.11 |
| 18 | 90 | 10x60 | 512.180.11 |
| 19 | 90 | 10x60 | 512.190.11 |
| 20 | 90 | 10x60 | 512.200.11 |
| 21 | 90 | 10x60 | 512.210.11 |
| 22 | 90 | 10x60 | 512.220.11 |
| 23 | 90 | 10x60 | 512.230.11 |
| 24 | 90 | 10x60 | 512.240.11 |
| 25 | 90 | 10x60 | 512.250.11 |
| 26 | 90 | 10x60 | 512.260.11 |
| 27 | 90 | 10x60 | 512.270.11 |
| 28 | 90 | 10x60 | 512.280.11 |
| 29 | 90 | 10x60 | 512.290.11 |
| 30 | 90 | 10x60 | 512.300.11 |
| 31 | 90 | 10x60 | 512.310.11 |
| 32 | 90 | 10x60 | 512.320.11 |
| 33 | 90 | 10x60 | 512.330.11 |
| 34 | 90 | 10x60 | 512.340.11 |
| 35 | 90 | 10x60 | 512.350.11 |
| 38 | 90 | 10x60 | 512.380.11 |
| 40 | 90 | 10x60 | 512.400.11 |
| 45 | 90 | 10x50 | 512.450.11 |
| 48 | 90 | 10x50 | 512.480.11 |
| 50 | 90 | 10x50 | 512.500.11 |
| 55 | 90 | 10x50 | 512.550.11 |
| 58 | 90 | 10x50 | 512.580.11 |
| 60 | 90 | 10x50 | 512.600.11 |

TECHNICAL DETAILS:

- Super strength steel.
- HW precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- 2 HW negatively ground spurs [V2].
- Parallel shank.

APPLICATION: used for drilling blind holes in solid wood, wood composites and plastic laminate materials. Ideal for hinges.

5 piece boring bit set for hinges

HW Z2 V2 RH

512


The perfect set for hinge work and other related applications. Machined from special high speed steel with micrograin carbide tips, these bits are available in diameters of 15, 20, 25, 30 and 35mm. Safely packaged in a solid plastic box with glass front for easy storage and inventory.

TECHNICAL DETAILS:

- Super strength steel.
- HW precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- 2 HW negatively ground spurs [V2].
- Parallel shank.

APPLICATION: used for drilling blind holes in solid wood, wood composites and plastic laminated materials. **Ideal for hinges.**

| DESCRIPTION | S | L | BIT DIAMETER | ORDER NO. |
|-----------------------------------|----|----|----------------|---------------------|
| | mm | mm | mm | Right-hand rotation |
| 5 piece boring bit set for hinges | 10 | 90 | 15-20-25-30-35 | 512.001.01 |

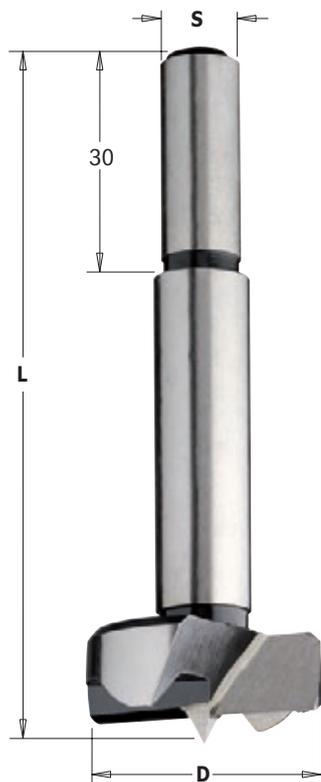

512

SP Z2 V2 RH

| D mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|----------------------------------|
| 8 | 90 | 10x30 | 512.081.31 |
| 10 | 90 | 10x30 | 512.101.31 |
| 12 | 90 | 10x30 | 512.121.31 |
| 14 | 90 | 10x30 | 512.141.31 |
| 15 | 90 | 10x30 | 512.151.31 |
| 16 | 90 | 10x30 | 512.161.31 |
| 18 | 90 | 10x30 | 512.181.31 |
| 20 | 90 | 10x30 | 512.201.31 |
| 22 | 90 | 10x30 | 512.221.31 |
| 24 | 90 | 10x30 | 512.241.31 |
| 25 | 90 | 10x30 | 512.251.31 |
| 26 | 90 | 10x30 | 512.261.31 |
| 28 | 90 | 10x30 | 512.281.31 |
| 30 | 90 | 10x30 | 512.301.31 |
| 32 | 90 | 10x30 | 512.321.31 |
| 34 | 90 | 10x30 | 512.341.31 |
| 35 | 90 | 10x30 | 512.351.31 |
| 38 | 90 | 10x30 | 512.381.31 |
| 40 | 90 | 10x30 | 512.401.31 |
| 45 | 90 | 10x30 | 512.451.31 |
| 50 | 90 | 10x30 | 512.501.31 |

TECHNICAL DETAILS:

- SP steel.
- Precision balanced centre point.
- 2 spurs [V2].
- 2 precision ground cutting edges [Z2].
- Long-lasting cutting performance.
- Parallel shank.

APPLICATION: used for drilling blind holes in softwood. **Ideal for hinges.**

5 piece boring bit set for hinges



512

SP Z2 V2 RH

The perfect set for hinge work and other related applications. Machined from special high speed steel, these bits are available in diameters of 15, 20, 25, 30 and 35mm. Precisely ground, sharpened with round shanks and safely packaged in a solid plastic box with glass front for easy storage and inventory.


TECHNICAL DETAILS:

- SP steel.
- Precision balanced centre point.
- 2 spurs [V2].
- 2 precision ground cutting edges [Z2].
- Long-lasting cutting performance.

APPLICATION: used for drilling blind holes in softwood. **Ideal for hinges.**

| DESCRIPTION | S mm | L mm | BIT DIAMETER mm | ORDER NO. Right-hand rotation |
|-----------------------------------|---------|---------|--------------------|----------------------------------|
| 5 piece boring bit set for hinges | 10 | 90 | 15-20-25-30-35 | 512.001.00 |

Boring bits with parallel shank

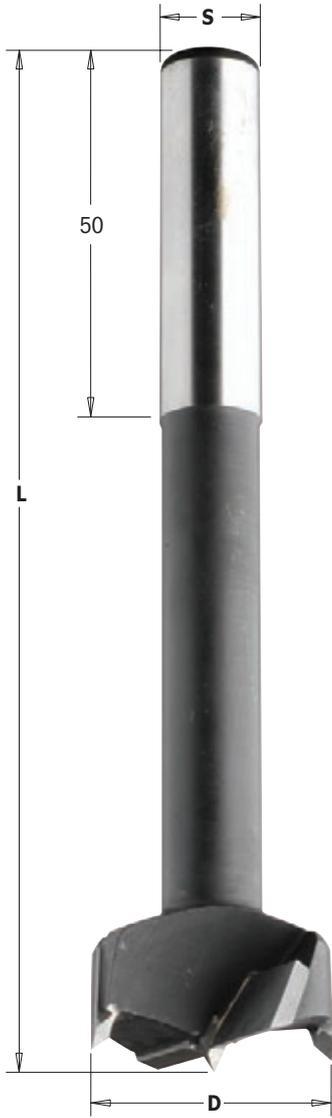HW **Z2** **V2** **RH**


513

| D mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|----------------------------------|
| 15 | 120 | 13 | 513.150.11 |
| 16 | 120 | 13 | 513.160.11 |
| 18 | 120 | 13 | 513.180.11 |
| 20 | 120 | 13 | 513.200.11 |
| 22 | 125 | 13 | 513.220.11 |
| 25 | 125 | 13 | 513.250.11 |
| 26 | 125 | 13 | 513.260.11 |
| 28 | 130 | 13 | 513.280.11 |
| 30 | 130 | 13 | 513.300.11 |
| 35 | 130 | 13 | 513.350.11 |
| 40 | 130 | 13 | 513.400.11 |
| 45 | 130 | 13 | 513.450.11 |
| 50 | 130 | 13 | 513.500.11 |
| 55 | 140 | 13 | 513.550.11 |
| 60 | 140 | 13 | 513.600.11 |


514

| D mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|----------------------------------|
| 15 | 120 | 16 | 514.150.11 |
| 16 | 120 | 16 | 514.160.11 |
| 18 | 120 | 16 | 514.180.11 |
| 20 | 120 | 16 | 514.200.11 |
| 22 | 125 | 16 | 514.220.11 |
| 25 | 125 | 16 | 514.250.11 |
| 26 | 125 | 16 | 514.260.11 |
| 28 | 130 | 16 | 514.280.11 |
| 30 | 130 | 16 | 514.300.11 |
| 32 | 130 | 16 | 514.320.11 |
| 35 | 130 | 16 | 514.350.11 |
| 40 | 130 | 16 | 514.400.11 |
| 45 | 130 | 16 | 514.450.11 |
| 50 | 130 | 16 | 514.500.11 |
| 55 | 140 | 16 | 514.550.11 |
| 60 | 140 | 16 | 514.600.11 |

TECHNICAL DETAILS:

- Super strength steel.
- HW precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- 2 HW negatively ground spurs [V2].
- Parallel shank.

APPLICATION: used for drilling blind holes in solid wood, wood composites and plastic laminated materials.
Ideal for hinges.

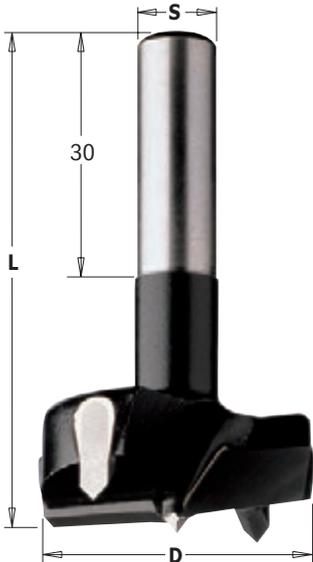

392



| D | L | S | ORDER NO. |
|----|----|------|---------------------|
| mm | mm | mm | Right-hand rotation |
| 15 | 60 | 8 | 392.150.11 |
| 20 | 60 | 8 | 392.200.11 |
| 25 | 60 | 8 | 392.250.11 |
| 26 | 60 | 8 | 392.260.11 |
| 30 | 60 | 8 | 392.300.11 |
| 35 | 60 | 8 | 392.350.11 |
| 35 | 60 | 12,7 | 392.351.11 |
| 40 | 60 | 8 | 392.400.11 |

TECHNICAL DETAILS:

- Super strength steel.
- HW precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- 2 HW negatively ground spurs [V2].
- Parallel shank.
- Right-hand rotation (RH).

APPLICATION: for use on drilling machines and hand-held routers in solid wood, wood composites and plastic laminated materials. **Ideal for hinges and blind holes.**

Mortise chisel & bit sets



543




| D | | S | | ORDER NO. |
|------|--------|----|--------|---------------------|
| mm | inches | mm | inches | Right-hand rotation |
| 6,35 | 1/4 | 19 | 3/4 | 543.064.51 |
| 8 | 5/16 | 19 | 3/4 | 543.079.51 |
| 9,5 | 3/8 | 19 | 3/4 | 543.095.51 |
| 12,7 | 1/2 | 19 | 3/4 | 543.127.51 |
| 15,8 | 5/8 | 19 | 3/4 | 543.158.51 |
| 19 | 3/4 | 19 | 3/4 | 543.190.51 |

It's tough to beat the "old faithful" mortise and tenon joint for strength and accuracy, even with all the other joining options in the world of woodworking.

It isn't the easiest joint to make, but for sure it helps have the best quality tools in your shop. That's why we've added a new selection of chisel and bit sets in all the popular sizes 6,35mm (1/4") to 19mm (3/4") diameter.

These sets are for use on any standard drill press mortising attachment of mortising machines.

Plug cutters

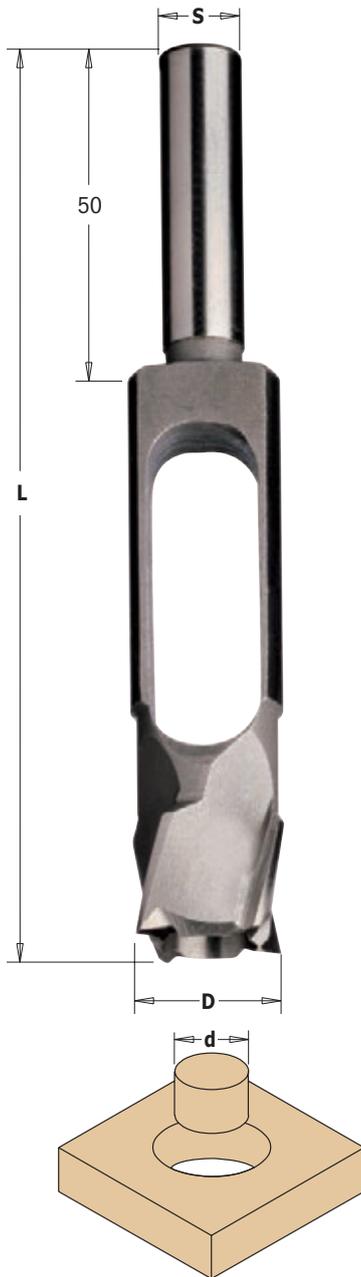

529

SP RH

| d mm | D mm | L mm | S mm | Z | ORDER NO. Right-hand rotation |
|---------|---------|---------|---------|---|----------------------------------|
| 8 | 18 | 140 | 13 | 4 | 529.080.31 |
| 10 | 20 | 140 | 13 | 4 | 529.100.31 |
| 12 | 24 | 140 | 13 | 4 | 529.120.31 |
| 14 | 26 | 140 | 13 | 4 | 529.140.31 |
| 15 | 27 | 140 | 13 | 4 | 529.150.31 |
| 16 | 28 | 140 | 13 | 4 | 529.160.31 |
| 18 | 30 | 140 | 13 | 4 | 529.180.31 |
| 20 | 32 | 140 | 13 | 4 | 529.200.31 |
| 22 | 34 | 140 | 13 | 5 | 529.220.31 |
| 25 | 37 | 140 | 13 | 5 | 529.250.31 |
| 30 | 42 | 140 | 13 | 5 | 529.300.31 |
| 32 | 44 | 160 | 16 | 5 | 529.320.31 |
| 35 | 47 | 160 | 16 | 6 | 529.350.31 |
| 40 | 52 | 160 | 16 | 6 | 529.400.31 |
| 45 | 57 | 160 | 16 | 6 | 529.450.31 |
| 50 | 62 | 160 | 16 | 6 | 529.500.31 |

| d inches | D inches | L inches | S inches | Z | ORDER NO. Right-hand rotation |
|-------------|-------------|-------------|-------------|---|----------------------------------|
| 3/8 | 49/64 | 5-1/2 | 1/2 | 4 | 529.095.31 |
| 1/2 | 61/64 | 5-1/2 | 1/2 | 4 | 529.127.31 |
| 5/8 | 1-7/64 | 5-1/2 | 1/2 | 4 | 529.158.31 |
| 3/4 | 1-7/32 | 5-1/2 | 1/2 | 4 | 529.191.31 |
| 7/8 | 1-11/32 | 5-1/2 | 1/2 | 4 | 529.222.31 |
| 1 | 1-15/32 | 5-1/2 | 1/2 | 5 | 529.254.31 |
| 1-1/4 | 1-19/32 | 5-1/2 | 1/2 | 5 | 529.317.31 |
| 1-3/8 | 1-27/32 | 6-5/16 | 5/8 | 6 | 529.349.31 |
| 1-1/2 | 1-31/32 | 6-5/16 | 5/8 | 6 | 529.381.31 |
| 1-5/8 | 2-3/32 | 6-5/16 | 5/8 | 6 | 529.413.31 |
| 1-3/4 | 2-7/32 | 6-5/16 | 5/8 | 6 | 529.445.31 |
| 2 | 2-15/32 | 6-5/16 | 5/8 | 6 | 529.508.31 |

Use our reduction bushing D=16mm to increase the 13mm shank (order no.799.130.00 page 253)

| D mm | D inches | Max RPM Softwood | Max RPM Hardwood |
|---------|-------------|---------------------|---------------------|
| < Ø16 | 5/8 | 1000 | 500 |
| < Ø40 | 1-37/64 | 500 | 300 |
| > Ø40 | 1-37/64 | 200 | 150 |

TECHNICAL DETAILS:

- SP steel.
- Long lasting cutter performance.

APPLICATION: used to make plugs in hard and soft woods.

Plug cutters



530

HS Z4 RH

| D mm | S | ORDER NO. Right-hand rotation |
|---------|------------|----------------------------------|
| 6,2 | Ø21x14F.1" | 530.062.51 |
| 8 | Ø21x14F.1" | 530.080.51 |
| 8,2 | Ø21x14F.1" | 530.082.51 |
| 10 | Ø21x14F.1" | 530.100.51 |
| 10,2 | Ø21x14F.1" | 530.102.51 |
| 12 | Ø21x14F.1" | 530.120.51 |
| 12,2 | Ø21x14F.1" | 530.122.51 |

TECHNICAL DETAILS:

- Super strength HS steel.
- 4 precision ground cutting edges [Z4].
- Long lasting cutter performance.


APPLICATION: used for cutting dowels.

REMARK: available on request.

500.001/02/03

SP **RH**

We offer a wide range of boring bits and plug cutters in the most popular diametres. If you need to bore or to make plugs in softwood these sets are with you need!

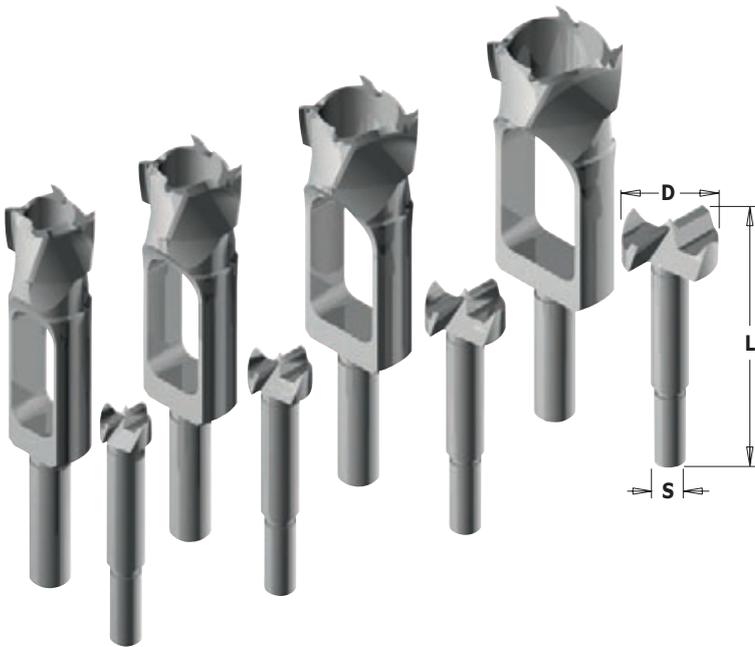

500.001.08 Boring bit & plug cutter set

| SET CONTAINS | D mm | L mm | S mm | ORDER NO. Right-hand rotation |
|--------------------------------|---------|---------|---------|----------------------------------|
| Boring bit with parallel shank | 8 | 90 | 10 | 512.081.31 |
| Boring bit with parallel shank | 10 | 90 | 10 | 512.101.31 |
| Boring bit with parallel shank | 12 | 90 | 10 | 512.121.31 |
| Boring bit with parallel shank | 15 | 90 | 10 | 512.151.31 |
| Plug cutter | 8 | 140 | 13 | 529.080.31 |
| Plug cutter | 10 | 140 | 13 | 529.100.31 |
| Plug cutter | 12 | 140 | 13 | 529.120.31 |
| Plug cutter | 15 | 140 | 13 | 529.150.31 |

500.002.08 Boring bit & plug cutter set

| SET CONTAINS | D mm | L mm | S mm | ORDER NO. Right-hand rotation |
|--------------------------------|---------|---------|---------|----------------------------------|
| Boring bit with parallel shank | 16 | 90 | 10 | 512.161.31 |
| Boring bit with parallel shank | 20 | 90 | 10 | 512.201.31 |
| Boring bit with parallel shank | 25 | 90 | 10 | 512.251.31 |
| Boring bit with parallel shank | 30 | 90 | 10 | 512.301.31 |
| Plug cutter | 16 | 140 | 13 | 529.160.31 |
| Plug cutter | 20 | 140 | 13 | 529.200.31 |
| Plug cutter | 25 | 140 | 13 | 529.250.31 |
| Plug cutter | 30 | 140 | 13 | 529.300.31 |

500.003.08 Boring bit & plug cutter set

| SET CONTAINS | D mm | L mm | S mm | ORDER NO. Right-hand rotation |
|--------------------------------|---------|---------|---------|----------------------------------|
| Boring bit with parallel shank | 15 | 90 | 10 | 512.151.31 |
| Boring bit with parallel shank | 20 | 90 | 10 | 512.201.31 |
| Boring bit with parallel shank | 25 | 90 | 10 | 512.251.31 |
| Boring bit with parallel shank | 30 | 90 | 10 | 512.301.31 |
| Plug cutter | 15 | 140 | 13 | 529.150.31 |
| Plug cutter | 20 | 140 | 13 | 529.200.31 |
| Plug cutter | 25 | 140 | 13 | 529.250.31 |
| Plug cutter | 30 | 140 | 13 | 529.300.31 |

Forstner bits

SP Z2 V2 RH



537

| D | L | S | ORDER NO. |
|----|-----|------|---------------------|
| mm | mm | mm | Right-hand rotation |
| 10 | 90 | 8 | 537.100.31 |
| 12 | 90 | 8 | 537.120.31 |
| 14 | 90 | 8 | 537.140.31 |
| 15 | 90 | 8 | 537.150.31 |
| 16 | 90 | 8 | 537.160.31 |
| 18 | 90 | 8 | 537.180.31 |
| 20 | 90 | 8 | 537.200.31 |
| 22 | 90 | 8 | 537.220.31 |
| 24 | 90 | 8 | 537.240.31 |
| 25 | 90 | 8 | 537.250.31 |
| 26 | 90 | 8 | 537.260.31 |
| 28 | 90 | 8 | 537.280.31 |
| 30 | 90 | 8 | 537.300.31 |
| 32 | 90 | 10 | 537.320.31 |
| 35 | 90 | 10 | 537.350.31 |
| 38 | 90 | 10 | 537.380.31 |
| 40 | 90 | 10 | 537.400.31 |
| 45 | 90 | 10 | 537.450.31 |
| 50 | 90 | 10 | 537.500.31 |
| 55 | 90 | 10 | 537.550.31 |
| 68 | 157 | 12,7 | 537.680.31 |

| D | L | S | ORDER NO. |
|--------|---------|--------|---------------------|
| inches | inches | inches | Right-hand rotation |
| 1/4 | 3-35/64 | 3/8 | 537.064.31 |
| 3/8 | 3-35/64 | 3/8 | 537.095.31 |
| 1/2 | 3-35/64 | 3/8 | 537.127.31 |
| 5/8 | 3-35/64 | 3/8 | 537.158.31 |
| 3/4 | 3-35/64 | 3/8 | 537.190.31 |
| 7/8 | 3-35/64 | 3/8 | 537.222.31 |
| 1 | 3-35/64 | 3/8 | 537.254.31 |
| 1-1/8 | 3-35/64 | 3/8 | 537.285.31 |
| 1-1/4 | 3-35/64 | 3/8 | 537.317.31 |
| 1-3/8 | 3-35/64 | 3/8 | 537.349.31 |
| 1-1/2 | 3-35/64 | 3/8 | 537.381.31 |
| 1-5/8 | 3-35/64 | 3/8 | 537.413.31 |
| 1-3/4 | 3-35/64 | 3/8 | 537.445.31 |
| 1-7/8 | 3-35/64 | 3/8 | 537.476.31 |
| 2 | 3-35/64 | 3/8 | 537.508.31 |
| 2-1/8 | 3-35/64 | 3/8 | 537.540.31 |

TECHNICAL DETAILS:

- Super strength SP steel.
- Precision balanced centre point.
- 2 spurs [V2].
- 2 precision ground cutting edges [Z2].
- Long-lasting cutting performance.

APPLICATION: used to drill precise flat bottom holes with no chipping in any softwood thickness.

Forstner bit sets

We offer a wide range of Forstner bits in the most popular diameters. These bits are available separately or in beautiful wooden sets. The high performance stagger tooth design on the bits with larger diameters allows for sharp holes with straight sides and flat bottoms. Bits available for drill presses, electric and cordless drills and suitable to work on any type of softwood.

SP Z2 V2 RH

- 537.000.04**
- 537.000.05**
- 537.000.07**
- 537.000.12**



| DESCRIPTION | SHANK | BIT DIAMETER | ORDER NO. |
|------------------------|---------|--|---------------------|
| | | | Right-hand rotation |
| 5 pcs. router bit set | Ø8-10mm | Ø15-20-25-30-35mm | 537.000.05 |
| 12 pcs. router bit set | Ø8-10mm | Ø10-12-14-15-16-18-20-22-25-26-30-35mm | 537.000.12 |
| 4 pcs. router bit set | Ø3/8" | Ø1/4" - 1/2" - 3/4" - 1" | 537.000.04 |
| 7 pcs. router bit set | Ø3/8" | Ø1/4" - 3/8" - 1/2" - 5/8" - 3/4" - 7/8" - 1" | 537.000.07 |
| 16 pcs. router bit set | Ø3/8" | Ø1/4" - 3/8" - 1/2" - 5/8" - 3/4" - 7/8" - 1" - 1-1/8" - 1-1/4" - 1-3/8" - 1-1/2" - 1-5/8" - 1-3/4" - 1-7/8" - 2" - 2-1/8" | 537.000.16 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts




531





| D mm | L mm | S mm | Max RPM | ORDER NO. Right-hand rotation |
|---------|---------|---------|------------|----------------------------------|
| 54 | 73,5 | 9,5 | 1500 | 531.541 |
| 54 | 71,3 | 9,5 | 1500 | 531.542 |
| 54 | 67,3 | 9,5 | 1500 | 531.543 |
| 54 | 72,3 | 9,5 | 1500 | 531.544 |
| 70 | 76,5 | 9,5 | 1000 | 531.701 |
| 70 | 74 | 9,5 | 1000 | 531.702 |

TECHNICAL DETAILS:


- Super strength HS steel.
- 2 HW precision ground cutting edges [Z2].
- Parallel exagonal shank.
- Right-hand rotation (RH).



APPLICATION: to be used on drill presses and drilling power tools at low RPMs (see table). We recommend clamping your workpiece mechanically during boring operations.

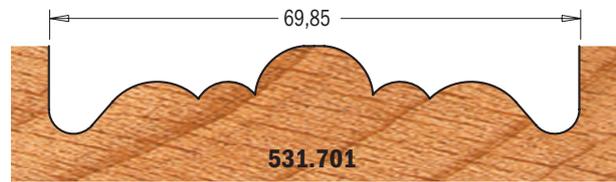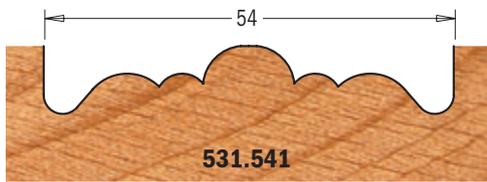

Drawings are 1:1 scale

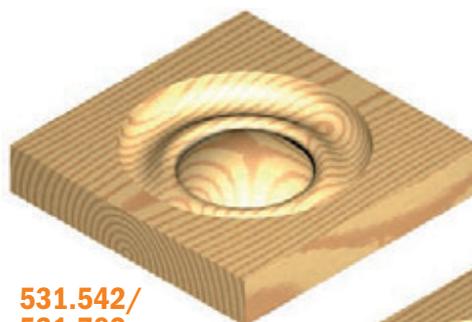

**531.541/
531.701**

**531.542/
531.702**

531.543

531.544

Brad point bits


HS **Z1** **V1** **RH**

542-535

| D mm | I mm | L mm | S | ORDER NO. Right-hand rotation |
|--------------|---------|---------|----------|----------------------------------|
| 6 | 155 | 230 | exagonal | 542.060.51 |
| 8 | 155 | 230 | exagonal | 542.080.51 |
| 10 | 155 | 230 | exagonal | 542.100.51 |
| 12 | 155 | 230 | exagonal | 542.120.51 |
| 14 | 155 | 230 | exagonal | 542.140.51 |
| 16 | 155 | 230 | exagonal | 542.160.51 |
| 18 | 155 | 230 | exagonal | 542.180.51 |
| 20 | 155 | 230 | exagonal | 542.200.51 |
| new 7 | 360 | 460 | exagonal | 535.070.51 |
| 8 | 360 | 460 | exagonal | 535.080.51 |
| 10 | 360 | 460 | exagonal | 535.100.51 |
| 12 | 360 | 460 | exagonal | 535.120.51 |
| 14 | 360 | 460 | exagonal | 535.140.51 |
| 16 | 360 | 460 | exagonal | 535.160.51 |
| 18 | 360 | 460 | exagonal | 535.180.51 |
| 20 | 360 | 460 | exagonal | 535.200.51 |

TECHNICAL DETAILS:

- Super strength HS steel.
- Precision balanced centre point.
- 1 precision ground cutting edge [Z1].
- 1 spiral flute.
- 1 spur [V1].
- Long-lasting cutting performance.

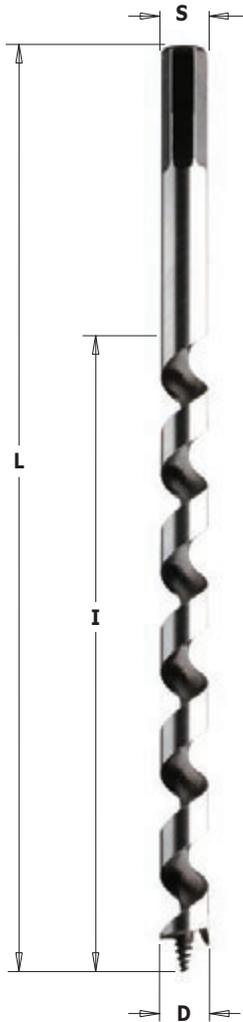APPLICATION: used for drilling deep holes in soft and hardwood.


Brad point bits

HW **Z2** **V2** **RH**

540

| D mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|---------|----------------------------------|
| 5 | 90 | 8x30 | 540.050.11 |
| 6 | 90 | 8x30 | 540.060.11 |
| 8 | 90 | 8x30 | 540.080.11 |
| 10 | 90 | 8x30 | 540.100.11 |
| 12 | 90 | 8x30 | 540.120.11 |

TECHNICAL DETAILS:

- Super strength steel.
- HW head with precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- 2 negatively ground spurs [V2].
- 2 spiral flutes


APPLICATION: for use on hand-held router to drill blind holes in solid wood, wood composites or plastic laminates.

541 Stop collars

| D mm | ORDER NO. | Spare parts | |
|---------|-------------------|---|---|
| 5 | 541.050.00 |  |  |
| 6 | 541.060.00 | 990.002.00 | 991.062.00 |
| 8 | 541.080.00 | 990.002.00 | 991.062.00 |
| 10 | 541.100.00 | 990.002.00 | 991.062.00 |
| 12 | 541.120.00 | 990.002.00 | 991.062.00 |

Stop collars with precision clamping nut and key for quick and easy assembly.



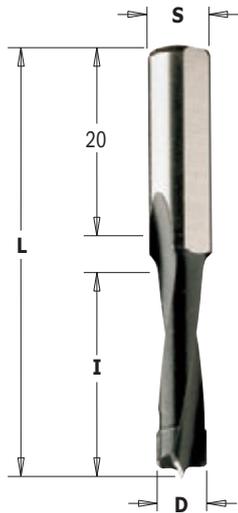

312



| | D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation |
|---|---------|---------|---------|---------|----------------------------------|
| new | 4 | 30 | 58 | 8 | 312.040.11 |
| | 5 | 30 | 58 | 8 | 312.050.11 |
| | 6 | 30 | 58 | 8 | 312.060.11 |
| | 8 | 30 | 58 | 8 | 312.080.11 |
| | 10 | 30 | 58 | 8 | 312.100.11 |
| | 12 | 30 | 58 | 8 | 312.120.11 |
| | 14 | 30 | 58 | 8 | 312.140.11 |
| | 16 | 30 | 58 | 8 | 312.160.11 |

These drill bits are made with high-strength steel in order to work with high speed rotation. They are perfect to bore all materials like solid wood, wood and composites, plastic and laminated with **hand-held routers and MAFELL® machine model DD40.**

Spare parts



990.003.00

Optional




990.088.00

TECHNICAL DETAILS:

- Super strength steel.
- Spiral portion coated with black P.T.F.E.
- HW precision balanced centre point.
- 2 HW precision ground cutting edges [Z2].
- 2 spiral flutes.
- Parallel shank with driving flat and length adjusting screw.

Router bits for Domino® Joining machines by Festool®

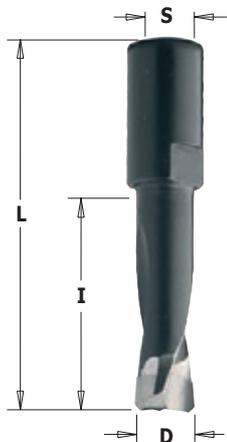

380



| | D mm | I mm | L mm | S mm | FESTOOL® | ORDER NO. Right-hand rotation |
|---|---------|---------|---------|---------|----------|----------------------------------|
| | • 4 | 11 | 38 | M6x0,75 | DF500 | 380.040.11 |
| | 5 | 20 | 49 | M6x0,75 | DF500 | 380.050.11 |
| | 6 | 28 | 49 | M6x0,75 | DF500 | 380.060.11 |
| | 8 | 28 | 49 | M6x0,75 | DF500 | 380.080.11 |
| new | 8 | 50 | 70 | M8x1 | DF700 | 380.081.11 |
| | 10 | 28 | 49 | M6x0,75 | DF500 | 380.100.11 |
| new | 10 | 70 | 90 | M8x1 | DF700 | 380.101.11 |
| new | 12 | 70 | 90 | M8x1 | DF700 | 380.121.11 |
| new | 14 | 70 | 90 | M8x1 | DF700 | 380.141.11 |

• HWM

TECHNICAL DETAILS:

- Premium quality super-strength steel.
- Spiral portion coating with black P.T.F.E.
- Extra-fine micrograin carbide spiral portion.
- 2 cutting edges [Z2].
- 2 spiral flutes.

APPLICATION: for use on "Domino®" machines to rout slots on solid wood and wood composites.



Brad point bits

SP HS Z2 RH



517

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | SP | ORDER NO. Right-hand rotation | HS |
|---------|---------|---------|---------|----------------------------------|----|----------------------------------|----|
| 3 | 33 | 61 | 3 | 517.030.31 | | 517.030.51 | |
| 4 | 43 | 75 | 4 | 517.040.31 | | 517.040.51 | |
| 5 | 52 | 86 | 5 | 517.050.31 | | 517.050.51 | |
| 6 | 57 | 93 | 6 | 517.060.31 | | 517.060.51 | |
| 7 | 69 | 109 | 7 | 517.070.31 | | 517.070.51 | |
| 8 | 75 | 117 | 8 | 517.080.31 | | 517.080.51 | |
| 9 | 80 | 120 | 9 | 517.090.31 | | 517.090.51 | |
| 10 | 80 | 130 | 10 | 517.100.31 | | 517.100.51 | |
| 11 | 89 | 142 | 8 | 517.110.31 | | 517.110.51 | |
| 12 | 96 | 151 | 8 | 517.120.31 | | 517.120.51 | |
| 13 | 96 | 151 | 8 | 517.130.31 | | 517.130.51 | |
| 14 | 96 | 151 | 10 | 517.140.31 | | 517.140.51 | |
| 15 | 100 | 160 | 10 | 517.150.31 | | 517.150.51 | |
| 16 | 100 | 160 | 10 | 517.160.31 | | 517.160.51 | |
| 18 | 130 | 180 | 10 | 517.180.31 | | | |
| 20 | 135 | 200 | 10 | 517.200.31 | | | |

SP

TECHNICAL DETAILS:

- Super strength SP steel.
- Precision balanced center point.
- 2 precision ground cutting edges [Z2].
- 2 flutes.

APPLICATION: used for drilling holes in softwood.

HS

TECHNICAL DETAILS:

- Super strength HS steel.
- Precision balanced center point.
- 2 precision ground cutting edges [Z2].
- 4 flutes.

APPLICATION: used for drilling holes in soft and hardwood.
Long-lasting cutting performance.

Brad point bit sets

HS SP Z2 RH



517

5 piece brad point bit set

An economical collection of the five most popular sized brad points - 4, 5, 6, 8 and 10mm. Safely packaged in a reusable plastic case for easy storage and inventory.

8 piece brad point bit set

A complete collection of the most popular brad points in the most requested sizes - 3, 4, 5, 6, 7, 8, 9 and 10mm. Safely packaged in a reusable plastic case for easy storage and inventory.

| DESCRIPTION | Z | BIT DIAMETER | ORDER NO. Right-hand rotation |
|--------------------------|----------|-----------------------|----------------------------------|
| 5 pcs. HS brad point set | 4 flutes | (Ø4-5-6-8-10mm) | 517.001.01 |
| 5 pcs. HS brad point set | 2 flutes | (Ø4-5-6-8-10mm) | 517.001.00 |
| 8 pcs. HS brad point set | 4 flutes | (Ø3-4-5-6-7-8-9-10mm) | 517.002.01 |
| 8 pcs. HS brad point set | 2 flutes | (Ø3-4-5-6-7-8-9-10mm) | 517.002.00 |



515

HS Z2 RH

| ANUBA no. | d mm | D-S mm | I mm | I ₁ mm | LB mm | L mm | ORDER NO. Right-hand rotation |
|-----------|------|--------|------|-------------------|-------|------|-------------------------------|
| 9,5 | 3,8 | 5,2 | 18 | 56 | 74 | 132 | 515.095.51 |
| 11 | 4,8 | 5,7 | 17 | 60 | 76 | 145 | 515.110.51 |
| 13 | 5,8 | 6,7 | 18 | 68 | 83 | 155 | 515.130.51 |
| 14,5 | 6,3 | 7,2 | 19 | 75 | 89 | 165 | 515.145.51 |
| 16 | 6,7 | 7,7 | 25 | 85 | 100 | 165 | 515.160.51 |
| 18 | 7,7 | 8,7 | 25 | 85 | 102 | 165 | 515.180.51 |
| 20 | 8,8 | 9,8 | 25 | 90 | 104 | 165 | 515.200.51 |

Parallel shank with driving flat

| ANUBA no. | d mm | D mm | I mm | LB mm | S mm | L mm | ORDER NO. Right-hand rotation |
|-----------|------|------|------|-------|-------|------|-------------------------------|
| 9 | 3,8 | 5 | 20 | 40 | 10x35 | 75 | 515.091.51 |
| 11 | 4,2 | 5,7 | 20 | 45 | 10x35 | 80 | 515.111.51 |
| 13 | 5,2 | 6,5 | 15 | 50 | 10x35 | 85 | 515.131.51 |
| 14 | 5,5 | 7 | 15 | 55 | 10x35 | 90 | 515.141.51 |
| 16 | 6 | 7,7 | 15 | 60 | 10x35 | 95 | 515.161.51 |
| 18 | 6,6 | 8,2 | 20 | 70 | 10x35 | 105 | 515.181.51 |
| 20 | 7,2 | 8,7 | 20 | 80 | 10x35 | 115 | 515.201.51 |


TECHNICAL DETAILS:

- Super strength steel.
- HS steel.
- 2 HS precision ground cutting edges [Z2].
- 2 spiral flutes.

APPLICATION: used for drilling blind holes in soft and hardwood.



Brad point bits

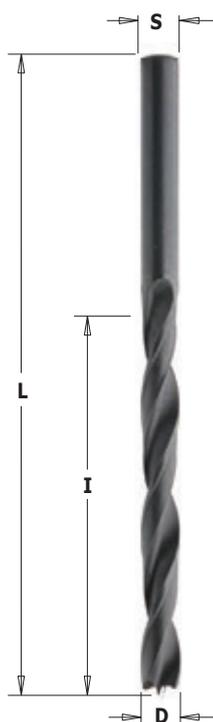

516

HS Z2 RH LH

| D mm | I mm | L mm | S mm | ORDER NO. Right-hand rotation | ORDER NO. Left-hand rotation |
|------|------|------|------|-------------------------------|------------------------------|
| 2 | 24 | 49 | 2 | 516.020.51 | 516.020.52 |
| 2,5 | 30 | 57 | 2,5 | 516.025.51 | 516.025.52 |
| 3 | 33 | 61 | 3 | 516.030.51 | 516.030.52 |
| 3,5 | 39 | 70 | 3,5 | 516.035.51 | 516.035.52 |
| 4 | 43 | 75 | 4 | 516.040.51 | 516.040.52 |
| 4,5 | 47 | 80 | 4,5 | 516.045.51 | 516.045.52 |
| 5 | 52 | 86 | 5 | 516.050.51 | 516.050.52 |
| 5,5 | 57 | 93 | 5,5 | 516.055.51 | 516.055.52 |
| 6 | 57 | 93 | 6 | 516.060.51 | 516.060.52 |
| 7 | 69 | 109 | 7 | 516.070.51 | 516.070.52 |
| 8 | 75 | 117 | 8 | 516.080.51 | 516.080.52 |
| 9 | 81 | 125 | 9 | 516.090.51 | 516.090.52 |
| 10 | 87 | 133 | 10 | 516.100.51 | 516.100.52 |

TECHNICAL DETAILS:

- Super strength steel.
- Precision balanced centre point.
- 2 precision ground cutting edges [Z2].
- 2 spiral flutes.
- Common shank and cutting diameter (S=D).

APPLICATION: used for drilling holes in soft and hardwood.

Countersinks with threaded shank



350

HW **Z2** **RH** **LH**

| D ₃ mm | S mm | ORDER NO. | |
|----------------------|-----------|---------------------|--------------------|
| | | Right-hand rotation | Left-hand rotation |
| 3 | M10/Ø11x4 | 350.030.11 | 350.030.12 |
| 4 | M10/Ø11x4 | 350.040.11 | 350.040.12 |
| 5 | M10/Ø11x4 | 350.050.11 | 350.050.12 |

TECHNICAL DETAILS:

- Super strength steel.
- 2 HW precision ground cutting edges [Z2].
- Quick and easy drill change.

Spare parts



990.001.00

APPLICATION: for use with spiral bits featuring parallel shank.

Countersinks with threaded shank



351

| D ₃ mm | S mm | ORDER NO. | |
|----------------------|---------|---------------------|--------------------|
| | | Right-hand rotation | Left-hand rotation |
| 3 | M10/30° | 351.030.11 | 351.030.12 |
| 4 | M10/30° | 351.040.11 | 351.040.12 |
| 5 | M10/30° | 351.050.11 | 351.050.12 |

TECHNICAL DETAILS:

- Super strength steel.
- 2 HW precision ground cutting edges [Z2].
- Quick and easy drill change.


Spare parts



990.001.00

APPLICATION: for use with spiral bits featuring parallel shank.


Adjustable countersink

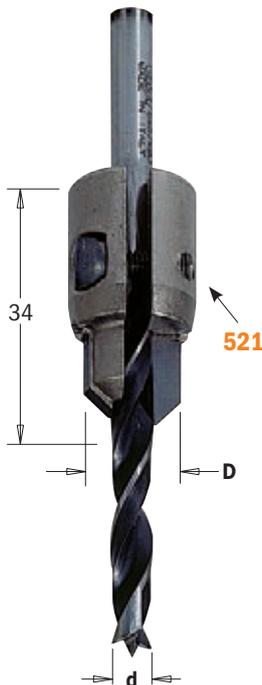

521.001

HW **Z2** **RH**

| d mm | D mm | ORDER NO. Right-hand rotation | Spare parts | |
|---------|---------|----------------------------------|-------------|------------|
| 3 ~ 7 | 11 ~ 15 | 521.001.11 | 990.061.00 | 991.067.00 |

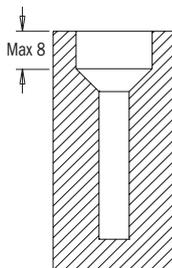

| Twist drills | Overall diameter |
|--------------|------------------|
| Ø3 | Ø11 |
| Ø4 | Ø12 |
| Ø5 | Ø13 |
| Ø6 | Ø14 |
| Ø7 | Ø15 |

TECHNICAL DETAILS:

- Premium quality HW.
- 2 HW precision ground cutting edges [Z2].
- Quick and easy drill change.

APPLICATION: for use with spiral bits featuring parallel shank.
Twist drills not included.

Drill bits with 45° countersink set

new

CMT ORANGE TOOLS™

HW Z2 RH




521A

| d mm | D mm | A | S mm | ORDER NO. Right-hand rotation |
|---------|---------|-----|---------|----------------------------------|
| 3 | 12 | 45° | 8 | 521.312.11A |
| 4 | 12 | 45° | 8 | 521.412.11A |
| 5 | 16 | 45° | 10 | 521.516.11A |
| 6 | 16 | 45° | 10 | 521.616.11A |

Spare parts

| | | |
|------------|------------|------------|
| | | |
| 521.312.11 | 517.030.51 | 541.101.00 |
| 521.412.11 | 517.040.51 | 541.101.00 |
| 521.516.11 | 517.050.51 | 541.141.00 |
| 521.616.11 | 517.060.51 | 541.141.00 |

Spare parts 990.014.00 Screw
991.060.00 Hex key

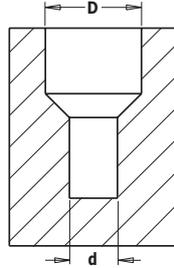

TECHNICAL DETAILS:


- Super strength steel.
- Countersink: 2 HW precision ground cutting edges [Z2].

APPLICATION: used for drilling holes in soft, hardwood and wood composites.

Stop collars with precision clamping nut for quick and easy assembly. The Delrin® protection sleeve lets you work without leaving marks on the workpiece.

Drill bits with 90° countersink set

new

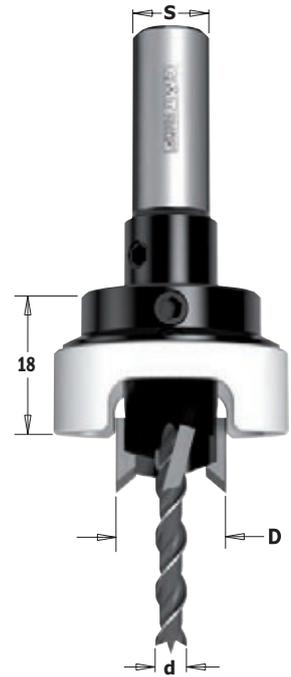


515A

| d mm | D mm | D ₂ mm | S mm | ORDER NO. Right-hand rotation |
|---------|---------|----------------------|---------|----------------------------------|
| 4 | 12 | 10 | 10 | 515.412.11A |
| 4 | 14 | 12 | 10 | 515.414.11A |
| 5 | 15 | 14 | 10 | 515.515.11A |
| 6 | 14 | 12 | 10 | 515.614.11A |
| 6 | 15 | 14 | 10 | 515.615.11A |

Spare parts

| | | |
|------------|------------|------------|
| | | |
| 515.412.11 | 517.040.51 | 541.101.00 |
| 515.414.11 | 517.040.51 | 541.121.00 |
| 515.515.11 | 517.050.51 | 541.141.00 |
| 515.614.11 | 517.060.51 | 541.121.00 |
| 515.615.11 | 517.060.51 | 541.141.00 |

Spare parts 990.014.00 Screw
991.060.00 Hex key

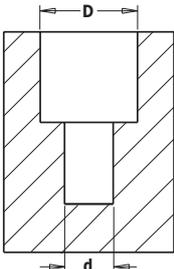

TECHNICAL DETAILS:


- Super strength steel.
- Countersink: 2 HW precision ground cutting edges [Z2].
- Countersink: 2 HW negatively ground spurs [V2].

APPLICATION: used for drilling holes in soft, hardwood and wood composites.

Stop collars with precision clamping nut for quick and easy assembly. The Delrin® protection sleeve lets you work without leaving marks on the workpiece.

Stop collars with Delrin® sleeve

new

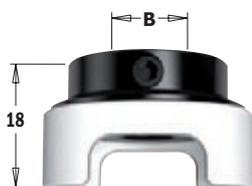

541

| B mm | ORDER NO. |
|---------|-------------------|
| 10 | 541.101.00 |
| 12 | 541.121.00 |
| 14 | 541.141.00 |

Spare parts


| | |
|------------|------------|
| | |
| 990.014.00 | 991.060.00 |
| 990.014.00 | 991.060.00 |
| 990.014.00 | 991.060.00 |

Stop collars with precision clamping nut for quick and easy assembly. The Delrin® protection sleeve lets you work without leaving marks on the workpiece.

45° countersink with parallel shank

new

CMT ORANGE TOOLS™

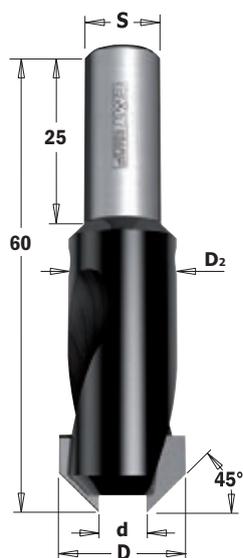


521

HW Z2 RH LH

| d mm | D mm | D ₂ mm | A | S mm | ORDER NO. | ORDER NO. | Spare parts |
|---------|---------|----------------------|-----|---------|---------------------|--------------------|-------------|
| | | | | | Right-hand rotation | Left-hand rotation | |
| 3 | 12 | 10 | 45° | 8 | 521.312.11 | 521.312.12 | 990.014.00 |
| 4 | 12 | 10 | 45° | 8 | 521.412.11 | 521.412.12 | 990.014.00 |
| 5 | 16 | 14 | 45° | 10 | 521.516.11 | 521.516.12 | 990.014.00 |
| 6 | 16 | 14 | 45° | 10 | 521.616.11 | 521.616.12 | 990.014.00 |

Spare parts 991.060.00 2mm hex key

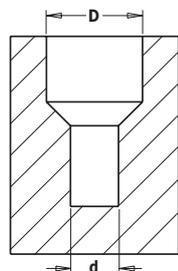


TECHNICAL DETAILS:

- Super strength steel.
- 2 HW precision ground cutting edges [Z2].

90° countersink with parallel shank

new

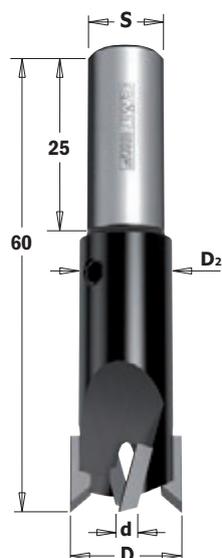


515

HW Z2 V2 RH

| d mm | D mm | D ₂ mm | A | S mm | ORDER NO. | ORDER NO. | Spare parts |
|---------|---------|----------------------|-----|---------|---------------------|--------------------|-------------|
| | | | | | Right-hand rotation | Left-hand rotation | |
| 4 | 12 | 10 | 90° | 10 | 515.412.11 | | 990.014.00 |
| 4 | 14 | 12 | 90° | 10 | 515.414.11 | | 990.014.00 |
| 5 | 15 | 14 | 90° | 10 | 515.515.11 | | 990.014.00 |
| 6 | 14 | 12 | 90° | 10 | 515.614.11 | | 990.014.00 |
| 6 | 15 | 14 | 90° | 10 | 515.615.11 | | 990.014.00 |

Spare parts 991.060.00 2mm hex key

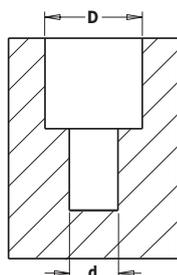

TECHNICAL DETAILS:

- Super strength steel.
- 2 HW precision ground cutting edges [Z2].
- 2 HW negatively ground spurs [V2].

Power tools, jig accessories, display cabinets & spare parts



| PRODUCTS | PAGE |
|------------------------------------|-----------|
| Routers | 270 - 271 |
| Router tables | 272 - 273 |
| Professional straight edge clamps | 274 |
| Superjaws portable clamping system | 274 |
| Dovetail jig | 276 - 277 |
| Eclipse & circle cutting jig | 278 |
| CMT-Enlock joining system | 279 |
| Kitchen worktop jig | 280 |
| Inlay kit | 281 |
| 3D router carver system | 282 ~ 284 |
| Organizer | 284 |
| Pocket-Pro joinery system | 285 |
| Boring systems | 286 ~ 291 |
| Blade & bit cleaner | 289 |
| Diamond whetstones | 292 - 293 |
| Flexible templates for routing | 294 |
| Bowl and tray system | 295 |
| Digital angle gauge & finder | 296 - 297 |
| Display cabinets | 298 ~ 301 |
| Spare parts | 302 ~ 306 |

1000W router

QUICK ACCESS BRUSHES
allows the end user to change worn brushes.



SAFETY SWITCH SHUTTER
locks closed in bit change mode to prevent power on.



SIDE AIR VENTS
reduces intake of dust into the motor casing when mounted upside-down in a router table.

TOP OF TABLE HEIGHT ADJUSTMENT
Top of table height adjustment is possible using the height winder handle from the template guide kit.



ELECTRONIC SPEED CONTROL & SOFT START
From 8.000 - 20.000 RPM.

FULLY ENCLOSED GUARDING
provides maximum protection from the cut zone.

MULTI-FUNCTION FENCE
provides excellent control for hand-held use and circle cutting.

QUICK FIT PINS
for fast fitment and removal from its fence.

Optional



- Bushes**
- Ø 7,93mm
 - 9,52mm
 - 11,1mm
 - 12,7mm
 - 15,87mm
 - 19,05mm
 - 20,2mm

CMT7E-TGA

Optional for CMT7E-TGA



| DESCRIPTION | ORDER NO. |
|------------------|------------|
| Guide bush Ø30mm | 899.007.07 |
| Guide bush Ø27mm | 899.008.07 |

CMT7E-TGA Template guide kit includes 7 guide bushes, a guide plate, and alignment bush, and spacers.

Optional

Clamping nuts and collets for CMT8E

| Diametre | ORDER NO. |
|------------|------------|
| D = 6mm | 796.660.00 |
| D = 6,35mm | 796.664.00 |
| D = 8mm | 796.680.00 |
| D = 10mm | 796.700.00 |
| D = 12mm | 796.720.00 |
| D = 12,7mm | 796.727.00 |



TECHNICAL SPECIFICATIONS

- Horsepower 1.000 Watt
- No load speed 8.000-20.000 RPM
- Plunge stroke 0-59mm
- Collet diametre..... Ø6-12,7mm
- Tool weight..... 4 Kg

STANDARD EQUIPMENT

- Extended baseplate with adjustable fence
- Dust extraction outlet
- Easy adjustment
- Wrench for easy cutter change

- Ø8 and Ø12mm collets
- 1 year warranty
- Instruction manual

Worldwide technical assistance

| DESCRIPTION | ORDER NO. |
|---|--------------|
| Router complete with standard equipment | CMT8E |

2400W router

CMT7E

REMOVABLE PLUNGE SPRING

for easy bit adjustment when table mounted.



ELECTRONIC SPEED CONTROL & SOFT START

From 8.000 - 20.000 RPM

SWITCH FROM A PLUNGE TO A FIXED BASE ROUTER

by simply pressing or releasing the button.



QUICK ACCESS BRUSHES

allows the end user to change worn brushes.



SAFETY SWITCH SHUTTER

locks closed in bit change mode to prevent power on.



SIDE AIR VENTS

reduces intake of dust into the motor casing when mounted upside-down in a router table.

FULLY ENCLOSED GUARDING

provides maximum protection from the cut zone.

MULTI-FUNCTION FENCE

provides excellent control for hand-held use and circle cutting.

QUICK FIT PINS

for fast fitment and removal from its fence.

3 STAGE TURRET

with direct reading scales for precise preset cut depths.



TOP OF TABLE HEIGHT ADJUSTMENT

Top of table height adjustment is possible using the height winder handle from the template guide kit.



TECHNICAL SPECIFICATIONS

- Horsepower 2.400 Watt
- No load speed 8.000-20.000 RPM
- Plunge stroke 0-68mm
- Collet diameter..... Ø6-12,7mm
- Tool weight..... 6 Kg

STANDARD EQUIPMENT

- Extended baseplate with adjustable fence
- Dust extraction outlet
- Infinite micro adjustment
- Wrench for easy cutter change
- Ø8 and Ø12mm collets
- 1 year warranty
- Instruction manual

Worldwide technical assistance

Optional

Clamping nuts and collets for CMT8E

| Diametre | ORDER NO. |
|------------|------------|
| D = 6mm | 796.660.00 |
| D = 6,35mm | 796.664.00 |
| D = 8mm | 796.680.00 |
| D = 10mm | 796.700.00 |
| D = 12mm | 796.720.00 |
| D = 12,7mm | 796.727.00 |



Optional



- Bushes**
- Ø 7,93mm
 - 9,52mm
 - 11,1mm
 - 12,7mm
 - 15,87mm
 - 19,05mm
 - 20,2mm

CMT7E-TGA

CMT7E-TGA Template guide kit includes 7 guide bushes, a guide plate, and alignment bush, and spacers.

Optional for CMT7E-TGA



| DESCRIPTION | ORDER NO. |
|------------------|------------|
| Guide bush Ø30mm | 899.007.07 |
| Guide bush Ø27mm | 899.008.07 |

DESCRIPTION

Router complete with standard equipment

ORDER NO.

CMT7E

Fine WoodWorking MAGAZINE



Industrio routing system


CMT ORANGE TOOLS™

999.500.01

CMT has turned the Industrio routing system into a great tool with new accessories such as phenolic insert, integral aluminium scales and an improved fence. Also, you will find some new optional features, such as a rugged moulded featherboard and a new mitre gauge.

The system includes:

999.501.09

Unique phenol top with new insert plate

Now featuring a 298x374mm (11-3/4"x14-3/4") insert plate, the top is milled from 12mm (15/32") thick phenol. Sturdy and very enduring material, phenol is much more resistant to warping than melamine. The top also features new aluminium scales on both ends to set the fence quickly and properly.

Easy fast bit change

No need to remove the router or fumble beneath the table top to change the bits. CMT's useful bent wrench allows you to replace the bits from above quickly and easily. 15 kg. shipping weight.


999.501.10 Pivoting, zero-clearance fence with new clamping system

Our extruded aluminium fence can be used as conventional locked-in-place fence or as a pivoting fence. New, quick-adjusting clamps on both ends of the fence make adjustments a breeze, especially when used in conjunction with the aluminium scales that we've added to the table top. The fence also includes a sub fence of high density white plastic for an ultra smooth feeding surface, with a replaceable centre section to create zero-clearance inserts. 8,5 kg shipping weight.

999.501.03 Sturdy melamine cabinet

This sturdy 20mm-thick (25/32") melamine cabinet is easy to assembly with posts and cross dowels. Also, it includes a double-door storage area to keep bits, wrenches and more tools safe and dust-free. 32,5 kg. shipping weight.


Router table dimensions:
79x59x(h)93cm. - 55 kg. weight

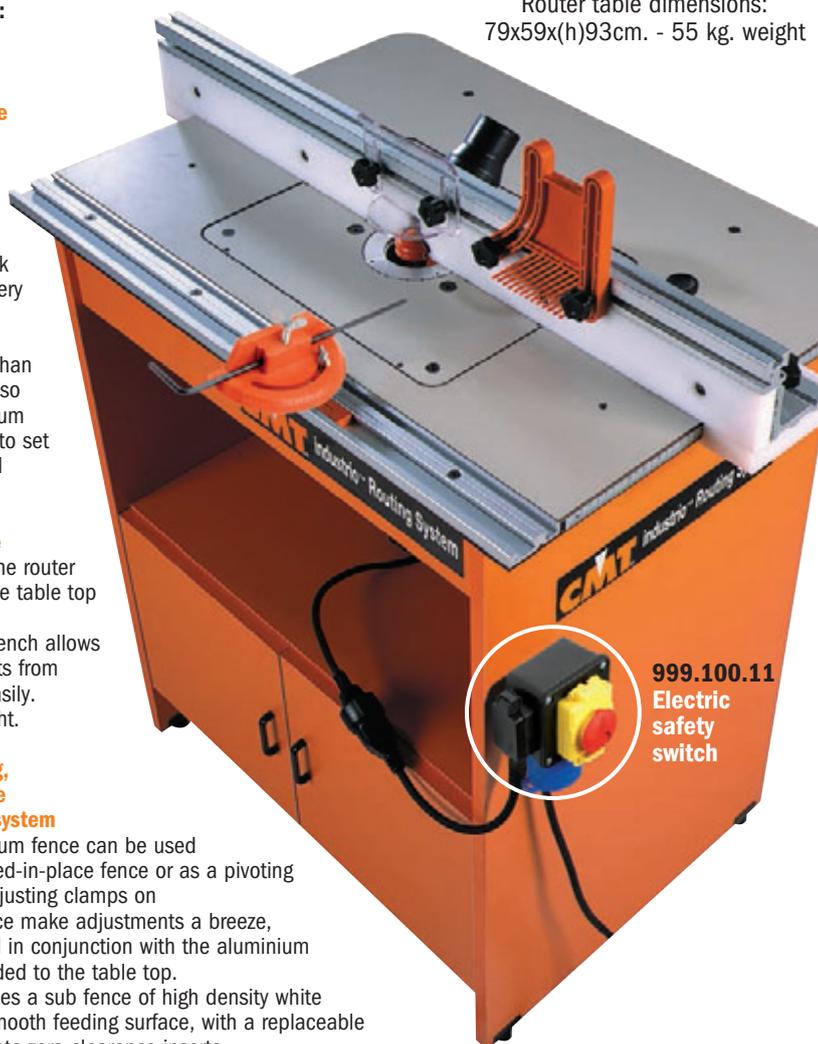


999.100.11
Electric safety switch



999.501.07_Moulded ABS featherboard setup on the table and in fence slots. In includes nuts, bolts and a plastic slide.

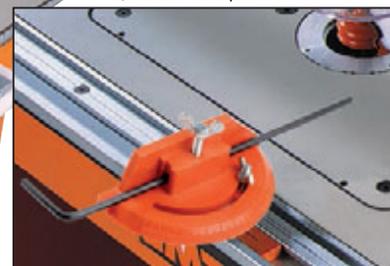

999.501.08_Mitre gauge.

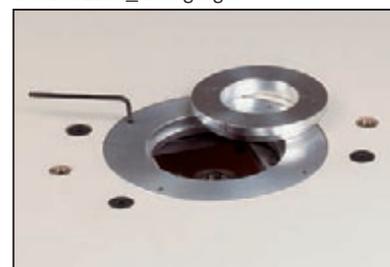

999.501.18_Phenolic plate with aluminium rings (Ø103-69,5mm) for CMT7E.




999.502.34_Centring device to position your router perfectly in the 8-12mm (5/16"- 15/32") insert plate.

Optional

Bent wrenches for easy bit replacement

| | |
|--------|-------------|
| 17mm | 991.005.00 |
| 21mm | 991.002.00 |
| 22,2mm | 991.004.00 |
| 23,8mm | 991.003.00 |
| 24mm | 991.006.00* |
| 28,6mm | 991.001.00 |

* For CMT7E and CMT8E routers

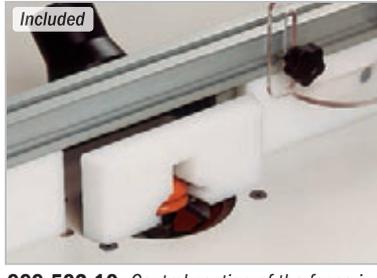

999.502.10_Central section of the fence is removable for custom replacements.



999.501.06_The dual and post guard makes freehand work safer.

| DESCRIPTION | ORDER NO. |
|--|-------------|
| Industrio routing system (with plate prebored for CMT7E) | 999.500.01 |
| CMT7E router and 999.500.01 Industrio routing system + 999.100.11 Electric safety switch | CMT7E-IND |
| Electric safety switch (mandatory for CE legislation) | 999.100.11 |
| Optional: | |
| Universal phenolic plate with aluminium rings (Ø103-69,5mm), not bored (for not CMT routers) | 999.501.26 |
| Phenolic plate with (Ø103-69,5mm) aluminium rings for CMT8E router | 999.501.27 |
| Pair of (Ø103-69,5mm) reduction rings | 999.501.05N |

CMT Professional router table system



Our quality bits have been designed for you, the professional craftsman, to allow you to confidently work at your best. CMT now offers even more possibilities with our professional router table: the perfect place to combine your skills and CMT quality.

The professional router table system has a strong and sturdy MDF laminate work surface measuring 68x50x2,5cm for easy mobility when working. This free standing table sits at a comfortable height of 85cm on solid high gauge steel legs and weighs 25 kg.


The universal plate are adaptable to all brands and models of routers on the market and provide shank holder options to select any bit up to 90mm in diameter.

Choose any of our wide range of CMT bits including multi profile and molding bits or even kitchen set bits and work easily and safely on this table!

999.100.00

Router table dimensions:
68x50x(h)85cm. - 25 kg. weight

999.100.11
(mandatory for CE legislation)

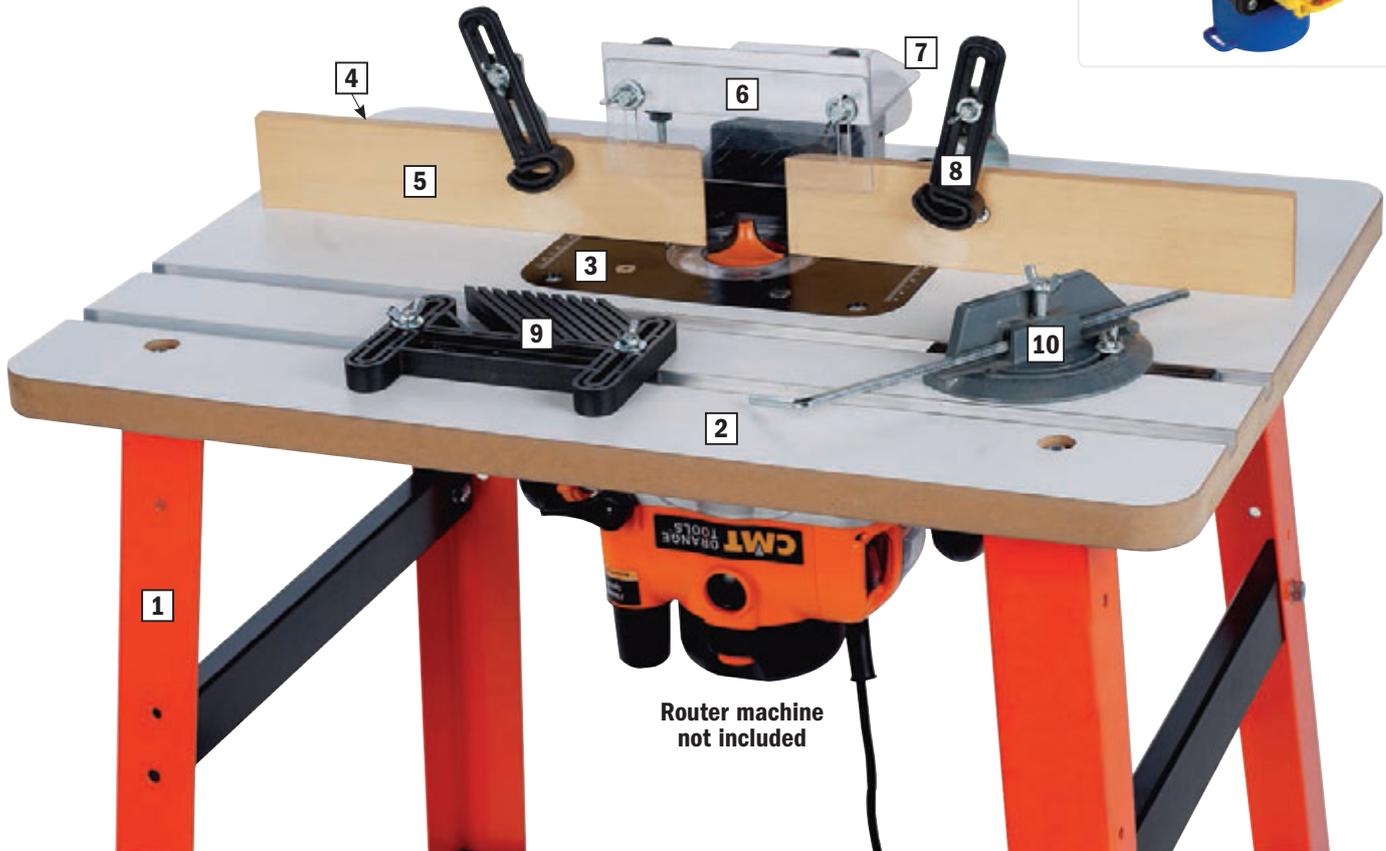

| DESCRIPTION | ORDER NO. |
|---|-------------------|
| CMT professional router table system: | 999.100.00 |
| Electric safety switch (mandatory for CE legislation) | 999.100.11 |
| CMT7E router and 999.500.01 Industrio routing system + 999.100.11 Electric safety switch | CMT7E-IND |
| Spare parts included with the table: | |
| 1) High gauge steel legs | 999.100.01 |
| 2) Thick MDF work surface with aluminium fluting | 999.100.02 |
| 3) Plate (235x170x8mm) with 30-40mm reduction rings prebored for CMT7E | 999.100.33 |
| 4) Aluminium support for wooden fence | 999.100.04 |
| 5) Longitudinal wooden fence (RH - LH) | 999.100.05 |
| 6) Lexan® and aluminium safety shield | 999.100.06 |
| 7) Vacuum hose | 999.100.07 |
| 8) Standing spring press | 999.100.08 |
| 9) Moulded ABS feather board | 999.100.09 |
| 10) Transversal mitre gauge | 999.100.10 |
| Optional: | |
| Universal plate (235x170x8mm) with 30-40mm reduction rings not bored (for not CMT routers) | 999.100.03 |
| Plate (235x170x8mm) with 30-40mm reduction rings prebored for CMT8E | 999.100.34 |

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets

CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools

Power tools & accessories

Display cabinets & spare parts

Professional straight edge clamps

new

CMT ORANGE TOOLS™


PGC

Used as a fence for your bandsaw, drill press or even as an auxiliary fence on your router table or table saw, CMT's professional straight edge clamps represent a two-in-one tool, allowing you to either use them as an edge guide, or to easily clamp your boards or any object for woodworking. Available in different sizes. Here are the main features:

- Made of extruded aluminium for easy carriage and enhanced durability.
- Light, yet more rigid than any other clamps on the market.
- Measuring scales, low-profile jaws, built-in T-tracks on the top allowing the use of accessories or jigs.
- Either single or back-to-back clamps.

| DESCRIPTION | ORDER NO. |
|---|---------------|
| Professional Straight Edge Clamp 610mm | PGC-24 |
| Professional Straight Edge Clamp 915mm | PGC-36 |
| Professional Straight Edge Clamp 1270mm | PGC-50 |

Low-profile clamps allow for accurate cuts, dados and grooves. In addition they properly work as an auxiliary fence on your drill press or router table. Sturdy jaws hold your workpiece to the full length of the clamp without any side-to-side play. Back-to-back clamps with the suitable accessories also let you manage your woodworking operations with a lot of versatility. Adjustable scale and two T-tracks allow you to use many accessories.

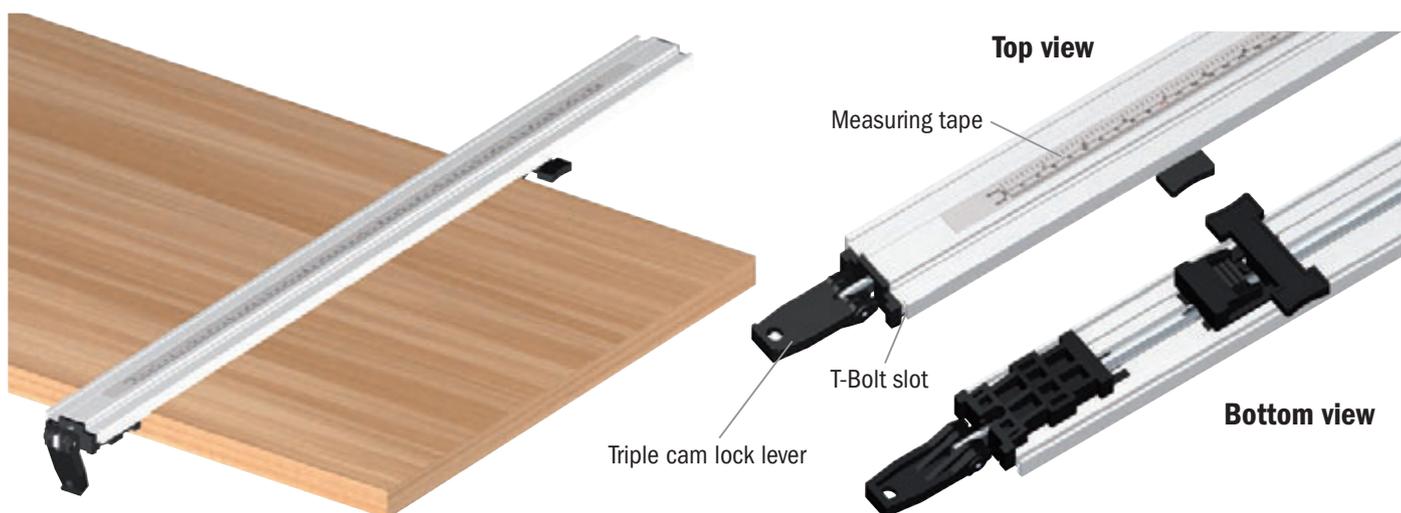


Back-to-Back connectors for straight edge clamps (optional)

new

Lay two more straight edge clamps on the back of the other pair of straight edge clamps and secure them by using your back-to-back connectors.

Fasten the bottom jaw pads to the table top and clamp wood with the top jaw pads. Thanks to the low profile jaws your work surface is never obstructed.

The back-to-back straight edge clamps can also be taken apart for making two separate clamps.

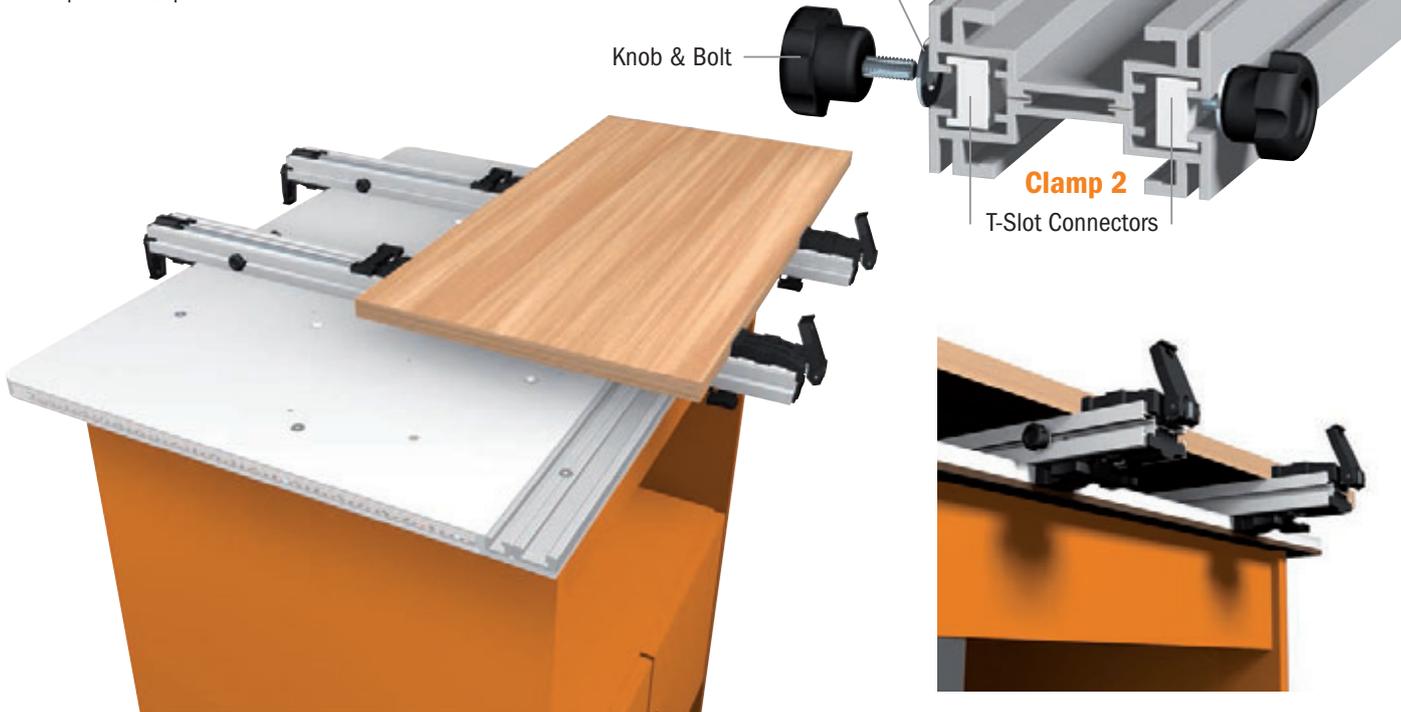

| DESCRIPTION | ORDER NO. |
|---|----------------|
| Back to Back Connectors for straight edge clamps (8 pieces) | PGC-B2B |

Superjaws portable clamping system

CMT200

LOCK / RELEASE SWITCH
allows fast, trouble-free release of the jaws.

URETHANE JAW FACINGS
provide a protective, slip-resistant grip.

REVERSIBLE SLIDING JAWS
allow for extra wide 956mm clamping width capacity.

FOOT OPERATED CLAMPING
frees up your hands for full control of the job.

ROBUST, ALL-STEEL CONSTRUCTION WITH POWDERCOAT FINISH
for long-lasting operation.

POWERFUL 1 TONNE CLAMPING FORCE
allows the ability to apply as much or as little clamping pressure as you require.

QUICKLY FOLDS DOWN FOR STORAGE AND TRANSPORT

TRIPOD BASE
for all-terrain stability.

CMT200-05

The CMT200 SuperJaws is the workstation you take right to the job; indoors, outdoors, construction sites or the factory floor. It provides fast and easy hands-free clamping action of material up to 956mm and features a massive force of up to 1000kg, for all clamping or pressing applications. It holds anything: car parts, bicycles, timber and tubing.

TECHNICAL SPECIFICATIONS

- Clamping Range 0 - 956mm
- Clamping Force Up to 1000kg
- Clamping Method Foot operated
- Standard Jaws Urethane
- Max. Load: 100kg approx.
- Folding Time 20 seconds approx.
- Folded Size 275 x 775 x 295mm
- Standing Size 980 x 1000 x 860mm
- Weight 16kg

| DESCRIPTION | ORDER NO. |
|--|------------------|
| SuperJaws Portable Clamping System | CMT200 |
| <i>Optional</i> | |
| Pair of jaws for clamping logs and pole for chain sawing, etc. | CMT200-01 |
| Pair of tough cast iron jaws for heavy duty metal work | CMT200-02 |
| Support foot to enhance work station stability | CMT200-03 |
| Extension tray to keep all your tools within your hand's reach | CMT200-04 |
| Pair of black polyurethane jaws | CMT200-05 |

ACCESSORIES OPTIONAL

CMT200-01

CMT200-02

Log Jaws
Pair of jaws for clamping logs and pole for chain sawing, etc.

Engineers Jaws
Pair of tough cast iron jaws for heavy duty metal work.

CMT200-03

CMT200-04

Support foot
To enhance work station stability.

Extension tray
To keep all your tools within your hand's reach.

new

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

CMT300

305mm max length
11~25mm joint thickness

Universal dovetail jig


Dovetail joints give a touch of craftsmanship to your work, but many woodworkers avoid these joints, because of their apparent complexity. CMT's new 305mm dovetail jig is the fast easy solution! Thanks to precise templates, permanent stops and easy adjustments, we have taken the "tinkering" out of the dovetail joinery. Simply clamp your workpiece in with the edges against the factory-set stops, set your bit depth and then you are ready to rout.

Also, we haven't cut corners on quality either. This jig features steel body, templates, stops and clamping bars, so it produces perfect long-lasting joints for all your woodworking needs. The machine accepts stock from 11mm to 25mm thick, and is capable of producing a variety of joints with the available templates. Standard jig includes a template for 12,7mm half blind joints and a template guide. Optional templates are available for through dovetail and box joints.



Standard equipment

- Standard Ø12,7mm silver blind template **CMT300-T128**
- Ø15,8x4mm template guide **899.005.00**



MASSIVE STEEL BODY SOLID SUPPORT

EASY-TO-GRID HANDLE

IMPORTANT TIP



HW DOVETAIL BITS (not included):

- | | | | |
|-------------------|----------|-------|----------|
| 718.127.11 | D=12,7mm | A=14° | S=6mm |
| 818.128.11 | D=12,7mm | A=14° | S=6,35mm |
| 918.127.11 | D=12,7mm | A=14° | S=8mm |
| 818.628.11 | D=12,7mm | A=14° | S=12,7mm |



Will the template fit my router?

Standard template guide attaches using two screws spaced 50mm on centre. Many routers accept this design. If your router does not, order one of the listed universal router bases below:



Universal router bases

For Ø8 and Ø12mm shank
For Ø6,35 and Ø12,7mm shank
Prebored router plate for CMT7E and CMT8E

ORDER NO.

- CMT300-SB1**
- CMT300-SB2**
- CMT300-SB**

Here's how it works:

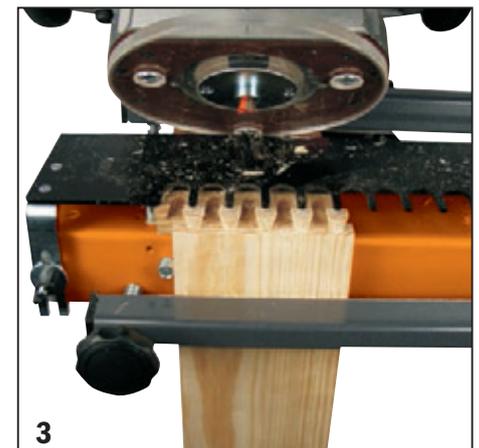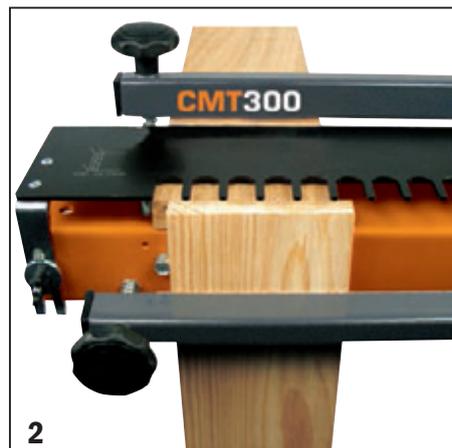

Half blind template CMT300-T064




| Template length mm | Dovetail size mm | Thickness mm | Colour | ORDER NO. |
|--------------------|------------------|--------------|--------|-------------|
| 300 | 6,3 | 8 ~ 12 | green | CMT300-T064 |

Supplied with Ø7,8x4mm precision guide **899.003.00**

To be used with CMT dovetail router bits:
 Ø8x8mm HW bit (Ø6mm shank) **718.060.11**
 Ø6,35x8,3mm HW bit (Ø6,35mm shank) **818.064.11**

Through dovetail templates CMT300-T129 - T190

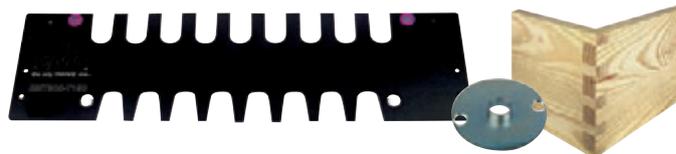


| Template length mm | Dovetail size mm | Thickness mm | Colour | ORDER NO. |
|--------------------|------------------|--------------|--------|-------------|
| 300 | 12,7 | 8 ~ 20 | brown | CMT300-T129 |

Supplied with Ø11,1x4mm precision guide **899.004.00**

To be used with CMT straight router bits:
 Ø8x25mm HW bit (shank Ø6,35mm) **811.081.11**
 Ø8x30mm HW bit (shank Ø8mm) **912.080.11**

To be used with CMT dovetail router bits:
 Ø12,7x20mm HW bit (Ø6,3mm shank) **818.129.11**
 Ø12,7x20mm HW bit (Ø8mm shank) **918.129.11**

Box joint templates CMT300-T080 - CMT300-T127

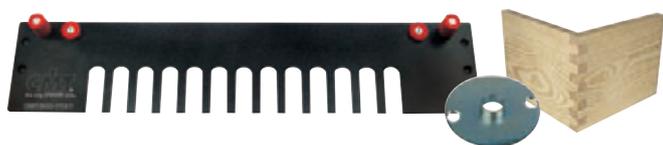

| Template length mm | Dovetail size mm | Thickness mm | Colour | ORDER NO. |
|--------------------|------------------|--------------|--------|-------------|
| 300 | 8 | 8 ~ 20 | blue | CMT300-T080 |

Supplied with Ø11,1x4mm precision guide **899.004.00**

To be used with CMT straight router bits:
 Ø8x25mm HW bit (Ø6,35mm shank) **811.081.11**
 Ø8x30mm HW bit (Ø8mm shank) **912.080.11**

| Template length mm | Dovetail size mm | Thickness mm | Colour | ORDER NO. |
|--------------------|------------------|--------------|--------|-------------|
| 300 | 12,7 | 8 ~ 20 | red | CMT300-T127 |

To be used with CMT straight router bits:
 Ø12,7x30mm bit HW (Ø6,35mm shank) **812.127.11**
 Ø12,7x30mm bit HW (Ø8mm shank) **912.127.11**
 Ø12,7x25mm bit HW (Ø12,7mm shank) **811.627.11**

| Template length mm | Dovetail size mm | Thickness mm | Colour | ORDER NO. |
|--------------------|------------------|--------------|--------|-------------|
| 300 | 19 | 15 ~ 22 | violet | CMT300-T190 |


Supplied with Ø22x4mm precision guide **899.006.00**

To be used with CMT straight router bits:
 Ø12,7x30mm HW bit (Ø6,35mm shank) **812.127.11**
 Ø12,7x30mm HW bit (Ø8mm shank) **912.127.11**
 Ø12,7x25mm HW bit (Ø12,7mm shank) **811.627.11**

To be used with CMT dovetail router bits:
 Ø19x22mm HW bit (Ø6mm shank) **718.190.11**
 Ø19x22mm HW bit (Ø6,35mm shank) **818.190.11**
 Ø19x22mm HW bit (Ø8mm shank) **918.190.11**
 Ø19x22mm HW bit (Ø12mm shank) **918.690.11**
 Ø19x22mm HW bit (Ø12,7mm shank) **818.690.11**


Precision guide for router:

| DESCRIPTION | ORDER NO. |
|-------------|------------|
| 7,8 x 4mm | 899.003.00 |
| 11,1 x 4mm | 899.004.00 |
| 15,8 x 4mm | 899.005.00 |
| 22 x 4mm | 899.006.00 |
| 30 x 4mm | 899.007.00 |




Here are a few of the beautiful dovetail joints you can produce using CMT bits

Half blind

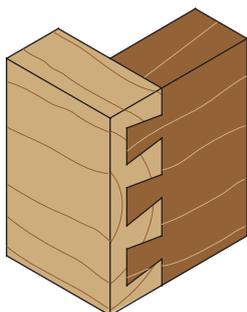


CMT300 - T064
 CMT300 - T128 (INCLUDED with CMT300)

Box joint

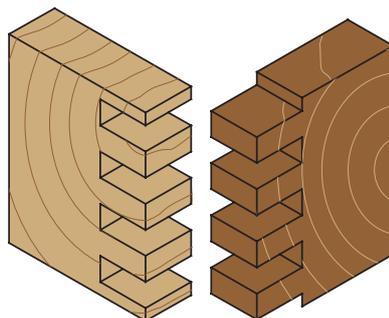

CMT300 - T080
 CMT300 - T127

Through dovetail

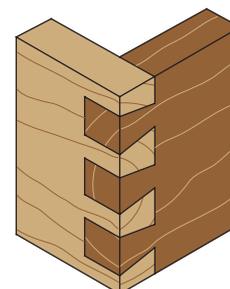

CMT300 - T129
 CMT300 - T190


This product has been designed for cutting ellipses and circles with any router types. You can make ellipses and circles for windows, doors and any other application. By using two slides into the T-slot you can cut ellipses, whereas if you use one slide, you can cut circles.

Ellipse & circle cutting jig



Slider in the T-slot of the cross frame

CMT3000 ellipse jig includes:

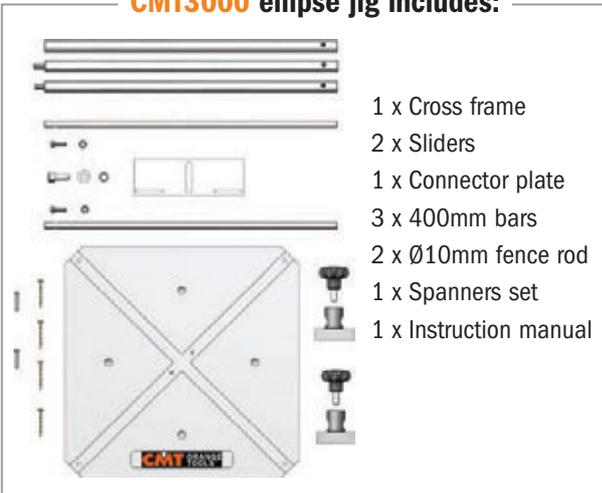


- 1 x Cross frame
- 2 x Sliders
- 1 x Connector plate
- 3 x 400mm bars
- 2 x Ø10mm fence rod
- 1 x Spanners set
- 1 x Instruction manual

Ellipse and circle cutting jig:

- Precise and rapid creation of ellipses and circles.
- Simple setup and effective operating.
- Clamping system for any type of routers.
- Special plastic cross frame with excellent sliding performance.
- Precisely machined T-slots and steel sliders.
- Zinc-coated metal parts to prevent rust.
- Delivered in a carton box along with instruction manual.

| Major axis | Minor axes | |
|------------------------|------------|------------|
| | Max | Min. |
| 3000 | 2890 | 2590 |
| 1800 | 1690 | 1390 |
| 1500 | 1390 | 1090 |
| 1030 | 920 | 620 |
| 900 | 790 | 620 |
| 730 | 620 | 620 |
| Min/max cutting radius | | 550/1500 |
| Package dimension (mm) | | 405x360x54 |
| Weight | | 6,6 kg. |

Here are a few examples you can produce using **CMT3000 ellipse**

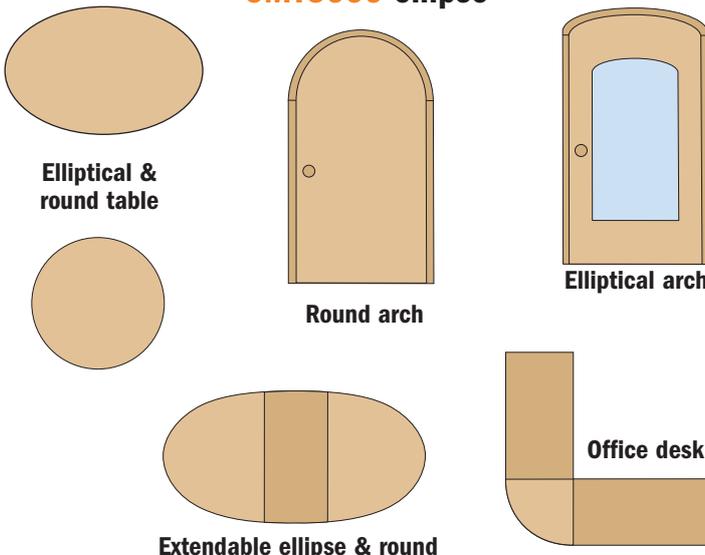

Optional

new



CMT3000-SB1
Ø170x15mm Delrin® guide plate for CMT3000 to be used with CMT7E & CMT8E

| DESCRIPTION | ORDER NO. |
|---|--------------------|
| Ellipse & circle cutting jig | CMT3000 |
| Optional: | |
| 400mm robust bar to extend the working radius | CMT3000-7 |
| 2 pcs. of fence rod for routers with bars up to Ø8mm in diameter | CMT3000-8 |
| new Ø170x15mm Delrin® guide plate for CMT3000 to be used with CMT7E & CMT8E | CMT3000-SB1 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

CMT-Enlock joining system

CMT-Enlock1

Patent No. AU2005/903586
PCT/AU2006/000957

Width range 30~75mm
Thickness range 19~35mm

The innovative CMT-Enlock joining system is designed to build the strongest "T", "Mitre" joints and "Edge-to-edge" assemblies using the patented E15 and E10 dovetail keys. The dovetail slots in each part to be joined are machined quickly and accurately using the CMT Enlock jig. Simply clamp your workpiece in the jig, set the bit depth and you are ready to rout. The jig features strong cast aluminium construction throughout the body, top plate, stops and clamping bar to produce perfect strong joints for life!

1. The strong and versatile clamping bar ensures no workpiece movement.

2. Solid cast aluminium body.

3. Support foot to fix the jig on the table.

4. Adjustable mitre blocks for mitre joints in picture frames.

5. Adjustable mitre plate to suit the workpiece width.

6. Clamp extension arm to make widening joints.

Patented system

Standard equipment
CMT-Enlock1 joining system
CMT-Enlock10 masterpack (50 keys)
Instruction manual (in five languages)
Video available on www.cmtutensili.com
Hw dovetail bits not included

The CMT-Enlock dovetail key expands when the cap is forced in. This widens the dovetail producing a strong clamping force across the joint. No other dovetail system on the market produces this clamping force.

Here are a few of the beautiful joints you can produce using CMT-Enlock Jig

T-Joint

Edge-to-edge assemblies

Mitre joints

"T" joints

A few seconds and your joints are ready!



Order now!

| DESCRIPTION | ORDER NO. |
|-------------------------------------|---------------------|
| Complete joining system | CMT-Enlock1 |
| Optional | |
| Ø9,5mm 50 key masterpack | CMT-Enlock10 |
| Ø12,7mm 50 key masterpack | CMT-Enlock15 |
| Ø9,5mm dovetail bit (Ø6mm shank) | 718.098.11B |
| Ø12,7mm dovetail bit (Ø6mm shank) | 718.127.11B |
| Ø9,5mm dovetail bit (Ø6,35mm shank) | 818.098.11B |
| Ø12,7mmdovetail bit (Ø6,35mm shank) | 818.128.11B |

CMT650

For perfect joint

For kitchen worktops from 420mm to 650mm in width.

CMT650 is designed to cut kitchen worktop joints with any type of router.


Letter code system for different operations makes the jig work much easier and very quick.



Kitchen worktop jig



Joints made in 15 minutes! Including setup time

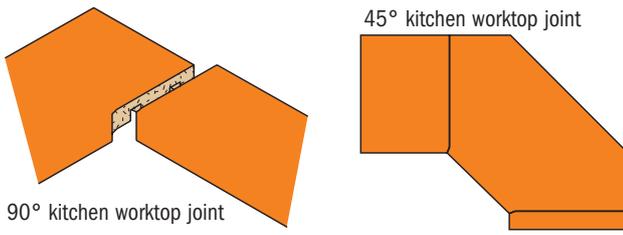

JIG INCLUDES:

- 1pc. Phenolic template
- 3pc. Zinc-coated steel location bush
- 1pc. Adjustable end stop
- 1pc. Instruction manual


Optional

new

- Portable router
- Guide bush Ø30mm*
- HW straight bit Ø12mm
- Two clamps

* COMBINATION ROUTERS/ACCESSORIES

| Router | Bush guide | Base Plate |
|--------|------------|------------|
| CMT7E | 899.007.00 | CMT300-SB |
| CMT8E | 899.007.00 | CMT300-SB |
| NO-CMT | 899.007.00 | CMT300-SB1 |

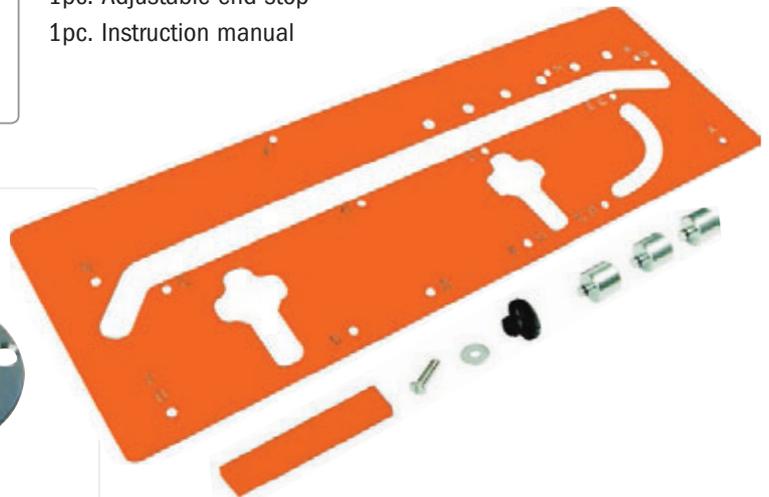

Bits for the jig:

We recommend the use of these Ø12mm straight bits:

| ORDER NO. | DESCRIPTION |
|------------|-------------------|
| 912.120.11 | Ø12x31,7 S=8mm |
| 652.120.11 | Ø12x28,3 S=8mm |
| 912.621.11 | Ø12x38,1 S=12mm |
| 912.622.11 | Ø12x50,8 S=12mm |
| 812.620.11 | Ø12x31,7 S=12,7mm |
| 812.621.11 | Ø12x38,1 S=12,7mm |
| 652.121.11 | Ø12x48,3 S=12mm |
| 652.621.11 | Ø12x48,3 S=12,7mm |


CMT650 is designed for Ø12mm straight bits.

- Template made of stable and hardened material.
- For 90° and 45° joints
- Integrated templates for rounding over and chamfering edges.
- Extra location bush for worktop width of 600mm.
- Two integrated templates for panel bolt recesses.
- Delivered with a clear and comprehensive instruction manual.

| DESCRIPTION | ORDER NO. |
|---------------------|-----------|
| Kitchen worktop jig | CMT650 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Beautiful, professional-quality inlays aren't as difficult as they seem. In fact, they are easy with CMT inlay kit. Just remove and reassemble the small bushing to make the recess in the workpiece and cut out the inlay. Perfect for toy making, puzzle making, lettering and lots of other decorative projects. Use the spiral bit for routing MDF, or the straight bit for natural wood.

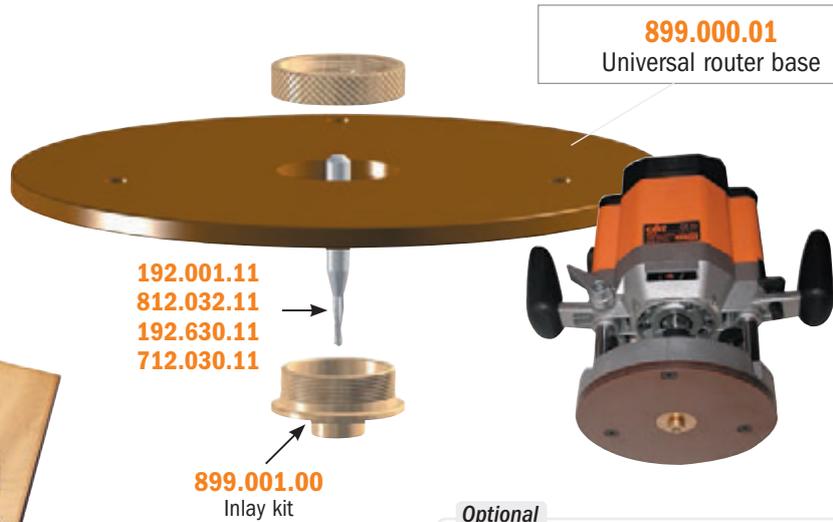

Complete instructions for assembling and using CMT inlay kit are included.

| DESCRIPTION | ORDER NO. |
|--|------------|
| Inlay kit with 3,2mm (1/8") HWM spiral bit (Ø6,35mm shank) | 899.051.00 |
| Inlay kit with 3,2mm (1/8") HWM straight bit (Ø6,35mm shank) | 899.052.00 |
| Solid brass template guide | 899.001.00 |
| Universal router base | 899.000.01 |
| Router base for CMT7E | 899.000.02 |
| 3,2mm (1/8") HWM spiral bit (Ø6,35mm shank) | 192.001.11 |
| 3,2mm (1/8") HWM straight bit (Ø6,35mm shank) | 812.032.11 |
| 3mm HWM spiral bit (Ø6mm shank) | 192.630.11 |
| 3mm HWM straight bit (Ø6mm shank) | 712.030.11 |

Optional




- Bushes**
- Ø 7,93mm
 - 9,52mm
 - 11,1mm
 - 12,7mm
 - 15,87mm
 - 19,05mm
 - 20,2mm

CMT7E-TGA Template guide kit includes 7 guide bushes, a guide plate, and alignment bush, and spacers. It could be used with CMT7E and CMT8E routers.

Here's how it works:


Make your pattern

Make your pattern in the desired shape of your inlay out of 6,35mm (1/4") thick material. For better results use masonite or similar smooth materials, avoid square corners, and be sure the opening is wide enough to place a 14,2mm(9/16") bushing.




Rout the workpiece

Attach the brass inlay guide to your router with the snap-on bushing in place. Set the bit depth to match your inlay stock. Attach the pattern to your workpiece and rout out the mortise for the inlay.

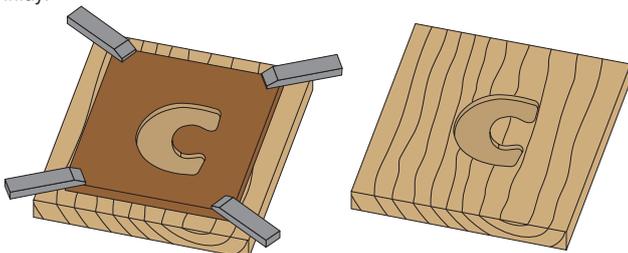


Rout the inlay

Temporarily attach the inlay stock to a piece of scrap with two-sided tape. Now attach your pattern to the inlay material. Take off the snap-on bushing and rout around the opening in the pattern very carefully. Be sure the template guide keeps tight to the perimeter of the pattern at all times.

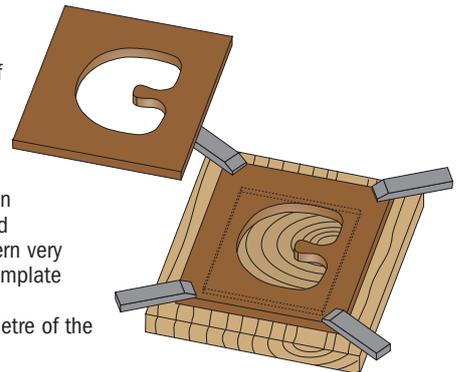

Assemble everything

Make sure the two workpieces fit perfectly. If it is necessary sand the inlay material. Apply adhesive and carefully tap the inlay in place. Use a wood block to protect the inlay stock. Sand as needed and that's it.

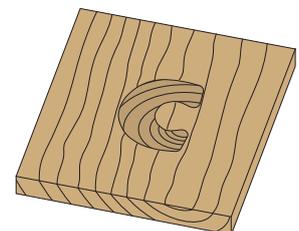

Complete detailed instructions in English are included in the kit. Instructions in Spanish, French, German and Italian are available on www.cmtutensili.com


3D Router Carver™ system

Exclusively from your CMT distributor

Turn your router into a remarkable carving tool. It's fast, easy, and a whole lot of fun!

Who says that intricate woodcarving requires an artist's touch? Thanks to the patented 3D Router Carver system, anyone with a plunge router can create any of the beautiful designs shown on these pages in just minutes. Decorate doors, drawers, cabinets, furniture or just about any flat wooden surface with one or more of these designs. How does it work? The secret is in the 3D Router Carver Bit and the way that bit interacts with the carving templates. The V-Groove router bit is enclosed in a 45° cone-shaped guide. You rout with the plunge mechanism of your router unlocked, allowing the bit to move up or down as the router moves forward. As the slot in the template get wider, the bit moves down, producing a wider, deeper V-groove. As the slot gets narrower, the bit moves up, and the groove gets narrower and shallower. It sounds simple, and it is! (that's why the system is patented worldwide). Please see the illustrations below for more details on the carving technique. You'll receive complete instructions with your 3D Carver templates. For an informative visual demonstration, check out the 3D Router Carver video on our web site.

RCS

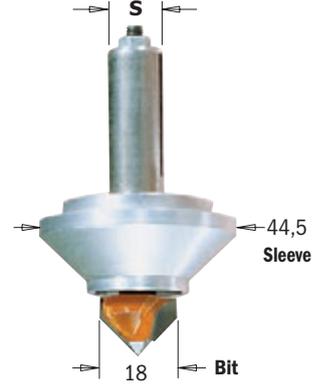

What do you need to get started?

- The 3D Router Carver bit
- The Carver template of your choice
- The Holding frame to match your template
- Your plunge router


(Note: Be sure the opening in the base of your router is at least 47,6mm in diameter. If it isn't, you'll need to make a sub-base to accept the large diameter of the 3D Carver bit.)

3D Router carver bit & sleeve


| S mm | ORDER NO. Right-hand rotation | Spare parts | | | | | Optional |
|------|----------------------------------|---|---|---|--|---|---|
| 8 | RCS-BIT8 |  |  |  |  |  |  |
| 12,7 | RCS-BIT | RCS-CUT8 | RCS-SLE8 | RCS-SHIELD | RCS-NUT8 | 991.007.00 | RCS-SLEEVE8 |
| | | RCS-CUT | RCS-SLE | RCS-SHIELD | 990.091.00 | 990.092.00 | RCS-SLEEVE |

Here's how it works:


1. Clamp or tack the holding frame to your workpiece

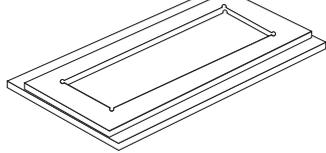

2. Drop the template into the holding frame

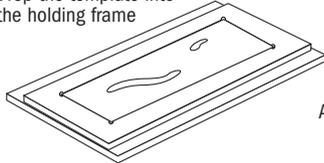


3. Plunge the bit into a wide part of the slot and rout with the router's plunge mechanism unlocked.

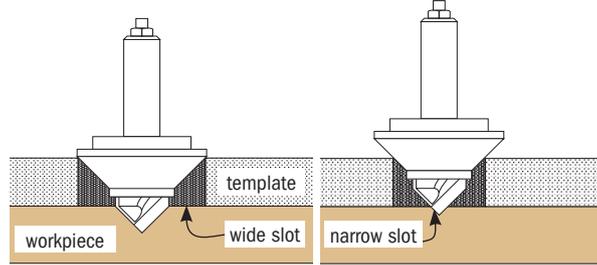


Allow the plunge mechanism to move up and down as you advance. Wider template slots allow wider, deeper grooves. Narrower slots produce shallower grooves.


4. With the frame still in place, flip the template & rout again. Some templates will be routed 2 to 4 times, depending on the complexity of the design.

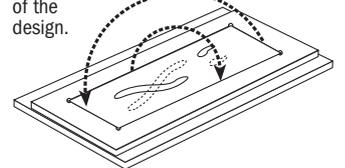

5. Remove the frame and you're finished!

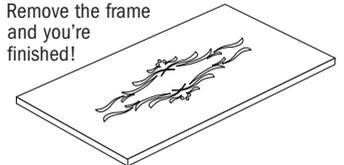

Cabinet door & panel carvings

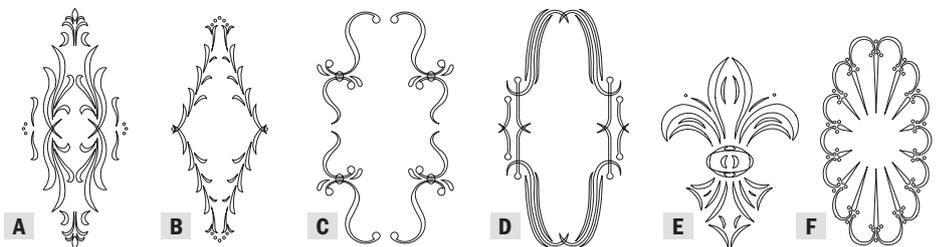


These designs are ideal for the doors or panels of cabinets, entertainment centers, fireplace surrounds or almost any flat surface. See the designs below for complementary patterns for drawers, rails and corners. Approximate carving time is 5 minutes.

| DESCRIPTION | Carving dimensions mm | No. of templates | ORDER NO. |
|-----------------------------|-----------------------|------------------|----------------|
| Classical cabinet door - A | 440 x 185 | 2 | RCS-302 |
| Florentine cabinet door - B | 415 x 170 | 2 | RCS-304 |
| Cascade cabinet door - C | 365 x 210 | 1 | RCS-305 |
| Roma cabinet door - D | 375 x 200 | 1 | RCS-306 |
| Fleur-de Lys door - E | 250 x 180 | 4 | RCS-805 |
| Spanish fan template - F | 380 x 200 | 2 | RCS-806 |
| Cabinet door holding frame | | | RCS-003 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts



Panel and rail carvings

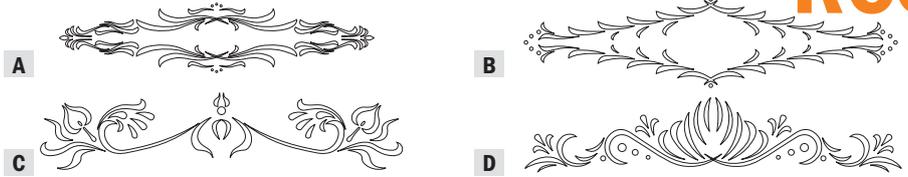


Tip: many carvings, like the Florentine rail, are enhanced with the additional of a rosette.

With a long, horizontal shape, these designs are perfect for door rails, headboards, cabinet face frames and valences. Approximate carving time is 4 minutes.

| DESCRIPTION | Carving dimensions mm | No. of templates | ORDER NO. |
|---------------------|-----------------------|------------------|-----------|
| Classical rail - A | 550 x 120 | 2 | RCS-402 |
| Florentine rail - B | 550 x 130 | 2 | RCS-404 |
| Cascade rail - C | 530 x 110 | 3 | RCS-405 |
| Folklore rail - D | 550 x 110 | 3 | RCS-406 |
| Rail holding frame | | | RCS-004 |


Drawer and furniture carvings

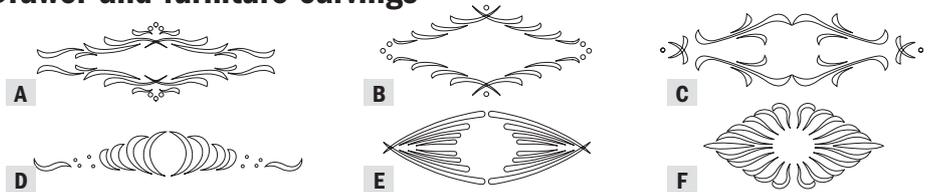

Originally intended for drawer fronts, these designs are great for lots of other projects: small doors, side panels of cabinets, furniture and more. For door and drawer combinations, match the style of the door designs above. Approximate carving time is 4 minutes.

| DESCRIPTION | Carving dimensions mm | No. of templates | ORDER NO. |
|-----------------------|-----------------------|------------------|-----------|
| Classical drawer - A | 210 x 70 | 2 | RCS-502 |
| Florentine drawer - B | 195 x 85 | 2 | RCS-504 |
| Cascade drawer - C | 250 x 65 | 1 | RCS-505 |
| Folklore drawer - D | 250 x 40 | 2 | RCS-506 |
| Roma drawer - E | 190 x 65 | 2 | RCS-507 |
| Blaze drawer - F | 250 x 110 | 2 | RCS-510 |
| Drawer holding frame | | | RCS-005 |


Corner & small decoration carving designs

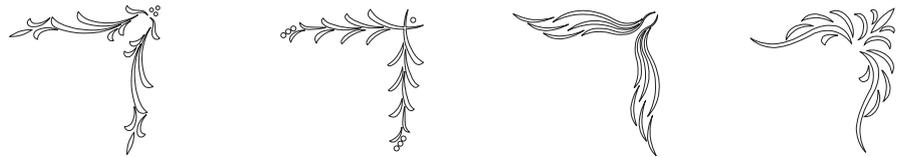





| DESCRIPTION | Carving dimensions mm | No. of templates | ORDER NO. |
|-----------------------|-----------------------|------------------|-----------|
| Classical corner - A | 155 x 40 | 3 | RCS-602 |
| Florentine corner - B | 120 x 30 | 3 | RCS-604 |
| Cascade corner - C | 190 x 40 | 3 | RCS-605 |
| Folklore corner - D | 150 x 45 | 3 | RCS-606 |
| Corner holding frame | | | RCS-006 |

Rosette carvings

You get two templates for the price of one with these designs! Each item includes templates for two sizes of rosette. Use with the rosette frame sold above, or use the large rosettes with the cabinet door frame or small rosettes with rail frame.

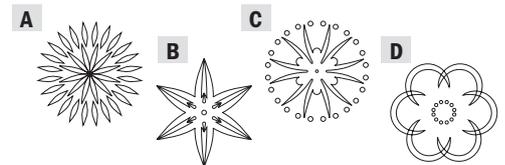

| DESCRIPTION | Carving diameter mm | No. of templates | ORDER NO. |
|-----------------------|---------------------|------------------|-----------|
| Rosette #1 & #5 - A | 85 & 68 | 2 & 2 | RCS-701 |
| Rosette #2 & #6 - B | 88 & 70 | 1 & 1 | RCS-702 |
| Rosette #3 & #7 - C | 82 & 65 | 1 & 1 | RCS-703 |
| Rosette #4 & #8 - D | 79 & 62 | 1 & 1 | RCS-704 |
| Rosette holding frame | | | RCS-007 |



3D Router Carver™ system

RCS

Saw blades

Jig saw blades

Tools with bore & Knives

Router bits & sets


CNC router cutter & chucks

Industrial dowel drills

Bits for hand power tools


Power tools & accessories

Display cabinets & spare parts


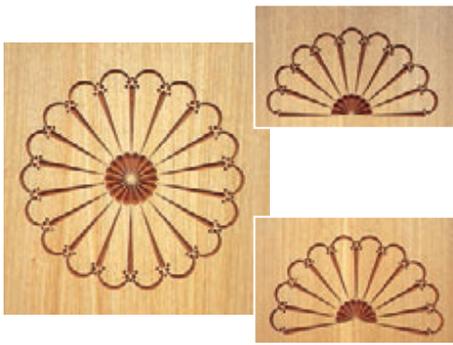


Southwestern carving designs

These popular Southwestern designs are actually several shapes in one. Both sizes can be routed as circular carvings, or use only portions of the template to suit your project.



Rout the complete spanish fan design or make partial rosettes



| DESCRIPTION | Carving dimensions mm | No. of templates | ORDER NO. |
|-----------------------|-----------------------|------------------|----------------|
| Large spanish fan | 400 | 1 | RCS-801 |
| Small spanish fan | 200 | 1 | RCS-802 |
| Rosette holding frame | | | RCS-007 |

Just for fun: Designs For every animal lover!



Your imagination will be your guide on these neat designs. Furniture or decorations for the kids, paneling for the den or rec room, a gift for the sportsman - who knows?



| DESCRIPTION | Carving dimensions mm | No. of templates | ORDER NO. |
|----------------------------|-----------------------|------------------|----------------|
| Dolphin - A | 200 x 290 | 4 | RCS-803 |
| Eagle - B | 178 x 298 | 4 | RCS-804 |
| Deer - C | 394 x 190 | 4 | RCS-901 |
| Horse - D | 445 x 203 | 3 | RCS-902 |
| Longhorn - E | 419 x 194 | 4 | RCS-904 |
| Teddy bear - F | 394 x 203 | 3 | RCS-906 |
| Cabinet door holding frame | | | RCS-003 |

Organizer

100 bits at your fingertips

When you constantly work on projects, you always need your most used bits right within hand's reach and safely organized. CMT gives you the perfect solution for keeping them all in sight, thanks to the 100 piece organizer. This conveniently holds any size router or drill bit by using CMT's interchangeable bushings to fit all CMT shank diametres. See options listed below.

03.51



| DESCRIPTION | ORDER NO. |
|---|--------------------|
| Bit organizer (without bushings) | 03.51.0106 |
| Interchangeable bushings for Ø6mm shank (20 pcs) | 03.51.0046A |
| Interchangeable bushings for Ø6,35mm shank (20 pcs) | 03.51.0047A |
| Interchangeable bushings for Ø8mm shank (20 pcs) | 03.51.0048A |
| Interchangeable bushings for Ø9,5mm shank (20 pcs) | 03.51.0057A |
| Interchangeable bushings for Ø10mm shank (20 pcs) | 03.51.0058A |
| Interchangeable bushings for Ø12mm shank (20 pcs) | 03.51.0059A |
| Interchangeable bushings for Ø12,7mm shank (20 pcs) | 03.51.0049A |

Pocket-Pro™ joinery system

For fast, easy and accurate cabinet & furniture construction. Designed by CMT and professional cabinetmakers, this new system allows you to make rock-solid pocket hole joints in stock 12,7mm (1/2") to 40mm (1-5/8") thick with unprecedented speed and accuracy.

The heart of the Pocket-Pro™ system is our unique moulded jig, which features hardened drill bushings and an interlocking two-piece design. Sliding the jig up or down enables you to adjust the stock thickness in preset 1,6mm (1/16") increments without test joints or measurements! If you have used other pocket hole jigs you will be familiar with many joint applications, but you will benefit from many Pocket-Pro™ system advantages.

For example:
- some jigs require adding or removing various parts of the jig to join different stock thicknesses. With the Pocket-Pro™ system you simply have to adjust the interlocking jig up or down for the full range of joints 12,7mm (1/2") to 40mm (1-5/8") thick;

- other jigs require frequent repositioning of the depth stop collar for different joint styles. CMT's Pocket-Pro™ joinery system allows you to make most of the adjustments leaving the stop collar in the same position of the drill bit;

- plus, with CMT's Pocket-Pro™ system you can quickly adjust the location of the pocket in relation to the end of your workpiece to create a stronger joint by using longer screws, or to leave more "meat" in the joint.

Check out the Pocket-Pro™ joinery system today. Easy enough for beginners and accurate enough for professional workers, it is the world's most versatile pocket hole jig.

PPJ-002



515.001.51+541.095.00



999.505.05



999.505.10



990.101X30



999.505.08

| DESCRIPTION | ORDER NO. |
|--|-------------------|
| Pocket-Pro™ joinery system set | PPJ-002 |
| Set contains: | |
| Pocket-Pro™ main parts | 999.505.10 |
| Toggle clamp | 999.505.05 |
| 9,5mm (3/8") step drill bit | 515.001.51 |
| 9,5mm (3/8") depth collar for step drill bit | 541.095.00 |
| 152mm (6") Square drive screw driver bit | 999.505.08 |
| Masterpack 30 screw 1-1/4" | 990.101X30 |


| DESCRIPTION OPTIONAL | ORDER NO. |
|---------------------------------------|--------------------|
| 500 fine screws (31,7mm) | 990.101X500 |
| 500 coarse screws (31,7mm) | 990.102X500 |
| 500 fine screws (38,1mm) | 990.103X500 |
| 500 coarse screws (38,1mm) | 990.104X500 |
| Face clamp swivel pad | 999.505.06 |
| 6mm (3") square drive screwdriver bit | 999.505.07 |

Optional




999.505.06
Face clamp with swivel pad

Enjoy Easy Pocket Hole Joinery!

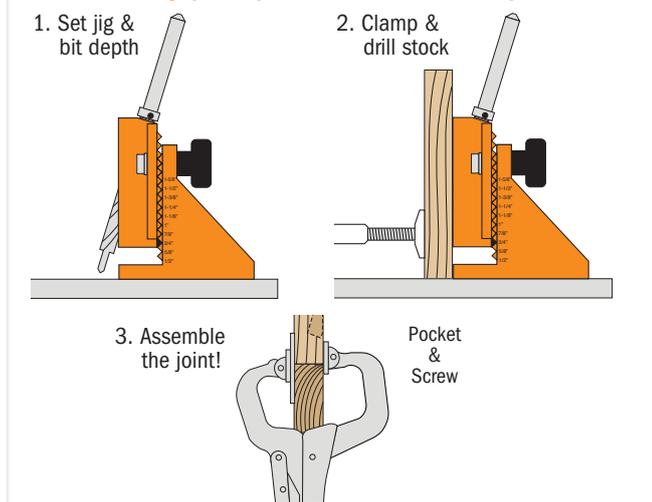


Build almost anything!

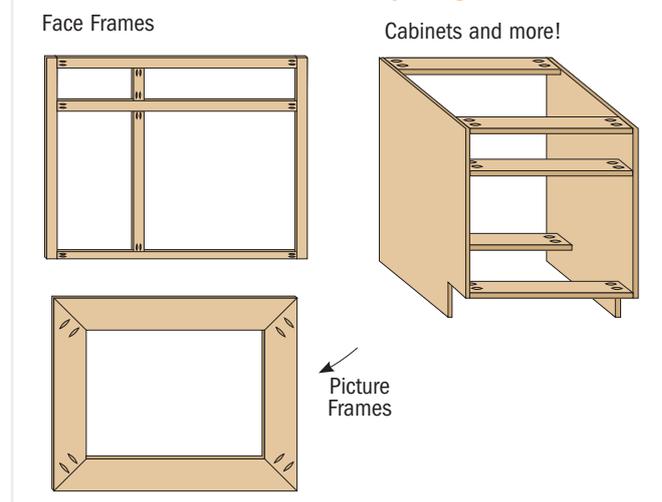

Universal hinges boring system

The innovative CMT333 hinge boring system with 3 spindle-heads allows you to bore holes for any hinge brand, such as Salice, Blum, Hettich, Würth, Mepla, Grass, etc.. The universal modular base supports the installation of 5 different boring heads, engineered by the worldwide leading company in industrial boring machines. Use the CMT333 universal hinge boring system on all hand-held or standing drilling power tools.

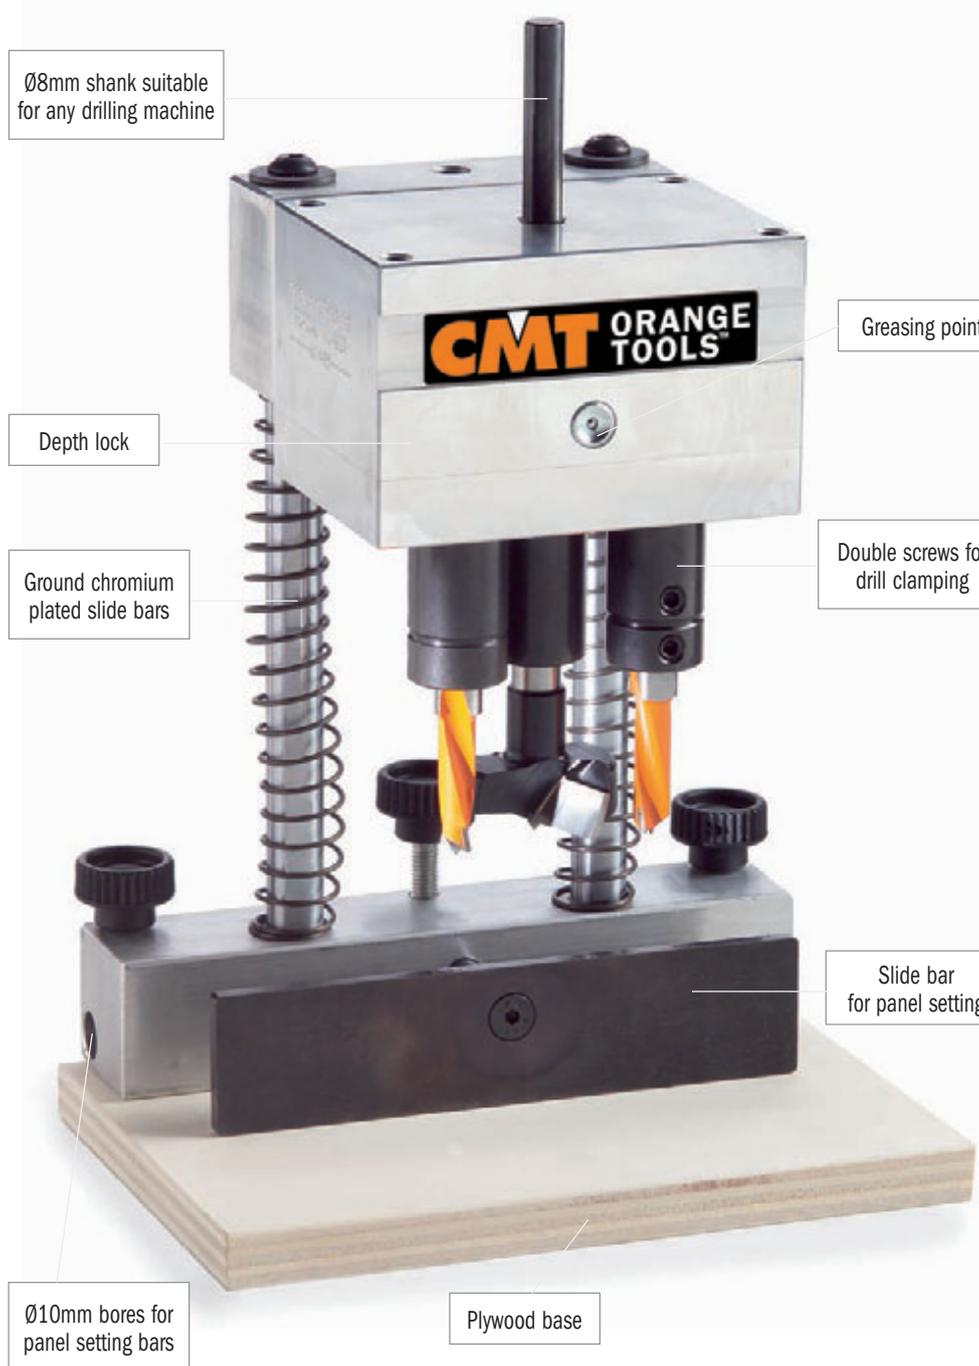

For use on standing drilling machines



To use on standing drilling power tools




For use on CMT Industrio™ router table

Technical features and specifications

- Complete anti-rust parts
- Ground aluminium (Avional)
- Max 5000 RPM
- Six radial antifriction bearings

Safety tips:








for lubrication use oil SHC100 Mobil

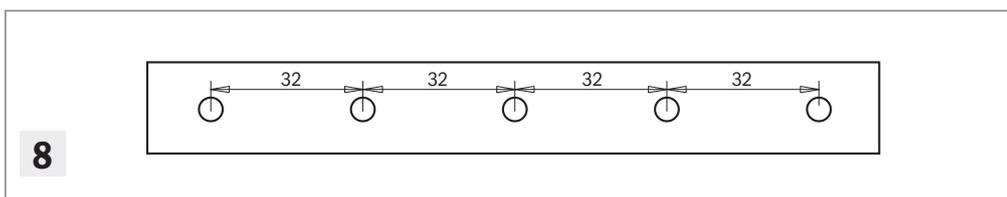

8 Boring head with 5 adaptors for system 32



CMT333-325

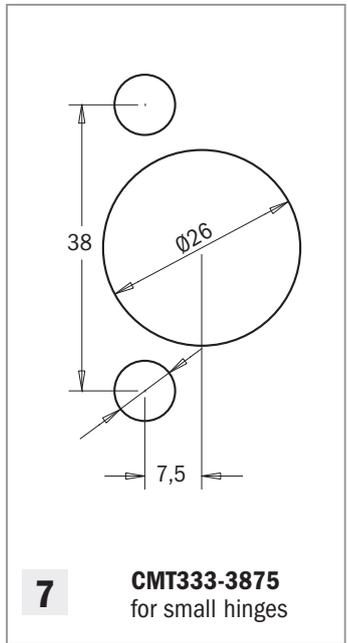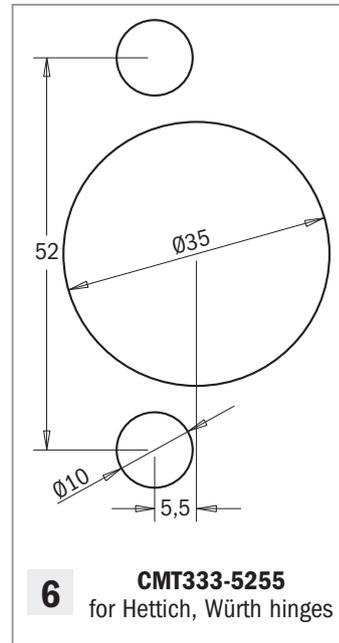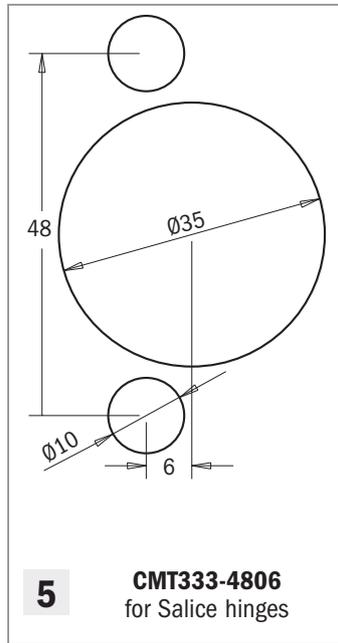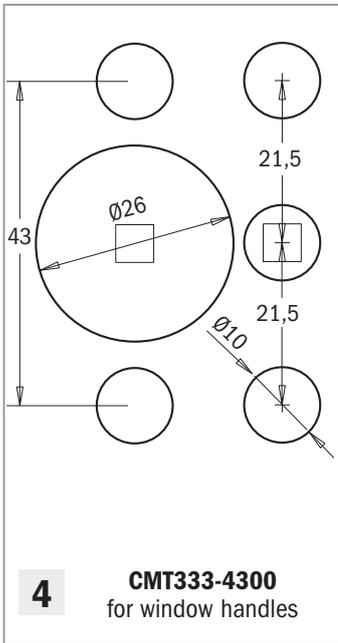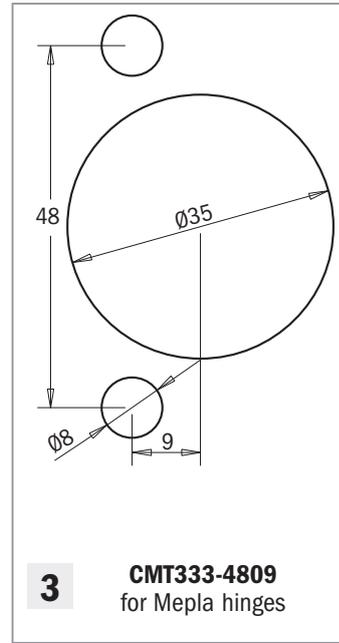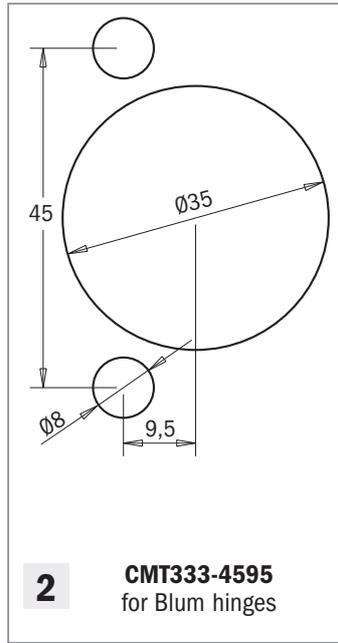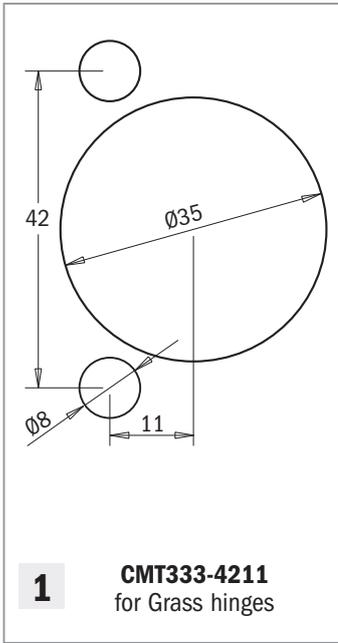

MAXIMUM VERSATILITY FOR ANY BRAND

Make your set

Choose your hinge

| | | |
|---|----------------|--------|
| 1 | Grass | 42/11 |
| 2 | Blum | 45/9,5 |
| 3 | Mepla | 48/9 |
| 4 | Window handles | 43/00 |
| 5 | Salice | 48/6 |
| 6 | Hettich, Würth | 52/5,5 |
| 7 | Small hinges | 38/7,5 |
| 8 | System 32 | |

| Support modular base | Boring heads | Drill bits | Boring bit |
|----------------------|------------------------------|--|---|
| | | | |
| ORDER NO. | ORDER NO. | ORDER NO. Left-hand rotation | ORDER NO. Right-hand rotation |
| CMT333 | CMT333-4211 Grass | 310.080.12 (2 pcs.) | 317.350.11 |
| CMT333 | CMT333-4595 Blum | 310.080.12 (2 pcs.) | 317.350.11 |
| CMT333 | CMT333-4809 Mepla | 310.080.12 (2 pcs.) | 317.350.11 |
| CMT333 | CMT333-4300 W/handles | 310.100.12 (2 pcs.) | 317.260.11 |
| CMT333 | CMT333-4806 Salice | 310.100.12 (2 pcs.) | 317.350.11 |
| CMT333 | CMT333-5255 Hettich | 310.100.12 (2 pcs.) | 317.350.11 |
| CMT333 | CMT333-3875 Small | (2 pcs.) | 317.260.11 |
| CMT333 | CMT333-325 System 32 | (3 pcs. RH + 2 pcs. LH) | |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts


Blum, Salice, Häfele & Hettich Hinges Boring Head

new


CMT ORANGE TOOLS™

The innovative CMT334 Universal Hinge Boring Head employs three spindles which allow you to bore the holes for all of the major hinge brands. The head can be utilized on boring and point to point machines.

CMT334

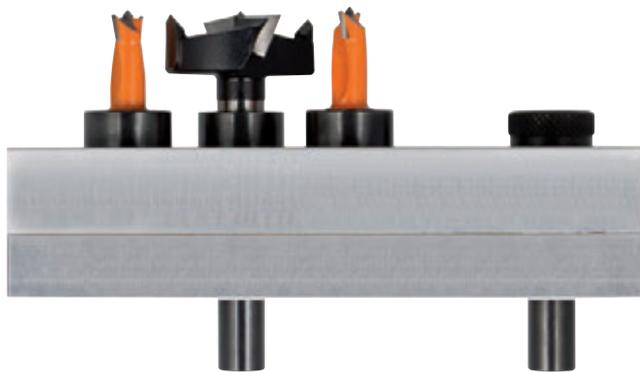

Standard

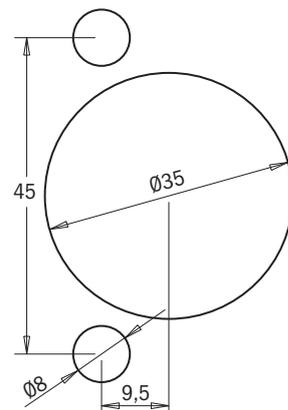

CMT334-4595

for Blum, Salice, Häfele and Hettich hinges 45/9.5

For use on boring and point to point machines

| DESCRIPTION | ORDER NO. |
|--|--------------------|
| Hinge boring head (bits not included) | CMT334-4595 |
| Boring bit Ø35mm x 38,5mm. Right-hand rotation | 393.350.11 |
| Dowel Drill Ø8mm x 38,5mm. Left-hand rotation | 393.080.12 |

Double-edge trimmer

new

Attach this trimmer to your workpiece, press both ends against the board for a cutting range between 13mm (1/2") and 25mm (1"), move the trimmer in the correct direction indicated by the arrow. This will cut on both sides easily. The first cutter will cut straight, the second one can be adjusted for a tapering cut. Both cutters are made from high-quality hardened steel and can be easily replaced when worn out.

DET-001



| DESCRIPTION | ORDER NO. |
|---|----------------|
| Double-edge trimmer | DET-001 |
| <i>Spare parts</i> DET-001K Spare knives for double-edge trimmer | |

Formula 2050: blade and bit cleaner



Finally a safe, environmentally-friendly cleaner that is more effective than all those hazardous chemicals used for cleaning cutting tools.

998

Saw shops know how to get the most out of cutting tools. They know that the pitch and resin left by wood on tools greatly shortens the useful life of carbide. Therefore we asked many blade sharpeners to test Formula 2050 and they rated it as an excellent product. Most blade and bit cleaning products work with dissolving action, but it takes some power and nasty chemicals to dissolve wood residues and adhesives. CMT's non-toxic and safe Formula 2050 penetrates the microscopic cracks in the resin and attacks the bond between carbide or steel surfaces and the resin itself. Formula 2050 keeps your tools clean and helps you increase the life span between sharpening and replacement.



12 spray bottles 0,500 lt (18 oz.) in merchandising display



- Removes pitch, resin and adhesive residue from all woodworking cutting tools (saw blades, router bits, drill bits, shaper cutters, planer blades, etc.).
- Completely non-toxic, non-flammable and certified biodegradable. Formula 2050 is a safe, earth-friendly product.
- Do not rinse after cleaning. Formula 2050 provides protection from rust and corrosion. Keeps your table saw top rust free too!
- Can be applied by spray bottle or used in ultrasonic cleaners and dip tanks.

★★★★★ This product received a five-star performance rating from "Wood Magazine"

| DESCRIPTION | ORDER NO. |
|---|----------------|
| 0,500 lt. spray bottle | 998.001.01 |
| 3,780 lt. plastic jug | 998.001.03 |
| 12 spray bottles 0,500 lt (18 oz.) in merchandising display | 998.001.01-X12 |
| Empty merchandising display (suitable for 12 spray bottles) | 998-DIS |

Lubricant for wood, Neutralizes resin

- Neutralizes resin, preventing it from being stuck on chips and sawdust.
- Cleans knobs, barbell handles, etc.
- Anti-corrosion action on woodworking machine table.
- Excellent against humidity.

Instruction:
Spray or apply the product on the desired parts of your woodworking machine. You will obtain a uniform layer on its surface that will aid in the sliding of your workpiece.

FLAMMABLE PRODUCT.
AIR FREIGHT IS NOT ALLOWED.

998



| DESCRIPTION | ORDER NO. |
|--|------------|
| 1 lt. spray bottle (master packaging 12 bottles) | 998.002.01 |
| 5 lt. plastic jug | 998.002.03 |

For dowelling into a surface

For shelf supports

For hinges

Universal boring template

CMT's universal boring template has been designed for precise and productive manual dowelling of furniture elements by using 32mm Euro-System screws, for boring shelf supports with 3mm or 5mm in diameter and for making and marking hinge holes.

By using this template you can prebore the most popular hinge types and also to bore holes for pivots, wooden screws and hinges on the base element, as well as prebore door hinges, included the marking of holes featuring 35mm in diameter for hinges.

This template will guarantee high precision work and productivity and has been designed to be used in pair with the specific CMT400-1 boring adaptor supporting any Ø8mm shank drill bits featuring different diametres.



Laminated phenolic material

Clear and comprehensible template marking

Precise end stops


QUICK AND EASY:

| | |
|-------------------------------------|--|
| Technical data: | CMT900 |
| Max. board width in one tightening: | 900mm |
| Max board width: | no limits |
| Board thickness: | no limits |
| For dowels: | Ø8mm |
| Hole distance: | 32mm |
| Number of holes: | 26 |
| For shelf support: | Ø3mm, Ø5mm |
| For hinges: | Ø3mm for wooden screws Ø5mm for Euro screws |

Boring into a surface for dowel joints using the template.

Boring Ø3mm and Ø5mm holes for shelf supports.

Preboring holes for hinges (base and panel).

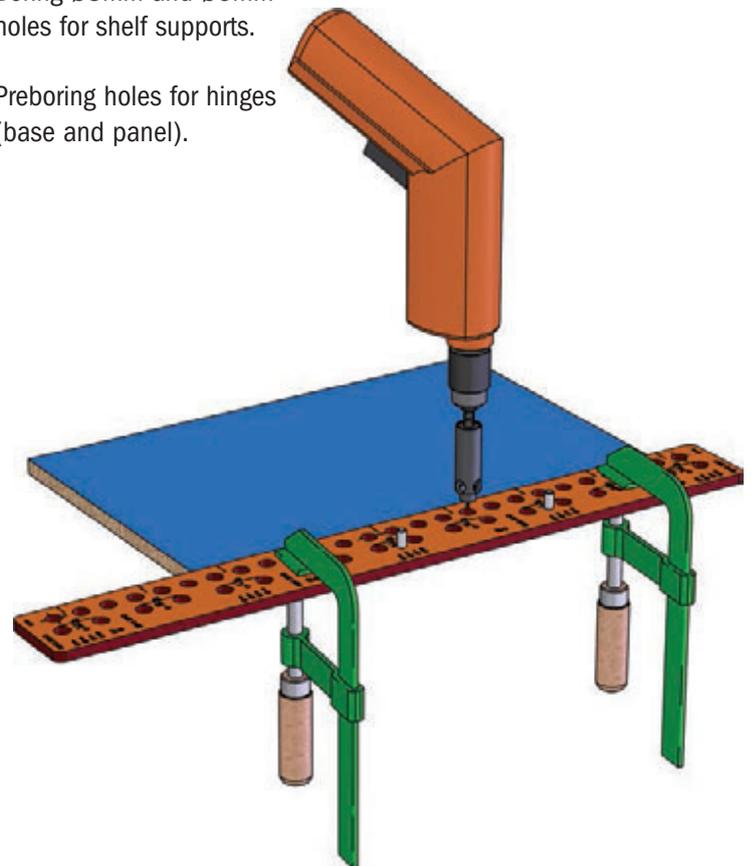

BORING ADAPTORS (not included):

- End stop for different boring depths
- Suitable for any type of drilling machine
- Duralumin body with holes for better chip ejection
- Precise and flat seating for proper alignment.

ORDER NO. **CMT400-1**
Boring adaptor for **CMT656, CMT900 JIGS**
to be used with drill bits up to 30mm depth:
306.030.21 - 306.050.11 - 306.080.11



HW DOWEL BITS (not included):

| DESCRIPTION | ORDER NO. |
|-----------------------|------------|
| D=3x18mm S=8x20mm HWM | 306.030.21 |
| D=5x30mm S=8x20mm HW | 306.050.11 |
| D=8x30mm S=8x20mm HW | 306.080.11 |



Other sizes available in 306-307 series

CMT900 boring template includes:

- Boring template from laminated pertinax
- End stop set
- End stop set for large elements
- Centring pin for hinges

| DESCRIPTION | ORDER NO. |
|---------------------------|-----------|
| Universal boring template | CMT900 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Universal boring jig

This universal boring jig has been designed for precise and productive manual dowelling of furniture elements and guarantees high precision work and productivity. The holes have been made with a distance of 32mm between one another, in compliance with the European regulations for doweling machine production. Also, the dowel jig fits CMT Ø8mm shank HW drill bits, clamped into a special boring adaptor.

CMT656


For edge dowelling and jointing

Precise holes

Detachable end stops


Ergonomic manual tighteners

Precise and flat duralumin profile

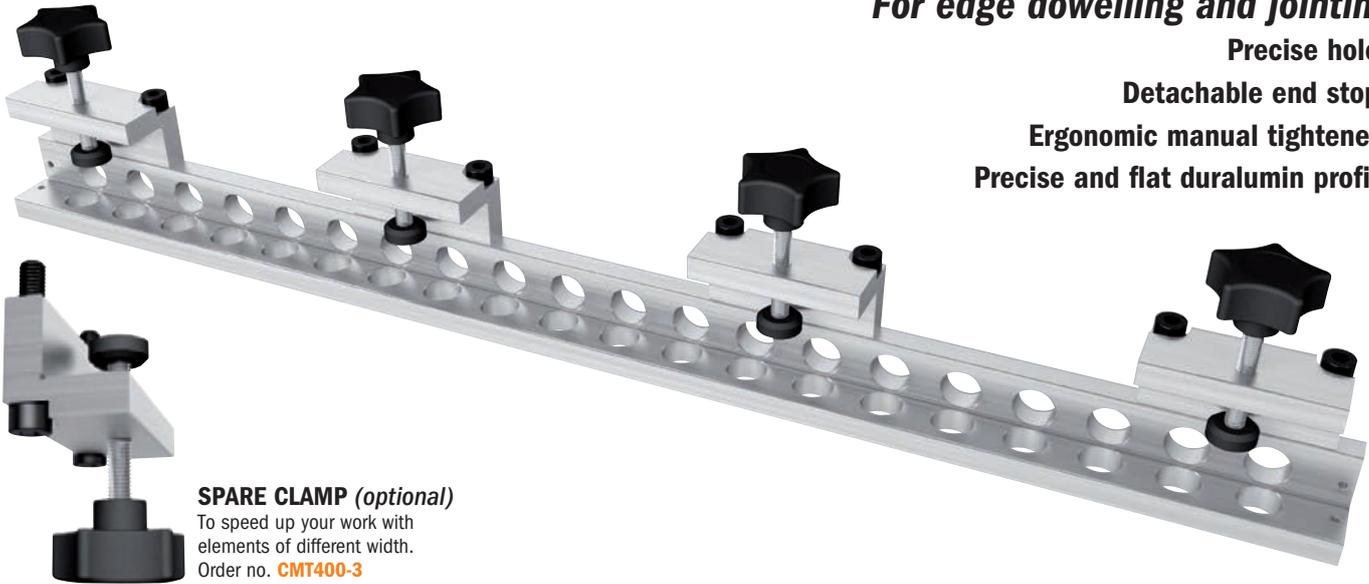

SPARE CLAMP (optional)

To speed up your work with elements of different width.
Order no. **CMT400-3**

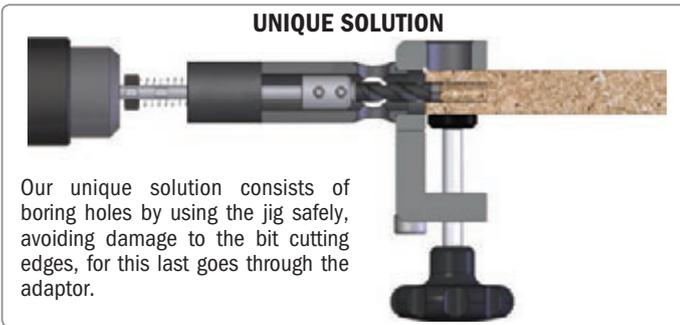

UNIQUE SOLUTION

Our unique solution consists of boring holes by using the jig safely, avoiding damage to the bit cutting edges, for this last goes through the adaptor.

BORING ADAPTORS (not included):

- End stop for different boring depths
- Suitable for any type of drilling machine
- Duralumin body with holes for better chip ejection
- Precise and flat seating for properly alignment.

ORDER NO. **CMT400-1**

Boring adaptor for **CMT656, CMT900 JIGS**

to use with the drill bit:

306.030.21 - 306.050.11 - 306.080.11 - 307.050.11

ORDER NO. **CMT400-2** (for screw joints)

Boring adaptor for **CMT656, CMT900 JIGS**

to use with the drill bit: 307.050.11

HW DOWEL BITS (not included):

| DESCRIPTION | | | ORDER NO. |
|-------------|----------|-----|-----------------------------|
| D=3x18mm | S=8x20mm | HWM | 306.030.21 |
| D=5x30mm | S=8x20mm | HW | 306.050.11 |
| D=8x30mm | S=8x20mm | HW | 306.080.11 |
| D=5x40mm | S=8x20mm | HW | 307.050.11 for screw joints |
| D=7x40mm | S=8x20mm | HW | 307.070.11 for screw joints |

Other sizes available in 306-307 series

TECHNICAL DETAILS:

| | |
|------------------------------------|------------------------|
| Max board width in one tightening: | CMT656 656mm |
| For dowels: | Ø8mm |
| For through holes: | Ø7mm |
| Hole distance: | 32mm |
| Number of Ø18mm holes : | 2x20 |
| Board thickness: | 16-40mm |
| Facet (elements lap): | 0,8mm |

3 easy steps for your dowel joints



Place the jig onto the board, fix the end stop and tighten the workpiece. Set the bore depth and clamp the boring adaptor on your drilling machine. Bore vertical holes.



Fasten the jig on the other element, fix the end stop and set the bore depth. Bore horizontal holes.



Now insert the dowels with glue into the holes and join both elements



As an alternative, use through hole bits and screw the elements together.

| DESCRIPTION | ORDER NO. |
|--|---------------|
| Universal boring jig (656mm in one tightening) | CMT656 |

Diamond whetstones

For professional, industrial and home users


DSS

FAST: real quality diamond, the hardest known material, reduces the sharpening process.

EASY: stoke the blade across surface with little pressure.

DURABLE: we use natural diamonds for long-lasting performance.

VERSATILE: or sharpening any hard material, steel, glass, ceramic, tungsten carbide, etc.

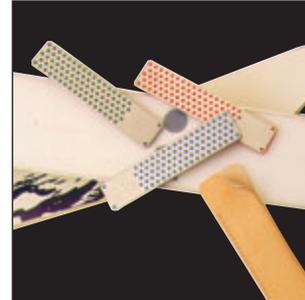

Mini-diamond whetstone in plastic cases

| Dimensions mm | Grains | Colour | ORDER NO. |
|---------------|---------------|--------|-----------|
| 70 x 24 x 2 | D15 extrafine | green | DSS-070E |
| 70 x 24 x 2 | D25 fine | green | DSS-070F |
| 70 x 24 x 2 | D46 coarse | blue | DSS-070M |

Until stocks last

Universal diamond whetstone in leather sheaths

| Dimensions mm | Grains | Colour | ORDER NO. |
|---------------|-----------------|--------|-----------|
| 115 x 25 x 3 | D15 extrafine | green | DSS-115E |
| 115 x 25 x 3 | D25 fine | red | DSS-115F |
| 115 x 25 x 3 | D46 coarse | blue | DSS-115M |
| 115 x 25 x 3 | D76 extracoarse | black | DSS-115G |

Diamond whetstone file

| Dimensions mm | Grain | Colour | ORDER NO. |
|---------------|------------|--------|-----------|
| 100 Ø4,8 | D54 coarse | blue | DSS-048M |

Universal diamond whetstones in hardwood case

| Dimensions mm | Grains | Colour | ORDER NO. |
|---------------|-----------------|--------|-----------|
| 150 x 52 x 16 | D15 extrafine | green | DSS-150E |
| 150 x 52 x 16 | D25 fine | red | DSS-150F |
| 150 x 52 x 16 | D46 coarse | blue | DSS-150M |
| 150 x 52 x 16 | D76 extracoarse | black | DSS-150G |

For sharpening, honing and lapping

- axes
- bayonets
- broadheads
- cable cutters
- carbide cutters
- chainsaws
- chisels
- climbing equipment
- engraving tools
- farm and garden tools
- fish hooks
- Fostner bits
- knives
- lapidary tools
- lawn mower blades
- masonry drills
- moulds and dies
- plane blades
- planer /jointer knives
- pruners
- ring tool
- router bits
- saw blades
- scissors
- shears
- ski and snowboard edges
- small contact area and pointed tools
- speed and hockey skates
- woodcarving scrapers
- woodturning tools

For abrading hard materials

- ceramic
- composites
- fibreglass
- glass
- stainless steel
- stone
- titanium
- tool steel
- tungsten carbide


DSS

For flattening

- chisel backs
- engine heads
- machine bolsters and ways

A unique production process to guarantee a long tool life

A perforated steel plate is moulded onto a strong plastic base by applying high pressure. The steel is then covered with natural diamonds embedded into a nickel plate. The pattern of diamond coating ensures fast sharpening, whereas the plastic indents hold the lubricating water and disperse the fine dust emitted by the diamonds during sharpening.

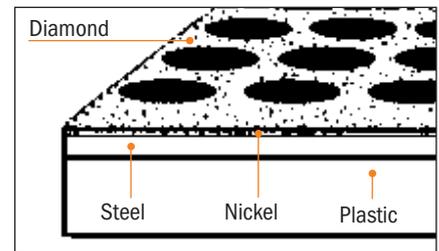

The diamond whetstones are available in four meshes for multiple purposes:

D15 EXTRAFINE/GREEN (9 microns, 1200 mesh)

To refine and polish sharp edges to razor sharp perfection. If you are new to sharpening or need your knife or tool edges as sharp as possible, this grain type is not recommended, but if this suffice, then this is what you are looking for.

D25 FINE/RED (25 microns, 600 mesh)

To restore any slightly dull knife or tool edges to perfect sharpness. Many customers consider the fine grit grain to be suitable to satisfy any working need. Professional chefs and gourmet cooks prefer using this grit grain too. For woodworkers and sportsmen who are stepping through this grit, it is the edge refinement process before micro- refinement and polishing.

D46 COARSE/BLUE (45 microns, 325 mesh)

To quickly restore dull edges to cutting sharp again. Workers who need fast cutting action without caring for edge refinement often use this grit grain.


D76 EXTRA-COARSE/BLACK (60 microns, 220 mesh)

Recommended for aggressive removal of metal on damaged tools or for heavy-duty outdoor tools such as axes and lawn mower blades. Also, this grit grain is commonly used as a first step for flattening the back of chisel and plane irons or for rapid stock removal from chipped or badly damaged edges.


Instructions

Use water for lubrication, after use, rinse and store dry.


1. Keep your knife with cutting edge away from you.

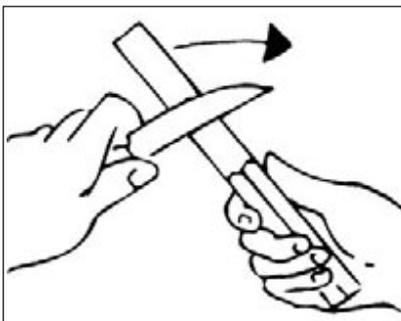

2. Apply some water to the stone surface. Hold blade 20° to diamond surface.



3. With little pressure and in long strokes push the blade across surface. From edge heel to edge tip, alternately on both sides. For pointed tools. Use the unperforated diamond area.

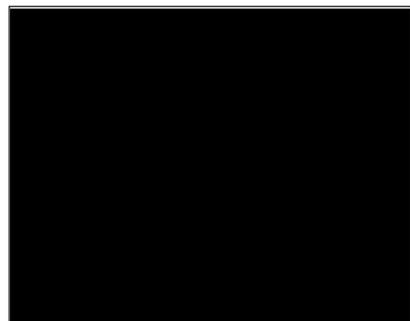

Flexible templates for curved and arched routing



TMP



The CMT flexible template is easy to screw on any kind of wooden panels, MDF or chipboard for creating forms, arcs and curved elements easily and rapidly. In order to fix your template you can use countersunk screws, which are widely available on the market. The CMT template is made of a highly-resistant flexible plastic, which can be tied in knots without any risk of ruining or reducing flexibility.

Screw your template to the edge of the panel and follow its shape and rout the border on the guide ring. The template is suitable for manual feed on routers, router tables and spindle moulders. Rout easily, safely and accurately to make multiple forms such as arcs, curved elements and cut-out forms. Mark the edge of your form precisely and screw it onto a previously-placed panel from underneath.

If you rout with a guide ring mounted onto your spindle moulder, keep your hands a safe distance behind the template. Two different profiles in three lengths are available. Please notice that the smallest profile features a short radius, whereas the larger profile features a larger opening in case of flat and long curves.

TECHNICAL SPECIFICATIONS:

- Special plastic without any plasticizer.
- Made in Germany.
- Lasts more than 10 years!

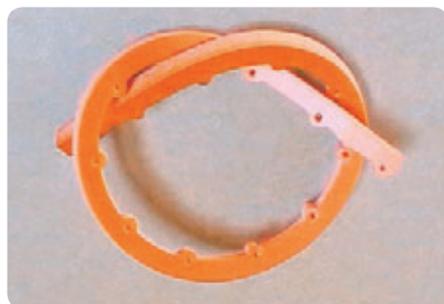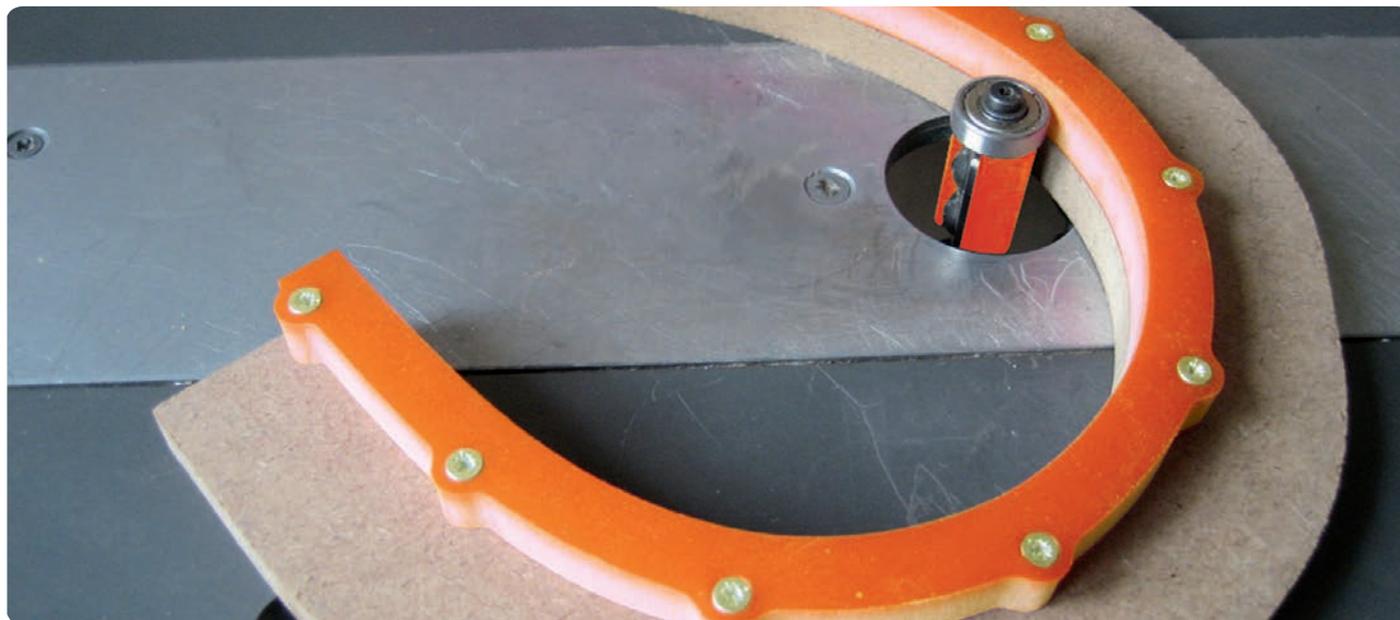

| | DESCRIPTION | ORDER NO. |
|--|--|-----------|
| | Flexible template for routing 18x18mm L=1000mm | TMP-1000 |
| | Flexible template for routing 12x12mm L=1200mm | TMP-1200 |
| | Flexible template for routing 18x18mm L=2000mm | TMP-2000 |

Bowl & tray system

new

CMT ORANGE TOOLS™

BTS-002

CMT System BTS-002 provides a fun and easy way for you to make divided bowls and trays in your shop. No lathe? No problem. This bowl making technique uses a router and CMT's unique bowl and tray router bit. The resulting bowls and trays are beautiful, and will leave your friends astonished! This kit also provides an excellent way to use up scrap wood. Glue pieces together, butcher block style, to make a beautiful pattern of colors and species.

The templates will withstand a lifetime of use and can be used to make more than just one style of bowl or tray. So, with a little imagination, you can make a variety of shapes and styles of bowls and trays. The collet extension, used to make extra deep bowls, is also useful whenever your general woodworking requires extra deep cuts.



TMP-012
MDF Template



TMP-011
MDF Template



| DESCRIPTION | ORDER NO. S=Ø12mm |
|-------------------------|----------------------|
| Bowl & tray system | BTS-002 |
| <i>The kit includes</i> | |
| Router Bit | 951.502.11B |
| Router Collet Extension | 796.002.00 |
| MDF Template nr. 1 | TMP-011 |
| MDF Template nr. 2 | TMP-012 |
| instruction manual | |



Trace the templates onto the bowl blank.



Rough out the interior using a drill press and a 50,8mm Forstner bit.



Rout the interior to final shape using the bowl and tray router bit and collet extension.



Bandsaw the exterior to final shape.

Optional



TMP-101
MDF Template
400x400mm.



TMP-103
MDF Template
400x400mm.



TMP-105
MDF Template
330x300mm.






DAG-001

Digital angle gauge

The digital angle gauge is a mini waterproof digital protractor that provides digital readings between $\pm 180^\circ$ with a resolution of $0,1^\circ$ and auto shut off after 5 minutes. It is small enough to be carried around in a pocket and the LED screen is convenient to read. It incorporates magnets in the base for adhesion to any ferrous surface to accurately measure mitre and bevel angles on mitre saws, saw benches, etc.



- TECHNICAL DETAILS:**
- battery voltage/type
3V/L lithium;
 - 51x51x33mm size;
 - $\pm 180^\circ$ range;
 - $0,1^\circ$ resolution.

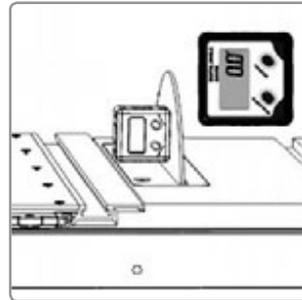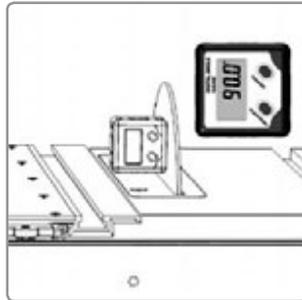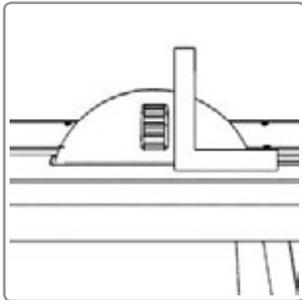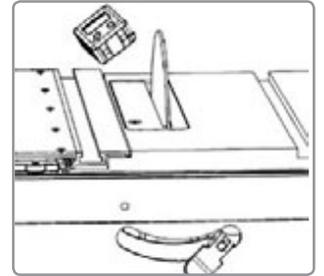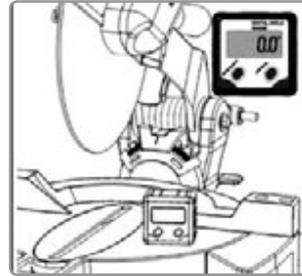

DESCRIPTION

ORDER NO.

Digital angle gauge

DAG-001





Digital angle finder

DAF-001

This digital angle finder is a multi-functional tool for many measuring applications. Easy to operate the base unit carries the electronics giving a very clear detailed LCD display as well as a pair of levelling vials and a pivoting measuring arm. When the arm is extended the angle it makes with the base is indicated clearly on digital read-out to the nearest $0,05^\circ$. The measuring range is $0 - 360^\circ$. The vials allow variations from the vertical and the horizontal to be accurately measured. Other features include a lock function to prevent the last measurement being lost, a low battery indicator and automatic shut off function. Being robust but light in weight this is a very well thought out tool with a lot of uses. Instructions included.

- Easy and simple to use;
- Calculates angles in seconds;
- Large detailed LCD display;
- Robust, lightweight aluminium construction;
- $0 - 360^\circ$ measuring range.

- TECHNICAL DETAILS:**
- 265x50x25mm size;
 - $\pm 0 - 360^\circ$ range;
 - $0,05^\circ$ resolution.

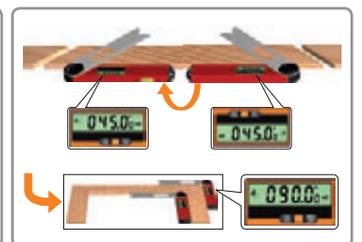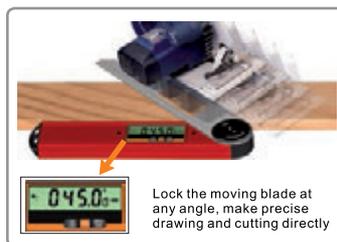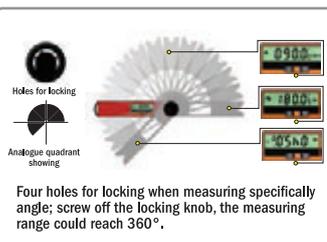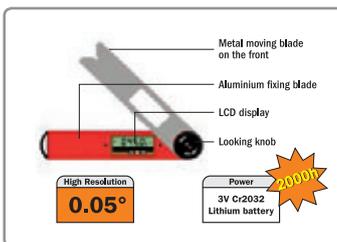

DESCRIPTION

ORDER NO.

Digital angle finder

DAF-001

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts



Horizontal and vertical measuring.

Self-standing for setting cutting depth on router tables and low profiles for backfence adjustment.

Measuring ruler with metric/imperial scale and locking screw.



Instruction manual.

TECHNICAL DETAILS :




- Measuring range: Scale: 0~80mm (0~3")
Needle: 0~50mm (0~2").
- Resolution: 0.05mm/0.002".
- Accuracy: ±0.1mm (±0.004").
- Power: CR2032 3V - 1500 hours.






Place your gauge on a flat surface and set "0" on the display.

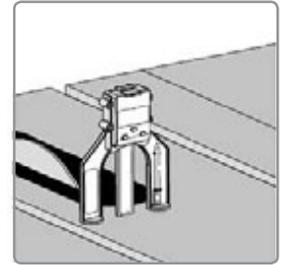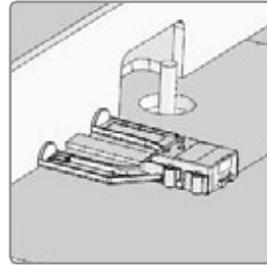

Position your gauge on the tool

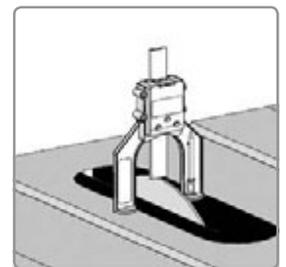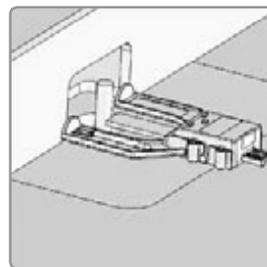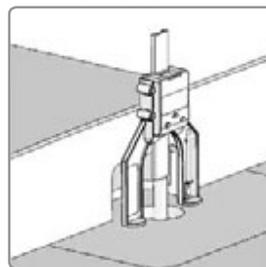

Insert needle and set "0"

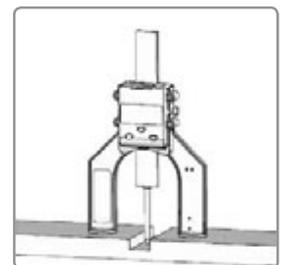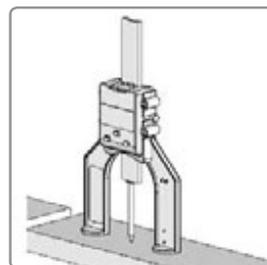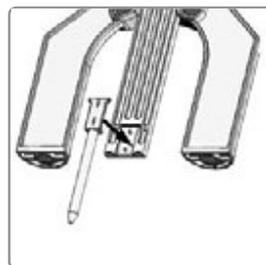

| DESCRIPTION | ORDER NO. |
|----------------------|-----------|
| Digital height gauge | DHG-001 |

Display cabinets for router bits / cutter heads / drill bits

This sturdy structure is hand-crafted using wood, tempered glass and iron and is free-standing to offer 360° visibility and to give you the versatility of positioning the display anywhere you like in the store. The front is a convenient 2 component assembly. The two upper sections are designed to display 141 of the best selling router bits from the CMT router bits line and 20 corresponding spare parts; while 10 of the popular wooden box sets can fit perfectly in the lower section if required.

Dimensions are in cm.



The products shown in the images do not correspond to the actual products in the display cabinets (700.300.00L and 900.300.00L)

03.53.0017



Order screws 990.010.00/65 to fix drill bits to the tool holder shelf.

Empty display cabinet for drill bits and toolholder shelf

Start your stock of CMT drill bits now by ordering a convenient cabinet to help you get organized and keep your tools within your hand's reach. Contact our office for terms and for choosing the drill bits you need from a very broad range.

Dimensions in cm.



DESCRIPTION

ORDER NO.

| | |
|---|--------------------|
| Display cabinets with: 240 HW router bits (S=Ø6mm), 60 spare parts (saw blades at your choice) | 700.300.00L |
| Display cabinets with: 240 HW router bits (S=Ø8mm), 60 spare parts (saw blades at your choice) | 900.300.00L |
| 21 pcs. HW router bits with shank Ø12mm for our display cabinet (optional) | 900.021.00 |
| Display cabinet for router bits / cutter heads / drill bits (empty) includes 145 hooks (125 long and 20 short) | 03.00.0032 |
| Toolholder shelf for CMT display cabinet 03.00.0032 for drills bits 270x209x1,5cm. | 03.53.0017 |
| Long hooks 200mm. | 03.53.0010 |
| Short hooks 150mm. | 03.53.0011 |

List of items included in display cabinets



700.300.00L Shank Ø6mm

| ORDER NO. | DESCRIPTION | Q.TY | ORDER NO. | DESCRIPTION | Q.TY | ORDER NO. | DESCRIPTION | Q.TY |
|---|--------------------------------------|------|-------------|--------------------------|------|---|---------------------------------|------|
| 700.240.00 KIT 240 ROUTER BITS WITH SHANK Ø6MM | | | 714.127.11 | Round nose bit | 2 | 748.190.11 | Roman ogee bit | 2 |
| 701.127.11 | Mortising bit | 2 | 714.160.11 | Round nose bit | 2 | 748.190.11B | Roman ogee bit w/bearing | 2 |
| 701.160.11 | Mortising bit | 2 | 714.190.11 | Round nose bit | 2 | 749.001.11 | 60° Lettering bit | 2 |
| 701.190.11 | Mortising bit | 2 | 714.190.11B | Round nose bit | 2 | 750.001.11 | Keyhole bit | 2 |
| 701.190.11B | Mortising bit | 2 | 715.060.11 | V-Grooving bit (90°) | 2 | 751.002.11 | Bowl and tray bit | 2 |
| 703.240.11 | Chamfer bit | 2 | 715.095.11 | V-Grooving bit (90°) | 2 | 751.002.11B | Bowl and tray bit | 2 |
| 704.240.11 | Chamfer bit | 2 | 715.127.11 | V-Grooving bit (90°) | 2 | 753.001.11 | Flush and V-groove bit | 2 |
| 705.240.11 | Chamfer bit | 2 | 715.190.11 | V-Grooving bit (90°) | 2 | 754.002.11 | Bull nose bit | 2 |
| 706.095.11 | Flush trim bit w/bearing | 2 | 715.190.11B | V-Grooving bit (90°) | 2 | 754.003.11 | Bull nose bit | 2 |
| 706.096.11 | Flush trim bit w/bearing | 2 | 716.060.11 | Panel pilot bit | 2 | 754.004.11 | Bull nose bit | 2 |
| 706.127.11 | Flush trim bit w/bearing | 2 | 716.061.11 | Panel pilot bit | 2 | | | |
| 706.128.11 | Flush trim bit w/bearing | 2 | 718.095.11 | Dovetail bit | 2 | 758.001.11 | Laser point bit (60°) | 2 |
| 706.190.11 | Flush trim bit w/bearing | 2 | 718.127.11 | Dovetail bit | 2 | 759.040.11 | Roman ogee bit w/bearing | 2 |
| 707.210.11 | Combination flush and bevel trim bit | 2 | 718.158.11 | Dovetail bit | 2 | 759.064.11 | Roman ogee bit w/bearing | 2 |
| 709.260.11 | Bevel trim and chamfer bit | 2 | 718.190.11 | Dovetail bit | 2 | 760.040.11 | Roman ogee bit w/bearing | 2 |
| 710.260.11 | Bevel trim and chamfer bit | 2 | 721.030.11 | Combination trimmer bit | 2 | 760.064.11 | Roman ogee bit w/bearing | 2 |
| 711.020.11 | Straight bit | 2 | 724.060.10 | Slot cutter arbor | 2 | 796.000.00 | Collet chuck | 2 |
| 711.030.11 | Straight bit | 2 | 727.040.11 | Ovolo bit | 2 | 796.560.00 | Collet | 2 |
| 711.040.11 | Straight bit | 2 | 727.050.11 | Ovolo bit | 2 | 796.580.00 | Collet | 2 |
| 711.050.11 | Straight bit | 2 | 727.060.11 | Ovolo bit | 2 | 796.595.00 | Collet | 2 |
| 711.060.11 | Straight bit | 2 | 727.080.11 | Ovolo bit | 2 | 822.320.11 | Slot cutter | 2 |
| 711.070.11 | Straight bit | 2 | 727.095.11 | Ovolo bit | 2 | 822.325.11 | Slot cutter | 2 |
| 711.080.11 | Straight bit | 2 | 735.317.11 | Rabbeting bit w/bearing | 2 | 822.330.11 | Slot cutter | 2 |
| 711.090.11 | Straight bit | 2 | 736.130.11 | Chamfer bit w/bearing | 2 | 822.335.11 | Slot cutter | 2 |
| 711.100.11 | Straight bit | 2 | 736.190.11 | Chamfer bit w/bearing | 2 | 822.340.11 | Slot cutter | 2 |
| 711.110.11 | Straight bit | 2 | 736.280.11 | Chamfer bit w/bearing | 2 | 822.350.11 | Slot cutter | 2 |
| 711.120.11 | Straight bit | 2 | 736.420.11 | Chamfer bit w/bearing | 2 | 822.360.11 | Slot cutter | 2 |
| 711.130.11 | Straight bit | 2 | 737.190.11 | Round nose bit w/bearing | 2 | | | |
| 711.130.11B | Straight bit | 2 | 737.222.11 | Round nose bit w/bearing | 2 | 900.060.00 KIT WITH 60 SPARE PARTS | | |
| 711.140.11 | Straight bit | 2 | 737.254.11 | Round nose bit w/bearing | 2 | 541.003.00 | Stop collar for top bearing bit | 3 |
| 711.150.11 | Straight bit | 2 | 737.286.11 | Round nose bit w/bearing | 2 | 541.004.00 | Stop collar for top bearing bit | 3 |
| 711.150.11B | Straight bit | 2 | 737.350.11 | Round nose bit w/bearing | 2 | 791.002.00 | Bearing | 3 |
| 711.160.11 | Straight bit | 2 | 738.160.11 | Ovolo bit w/bearing | 2 | 791.003.00 | Bearing | 3 |
| 711.180.11 | Straight bit | 2 | 738.190.11 | Ovolo bit w/bearing | 2 | 791.004.00 | Bearing | 3 |
| 711.190.11 | Straight bit | 2 | 738.222.11 | Ovolo bit w/bearing | 2 | 791.006.00 | Bearing | 3 |
| 711.190.11B | Straight bit | 2 | 738.254.11 | Ovolo bit w/bearing | 2 | 791.007.00 | Bearing | 3 |
| 711.200.11 | Straight bit | 2 | 738.285.11 | Ovolo bit w/bearing | 2 | 791.012.00 | Bearing | 3 |
| 711.220.11 | Straight bit | 2 | 738.317.11 | Ovolo bit w/bearing | 2 | 791.018.00 | Bearing | 3 |
| 711.240.11 | Straight bit | 2 | 738.380.11 | Ovolo bit w/bearing | 2 | 791.023.00 | Bearing | 3 |
| 711.250.11 | Straight bit | 2 | 740.270.11 | Roman ogee bit w/bearing | 2 | 791.024.00 | Bearing | 3 |
| 712.060.11 | Straight bit | 2 | 740.350.11 | Roman ogee bit w/bearing | 2 | 791.025.00 | Bearing | 3 |
| 712.080.11 | Straight bit | 2 | 741.285.11 | Roman ogee bit w/bearing | 2 | 799.060.00 | Bushing | 3 |
| 712.100.11 | Straight bit | 2 | 741.380.11 | Roman ogee bit w/bearing | 2 | 990.004.00 | Bearing screw | 3 |
| 712.120.11 | Straight bit | 2 | 744.287.11 | Roman ogee bit w/bearing | 2 | 990.005.00 | Bearing screw | 3 |
| 712.150.11B | Straight bit | 2 | 744.350.11 | Roman ogee bit w/bearing | 2 | 990.058.00 | Bearing screw | 3 |
| 712.160.11 | Straight bit | 2 | 745.287.11 | Roman ogee bit w/bearing | 2 | 990.059.00 | Bearing screw | 3 |
| 714.032.11 | Round nose bit | 2 | 745.350.11 | Roman ogee bit w/bearing | 2 | 991.056.00 | Hex key for bearing screw | 3 |
| 714.060.11 | Round nose bit | 2 | 746.325.11 | Roman ogee bit w/bearing | 2 | 991.057.00 | Hex key for bearing screw | 3 |
| 714.095.11 | Round nose bit | 2 | 747.325.11 | Roman ogee bit w/bearing | 2 | 991.062.00 | Hex key for bearing screw | 3 |

900.300.00L Shank Ø8mm

| ORDER NO. | DESCRIPTION | Q.TY | ORDER NO. | DESCRIPTION | Q.TY | ORDER NO. | DESCRIPTION | Q.TY |
|---|--------------------------------------|------|-------------|--------------------------------|------|---|---------------------------------|------|
| 900.240.00 KIT 240 ROUTER BITS WITH SHANK Ø8MM | | | 914.160.11 | Round nose bit | 2 | 945.350.11 | Roman ogee bit w/bearing | 2 |
| 901.127.11 | Mortising bit | 2 | 914.160.11B | Round nose bit w/bearing | 2 | 946.325.11 | Roman ogee bit w/bearing | 2 |
| 901.160.11 | Mortising bit | 2 | 914.190.11 | Round nose bit | 2 | 947.325.11 | Roman ogee bit w/bearing | 2 |
| 901.160.11B | Mortising bit w/bearing | 2 | 915.060.11 | V-Grooving bit (90°) | 2 | 948.190.11 | Roman ogee bit | 2 |
| 901.180.11 | Mortising bit | 2 | 915.095.11 | V-Grooving bit (90°) | 2 | 950.001.11 | Keyhole bit | 2 |
| 901.190.11 | Mortising bit | 2 | 915.127.11 | V-Grooving bit (90°) | 2 | 951.002.11 | Bowl and tray bit | 2 |
| 901.200.11 | Mortising bit | 2 | 915.160.11 | V-Grooving bit (90°) | 2 | 953.001.11 | Flush and V-groove w/bearing | 2 |
| 903.240.11 | Chamfer bit | 2 | 915.160.11B | V-Grooving bit (90°) w/bearing | 2 | 954.002.11 | Bull nose bit | 2 |
| 904.240.11 | Chamfer bit | 2 | 916.080.11 | Panel pilot bit | 2 | 954.003.11 | Bull nose bit | 2 |
| 905.240.11 | Chamfer bit | 2 | 918.095.11 | Dovetail bit | 2 | 954.004.11 | Bull nose bit | 2 |
| 906.095.11 | Flush trim bit w/bearing | 2 | 918.127.11 | Dovetail bit | 2 | 958.001.11 | Laser point bit (60°) | 2 |
| 906.096.11 | Flush trim bit w/bearing | 2 | 918.158.11 | Dovetail bit | 2 | 959.040.11 | Roman ogee bit w/bearing | 2 |
| 906.127.11 | Flush trim bit w/bearing | 2 | 918.190.11 | Dovetail bit | 2 | 959.064.11 | Roman ogee bit w/bearing | 2 |
| 906.128.11 | Flush trim bit w/bearing | 2 | 921.030.11 | Combination trimmer bit | 2 | 960.040.11 | Roman ogee bit w/bearing | 2 |
| 906.190.11 | Flush trim bit w/bearing | 2 | 924.080.00 | Slot cutter arbor | 2 | 960.064.11 | Roman ogee bit w/bearing | 2 |
| 907.210.11 | Combination flush and bevel trim bit | 2 | 924.080.10 | Slot cutter arbors w/bearing | 2 | 796.000.00 | Collet chuck | 2 |
| 909.260.11 | Bevel trim and chamfer bit w/bearing | 2 | 927.040.11 | Ovolo bit | 2 | 796.560.00 | Collet | 2 |
| 910.260.11 | Bevel trim and chamfer bit w/bearing | 2 | 927.050.11 | Ovolo bit | 2 | 796.580.00 | Collet | 2 |
| 911.030.11 | Straight bit | 2 | 927.060.11 | Ovolo bit | 2 | 796.595.00 | Collet | 2 |
| 911.040.11 | Straight bit | 2 | 927.080.11 | Ovolo bit | 2 | 822.320.11 | Slot cutter | 2 |
| 911.050.11 | Straight bit | 2 | 927.095.11 | Ovolo bit | 2 | 822.325.11 | Slot cutter | 2 |
| 911.060.11 | Straight bit | 2 | 935.001.11 | Rabbeting bit w/bearing | 2 | 822.330.11 | Slot cutter | 2 |
| 911.070.11 | Straight bit | 2 | 935.317.11 | Rabbeting bit w/bearing | 2 | 822.335.11 | Slot cutter | 2 |
| 911.080.11 | Straight bit | 2 | 935.350.11 | Rabbeting bit w/bearing | 2 | 822.340.11 | Slot cutter | 2 |
| 911.090.11 | Straight bit | 2 | 935.502.11 | Rabbeting set w/bearing | 2 | 822.350.11 | Slot cutter | 2 |
| 911.100.11 | Straight bit | 2 | 936.130.11 | Chamfer bit w/bearing | 2 | 822.360.11 | Slot cutter | 2 |
| 911.120.11 | Straight bit | 2 | 936.190.11 | Chamfer bit w/bearing | 2 | | | |
| 911.140.11 | Straight bit | 2 | 936.280.11 | Chamfer bit w/bearing | 2 | 900.060.00 KIT WITH 60 SPARE PARTS | | |
| 911.150.11 | Straight bit | 2 | 936.420.11 | Chamfer bit w/bearing | 2 | 541.003.00 | Stop collar for top bearing bit | 3 |
| 911.160.11 | Straight bit | 2 | 937.190.11 | Round nose bit w/bearing | 2 | 541.004.00 | Stop collar for top bearing bit | 3 |
| 911.160.11B | Straight bit w/bearing | 2 | 937.222.11 | Round nose bit w/bearing | 2 | 791.002.00 | Bearing | 3 |
| 911.180.11 | Straight bit | 2 | 937.254.11 | Round nose bit w/bearing | 2 | 791.003.00 | Bearing | 3 |
| 911.200.11 | Straight bit | 2 | 937.286.11 | Round nose bit w/bearing | 2 | 791.004.00 | Bearing | 3 |
| 911.220.11 | Straight bit | 2 | 937.350.11 | Round nose bit w/bearing | 2 | 791.006.00 | Bearing | 3 |
| 911.220.11B | Straight bit w/bearing | 2 | 938.160.11 | Ovolo bit w/bearing | 2 | 791.007.00 | Bearing | 3 |
| 911.240.11 | Straight bit | 2 | 938.190.11 | Ovolo bit w/bearing | 2 | 791.012.00 | Bearing | 3 |
| 911.250.11 | Straight bit | 2 | 938.222.11 | Ovolo bit w/bearing | 2 | 791.018.00 | Bearing | 3 |
| 912.060.11 | Straight bit | 2 | 938.254.11 | Ovolo bit w/bearing | 2 | 791.023.00 | Bearing | 3 |
| 912.080.11 | Straight bit | 2 | 938.285.11 | Ovolo bit w/bearing | 2 | 791.024.00 | Bearing | 3 |
| 912.100.11 | Straight bit | 2 | 938.317.11 | Ovolo bit w/bearing | 2 | 791.025.00 | Bearing | 3 |
| 912.120.11 | Straight bit | 2 | 938.380.11 | Ovolo bit w/bearing | 2 | 799.060.00 | Bushing | 3 |
| 912.140.11 | Straight bit | 2 | 938.445.11 | Ovolo bit w/bearing | 2 | 990.004.00 | Bearing screw | 3 |
| 912.150.11 | Straight bit | 2 | 940.270.11 | Roman ogee bit w/bearing | 2 | 990.005.00 | Bearing screw | 3 |
| 912.160.11 | Straight bit | 2 | 940.350.11 | Roman ogee bit w/bearing | 2 | 990.058.00 | Bearing screw | 3 |
| 912.160.11B | Straight bit w/bearing | 2 | 941.285.11 | Roman ogee bit w/bearing | 2 | 990.059.00 | Bearing screw | 3 |
| 914.032.11 | Round nose bit | 2 | 941.380.11 | Roman ogee bit w/bearing | 2 | 991.056.00 | Hex key for bearing screw | 3 |
| 914.060.11 | Round nose bit | 2 | 944.287.11 | Roman ogee bit w/bearing | 2 | 991.057.00 | Hex key for bearing screw | 3 |
| 914.095.11 | Round nose bit | 2 | 944.350.11 | Roman ogee bit w/bearing | 2 | 991.062.00 | Hex key for bearing screw | 3 |
| 914.127.11 | Round nose bit | 2 | 945.287.11 | Roman ogee bit w/bearing | 2 | | | |

900.021.00 Shank Ø12mm

| ORDER NO. | DESCRIPTION | Q.TY | ORDER NO. | DESCRIPTION | Q.TY | ORDER NO. | DESCRIPTION | Q.TY |
|------------|----------------------------|------|------------|------------------------------|------|------------|-------------------------------|------|
| 900.506.11 | Three wing slot cutter set | 1 | 954.509.11 | Bull nose bit | 1 | 956.701.11 | Table edge and hand rail bit | 1 |
| 918.658.11 | Dovetail bit | 1 | 955.501.11 | Reverse glue joint bit | 1 | 956.801.11 | Multiprofile bit with bearing | 1 |
| 938.990.11 | Ovolo bit with bearing | 1 | 955.601.11 | Finger pull bit | 1 | 956.802.11 | Multiprofile bit with bearing | 1 |
| 938.991.11 | Ovolo bit with bearing | 1 | 955.901.11 | Molding bit with bearing | 1 | 956.851.11 | CMT molding system | 1 |
| 938.992.11 | Ovolo bit with bearing | 1 | 955.902.11 | Molding bit with bearing | 1 | 956.852.11 | CMT molding system | 1 |
| 938.993.11 | Ovolo bit with bearing | 1 | 956.501.11 | Molding bit with bearing | 1 | 990.501.11 | Raised panel bit | 1 |
| 954.507.11 | Bull nose bit | 1 | 956.601.11 | Table edge and hand rail bit | 1 | 991.501.11 | Rail & Stile set | 1 |


Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Display cabinets for router bits / cutter heads / Forstner bits

7/900.084.00

A beautiful, well-organized display of router bits in your shop is the best way to encourage customers to buy. CMT has produced this beautiful cabinet to best show off our wide selection of high quality bright orange bits. Made with a sturdy hardwood frame and three glass panels, it is the ideal counter-top display. Holds 42 of our most popular router bits and spare parts - 2 pcs. each for 84 pcs. total or 3 pcs. each for 126 pcs. total. The wooden slat back wall allows for easy bit organization and comes standard with front door lock. The cabinet is available with router bits with 6mm and 8mm shanks.

Dimensions are in cm.

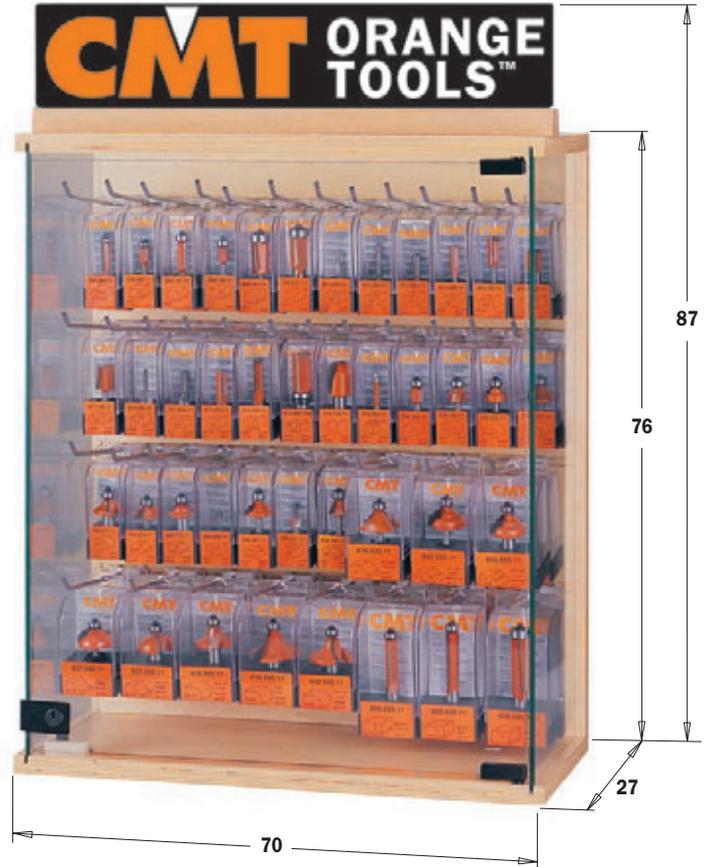

Suitable for boring and Forstner Bits
(at your choice)



Suitable for cutter heads
(at your choice)

700.084.00 Shank Ø6mm

| ORDER NO. | DESCRIPTION | Q.TY |
|------------|---------------------------|------|
| 701.190.11 | Mortising bit | 2 |
| 706.096.11 | Flush trim bit w/bearing | 2 |
| 706.127.11 | Flush trim bit w/bearing | 2 |
| 706.190.11 | Flush trim bit w/bearing | 2 |
| 711.030.11 | Straight bit | 2 |
| 711.040.11 | Straight bit | 2 |
| 711.050.11 | Straight bit | 2 |
| 711.060.11 | Straight bit | 2 |
| 711.080.11 | Straight bit | 2 |
| 711.100.11 | Straight bit | 2 |
| 711.120.11 | Straight bit | 2 |
| 711.160.11 | Straight bit | 2 |
| 711.200.11 | Straight bit | 2 |
| 712.060.11 | Straight bit | 2 |
| 712.120.11 | Straight bit | 2 |
| 714.060.11 | Round nose bit | 2 |
| 714.095.11 | Round nose bit | 2 |
| 715.060.11 | V-Grooving bit (90°) | 2 |
| 715.127.11 | V-Grooving bit (90°) | 2 |
| 716.060.11 | Panel pilot bit | 2 |
| 718.127.11 | Dovetail bit | 2 |
| 727.060.11 | Ovolo bit | 2 |
| 735.317.11 | Rabbeting bit w/bearing | 2 |
| 736.190.11 | Chamfer bit w/bearing | 2 |
| 736.280.11 | Chamfer bit w/bearing | 2 |
| 737.222.11 | Round nose bit w/bearing | 2 |
| 737.286.11 | Round nose bit w/bearing | 2 |
| 737.350.11 | Round nose bit w/bearing | 2 |
| 738.254.11 | Ovolo bit w/bearing | 2 |
| 738.317.11 | Ovolo bit w/bearing | 2 |
| 738.380.11 | Ovolo bit w/bearing | 2 |
| 740.270.11 | Roman ogee bit w/bearing | 2 |
| 741.285.11 | Roman ogee bit w/bearing | 2 |
| 744.287.11 | Roman ogee bit w/bearing | 2 |
| 746.325.11 | Roman ogee bit w/bearing | 2 |
| 748.190.11 | Roman ogee bit | 2 |
| 754.003.11 | Bull nose bit | 2 |
| 759.040.11 | Roman ogee bit w/bearing | 2 |
| 791.002.00 | Bearing | 2 |
| 791.003.00 | Bearing | 2 |
| 990.058.00 | Bearing screw | 2 |
| 991.057.00 | Hex key for bearing screw | 2 |

900.084.00 Shank Ø8mm

| ORDER NO. | DESCRIPTION | Q.TY |
|------------|---------------------------|------|
| 901.190.11 | Mortising bit | 2 |
| 906.096.11 | Flush trim bit w/bearing | 2 |
| 906.127.11 | Flush trim bit w/bearing | 2 |
| 906.190.11 | Flush trim bit w/bearing | 2 |
| 911.030.11 | Straight bit | 2 |
| 911.040.11 | Straight bit | 2 |
| 911.050.11 | Straight bit | 2 |
| 911.060.11 | Straight bit | 2 |
| 911.080.11 | Straight bit | 2 |
| 911.100.11 | Straight bit | 2 |
| 911.120.11 | Straight bit | 2 |
| 911.160.11 | Straight bit | 2 |
| 911.200.11 | Straight bit | 2 |
| 912.060.11 | Straight bit | 2 |
| 912.120.11 | Straight bit | 2 |
| 914.060.11 | Round nose bit | 2 |
| 914.095.11 | Round nose bit | 2 |
| 915.060.11 | V-Grooving bit (90°) | 2 |
| 915.127.11 | V-Grooving bit (90°) | 2 |
| 916.080.11 | Panel pilot bit | 2 |
| 918.127.11 | Dovetail bit | 2 |
| 927.060.11 | Ovolo bit | 2 |
| 935.317.11 | Rabbeting bit w/bearing | 2 |
| 936.190.11 | Chamfer bit w/bearing | 2 |
| 936.280.11 | Chamfer bit w/bearing | 2 |
| 937.222.11 | Round nose bit w/bearing | 2 |
| 937.286.11 | Round nose bit w/bearing | 2 |
| 937.350.11 | Round nose bit w/bearing | 2 |
| 938.254.11 | Ovolo bit w/bearing | 2 |
| 938.317.11 | Ovolo bit w/bearing | 2 |
| 938.380.11 | Ovolo bit w/bearing | 2 |
| 940.270.11 | Roman ogee bit w/bearing | 2 |
| 941.285.11 | Roman ogee bit w/bearing | 2 |
| 944.287.11 | Roman ogee bit w/bearing | 2 |
| 946.325.11 | Roman ogee bit w/bearing | 2 |
| 948.190.11 | Roman ogee bit | 2 |
| 954.003.11 | Bull nose bit | 2 |
| 959.040.11 | Roman ogee bit w/bearing | 2 |
| 791.002.00 | Bearing | 2 |
| 791.003.00 | Bearing | 2 |
| 990.058.00 | Bearing screw | 2 |
| 991.057.00 | Hex key for bearing screw | 2 |

| DESCRIPTION | ORDER NO. |
|--|-------------------|
| Display cabinet with: 76 HW Router bits (S=Ø6mm), 8 Spare parts (2 pcs. each) | 700.084.00 |
| Display cabinet with: 76 HW Router bits (S=Ø8mm), 8 Spare parts (2 pcs. each) | 900.084.00 |
| Display cabinet for router bits / cutter heads / Forstner bits (empty) includes 42 short hooks | 03.00.0002 |
| Short hooks 150mm. | 03.53.0011 |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Display cabinets for saw blades

new


CMT ORANGE TOOLS™

A sturdy steel-made saw blade display cabinet with backlight to place anywhere you want in your store. You can hang up different types of saw blades. Please contact your CMT salesman to get advice on the most suitable saw blade composition to display.

Saw blades are not included.

Dimensions are in cm.

03.00.0038

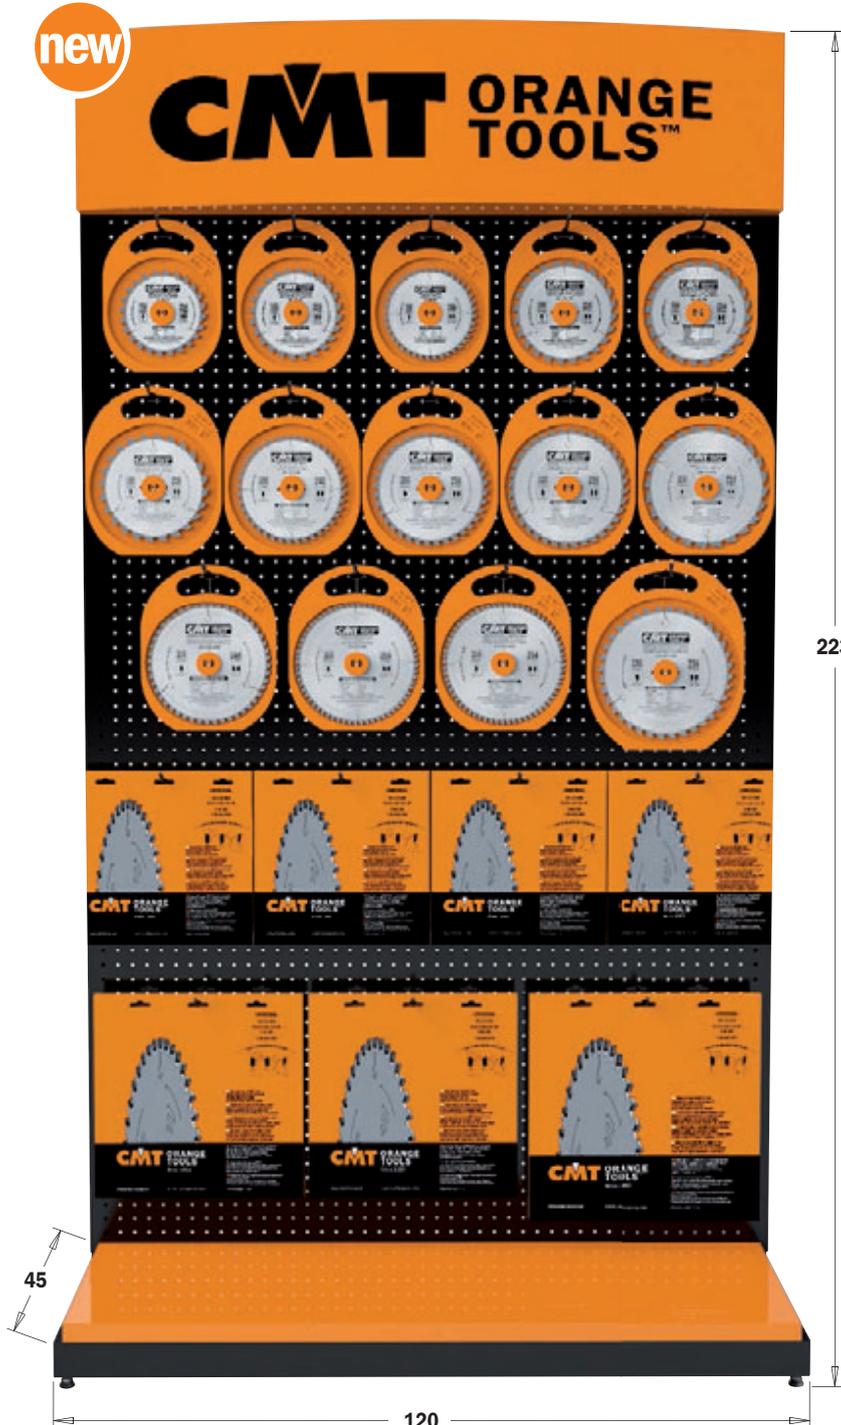

03.00.0030



We also offer a practical wire counter display for saw blades up to Ø350mm.

| DESCRIPTION | ORDER NO. |
|--|-------------------|
| Wire counter display only (empty) | 03.00.0030 |
| Display cabinet with backlight (220V) for saw blades (empty) hooks not included, order separately | 03.00.0038 |
| Short hooks 150mm. | 03.53.0011 |


Arbors
797

| S mm | S ₁ mm | ORDER NO. |
|---------|----------------------|-------------------|
| 8 | M10x1,5 | 797.580.00 |
| 10 | M12x1 | 797.100.00 |
| 12 | M12x1 | 797.120.00 |
| 12,7 | M12x1 | 797.127.00 |

TECHNICAL DETAILS:

- Super strength steel.
- Precisely machined for accuracy.


Collet chucks
796

| S ₁ mm | D ₃ _For collet diameter mm | L mm | ORDER NO. |
|----------------------|---|---------|-------------------|
| M10x1,5 | 6 - 6,35 - 8 - 9,5 | 38 | 796.100.00 |
| M12x1 | 6 - 6,35 - 8 - 9,5 | 38 | 796.000.00 |
| M12x1 | 10 - 12 - 12,7 | 47 | 796.121.00 |

TECHNICAL DETAILS:

- Super strength steel.
- Precisely machined for accuracy.

Collet not included.

Router chuck extensions with collet
796.001/002

| S mm | D ₃ _For collet diameter mm | L mm | ORDER NO. |
|---------|---|---------|-------------------|
| 12 | 8 | 81 | 796.002.01 |
| 12 | 12 | 88 | 796.002.00 |
| 12,7 | 6,35 | 81 | 796.001.01 |
| 12,7 | 12,7 | 88 | 796.001.00 |

TECHNICAL DETAILS:

- Super strength steel.
- Precisely machined for accuracy.

Collet included.

Collet chucks
796

| S mm | D ₃ _For collet diameter mm | LB mm | ORDER NO. |
|---------|---|----------|-------------------|
| M14x2 | 6 - 6,35 - 8 - 9,5 | 32 | 796.140.00 |
| M14x2 | 10 - 12 - 12,7 | 38 | 796.141.00 |
| M16x2 | 6 - 6,35 - 8 - 9,5 | 32 | 796.160.00 |
| M16x2 | 10 - 12 - 12,7 | 38 | 796.161.00 |

TECHNICAL DETAILS:

- Super strength steel.
- Precisely machined for accuracy.

Collet not included.

Collets
796.500/600

| D ₃ mm | ORDER NO. | D ₃ mm | ORDER NO. |
|----------------------|-------------------|----------------------|-------------------|
| 6 | 796.560.00 | 10 | 796.600.00 |
| 6,35 | 796.564.00 | 12 | 796.620.00 |
| 8 | 796.580.00 | 12,7 | 796.627.00 |
| 9,5 | 796.595.00 | | |




Arbors

798

| S mm | S ₁ mm | ORDER NO. |
|---------|----------------------|------------|
| M10x1,5 | M10x1,5 | 798.101.00 |
| M10x1,5 | M12x1 | 798.102.00 |
| M12x1 | M10x1,5 | 798.121.00 |
| M12x1 | M12x1 | 798.122.00 |

TECHNICAL DETAILS:

- Super strength steel.
- Precisely machined for accuracy.

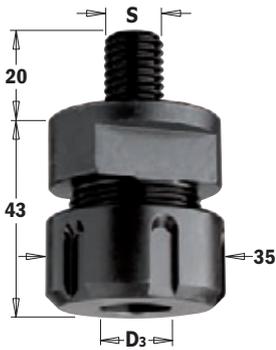

“ER20” chucks

796

| S mm | D ₃ _For collet diameter mmmm | LB mm | ORDER NO. |
|----------|---|----------|------------|
| M12x1,75 | 3 ~ 12,7 | 43 | 796.122.00 |
| M14x2 | 3 ~ 12,7 | 43 | 796.142.00 |
| M16x2 | 3 ~ 12,7 | 43 | 796.162.00 |

Spare parts: 992.483.03 M25x1,5mm clamping nut
991.483.00 “ER20” key

TECHNICAL DETAILS:

Super strength steel. Precisely machined for accuracy.

Collet not included.



“ER20” precision collets for 796.122/142/162 items

184

| D ₃ mm | ORDER NO. | D ₃ mm | ORDER NO. |
|----------------------|------------|----------------------|------------|
| 3 | 184.030.20 | 8 | 184.080.20 |
| 5 | 184.050.20 | 10 | 184.100.20 |
| 6 | 184.060.20 | 12 | 184.120.20 |
| 6,35 | 184.064.20 | 12,7 | 184.127.20 |



“ER20” precision collets for 796.122/142/162 items

796.8

| D ₃ mm | ORDER NO. | D ₃ mm | ORDER NO. |
|----------------------|------------|----------------------|------------|
| 6 | 796.860.00 | 10 | 796.900.00 |
| 6,35 | 796.864.00 | 12 | 796.920.00 |
| 8 | 796.880.00 | 12,7 | 796.927.00 |
| 9,5 | 796.895.00 | | |

Spare parts: 992.100.01 M22 clamping nut



Collets for CMT1E, CMT2E, DeWalt, Felisatti, Fein, Metabo hand-held routers

796.780


| D ₃ mm | L mm | ORDER NO. |
|----------------------|---------|------------|
| 8 | 14 | 796.780.00 |



Bushings

799

| B mm | D mm | L mm | ORDER NO. | B mm | D mm | L mm | ORDER NO. |
|---------|---------|---------|------------|---------|---------|---------|------------|
| 6 | 8 | 25 | 799.060.00 | 8 | 10 | 25 | 799.280.00 |
| 6 | 9,5 | 25 | 799.160.00 | 8 | 12 | 25 | 799.380.00 |
| 6 | 12 | 25 | 799.260.00 | 8 | 12,7 | 25 | 799.480.00 |
| 6,35 | 8 | 25 | 799.064.00 | 9,5 | 12,7 | 25 | 799.001.00 |
| 6,35 | 9,5 | 25 | 799.164.00 | 10 | 12 | 25 | 799.100.00 |
| 6,35 | 12,7 | 25 | 799.264.00 | 13 | 16 | 45 | 799.130.00 |
| 8 | 9,5 | 25 | 799.180.00 | | | | |

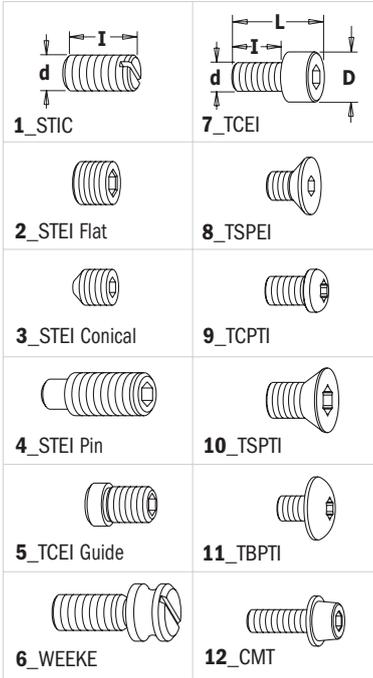
Screws

| d x l x L mm | D mm | TIPO | ORDER NO. | d x l x L mm | D mm | TIPO | ORDER NO. |
|-----------------|---------|---------|------------|-------------------|---------|----------|------------|
| M5x8 | | 1_STIC | 990.008.00 | M6x25x31 | 10 | 7_TCEI | 990.098.00 |
| M5x10 | | 1_STIC | 990.003.00 | M8x25x33 | 13 | 7_TCEI | 990.099.00 |
| M4x20 | | 2_STEI | 990.091.00 | 1/8"x1/2"x5/8" | 5,5 | 7_TCEI | 990.059.00 |
| M5x4 | | 2_STEI | 990.015.00 | M5x10x15 | 8,5 | 7_TCEI | 990.010.00 |
| M5x5 | | 2_STEI | 990.001.00 | M4x3,7x6 | 8 | 8_TSPEI | 990.004.00 |
| M5x5 p/coppa | | 2_STEI | 990.006.00 | M5x9x12 | 10 | 8_TSPEI | 990.055.00 |
| M3x3 | | 3_STEI | 990.005.00 | M5x5,2x8 | 9 | 8_TSPIC | 990.067.00 |
| M5x5 | | 3_STEI | 990.002.00 | M6x8x10 | 9 | 8_TSPEI | 990.083.00 |
| M6x6 | | 3_STEI | 990.007.00 | 1/4"x11/16"x7/8" | 12 | 9_TSPEI | 990.097.00 |
| M4x3 | | 3_STEI | 990.013.00 | 1/8"x3/8"x1/2" | 7 | 12_TCEI | 990.058.00 |
| M4x4 | | 3_STEI | 990.014.00 | Torx screw | | | |
| M6x5 | | 3_STEI | 990.009.00 | M3x4x5,7 | 4,6 | 9_TCPTI | 990.082.00 |
| M6x8 | | 4_STEI | 990.087.00 | M4x4,5x8 | 7,5 | 9_TCPTI | 990.094.00 |
| M6x16 | | 4_STEI | 990.066.00 | M5x12x18 | 6,8 | 8_TSPEI | 990.063.00 |
| M6x20 | | 4_STEI | 990.084.00 | M2,5x3x4,5 | 3,5 | 10_TSPTI | 990.070.00 |
| M6x25 | | 4_STEI | 990.085.00 | M2,5x4,5x6 | 3,7 | 10_TSPTI | 990.071.00 |
| M8x16 | | 4_STEI | 990.064.00 | M4x2x3 | 7,6 | 10_TSPTI | 990.079.00 |
| M8x12 | | 4_STEI | 990.065.00 | M5x4,75x6,5 | 9 | 10_TSPTI | 990.080.00 |
| M8x20 | | 4_STEI | 990.086.00 | M5x5x8 | 9 | 10_TSPTI | 990.093.00 |
| M5x5x9 | 6 | 5_STEI | 990.068.00 | M3,5x3,5x6 | 6 | 11_TBPTI | 990.072.00 |
| M5x11,5x17 | | 6_WEEKE | 990.088.00 | M3,5x5x7,2 | 8,8 | 11_TBPTI | 990.073.00 |
| M2,5x6x8,5 | 4,5 | 7_TCEI | 990.062.00 | M3,5x6x8,5 | 6 | 11_TBPTI | 990.077.00 |
| M3x6x9 | 5,5 | 7_TCEI | 990.051.00 | M4x3,5x5,7 | 8,8 | 11_TBPTI | 990.074.00 |
| M3x10x13 | 5,5 | 7_TCEI | 990.053.00 | M4x4x6,2 | 9 | 11_TBPTI | 990.056.00 |
| M3x16x19 | 5,5 | 7_TCEI | 990.054.00 | M4x4x6,2 | 5,8 | 11_TBPTI | 990.076.00 |
| M4x6x10 | 7 | 7_TCEI | 990.052.00 | M4x6x8 | 6 | 11_TBPTI | 990.078.00 |
| M4x12x16 | 7 | 7_TCEI | 990.061.00 | M4x6x8,2 | 8,8 | 11_TBPTI | 990.075.00 |

Keys for screws


| DESCRIPTION | ORDER NO. | DESCRIPTION | ORDER NO. |
|-------------------------|------------|-----------------|------------|
| Hex keys | | 6mm | 991.066.00 |
| 1,5mm (for M3 screws) | 991.056.00 | Torx key | |
| 2mm | 991.060.00 | T8 | 991.063.00 |
| 3/32" (for 1/8W screws) | 991.057.00 | T9 | 991.069.00 |
| 2,5mm (for M4 screws) | 991.062.00 | T15 | 991.061.00 |
| 3mm | 991.067.00 | T20 | 991.072.00 |
| 4mm | 991.064.00 | T25 | 991.073.00 |
| 5mm | 991.065.00 | T30 | 991.071.00 |

Shields for bearings



| DESCRIPTION | ORDER NO. | DESCRIPTION | ORDER NO. |
|-------------|------------|-------------|------------|
| Ø9,5mm | 990.422.00 | Ø12,7mm | 990.423.00 |

Nuts for arbors


| DESCRIPTION | ORDER NO. | DESCRIPTION | ORDER NO. |
|-------------|------------|-------------|------------|
| M4 | 990.092.00 | M8 | 990.020.00 |
| M6 | 990.095.00 | M12x1,25mm | 990.022.00 |

Stop collars


| B mm | ORDER NO. | B mm | ORDER NO. |
|---------|------------|---------|------------|
| 6 | 541.003.00 | 9,5 | 541.006.00 |
| 6,35 | 541.001.00 | 12 | 541.005.00 |
| 8 | 541.004.00 | 12,7 | 541.002.00 |

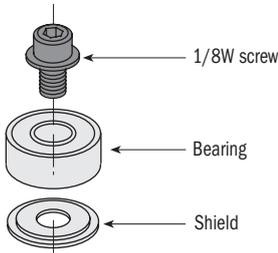

Be Sure: to keep the black washer right side up to correspond with the bearing rotation during reassembly.



***10° Delrin® conical bearing**




****Delrin® triangular bearing**



*****Delrin® cylindrical bearings**

Bearings


| D | | B | | Thickness | ORDER NO. |
|-------------------------------------|--------|------|--------|-----------|----------------------|
| mm | inches | mm | inches | mm | |
| 6,35 | 1/4 | 3,17 | 1/8 | 2,8 | 791.035.00 |
| 9,5 | 3/8 | 4,76 | 3/16 | 3,2 | 791.002.00 |
| 12,7 | 1/2 | 4,76 | 3/16 | 5 | 791.003.00 |
| 12,7 | 1/2 | 6,35 | 1/4 | 4,8 | 791.010.00 |
| 13 | | 5 | | 4 | 791.022.00 |
| 13 | | 6 | | 5 | 791.023.00 |
| 15 | | 6 | | 5 | 791.024.00 |
| 15,8 | 5/8 | 4,76 | 3/16 | 5 | 791.018.00 |
| 15,8 | 5/8 | 6,35 | 1/4 | 5 | 791.009.00 |
| 16 | | 5 | | 5 | 791.006.00 |
| 16 | | 8 | | 5 | 791.025.00 |
| 19 | 3/4 | 4,76 | 3/16 | 7,5 | 791.019.00 |
| 19 | | 6 | | 6 | 791.007.00 |
| 19 | 3/4 | 6,35 | 1/4 | 7 | 791.004.00 |
| 19 | | 8 | | 6 | 791.034.00 |
| 19 | 3/4 | 12,7 | 1/2 | 4 | 791.011.00 |
| 22 | | 8 | | 6 | 791.012.00 |
| 22 | | 8 | | 7 | 791.005.00 |
| 22,2 | 7/8 | 4,76 | 3/16 | 7,5 | 791.017.00 |
| 22,2 | 7/8 | 9,52 | 3/8 | 7 | 791.021.00 |
| 22,2 | 7/8 | 12,7 | 1/2 | 7 | 791.013.00 |
| 24 | | 8 | | 8 | 791.036.00 |
| 28 | | 12 | | 8 | 791.026.00 |
| 28,5 | 1-1/8 | 4,76 | 3/16 | 8,4 | 791.014.00 |
| 28,5 | 1-1/8 | 8 | | 8,5 | 791.030.00 |
| 28,5 | 1-1/8 | 12,7 | 1/2 | 8 | 791.027.00 |
| 31,7 | 1-1/4 | 8 | | 5 | 791.033.00 |
| 31,7 | 1-1/4 | 12,7 | 1/2 | 8 | 791.015.00 |
| 34,9 | 1-3/8 | 4,76 | 3/16 | 11,5 | 791.016.00 |
| 34,9 | 1-3/8 | 8 | | 11,6 | 791.031.00 |
| 34,9 | 1-3/8 | 12,7 | 1/2 | 11 | 791.029.00 |
| 37 | | 12 | | 12 | 791.028.00 |
| 38,1 | 1-1/2 | 12,7 | 1/2 | 13,3 | 791.020.00 |
| 62 | | 30 | | 16 | 791.051.00 |
| 62 | | 35 | | 14 | 791.052.00 |
| 80 | | 40 | | 18 | 791.054.00 |
| 80 | | 50 | | 16 | 791.053.00 |
| 10° Delrin® conical bearings | | | | | |
| 19 | 3/4 | 4,76 | 3/16 | 6,8 | 791.041.00* |
| Delrin® triangular bearings | | | | | |
| 12,7 | 1/2 | 4,76 | 3/16 | 5,8 | 791.042.00** |
| 19 | 3/4 | 4,76 | 3/16 | 7 | 791.043.00** |
| Delrin® cylindrical bearings | | | | | |
| 12,7 | 1/2 | 4,76 | 3/16 | 5 | 791.044.00*** |
| 15,87 | 5/8 | 4,76 | 3/16 | 7,2 | 791.045.00*** |
| 19,05 | 3/4 | 4,76 | 3/16 | 6,8 | 791.046.00*** |
| 37,4 | | 12,7 | 1/2 | 15,7 | 791.047.00*** |

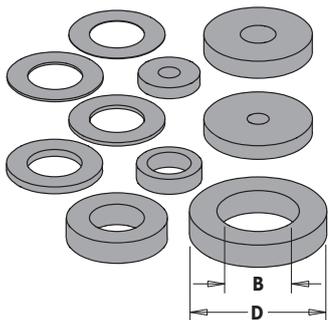

Shields for assembly

| B | D | Thickness | ORDER NO. | B | D | Thickness | ORDER NO. |
|------|------|-----------|-------------------|----|------|-----------|-------------------|
| mm | mm | mm | | mm | mm | mm | |
| 3,25 | 9 | 1,6 | 541.550.00 | 8 | 14,7 | 5,8 | 541.519.00 |
| 3,25 | 15,8 | 2 | 541.552.00 | 12 | 20 | 2 | 541.512.00 |
| 5,2 | 15,8 | 2,5 | 541.551.00 | 12 | 20 | 3 | 541.511.00 |
| 6,4 | 9,52 | 2,2 | 541.514.00 | 12 | 21 | 0,1 | 541.513.00 |
| 8 | 14 | 0,1 | 541.515.00 | 12 | 21 | 0,3 | 541.520.00 |
| 8 | 14 | 0,3 | 541.516.00 | 12 | 21 | 1,59 | 541.521.00 |
| 8 | 14 | 0,5 | 541.517.00 | 12 | 21 | 3,18 | 541.522.00 |
| 8 | 14 | 1 | 541.518.00 | 12 | 21 | 6,16 | 541.523.00 |
| 8 | 14,7 | 3 | 541.500.00 | 12 | 21 | 1 | 541.524.00 |
| 8 | 14,7 | 4 | 541.501.00 | 12 | 21 | 0,5 | 541.525.00 |


Spare part and accessories



Threaded rings for 694.001 cutter heads

695.996

| DESCRIPTION | ORDER NO. |
|----------------|------------|
| M4 (Ø10x1,6mm) | 695.996.01 |
| M4 (Ø12x1,7mm) | 695.996.02 |




Spacers set

695.998

A SPACER SETS


| DESCRIPTION | FOR CUTTER HEAD | ORDER NO. | DESCRIPTION | FOR CUTTER HEAD | ORDER NO. |
|----------------|-----------------|------------|---------------|-------------------|-------------|
| Ø50x9x30mm | 694.015 | 695.998.01 | Ø60x33x40mm | 694.005 | 695.998.14 |
| Ø50x9x31,75mm | 694.015 | 695.998.02 | Ø70x22x50mm | 694.005 | 695.998.15 |
| Ø55x9x35mm | 694.015 | 695.998.03 | ...Pin Hole | | |
| Ø60x9x40mm | 694.015 | 695.998.04 | Ø65x8x30mm | 694.001 & 694.015 | 695.998.21 |
| Ø70x9x50mm | 694.015 | 695.998.05 | Ø65x8x31,75mm | 694.001 & 694.015 | 695.998.22 |
| Ø50x33x30mm | 694.005 | 695.998.11 | Ø65x8x35mm | 694.001 & 694.015 | 695.998.23 |
| Ø50x33x31,75mm | 694.005 | 695.998.12 | Ø70x8x40mm | 694.001 & 694.015 | 695.998.24N |
| Ø55x33x35mm | 694.005 | 695.998.13 | Ø70x8x50mm | 694.001 & 694.015 | 695.998.25N |

B SPACER SETS WITH PIN HOLE




Wedges for cutter heads

651-692-693-695




| DESCRIPTION | ORDER NO. | DESCRIPTION | ORDER NO. |
|-------------------------------|------------|---|------------|
| Wedge for cutter heads | | | |
| 38x15x16mm | 692.999.01 | 31x11x9,5mm | 695.999.31 |
| 38x22,5x13mm | 692.999.02 | 38x11x9,5mm | 695.999.38 |
| 38x26x13mm | 693.999.01 | 39x11x9,5mm | 695.999.39 |
| 38x28x12,5mm | 693.999.02 | 41x11x9,5mm | 695.999.41 |
| 38x15x16mm (per/para 695.018) | 695.018.01 | 42x11x9,5mm | 695.999.42 |
| 7x11x9,5mm | 695.999.07 | 46x11x9,5mm | 695.999.46 |
| 16x11x9,5mm | 695.999.16 | 49x11x9,5mm | 695.999.49 |
| 17x11x9,5mm | 695.999.17 | 53x11x9,5mm | 695.999.53 |
| 22x11x9,5mm | 695.999.22 | Wedges for router bits with knives | |
| 23x11x9,5mm | 695.999.23 | D=8x20mm | 651.999.01 |
| 23x11x9,5mm | 695.999.24 | D=10-12-12,7x30mm | 651.999.02 |
| | | D=12-12,7x50mm | 651.999.03 |





Slot cutter arbors

7/8/924

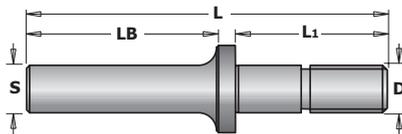

| D | L ₁ | LB | L | ORDER NO. |
|---|----------------|------|------|------------|------------|------------|------------|------------|
| mm | mm | mm | mm | S=Ø6mm | S=Ø6,35mm | S=Ø8mm | S=Ø12mm | S=Ø12,7mm |
| Arbors for 822 slot cutters | | | | | | | | |
| M8 | 26 | 32 | 61 | 724.060.00 | 824.064.00 | 924.080.00 | | |
| M8 | 40 | 38 | 86 | | | 924.083.00 | | |
| M8 | 26 | 38 | 67,5 | | | | 924.120.00 | 824.127.00 |
| M8 | 40 | 38 | 81 | | | | 924.128.00 | 824.128.00 |
| M12 | 54 | 38 | 97 | | | | 924.129.00 | 824.129.00 |
| M8 | 47 | 38 | 97 | | | | 924.130.00 | 824.130.00 |
| M8 | 29,75 | 32 | 71 | | | | 924.131.00 | 824.131.00 |
| M8 | 35,5 | 28,5 | 71 | | | | 924.132.00 | 824.132.00 |
| M8 | 23 | 41 | 71 | | | | 924.133.00 | 824.133.00 |
| M12 | 39,5 | 38 | 85 | | | | 924.134.00 | 824.134.00 |
| M12 | 54,5 | 38 | 100 | | | | | 824.135.00 |
| Arbors for 823 slot cutters with counterbore | | | | | | | | |
| | | 40 | 55 | 724.061.00 | 824.061.00 | 924.081.00 | | 824.121.00 |
| 8 | 11 | 41 | 61 | 724.062.00 | 824.062.00 | 924.082.00 | | 824.122.00 |

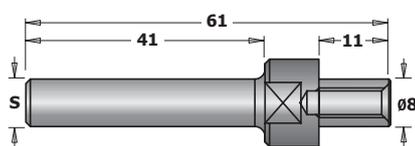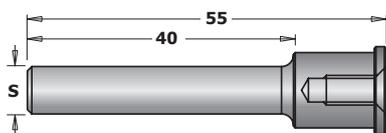

Alphabetical index

| DESCRIPTION | PAGE | DESCRIPTION | PAGE |
|--|------------------|---|----------|
| 1 piece rail & stile cutter heads | 67 | Cap nuts for router machines | 196 |
| 1000W router | 270 | Cavetto edge mold bits | 148 |
| 12 piece router bit set with wooden case | 179 | Chamfer bits | 143-144 |
| 13 piece dovetail and straight bit sets | 178 | Chamfer bits with insert knives | 143 |
| 13 piece multiprofile cutter head sets without limiters | 71 | Chamfer set | 144 |
| 13 piece router bit set with wooden case | 179 | Chucks and "ER20" collets for spindle moulder machine | 87 |
| 15° dovetail cutter with insert knives for roof-frames | 138 | Chucks for "ER32" precision collets | 192 |
| 2 flute dowel drills | 236-237 | Clamping nuts | 194, 197 |
| 2 flute dowel drills for through holes | 242-243 | Clamping nuts for chucks with "ER32" collets | 192 |
| 2 piece adjustable grooving sets | 55 | Clamping nuts for chucks with "ER40" precision collets | 193 |
| 2 piece adjustable rounding & chamfering sets | 57 | Classical bead bits | 152 |
| 2-piece entry door router bit set | 181 | Classical ogee bits | 154 |
| 2400W router | 271 | CMT Inlay kit | 281 |
| 3 in 1 flush trim bits for MDF/laminate | 116 | CMT Molding system | 159 |
| 3 piece adjustable grooving sets | 54 | CMT Professional router table system | 273 |
| 3D Router Carver™ system | 282-284 | CMT-Enlock joining system | 279 |
| 4 flute dowel drills | 238-239 | CMT's complete kitchen set | 184 |
| 4 flute dowel drills | 240 | Collet chucks clamp with MK2 tapered shank | 197 |
| 4 flute dowel drills for through holes | 243 | Collets for 123 chucks | 197 |
| 4-wing cut out slot cutters for solid surface | 174 | Combination trimmer bits | 112-113 |
| 45° chamfer cutter heads | 58 | Complete set for decorating and engraving | 215 |
| 45° countersink with parallel shank | 268 | Complete set for MDF doors | 216 |
| 45° lock miter cutter heads | 65 | Complete set for MDF doors insert knives for optional profiles | 217 |
| 5 piece boring bit set for hinges | 254 | Conical scoring blades industrial line | 21 |
| 5 piece boring bit set for hinges | 255 | Contractor saw blade masterpack | 30 |
| 5 piece spiral bit sets | 183 | Corner beading bit with 45° chamfer | 157 |
| 5 piece straight bit set and profile bit set | 182 | Corner beading bits | 158 |
| 5%co HS spiral bits for aluminium positive single flute | 105 | Countersinks for 2 flutes dowel drills | 244 |
| 5%co HS spiral bits for aluminium positive single flute for high cutting depth | 105 | Countersinks for 4 flutes dowel drills | 244 |
| 6 piece mortising bit sets | 220 | Countersinks with threaded shank | 266 |
| 6 piece mortising bit sets | 221 | Cove bit set | 147 |
| 6 piece profile bit set with wooden case | 180 | Cove bits | 147 |
| 60° Lettering bit | 139 | Crosscut saw blades for portable machines | 31 |
| 7 piece multiprofile cutter head sets with limiters | 72 | Cutter arbor with HSK tapered shank | 196 |
| 8 piece dovetail and straight bit sets | 178 | Cutter arbor with ISO30 tapered shank | 196 |
| 9° Dovetail cutters | 138 | Cutter heads for rabbeting and 40mm profile knives | 53 |
| 90° countersink with parallel shank | 268 | Cutter heads with limiters | 70 |
| | | Cutter heads without limiters | 70 |
| A | | D | |
| Adaptors | 226-228, 252-253 | Dado & Planer bits | 109 |
| Adaptors for twist drills | 234 | Decorative ogee bits | 151-153 |
| Additional templates, bits and accessories | 277 | Diamond router cutters with 20° shear angle | 208 |
| Adjustable chamfer cutter heads with positive stop | 59 | Diamond router cutters with 40° shear angle for roughing | 209 |
| Adjustable chamfering CNC cutter | 214 | Diamond router cutters with 45° shear angle | 207 |
| Adjustable countersink | 266 | Diamond whetstones | 292-293 |
| Adjustable double roundover router bits | 156 | Digital angle finder | 296 |
| Adjustable roundover and bevel router bits | 156 | Digital angle gauge | 296 |
| Adjustable scoring blades industrial line | 21 | Digital height gauge | 297 |
| Adjustable shaker router bit sets | 188 | DIN6388 precision collets | 194 |
| Adjustable tongue & groove bit set for mission style cabinet doors | 188 | Display cabinets for router bits / cutter heads / Forstner bits | 300 |
| | | Display cabinets for router bits /cutter heads / drill bits | 298 |
| B | | Display cabinets for saw blades | 301 |
| Back-to-Back connectors for straight edge clamps (optional) | 274 | Divided light door sets | 187 |
| Balance blade & sanding disks | 35 | Double-bearing spiral flush trim bits | 116 |
| Ball milling | 146 | Double-edge trimmer | 288 |
| Bead & Bull nose bits | 158 | Dovetail bits | 136-137 |
| Beading bits | 149 | Dowel drills | 232 |
| Biscuit joiner saw blades | 34 | Dowel drills for Mafell® and hand-held routers | 263 |
| Blank knives and limiters (to be sharpened) | 87 | Dowel drills for through holes | 233 |
| Blum, Salice, Häfele & Hettich Hinges Boring Head | 288 | Dowel drills for through holes with countersink | 241 |
| Boring bit and plug cutter sets | 259 | Dowel drills with countersink | 241 |
| Boring bits with parallel shank | 254-257 | Dowel drills with threaded shank | 247 |
| Bowl & tray system | 295 | Dowel drills with threaded shank with countersink | 248-249 |
| Bowl and tray bits | 139 | Dowel drills with threaded shank without countersink | 248-249 |
| Brad point bit sets | 264 | DP conical scoring blades XTreme line | 19 |
| Brad point bits | 262, 264-265 | DP Flush trim bits for laminates | 115 |
| Bushings for twist drills | 235 | DP Hinge boring bits | 245 |
| | | DP laminated and chipboard saw blades XTreme line | 19 |
| C | | DP router cutters with shear angle | 206-208 |
| C-spanner | 197 | DP saw blades for ultra-hard materials | 29 |
| C-Spanner for "DIN6388" & "ER40" | 194 | DP spiral router cutters with shear angle | 209 |
| C-Spanner for "ER32" precision collets | 192 | Drawer lock bits | 131 |
| C-Spanner for "ER40" precision collets | 193 | Drill bits for ANUBA® hinges | 265 |
| Cap nuts for CNC machines | 196 | | |

Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Alphabetical index

| DESCRIPTION | PAGE | DESCRIPTION | PAGE |
|--|---------|---|---------|
| Drill bits with 45° countersink set | 267 | Lock miter bits | 129 |
| Drill bits with 90° countersink set | 267 | Lock miter set | 128 |
| Dry cutter saw blades | 24 | Lockset bits | 219 |
| E | | Low noise & Chrome coated saw blades with ATB grind | 14 |
| Edge Banding bits set | 135 | Low noise & Chrome coated saw blades with TCG grind | 17 |
| Edge-fluting bits | 159 | Lubricant for wood, neutralizes resin | 289 |
| Ellipse & circle cutting jig | 278 | M | |
| Entry & interior door router bit set | 180 | Melamine and laminated long-lasting saw blades XTreme line | 17 |
| ER20 precision collets for 796.122/142/162 items | 87 | Mini-spot circular saw blade for Lamello | 35 |
| F | | Molding bits | 161-162 |
| FILE-FREE Flush trim bits for laminate | 117 | Mortise chisel & bit sets | 257 |
| Fine cut-off saw blades for melamine two-sided XTreme line | 16 | Mortising bits | 108 |
| Fine cut-off saw blades for portable machines | 32 | Multi-rip anti-kickback saw blades industrial line | 9 |
| Fine cut-off saw blades for two-sided melamine industrial line | 15-16 | Multi-rip saw blades with rakers industrial line | 9 |
| Finger joint bit | 134 | Multiprofile bits | 160 |
| Finger pull bit | 163 | Multiradius roundover cutter heads | 60-61 |
| Finishing saw blades industrial line | 13 | N | |
| Flexible templates for curved and arched routing | 294 | Non-ferrous metal and laminated panel saw blades industrial line | 23 |
| Flooring router bits | 124 | Non-ferrous metal and plastic material saw blades industrial line | 22 |
| Flush trim bit set | 114 | O | |
| Flush trim bits | 114 | Ogee bits | 155 |
| Flush trim bits with insert knives | 117 | Ogee with fillet bits | 155 |
| Flush trim router bits with double bearing | 118 | Organizer | 284 |
| Flute & bead set | 128 | Ovolo bits | 148 |
| Formula 2050: blade and bit cleaner | 289 | Ovolo sash bits | 133 |
| Forstner bit sets | 260 | P | |
| Forstner bits | 260 | Pair of bore reducers | 87 |
| G | | Panel strips | 184 |
| Glass panel retainers | 187 | Panel pilot bits with guide | 119 |
| Glass panel sets | 187 | Panel sizing saw blades industrial line | 20 |
| Grand rabbeting bits with insert knives | 122 | Pattern bits | 110 |
| Grinding wheels for XTreme sharpening | 231 | Pattern router bits with insert knives | 111 |
| Grooving saw blades industrial line | 34 | Pattern router bits with insert knives for laminates | 111 |
| H | | Pattern/Flush trim bits with insert knives | 118 |
| Hinge boring bits | 245-246 | Planner and jointer knives | 89-90 |
| Hinge boring bits with chipbreaker for boring machines | 246 | Planing and jointing spiral cutter heads | 56 |
| Hinge recesser bits | 109 | Plug cutters | 258 |
| HS corrugated back moulder knives | 88 | Plunge ogee bits | 153 |
| HSK chuck for "DIN6388" precision collet | 194 | Plywood groove set | 100 |
| HSK chuck for "ER32" precision collets | 190 | Pocket-Pro™ joinery system | 285 |
| HSK chucks for "ER40" precision collets | 193 | Precision chucks and collets | 190 |
| HWM reversible knives | 92-93 | Precision collets | 195 |
| HWM reversible knives for portable planers | 91 | Precision dado | 33 |
| I | | Professional adjustable chamfer cutter heads with gear box | 59 |
| Industrial chrome-coated scoring blades | 22 | Professional finger joint bit | 134 |
| Industrial XTreme saw blades for stainless steel | 24 | Professional finger joint cutter heads | 63 |
| Industrio routing system | 272 | Professional raised panel cutter heads | 66 |
| Interchangeable boring bits with threaded shank | 253 | Professional straight edge clamps | 274 |
| ISO30 chucks for "ER32" precision collets | 191 | Profile and counter profile cutter head sets | 68-69 |
| ISO30 chucks for "ER40" precision collets | 193 | Profile knives and limiters | 73-86 |
| ISO30 retaining studs | 196 | PVC & plexiglass saw blades Industrial line | 25 |
| ITK Plus crosscut saw blades | 27 | R | |
| ITK Plus fine cut-off saw blades | 27 | Rabbeting bits | 121 |
| ITK Plus rip and crosscut saw blades | 26 | Rabbeting bits with insert knives | 122 |
| ITK Plus ripping saw blades | 26 | Rabbeting cutter heads | 52 |
| J | | Rabbeting sets | 121 |
| Jig saw blades for wood | 45~50 | Rail & stile sets | 168 |
| Junior ogee rail and stile set | 167 | Rail and stile set | 167 |
| K | | Raised panel bit with back cutter | 165 |
| Keyhole bits | 123 | Raised panel bits | 166 |
| Kitchen sets | 185 | Reciprocating slot mortising bits | 222-224 |
| Kitchen worktop jig | 280 | Reduction rings for saw blades | 35 |
| L | | Reverse glue joint bits | 130 |
| Laminated and chipboard saw blades industrial line | 18 | Reverse glue joint cutter heads | 64 |
| Laminated and chipboard saw blades XTreme line | 18 | Rip & crosscut saw blades industrial line | 12 |
| Laser point bit (60°) Z=3 | 141 | Rip saw blades for portable machines | 29 |
| List of items included in display cabinets | 299 | Rip saw blades industrial line | 11 |
| | | Roman ogee bits | 154 |
| | | Rosette cutters | 261 |

Alphabetical index

| DESCRIPTION | PAGE | DESCRIPTION | PAGE |
|--|---------|---|---------|
| Round nose bits | 145 | Special dowel drills | 250 |
| Round nose set | 146 | Spiral bits with insert knives and chip-breaker for locksets | 205 |
| Round nose solid carbide upcut spiral bits | 206 | Spoilboard surfacing router cutters with insert knives | 213 |
| Roundover and cove cutter heads | 62 | Step-by-step window sash construction | 132 |
| Roundover bits | 150 | Stepped rebate router bit | 142 |
| Roundover bits with insert knives | 149 | Stile & panel router bits | 170 |
| Roundover set | 150 | Stop collars with Delrin® sleeve | 267 |
| Router bit set with insert knives | 183 | Straight bits | 100 |
| Router bit sets | 177 | Straight bits with centre tip | 103 |
| Router bits for Domino® Joining machines by Festool® | 263 | Straight bits, long series | 102 |
| Router cutters | 210~212 | Straight bits, short series | 101 |
| | | Straight cutters with threaded shank | 104 |
| S | | Straight router bits with insert knives | 106-107 |
| Saw blade arbor with parallel shank | 197 | Straight router bits with insert knives for laminates | 106 |
| Saw blade index | 38~44 | Straight router cutters with insert knives | 213 |
| Saw blades for building contractors | 11 | Super fine finishing blade XTreme line | 15 |
| Saw blades for building contractors for portable machines | 28 | Super finishing saw blades for cutting frames XTreme line | 13 |
| Saw blades for portable machines | 36-37 | Super-duty flush trim bits | 115 |
| Saw blades stabilizers | 35 | Superjaws portable clamping system | 275 |
| Screw slot bits | 124 | | |
| Set of 2 magnetic knife setting jigs | 88 | T | |
| Sharp technology with a new twist | 198 | T-Slot bits | 123 |
| Slot and mortise boring bits | 218 | Table edge and hand rail bits | 164 |
| Slot cutter sets | 182 | Tenon cutting router bits | 181 |
| Slot cutters | 126-127 | The ABC's of panel door construction | 169 |
| Slot mortising bits | 224 | The cabinetmaking sets | 186 |
| Slot mortising bits with chip-breaker | 220 | The CMT grand rabbet set | 120 |
| Small arch door sets | 186 | The raised panel sets with backcutter | 185 |
| Solid carbide dowel drills | 230 | Thick-kerf multi-rip saw blades with rakers industrial line | 10 |
| Solid carbide dowel drills for through holes | 231 | Three wing slot cutter set | 125 |
| Solid carbide downcut spiral bits | 203 | Tongue and groove set | 125 |
| Solid carbide downcut spiral bits with chip-breaker | 200 | Twisted slot mortising bits with chip-breaker | 221 |
| Solid carbide router cutters | 210-211 | | |
| Solid carbide spiral bits | 98-99 | U | |
| Solid carbide spiral bits downcut | 201 | Ultra thin-kerf saw blades for cordless saws | 28, 30 |
| Solid carbide twist drills "V" point 120° sharpening | 235 | Universal assembly supports for chucks | 190 |
| Solid carbide twist drills negatively ground spurs sharpening | 235 | Universal boring jig | 291 |
| Solid carbide up & downcut spiral bits | 199 | Universal boring template | 290 |
| Solid carbide upcut spiral bits | 198-202 | Universal dovetail jig | 276 |
| Solid carbide upcut spiral bits for locksets | 204 | Universal hinges boring system | 286-287 |
| Solid carbide upcut spiral bits with chip-breaker | 200 | Upcut spiral bits with chipbreaker for glue-laminated wooden beams | 205 |
| Solid carbide upcut with spiral bits chip-breaker for 60° V-point locksets | 204 | | |
| Solid surface - inlay bits | 176 | V | |
| Solid surface bevel bit | 173 | V-groove - folding - signmaking CNC router cutters with insert knives | 214 |
| Solid surface bevel bowl bits | 173 | V-grooving & signmaking router bits with indexable knives (90°) | 142 |
| Solid surface cut and plug repair set | 174 | V-Grooving bits (90°) | 140 |
| Solid surface decorative edge profile bits | 171 | V-Grooving bits for Alucobond® | 141 |
| Solid surface drainboard bits | 176 | V-Tongue and groove set | 135 |
| Solid surface no-drip bit | 175 | Vertical raised panel bits | 164 |
| Solid surface rounding over bits | 171 | | |
| Solid surface rounding over bowl bit (ogee profile) | 172 | W | |
| Solid surface rounding over bowl bits | 172 | Wainscot/paneling bits | 157 |
| Solid surface saw blades industrial line | 25 | Weatherseal bits | 112 |
| Solid surface wavy joint bit | 175 | Window sash set | 132 |
| Spare part and accessories | 302-306 | Window sill and finger bits | 163 |
| Spare parts for chucks | 196 | | |

Numerical index

| ORDER NO. | PAGE | ORDER NO. | PAGE | ORDER NO. | PAGE | ORDER NO. | PAGE | ORDER NO. | PAGE |
|----------------|--------------|-----------|------|-----------|------|-----------|----------|-----------|------|
| 01.02 | 231 | 105 | 222 | 160 | 221 | 174 | 103, 210 | 183.210 | 191 |
| 03.00.0002 | 300 | 106 | 224 | 161 | 221 | 175 | 212 | 183.211 | 193 |
| 03.00.0030 | 301 | 107 | 224 | 163 | 218 | 176 | 212 | 183.220 | 191 |
| 03.00.0032 | 298 | 112 | 211 | 164 | 218 | 177 | 103, 212 | 183.221 | 193 |
| 03.00.0038 | 301 | 113 | 211 | 166 | 219 | 180 | 104 | 183.250 | 191 |
| 03.51 | 284 | 123 | 197 | 167 | 219 | 181 | 104 | 183.251 | 191 |
| 03.53.0010 | 298 | 124 | 197 | 169 | 219 | 182 | 104 | 183.260 | 196 |
| 03.53.0011 ... | 298, 300-301 | 140 | 207 | 170 | 104 | 183 | 190 | 183.300 | 190 |
| 03.53.0017 | 298 | 141 | 206 | 171 | 104 | 183.000 | 192 | 183.310 | 193 |
| 102 | 220 | 142 | 208 | 172 | 220 | 183.100 | 192 | 183.320 | 194 |
| 103 | 223 | 143 | 209 | 173 | 104 | 183.200 | 191 | 183.360 | 196 |
| 104 | 222 | 145 | 209 | 173 | 223 | 183.201 | 193 | 183.400 | 192 |

Numerical index

| ORDER NO. | PAGE | ORDER NO. | PAGE | ORDER NO. | PAGE | ORDER NO. | PAGE | ORDER NO. | PAGE |
|-----------------|---------------|----------------|---------|-----------------|----------|------------------|----------|-----------------|--------------|
| 183.410..... | 197 | 299..... | 35 | 375..... | 243 | 692..... | 70-71 | 744..... | 154 |
| 184..... | 87 | 299.10..... | 35 | 376..... | 241 | 693..... | 70, 72 | 746..... | 155 |
| 184.000..... | 195 | 299.11..... | 35 | 377..... | 241 | 694.001..... | 54 | 747..... | 155 |
| 184.002..... | 195 | 301..... | 226 | 378..... | 241 | 694.002..... | 58 | 748..... | 153 |
| 184.xxx.11..... | 195 | 302..... | 226 | 380..... | 263 | 694.003..... | 60 | 748B..... | 153 |
| 184.xxx.16..... | 195 | 303..... | 226 | 381..... | 243 | 694.004..... | 61 | 749..... | 139 |
| 184.xxx.20..... | 195 | 304..... | 226 | 392..... | 257 | 694.005..... | 57 | 750.001..... | 123 |
| 184.xxx.25..... | 195 | 305..... | 226 | 500.001.08..... | 259 | 694.007..... | 62 | 751..... | 139 |
| 185..... | 194 | 306..... | 238 | 500.002.08..... | 259 | 694.008..... | 63 | 751B..... | 139 |
| 188..... | 105 | 307..... | 238 | 500.003.08..... | 259 | 694.009..... | 64 | 753..... | 119 |
| 189..... | 105 | 308..... | 239 | 501..... | 254 | 694.011..... | 65 | 754..... | 154, 158 |
| 190..... | 98, 199 | 309..... | 239 | 503..... | 253 | 694.013..... | 66 | 755.002..... | 131 |
| 190B..... | 116 | 310..... | 236 | 506..... | 252 | 694.014..... | 67 | 758..... | 141 |
| 191..... | 99, 183, 202 | 310.21/22..... | 230 | 509..... | 252 | 694.015..... | 68-69 | 759..... | 155 |
| 191.143..... | 204 | 310.41/42..... | 232 | 511..... | 252 | 694.017..... | 59 | 760..... | 155 |
| 191.163..... | 204 | 311..... | 237 | 512..... | 255-256 | 694.018..... | 59 | 761..... | 158 |
| 191.635..... | 112 | 311.21/22..... | 230 | 513..... | 256 | 694.019..... | 56 | 762..... | 159 |
| 191B..... | 116 | 311.41/42..... | 232 | 514..... | 256 | 694.020..... | 53 | 763..... | 148 |
| 192..... | 99, 183, 203 | 312..... | 263 | 515..... | 265, 268 | 694.021..... | 55 | 764..... | 148 |
| 192B..... | 116 | 313..... | 242 | 515A..... | 267 | 694.022..... | 55 | 765..... | 151~153 |
| 193..... | 201 | 313.41/42..... | 233 | 516..... | 265 | 694.100..... | 52 | 765B..... | 152 |
| 194..... | 201 | 314..... | 242 | 517..... | 264 | 699..... | 87 | 790..... | 91~93 |
| 195..... | 200, 204-205 | 314.21/22..... | 231 | 521..... | 268 | 700.001..... | 177 | 792..... | 89 |
| 195.143..... | 204 | 314.41/42..... | 233 | 521.001..... | 266 | 700.003..... | 177 | 793..... | 88 |
| 195.163..... | 204 | 315..... | 244 | 521A..... | 267 | 700.005.03..... | 182 | 795..... | 90 |
| 196..... | 200 | 316..... | 244 | 522..... | 138 | 700.084.00..... | 300 | 796..... | 87 |
| 197..... | 199 | 317..... | 245 | 523..... | 138 | 700.300.00L..... | 298-299 | 800.001..... | 177 |
| 198..... | 98, 198 | 317C..... | 246 | 529..... | 258 | 701..... | 108 | 800.005.01..... | 182 |
| 199..... | 145, 206 | 325..... | 249 | 530..... | 258 | 701B..... | 108 | 800.500..... | 178 |
| 210..... | 16 | 327..... | 249 | 531..... | 261 | 702..... | 109 | 800.501..... | 178 |
| 222..... | 25 | 329..... | 249 | 532..... | 252 | 703..... | 143 | 800.503..... | 179 |
| 223..... | 25 | 330..... | 249 | 533..... | 252 | 704..... | 143 | 800.504..... | 180 |
| 226..... | 24, 24 | 332..... | 248 | 534..... | 253 | 705..... | 143 | 800.505..... | 179 |
| 230..... | 33 | 334..... | 248 | 535..... | 262 | 706..... | 114-115 | 800.506..... | 125 |
| 236..... | 29 | 336..... | 248 | 537..... | 260 | 707..... | 113, 116 | 800.509..... | 184 |
| 237..... | 19 | 337..... | 248 | 537.000.04..... | 260 | 709..... | 113 | 800.510..... | 184 |
| 238..... | 19 | 338..... | 249 | 537.000.05..... | 260 | 710..... | 113 | 800.511..... | 184 |
| 240..... | 34 | 339..... | 249 | 537.000.07..... | 260 | 711..... | 100-101 | 800.512..... | 185 |
| 240.004.04..... | 35 | 340..... | 249 | 537.000.12..... | 260 | 711.031..... | 112 | 800.513..... | 185 |
| 241..... | 34 | 341..... | 248 | 537.000.16..... | 260 | 711B..... | 110 | 800.514..... | 185 |
| 250..... | 28 | 342..... | 248 | 540..... | 262 | 712..... | 102 | 800.515..... | 186 |
| 251..... | 28 | 343..... | 248 | 541..... | 262, 267 | 712.030..... | 112 | 800.516..... | 185 |
| 271..... | 26, 28 | 344..... | 247 | 542..... | 262 | 712.040..... | 112 | 800.517..... | 185 |
| 272..... | 27-28 | 346..... | 247 | 543..... | 257 | 712B..... | 110 | 800.518..... | 185 |
| 273..... | 27 | 350..... | 266 | 600.005.01..... | 183 | 713.001..... | 112 | 800.519..... | 178 |
| 274..... | 15 | 351..... | 266 | 615.004.01..... | 216-217 | 714..... | 145 | 800.520..... | 186 |
| 277..... | 10 | 352..... | 247 | 626.000.01..... | 215 | 714B..... | 145 | 800.521..... | 185 |
| 278..... | 9 | 353..... | 247 | 651..... | 106 | 715..... | 140 | 800.522..... | 185 |
| 279..... | 9 | 358..... | 226 | 652..... | 106 | 715B..... | 140 | 800.524..... | 186 |
| 280..... | 10 | 359..... | 226 | 652B..... | 111 | 716..... | 119 | 800.525..... | 187 |
| 281..... | 17-18, 20, 32 | 360.001..... | 226 | 653..... | 107 | 716.061..... | 119 | 800.527..... | 180 |
| 282..... | 20 | 360.101..... | 228 | 653..... | 213 | 718..... | 136-137 | 800.606..... | 134 |
| 283..... | 16 | 360.201..... | 228 | 654..... | 107 | 718B..... | 136-137 | 800.616..... | 134 |
| 284..... | 22 | 360.301..... | 228 | 655..... | 107 | 721..... | 112 | 800.622..... | 156 |
| 285..... | 11-14, 31-32 | 360.401..... | 228 | 656..... | 111 | 722A..... | 126 | 800.623..... | 156 |
| 285.5..... | 13 | 361..... | 236 | 657.1..... | 117 | 724..... | 127 | 800.624..... | 188 |
| 286..... | 11 | 362..... | 237 | 657B..... | 118 | 724.xxx.00..... | 126 | 800.625..... | 188 |
| 287..... | 15 | 363..... | 235 | 659..... | 143 | 724.xxx.10..... | 126 | 800.626..... | 125 |
| 288..... | 21-22 | 364..... | 234 | 660..... | 122 | 727..... | 148 | 800.627..... | 181 |
| 289..... | 21-22 | 365..... | 234 | 660.9..... | 122 | 735..... | 121 | 800.628..... | 181 |
| 290..... | 11, 29 | 366..... | 242 | 661..... | 149 | 735.001..... | 121 | 801..... | 108 |
| 291..... | 12, 31 | 367..... | 243 | 662..... | 205 | 736..... | 144 | 801B..... | 108 |
| 292..... | 32 | 368..... | 243 | 663..... | 213 | 737..... | 147 | 806..... | 114-115 |
| 293..... | 11 | 369..... | 245-246 | 663.001.11..... | 214 | 738..... | 150 | 806B..... | 118 |
| 294..... | 12-13 | 369C..... | 246 | 663.101.11..... | 214 | 739..... | 149 | 807..... | 113, 116-117 |
| 295..... | 17 | 370..... | 246 | 664..... | 138 | 740..... | 154 | 809..... | 113 |
| 296..... | 23 | 372..... | 240 | 665..... | 142 | 741..... | 154 | 811..... | 100-101 |
| 297..... | 23 | 373..... | 240 | 690-691..... | 73-86 | 742..... | 113 | 811B..... | 110 |
| 298..... | 30 | 374..... | 243 | 690-691..... | 87 | 743..... | 113 | 812..... | 102 |

Numerical index



| ORDER NO. | PAGE | ORDER NO. | PAGE | ORDER NO. | PAGE | ORDER NO. | PAGE | ORDER NO. | PAGE |
|-----------------|---------|------------------|---------|-----------------|----------|---------------|--------------|---------------------|---------|
| 812.032..... | 112 | 855.805..... | 163 | 900.512..... | 185 | 951..... | 139 | 991.123..... | 197 |
| 812B..... | 110 | 855.805B..... | 163 | 900.513..... | 185 | 953..... | 119 | 991.183..... | 192 |
| 813..... | 124 | 855.806..... | 181 | 900.514..... | 185 | 954..... | 157-158 | 991.184..... | 193 |
| 813.001..... | 112 | 855.901..... | 161 | 900.516..... | 185 | 955..... | 128, 163 | 991.283..... | 194 |
| 814..... | 145-146 | 855.902..... | 161 | 900.517..... | 185 | 955.002..... | 131 | 991.5..... | 168 |
| 814B..... | 145 | 856.501..... | 161 | 900.518..... | 185 | 955.008..... | 131 | 991.512..... | 167 |
| 815..... | 140 | 856.601..... | 164 | 900.521..... | 185 | 955.3..... | 133 | 991.517..... | 167 |
| 815B..... | 140 | 856.701..... | 164 | 900.522..... | 185 | 955.302..... | 133 | 991.521..... | 168 |
| 816..... | 119 | 856.702..... | 164 | 900.527..... | 180 | 955.501..... | 130 | 992.123..... | 197 |
| 818..... | 136-137 | 856.8..... | 160 | 900.606..... | 134 | 955.502..... | 131 | 992.183..... | 192 |
| 818B..... | 136-137 | 856.851..... | 159 | 900.616..... | 134 | 955.503..... | 129 | 992.283..... | 194 |
| 821..... | 112 | 856.852..... | 159 | 900.622..... | 156 | 955.504..... | 129 | 992.383..... | 193 |
| 822..... | 126 | 857..... | 144 | 900.623..... | 156 | 955.506..... | 135 | 992.5..... | 196 |
| 822.023B..... | 124 | 858..... | 141 | 900.624..... | 188 | 955.510..... | 135 | 993.0..... | 196 |
| 822.024B..... | 124 | 859..... | 155 | 900.625..... | 188 | 955.701..... | 128 | 993.5..... | 196 |
| 822.033B..... | 174 | 860..... | 155 | 900.626..... | 125 | 955.801..... | 132 | 998..... | 289 |
| 822A..... | 126 | 861..... | 158 | 900.627..... | 181 | 955.803..... | 187 | 999.100.00..... | 273 |
| 822B..... | 126 | 861.6..... | 157 | 900.628..... | 181 | 955.804..... | 163 | 999.500.01..... | 272 |
| 823..... | 127 | 862..... | 159 | 901..... | 108 | 955.804B..... | 163 | BTS-002..... | 295 |
| 823.001..... | 182 | 863..... | 148 | 901B..... | 108 | 955.805..... | 163 | CMT-Enlock1..... | 279 |
| 823B..... | 127 | 864..... | 148 | 902..... | 109 | 955.805B..... | 163 | CMT200..... | 275 |
| 824..... | 127 | 865..... | 151-153 | 903..... | 143 | 955.806..... | 181 | CMT300..... | 276-277 |
| 824.xxx.00..... | 126 | 865B..... | 152 | 904..... | 143 | 955.901..... | 161 | CMT3000..... | 278 |
| 824.xxx.10..... | 126 | 866.501..... | 172 | 905..... | 143 | 955.902..... | 161 | CMT333..... | 286-287 |
| 827..... | 148 | 866.601..... | 171 | 906..... | 114-115 | 956.501..... | 161 | CMT334..... | 288 |
| 835..... | 121 | 866.602..... | 171 | 906B..... | 118 | 956.601..... | 164 | CMT650..... | 280 |
| 835.001..... | 121 | 867.5B..... | 162 | 907..... | 117 | 956.701..... | 164 | CMT656..... | 291 |
| 835.503..... | 120 | 867.6B..... | 162 | 909..... | 113, 116 | 956.8..... | 160 | CMT792..... | 88 |
| 836..... | 144 | 868..... | 146 | 910..... | 113 | 956.851..... | 159 | CMT7E..... | 271 |
| 837..... | 147 | 870..... | 169 | 911..... | 100-101 | 956.852..... | 159 | CMT8E..... | 270 |
| 838..... | 150 | 880.5..... | 166 | 911B..... | 110 | 957..... | 144 | CMT900..... | 290 |
| 839..... | 149 | 880.501..... | 170 | 912..... | 102 | 958..... | 141 | DAF-001..... | 296 |
| 840..... | 154 | 880.502..... | 170 | 912B..... | 110 | 959..... | 155 | DAG-001..... | 296 |
| 841..... | 154 | 880.503..... | 170 | 913..... | 124 | 959.702..... | 164 | DET-001..... | 288 |
| 842..... | 113 | 880.504..... | 170 | 914..... | 145 | 960..... | 155 | DHG-001..... | 297 |
| 843..... | 113 | 880.511..... | 176 | 914B..... | 145 | 961..... | 158 | DSS..... | 292-293 |
| 844..... | 154 | 880.512..... | 176 | 915..... | 140-141 | 961.6..... | 157 | GLAS/RTBRN..... | 187 |
| 845..... | 154 | 880.513..... | 176 | 915B..... | 140 | 963..... | 148 | JT101AO..... | 48 |
| 846..... | 155 | 880.521..... | 170 | 916..... | 119 | 964..... | 148 | JT101B..... | 48 |
| 847..... | 155 | 880.531..... | 175 | 918..... | 136-137 | 965..... | 142, 151-153 | JT101BIF..... | 49 |
| 848..... | 153 | 880.541..... | 171 | 921..... | 112 | 965B..... | 152 | JT101BR..... | 48 |
| 848B..... | 153 | 880.542..... | 171 | 922.033B..... | 174 | 966.501..... | 172 | JT101D..... | 49 |
| 849..... | 139 | 880.551..... | 172 | 922A..... | 126 | 966.601..... | 171 | JT111C..... | 47 |
| 849B..... | 139 | 881.501..... | 175 | 922B..... | 126 | 966.602..... | 171 | JT118A..... | 50 |
| 850.001..... | 123 | 881.511..... | 176 | 923.001..... | 182 | 967.5B..... | 162 | JT118B..... | 50 |
| 850.6..... | 123 | 881.512..... | 176 | 923A..... | 127 | 967.6B..... | 162 | JT119B0..... | 47 |
| 851..... | 139 | 881.521..... | 173 | 924..... | 127 | 968..... | 146 | JT123X..... | 50 |
| 851B..... | 139 | 881.531..... | 175 | 924.xxx.00..... | 126 | 970..... | 169 | JT127D..... | 50 |
| 852..... | 109 | 881.541..... | 174 | 924.xxx.10..... | 126 | 980.501..... | 170 | JT144D..... | 47 |
| 852B..... | 109 | 890..... | 165 | 927..... | 148 | 980.502..... | 170 | JT218A..... | 50 |
| 853..... | 119 | 890.6..... | 164 | 935..... | 121 | 980.503..... | 170 | JT234X..... | 49 |
| 854..... | 158 | 891.5..... | 168 | 935.001..... | 121 | 980.504..... | 170 | JT244D..... | 47 |
| 855..... | 128 | 891.512..... | 167 | 935.503..... | 120 | 980.511..... | 176 | JT301CD..... | 49 |
| 855..... | 163 | 891.517..... | 167 | 936..... | 144 | 980.512..... | 176 | JT344D..... | 48 |
| 855.002..... | 131 | 891.521..... | 168 | 937..... | 147 | 980.513..... | 176 | K (Contractor)..... | 30 |
| 855.3..... | 133 | 899..... | 281 | 938..... | 150 | 980.521..... | 170 | PGC..... | 274 |
| 855.501..... | 130 | 900.001..... | 177 | 939..... | 149 | 980.531..... | 175 | PNL-001..... | 184 |
| 855.502..... | 131 | 900.003..... | 177 | 940..... | 154 | 980.541..... | 171 | PPJ-002..... | 285 |
| 855.503..... | 129 | 900.005.01..... | 182 | 941..... | 154 | 980.542..... | 171 | RCS..... | 282-284 |
| 855.504..... | 129 | 900.005.03..... | 182 | 944..... | 154 | 980.551..... | 173 | TMP..... | 294 |
| 855.506..... | 135 | 900.021.00..... | 298-299 | 945..... | 154 | 981.501..... | 175 | | |
| 855.508..... | 131 | 900.024..... | 186 | 946..... | 155 | 981.511..... | 176 | | |
| 855.510..... | 135 | 900.025..... | 187 | 947..... | 155 | 981.512..... | 176 | | |
| 855.701..... | 128 | 900.084.00..... | 300 | 948..... | 153 | 981.521..... | 173 | | |
| 855.801..... | 132 | 900.300.00L..... | 298-299 | 948B..... | 153 | 981.531..... | 175 | | |
| 855.802..... | 133 | 900.506..... | 125 | 949..... | 139 | 981.541..... | 174 | | |
| 855.803..... | 187 | 900.509..... | 184 | 949B..... | 139 | 990..... | 165 | | |
| 855.804..... | 163 | 900.510..... | 184 | 950.001..... | 123 | 990.5..... | 166 | | |
| 855.804B..... | 163 | 900.511..... | 184 | 950.6..... | 123 | 990.6..... | 164 | | |


Saw blades
Jig saw blades
Tools with bore & Knives
Router bits & sets
CNC router cutter & chucks
Industrial dowel drills
Bits for hand power tools
Power tools & accessories
Display cabinets & spare parts

Conversion Table

| Inch Decimals | Inch Fractions (x) | | | | | | Millimeters | | | | | |
|---------------|--------------------|-------|-------|-----|-----|-----|-------------|----------|----------|----------|----------|----------|
| | 1/64 | 1/32 | 1/16 | 1/8 | 1/4 | 1/2 | mm | 1" + (x) | 2" + (x) | 3" + (x) | 4" + (x) | 5" + (x) |
| 0.015625 | 1/64 | | | | | | 0.397 | 25.400 | 50.800 | 76.200 | 101.600 | 127.000 |
| 0.031250 | | 1/32 | | | | | 0.794 | 25.797 | 51.197 | 76.597 | 101.997 | 127.397 |
| 0.046875 | 3/64 | | | | | | 1.191 | 26.194 | 51.595 | 76.994 | 102.394 | 127.794 |
| 0.062500 | | | 1/16 | | | | 1.588 | 26.591 | 51.991 | 77.391 | 102.791 | 128.191 |
| 0.078125 | 5/64 | | | | | | 1.984 | 26.988 | 52.388 | 77.788 | 103.188 | 128.588 |
| 0.093750 | | 3/32 | | | | | 2.381 | 27.384 | 52.784 | 78.184 | 103.584 | 128.984 |
| 0.109375 | 7/64 | | | | | | 2.778 | 27.781 | 53.181 | 78.581 | 103.981 | 129.381 |
| 0.125000 | | | | 1/8 | | | 3.175 | 28.178 | 53.578 | 78.978 | 104.378 | 129.778 |
| 0.140625 | 9/64 | | | | | | 3.572 | 28.575 | 53.975 | 79.375 | 104.775 | 130.175 |
| 0.156250 | | 5/32 | | | | | 3.969 | 28.972 | 54.372 | 79.772 | 105.172 | 130.572 |
| 0.171875 | 11/64 | | | | | | 4.366 | 29.369 | 54.769 | 80.169 | 105.569 | 130.969 |
| 0.187500 | | | 3/16 | | | | 4.762 | 29.766 | 55.166 | 80.568 | 105.966 | 131.366 |
| 0.203125 | 13/64 | | | | | | 5.159 | 30.162 | 55.562 | 80.962 | 106.362 | 131.762 |
| 0.218750 | | 7/32 | | | | | 5.556 | 30.559 | 55.959 | 81.359 | 106.759 | 132.159 |
| 0.234375 | 15/64 | | | | | | 5.953 | 30.956 | 56.356 | 81.756 | 107.156 | 132.556 |
| 0.250000 | | | | | 1/4 | | 6.350 | 31.353 | 56.753 | 82.153 | 107.553 | 132.953 |
| 0.265625 | 17/64 | | | | | | 6.747 | 31.750 | 57.150 | 82.550 | 107.950 | 133.350 |
| 0.281250 | | 9/32 | | | | | 7.144 | 32.147 | 57.547 | 82.947 | 108.347 | 133.747 |
| 0.296875 | 19/64 | | | | | | 7.541 | 32.544 | 57.944 | 83.344 | 108.744 | 134.144 |
| 0.312500 | | | 5/16 | | | | 7.938 | 32.941 | 58.341 | 83.741 | 109.141 | 134.541 |
| 0.328125 | 21/64 | | | | | | 8.334 | 33.338 | 58.738 | 84.138 | 109.538 | 134.938 |
| 0.343750 | | 11/32 | | | | | 8.731 | 33.734 | 59.134 | 84.534 | 109.934 | 135.334 |
| 0.359375 | 23/64 | | | | | | 9.128 | 34.131 | 59.531 | 84.931 | 110.331 | 135.731 |
| 0.375000 | | | | 3/8 | | | 9.526 | 34.528 | 59.928 | 85.328 | 110.728 | 136.128 |
| 0.390625 | 25/64 | | | | | | 9.922 | 34.925 | 60.325 | 85.725 | 111.125 | 136.525 |
| 0.406250 | | 13/32 | | | | | 10.319 | 35.322 | 60.722 | 86.122 | 111.522 | 136.922 |
| 0.421875 | 27/64 | | | | | | 10.716 | 35.719 | 61.119 | 86.519 | 111.919 | 137.319 |
| 0.437500 | | | 7/16 | | | | 11.112 | 36.116 | 61.516 | 86.916 | 112.316 | 137.716 |
| 0.453125 | 29/64 | | | | | | 11.509 | 36.513 | 61.913 | 87.313 | 112.713 | 138.113 |
| 0.468750 | | 15/32 | | | | | 11.906 | 36.909 | 62.309 | 87.709 | 113.109 | 138.509 |
| 0.484375 | 31/64 | | | | | | 12.303 | 37.306 | 62.706 | 88.106 | 113.506 | 138.906 |
| 0.500000 | | | | | 1/2 | | 12.700 | 37.703 | 63.103 | 88.503 | 113.903 | 139.303 |
| 0.515625 | 33/64 | | | | | | 13.097 | 38.100 | 63.500 | 88.900 | 114.300 | 139.700 |
| 0.531250 | | 17/32 | | | | | 13.494 | 38.497 | 63.897 | 89.297 | 114.697 | 140.097 |
| 0.546875 | 35/64 | | | | | | 13.891 | 38.894 | 64.294 | 89.694 | 115.094 | 140.494 |
| 0.562500 | | | 9/16 | | | | 14.288 | 39.291 | 64.691 | 90.091 | 115.491 | 140.891 |
| 0.578125 | 37/64 | | | | | | 14.684 | 39.688 | 65.088 | 90.488 | 115.888 | 141.288 |
| 0.593750 | | 19/32 | | | | | 15.081 | 40.084 | 65.484 | 90.884 | 116.284 | 141.684 |
| 0.609375 | 39/64 | | | | | | 15.478 | 40.481 | 65.881 | 91.281 | 116.681 | 142.081 |
| 0.625000 | | | | 5/8 | | | 15.875 | 40.878 | 66.278 | 91.678 | 117.078 | 142.478 |
| 0.640625 | 41/64 | | | | | | 16.272 | 41.275 | 66.675 | 92.075 | 117.475 | 142.875 |
| 0.656250 | | 21/32 | | | | | 16.669 | 41.672 | 67.072 | 92.472 | 117.872 | 143.272 |
| 0.671875 | 43/64 | | | | | | 17.066 | 42.069 | 67.469 | 92.869 | 118.269 | 143.669 |
| 0.687500 | | | 11/16 | | | | 17.462 | 42.466 | 67.866 | 93.266 | 118.666 | 144.066 |
| 0.703125 | 45/64 | | | | | | 17.859 | 42.862 | 68.262 | 93.662 | 119.062 | 144.462 |
| 0.718750 | | 23/32 | | | | | 18.256 | 43.259 | 68.659 | 94.059 | 119.459 | 144.859 |
| 0.734375 | 47/64 | | | | | | 18.653 | 43.656 | 69.056 | 94.456 | 119.856 | 145.256 |
| 0.750000 | | | | | 3/4 | | 19.050 | 44.053 | 69.453 | 94.853 | 120.253 | 145.653 |
| 0.765625 | 49/64 | | | | | | 19.447 | 44.450 | 69.850 | 95.250 | 120.650 | 146.050 |
| 0.781250 | | 25/32 | | | | | 19.844 | 44.847 | 70.247 | 95.647 | 121.047 | 146.447 |
| 0.796875 | 51/64 | | | | | | 20.241 | 45.244 | 70.644 | 96.044 | 121.444 | 146.844 |
| 0.812500 | | | 13/16 | | | | 20.638 | 45.641 | 71.041 | 96.441 | 121.841 | 147.241 |
| 0.828125 | 53/64 | | | | | | 21.034 | 46.038 | 71.438 | 96.838 | 122.238 | 147.638 |
| 0.843750 | | 27/32 | | | | | 21.431 | 46.434 | 71.834 | 97.234 | 122.634 | 148.034 |
| 0.859375 | 55/64 | | | | | | 21.828 | 46.831 | 72.231 | 97.631 | 123.031 | 148.431 |
| 0.875000 | | | | 7/8 | | | 22.225 | 47.228 | 72.628 | 98.028 | 123.428 | 148.828 |
| 0.890625 | 57/64 | | | | | | 22.622 | 47.625 | 73.025 | 98.425 | 123.825 | 149.225 |
| 0.906250 | | 29/32 | | | | | 23.019 | 48.022 | 73.422 | 98.822 | 124.222 | 149.622 |
| 0.921875 | 59/64 | | | | | | 23.416 | 48.419 | 73.819 | 99.219 | 124.619 | 150.019 |
| 0.937500 | | | 15/16 | | | | 23.812 | 48.816 | 74.216 | 99.616 | 125.016 | 150.416 |
| 0.953125 | 61/64 | | | | | | 24.209 | 49.212 | 74.612 | 100.012 | 125.412 | 150.812 |
| 0.968750 | | 31/32 | | | | | 24.606 | 49.609 | 75.009 | 100.409 | 125.809 | 151.209 |
| 0.984375 | 63/64 | | | | | | 25.003 | 50.000 | 75.406 | 100.806 | 126.206 | 151.606 |
| | | | | | | | | 50.403 | 75.803 | 101.203 | 126.603 | 152.003 |


Saw blade safety

- ALWAYS** thoroughly check all blades for damage and flaws before using. Do not use blades with missing or damaged teeth.
- ALWAYS** wear safety glasses and ear protection when using power tools.
- ALWAYS** thoroughly read the owners manual and manufacturer's instructions before working with tools.
- ALWAYS** use a fence and splitter when using the table saw. Do not make freehand cuts.
- ALWAYS** use pusher blocks or a pusher stick, especially when working with small or narrow pieces.
- ALWAYS** unplug your saw before cleaning or adjusting the tool, or before making blade changes.
- ALWAYS** keep your tools sharpened, clean and stored in a safe place to avoid breakage and accidents and to extend the life of your bits and blades.
- ALWAYS** feed the work against the rotation of the blade on table saws.
- ALWAYS** be sure your workpiece is completely supported, before and after the cut.
- NEVER** remove guards from radial arm saws and miter saws.
- NEVER** remove the splitter or anti-kickback devices from table saws.
- NEVER** use dull or damaged blades.
- NEVER** use blades with missing or chipped teeth.
- NEVER** force the cut or overload the saw.
- NEVER** change blades with the saw plugged in.
- NEVER** make adjustments to any saw while the blade is turning.

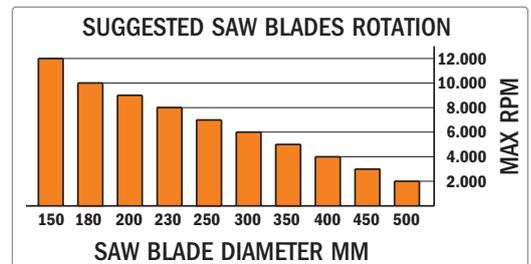


Cutter head safety

- ALWAYS** thoroughly check all cutters for damage and flaws before using.
- ALWAYS** wear safety glasses and ear protection when using power tools.
- ALWAYS** thoroughly read the owners manual and manufacturer's instructions before working with tools.
- ALWAYS** use guards that were supplied with your shaper.
- ALWAYS** use a fence with your shaper. Do not make freehand cuts.
- ALWAYS** use pusher blocks, especially when working with small or narrow pieces.
- ALWAYS** unplug your shaper before cleaning or adjusting the tool, or before making cutter or knife changes.
- ALWAYS** be sure the spindle nut is tight before plugging in the shaper.
- ALWAYS** check that knives are properly and securely installed in the cutterhead when using interchangeable-knife systems.
- ALWAYS** keep your tools sharpened, clean and stored in a safe place to avoid breakage and accidents and to extend the life of your bits and blades.
- ALWAYS** feed the work against the rotation of the knives.
- ALWAYS** be sure your workpiece is completely supported, before and after the cut.
- NEVER** remove guards or any other safety devices from your shaper.
- NEVER** use dull or damaged knives.
- NEVER** force the cut or overload the shaper.
- NEVER** change cutters or knives or make adjustments with the shaper plugged in.
- NEVER** make adjustments to the shaper while the cutter is turning.

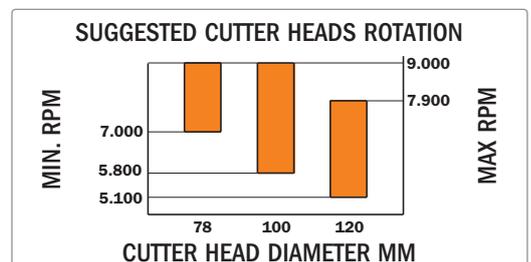

Router bits safety

- ALWAYS** thoroughly check all tools for possible flaws before using.
- ALWAYS** wear safety glasses and ear protection.
- ALWAYS** thoroughly read the owners manual and manufacturer instructions before using.
- ALWAYS** check that at least 75% of the shank is securely inserted into the collet of the router.
- ALWAYS** use template guide collars when possible to absorb lateral bit deflection.
- ALWAYS** use a fence when working on the router table.
- ALWAYS** reduce the router speed when working with larger diameter bits.
- ALWAYS** keep your fence adjusted so there is some clearance between the bearing guide and the workpiece.
- ALWAYS** take care to remove large quantities of stock (cross section > 10mm) in more than one run.
- ALWAYS** keep your tools sharpened, clean and stored in a safe place to avoid breakage and accidents and to extend the life of your bits and blades.
- NEVER** use dull or defective, even suspiciously defective, tools.
- NEVER** force the shank entirely into the collet (bottoming out). Leave about a 3,2mm (1/8") space from the bottom.
- NEVER** force the bit into your router or overload the router.

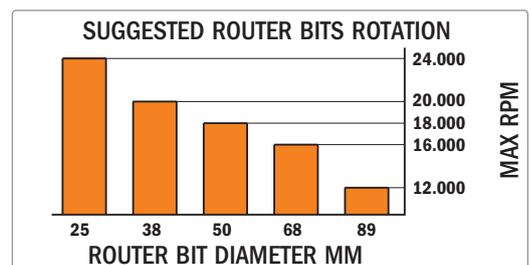

Explanation of symbol

| | | | | | | | |
|---|---|---|----------------------------------|--|--------------------------------------|---|-------------------------|
|  | Antikick-back |  | Radial relief |  | Tool with plunging capacity |  | Tool with bearing |
|  | Not for hand held use for router table only |  | Low noise saw blade |  | Tungsten carbide tipped |  | Solid tungsten carbide |
|  | High speed steel |  | Alloyed tools steel |  | High-alloyed tool steel |  | High performance steel |
|  | High carbon steel |  | Bimetal |  | High speed steel |  | Cermet Carbide |
|  | Polycrystalline diamond |  | Insert carbide |  | Polycrystalline diamond |  | One cutting edge |
|  | One + one cutting edges |  | Two cutting edges |  | Two + one cutting edges |  | Two + two cutting edges |
|  | Three cutting edges |  | Three + three cutting edges |  | Three cutting edges with chipbreaker |  | Four cutting edges |
|  | Twelve cutting edges |  | One spur |  | Two spur |  | Four spur |
|  | Right-hand rotation |  | Left-hand rotation |  | Right-hand & Left-hand rotation |  | Mechanical feed |
|  | Manual feed |  | Cardboard box for saw blades |  | Plastic carry case for saw blades | | |
|  | Clamshell carry case for saw blades |  | Plastic box for cutter head |  | Wear dust mask |  | Wear safety helmet |
|  | Wear safety glasses |  | Wear safety shoes |  | Wear five finger gloves |  | Wear ear protection |
|  | Warning |  | Industrial Thin-kerf blade |  | ORANGE CHROME |  | High-Density Carbide |
|  | High performance tool |  | Non-Stick Orange Shield Coating™ |  | Shear Angle Grind | | |

Conditions of trading

PREMISE

C.M.T. products are the result of technological innovation achieved through continuous research applied on a vast scale. Drawings, technical data, photos of the products and packaging are supplied for the sole purpose of informing the customer and are not binding in any manner. **C.M.T.** may undertake, when necessary, modifications and improvements without applying these innovations to the parts already supplied. The operational tolerances conform to technical standards that are acceptable for this range of tools.

ACCEPTANCE OF THE CONTRACT

All orders for our products are meant to be accepted at the price and sale conditions that are legally in force at the date of delivery. Every order will be treated and supplied according to the following general sale conditions. By placing an order or accepting an offer, the customer accepts, without any reservations, all conditions expressly mentioned hereafter. Any other derogation will only be accepted upon written consent by **C.M.T.** All other cases not contained within these conditions will fall under the Italian Civil Code. Offers and order confirmations will be processed according to stock availability. Any order, even those taken by our representative agents, will be subject to our acceptance, which could also be a partial one. We will notify the acceptance of any order by an order confirmation in which we will indicate all details pertaining to the items purchased, their price and expected delivery date. Therefore, we will not be able to accept any modification after three working days from the date of receipt.

MINIMUM AMOUNT ACCEPTABLE

C.M.T. will only be able to accept and process orders for a minimum net amount of € 100,00. In case of acceptance of the order, we will add € 15,00 for shipping and handling.

PRICES

The prices stated in **C.M.T.**'s quotation and price lists are gross and are intended to be "ex-works". Prices and VAT will be those in force at the date of shipping. To the best of our knowledge, the prices indicated in our catalogues, price lists and order confirmations are correct. However, **C.M.T.** cannot be held legally liable for reserving the right to change prices without notification in line with the manufacturer's cost increases.

DELIVERY

Delivery dates in the order confirmation are given as an indication of the estimated delivery time. They have to be considered as reliable only in case of normal operating conditions, and there shall be no liability on the part of the Seller for any failure to deliver due to causes beyond the Seller's control. **C.M.T.** will also not be able to accept any cancellation of existing orders which were not delivered in time due to external impediments. Standard products will be shipped within five working days from receipt of the order.

SHIPPING AND HANDLING

The packing of our products will be charged on the final invoice, while shipping is "ex-works" from our factory at Chiusa di Ginestreto (Pesaro). All products supplied by **C.M.T.** travel at the customer's own risk. **C.M.T.** retains the right to charge freight costs on the invoice in case of value under the minimum amount acceptable of €100,00. **C.M.T.** will not be held responsible for any damage, theft or tampering that might occur during transport, and for which the forwarder will be legally liable according to article 1693 of the Civil Code. The customer, for his part, will have to check the goods at the moment of receipt and, in case any anomaly or damage is found, he will have to apply for a refund to be addressed to the forwarder.

PAYMENT

Cash payments can only be accepted for purchases done directly at the **C.M.T.** factory located in Chiusa di Ginestreto (Pesaro) in accordance with article 1182, sub-section 3 of the Civil Code, or upon delivery of the goods provided there is a written agreement between the parties. Deferred methods of payment will have to be previously agreed with the Seller. In this case, if one or more instalments are not paid, the agreement will automatically expire according to article 1186 of the Civil Code. A delay in payment, even partial, will automatically incur interest in the amount of an extra 5% to be charged to the customer's account. In case of non payment, **C.M.T.** reserves the right to suspend any further supply of its products.

WARRANTY

All professional tools by **C.M.T.** are manufactured according to high standards of technology and are therefore warranted against any possible defect. This warranty does not cover damage or tampering which can be ascribed to inappropriate use. It is also not applicable for tools that have been re-sharpened. This warranty does not cover the possible injuries resulting from inappropriate use of defective tools. **C.M.T.** will repair or replace any goods which the buyer shall prove to have been defective in material or workmanship upon analysis by its technical department. Any complaint must be communicated within fifteen days from receipt of the goods together with a written form in which the customer provides a detailed description of the defect. Any return of tools will only be accepted upon authorisation by **C.M.T.** and the freight will be at the customer's own expense.

OWNERSHIP RIGHTS

All rights are reserved in accordance with Italian law and with international agreements, and the whole or any part of this catalogue may not be reproduced in any way or form.

PLACE OF JURISDICTION

For any legal matter the place of jurisdiction is Pesaro. All contracts, even those made with foreign Buyers or for goods to be sent abroad, are regulated by Italian legislation.

CMT ORANGE TOOLS™

C.M.T. UTENSILI S.p.A.

Via della Meccanica
61122 Pesaro - Fraz. Chiusa di Ginestreto - Italia

Tel. #39 0721 48571
Fax #39 0721 481021
e-mail info@cmtutensili.com

www.cmtutensili.com



ORDER NO. 03.60.3006

